


tesseract\_command\_language  
/include/tesseract\_command  
\_language/null\_instruction.h

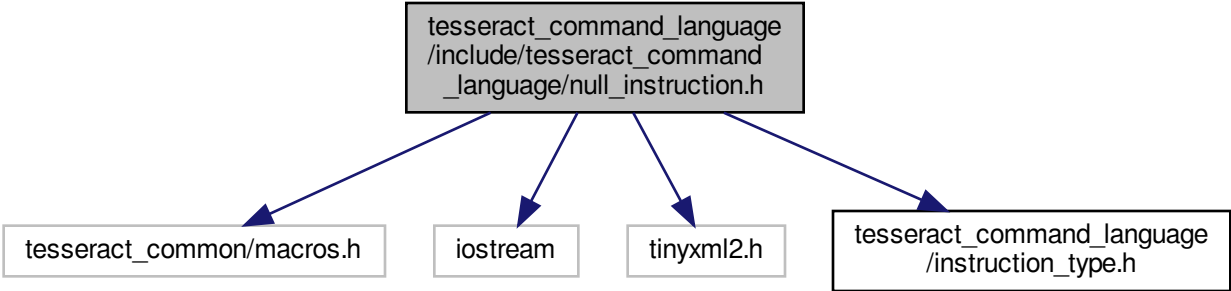

```
graph TD; A["tesseract_command_language  
/include/tesseract_command  
_language/null_instruction.h"] --> B["tesseract_common/macros.h"]; A --> C["iostream"]; A --> D["tinyxml2.h"]; A --> E["tesseract_command_language  
/instruction_type.h"];
```

tesseract\_common/macros.h

iostream

tinyxml2.h

tesseract\_command\_language  
/instruction\_type.h