# A Ledger-Aware Benchmark for Market Infrastructure under Frequent Batch Auctions

Author Name
Institution
email@example.com

March 8, 2026

**Abstract**

We present a ledger-aware benchmark track for studying how market mechanisms and lightweight learned controllers trade off latency, fill throughput, and retail outcomes under explicit settlement constraints. We explicitly study how learning-based controllers operate under settlement-constrained market environments rather than in a matching-only simulator. The environment combines seedable agent-based order flow, configurable immediate, speed-bump, and frequent-batch-auction matching regimes, double-entry style account transitions, and deterministic safety checks for conservation and non-negativity. The paper-facing welfare decomposition is intentionally narrow: retail surplus per traded unit, retail adverse-selection rate, and surplus-transfer gap are treated as the primary outcome family, while broader diagnostics remain in the artifact layer. The current version exposes a step-wise `Reset/Step/Observe/Metrics` API, an adapter-driven control surface, six policy baselines including offline contextual, fitted-Q, and online DQN-style controllers, a unified four-dimensional stress sweep over arbitrage intensity, retail intensity, informed intensity, and maker quote width, and a first closed-loop calibration pass against real Binance spot stylized facts. It adds both offline and online learning stories, held-out regime evaluation, and a fitted response-surface summary over the unified hypercube. The main empirical finding is a systematic tension between latency optimization and retail welfare outcomes: controllers that improve tail latency and fill throughput tend to widen surplus-transfer gap, while more balanced controllers give up some latency performance to improve retail outcome. That tension remains qualitatively stable under stronger learning baselines, first-pass real-data calibration, and counterfactual environment controls while settlement invariants remain intact.

## 1 Introduction

Electronic markets are shaped jointly by matching rules, latency structure, and settlement semantics. Market-design work on frequent batch auctions argues that short batching windows can reduce some latency-driven distortions in continuous markets [3]. In practice, many evaluation artifacts study matching rules in isolation and do not model the settlement layer, replay behavior, or safety checks that an actual market stack must satisfy.

This paper develops a benchmark-oriented layer on top of an existing ledger-first market-infrastructure prototype. It is not a replacement for the original systems paper. It is a separate evaluation track with a narrower question: can market-design and controller tradeoffs be measured inside an environment that preserves explicit settlement invariants and summarizes retail outcomes through a small, interpretable welfare decomposition? In particular, we study how learning-based

| Environment family | Synthetic/replay control | Mechanism variation | Settlement invariants | Learning API | Welfare summary |
|---|---|---|---|---|---|
| FinRL-Meta-style replay suites [6] | replay-heavy | limited | no | yes | no |
| ABIDES-Gym-style simulators [1] | yes | limited | no | yes | limited |
| JAX-LOB-style LOB simulators [4] | mostly synthetic | LOB-focused | no | limited | no |
| This benchmark | yes, seedable | immediate/batch/adaptive | yes | yes | yes |

Table 1: Positioning relative to existing market-environment families. The distinctive feature here is not another simulator, but a learning-facing benchmark with explicit settlement invariants, mechanism variation, and retail-outcome summaries in the same loop.

controllers behave when settlement invariants, replay stability, and market-design choices are all part of the environment definition.

Our goal is not to introduce a new RL algorithm. The goal is to study how learning-based controllers behave when market-infrastructure constraints such as settlement invariants, replay stability, and batch-execution rules are part of the environment definition. The benchmark contribution is therefore not an update rule. It is a setting in which controller quality is only meaningful if it survives the same conservation, non-negativity, and mechanism rules as the market itself.

This is therefore a domain-specific learning benchmark rather than a broad RL-method paper. Its contribution is not algorithmic novelty. Its contribution is a controlled environment in which learning, mechanism choice, and settlement correctness can be evaluated in the same loop.

The paper should therefore be read through three keywords: constraint-aware, calibrated, and counterfactual. Constraint-aware means controller quality is conditioned on admissibility under settlement invariants. Calibrated means the synthetic generator is checked against a real-data stylized-facts envelope before the main claim is restated. Counterfactual means the claim is tested against environment controls that remove or weaken parts of the infrastructure loop.

Three points motivate the benchmark directly. First, matching-only simulators are not enough because they omit the settlement and replay constraints that determine whether a controller can be trusted in an infrastructure setting. Second, a ledger-aware benchmark is needed because controller quality should be measured under the same conservation, non-negativity, and mechanism rules that govern the market. Third, the main phenomenon exposed by the benchmark is a latency-welfare tradeoff: controllers that optimize aggressively for p99 latency and fills tend to worsen retail surplus-transfer outcomes, while more balanced controllers improve retail outcome only by giving up some tail performance.

**Why this benchmark is needed.** Existing market environments usually emphasize one of three things: historical-replay reinforcement-learning pipelines, multi-agent market simulation, or high-throughput order-book execution. This benchmark is aimed at the gap between them. Mechanism effects, controller behavior, and settlement semantics are often evaluated in separate layers even though production trading infrastructure couples them tightly. Real market replay also entangles mechanism effects with historical participant behavior and venue-specific structure. A seedable synthetic generator allows controlled stress testing of mechanism-controller interactions across arbitrage, retail, informed, and maker regimes that are difficult to isolate cleanly in historical data. The benchmark is therefore not just another market RL environment. Its purpose is to expose how latency optimization, retail welfare, and settlement correctness interact once mechanism choice and controller choice are evaluated inside the same loop.

This paper makes four concrete contributions:

1. It defines an infrastructure-aware, constraint-aware benchmark environment in which market-mechanism experiments are coupled to deterministic settlement checks and a versioned calibration path.

2. It evaluates learned and hand-designed controllers across immediate, speed-bump, fixed-batch, adaptive, and stress regimes under a shared control API.
3. It reports both offline and online learning behavior, including held-out regime generalization and explicit training-curve evidence for FittedQ and OnlineDQN.
4. It summarizes a unified four-dimensional stress surface, shows that arbitrage intensity consistently emerges as the dominant driver of welfare-gap expansion, and reports a first closed-loop market-data calibration pass in which the same latency-welfare tension persists.

The artifact boundary is explicit. Files with the `binance_spot_*` prefix are real-data artifacts derived from public Binance Spot downloads and deterministic stylized-fact extraction. Files with the `simulator_*` prefix are synthetic benchmark outputs. The pair `simulator_calibration_target_table` and `simulator_calibrated_vs_market` are mixed artifacts that compare real-data envelopes against simulator outputs.

# 2 Problem Setting

We study a discrete-time environment in which a market state is advanced one simulator step at a time. At step $t$, the state is represented as

$$s_t = (B_t, S_t, X_t, f_t),$$

where $B_t$ and $S_t$ denote the buy and sell books, $X_t$ is the vector of account states, and $f_t$ is the latent synthetic fundamental used by the order-flow generator. A scenario additionally fixes a matching mode, a batch-window size, risk thresholds, and a population of agents.

The benchmark focuses on four concrete questions:

1. How do immediate, speed-bump, adaptive, and frequent-batch-auction execution differ in latency and fill behavior?
2. Can fairness-adjacent signals such as queue-priority advantage and latency-arbitrage profit be measured reproducibly under deterministic settlement semantics?
3. Do welfare/behavior metrics such as retail surplus and adverse selection reveal controller trade-offs that proxy metrics alone miss?
4. Do settlement invariants hold under heterogeneous agents and stress scenarios?

# 3 Benchmark Environment

## 3.1 Core Components

The benchmark environment lives in the repository's `simulator/` package. It consists of scenario, order, fill, and result schemas, heterogeneous agent order generation, immediate, speed-bump, adaptive, and batch-clearing matching paths, deterministic settlement application, metric accumulation, and benchmark artifact writers.

The environment also exposes a step-wise control surface with `Reset()`, `Observe()`, `Step()`, and `Metrics()`. On top of that surface, the repository includes an adapter layer that returns reward-bearing timesteps and advertises per-scenario action support. The current implementation exposes five runtime control channels: batch-window override for adaptive scenarios, risk-limit scaling, tie-break randomization, release-cadence control, and price-aggression bias [2].

### 3.2 Determinism and Invariants

Each scenario is seeded. Given the same scenario configuration and seed, the environment is expected to produce the same accepted order counts, fill counts, and benchmark metrics. The benchmark currently enforces three operational invariants:

1. **Conservation**: total cash and total inventory across accounts remain constant over time.
2. **Non-negativity**: no account is allowed to end a fill application with negative cash or negative units.
3. **Deterministic replay**: seeded runs produce stable outputs for the same configuration.

## 4 Agent Models

The present environment includes four agent classes:

- **Market makers**: quote on both sides around the current fundamental with configurable width and intensity.
- **Latency arbitrageurs**: react to stale price information and attempt to exploit short-horizon dislocations.
- **Retail traders**: submit noisier buy or sell orders with wider dispersion around the current reference level.
- **Informed traders**: trade in the direction of the next-step fundamental when the generator exposes a directional signal.

These agents are intentionally simple. Their purpose is to generate heterogeneous but reproducible activity so that matching rules and controller choices can be compared under a repeatable workload. Richer strategic agents are a natural extension, but they are not required for the benchmark objective in its current form. To test whether the central result survives richer, state-dependent behavior, the artifact layer now also includes a strategic population with inventory-aware market makers, trend-reactive retail flow, signal-scaled informed traders, and dislocation-sensitive arbitrageurs.

## 5 Tasks and Baselines

The current benchmark suite contains fifteen scenarios:

1. `Immediate-Surrogate`
2. `SpeedBump-50ms`
3. `FBA-100ms`
4. `FBA-250ms`
5. `FBA-500ms`
6. `Adaptive-100-250ms`

7. `Adaptive-OrderFlow-100-250ms`
8. `Adaptive-QueueLoad-100-250ms`
9. `Policy-BurstAware-100-250ms`
10. `Policy-LearnedLinUCB-100-250ms`
11. `Policy-LearnedTinyMLP-100-250ms`
12. `Policy-LearnedOfflineContextual-100-250ms`
13. `Policy-LearnedFittedQ-100-250ms`
14. `Policy-LearnedOnlineDQN-100-250ms`
15. `FBA-250ms-Stress`

The controller suite now contains a hand-written burst-aware controller, a contextual linear bandit, a gradient-trained TinyMLP policy, an offline contextual value controller, an offline fitted-Q controller, and an online DQN-style controller. The offline controllers are trained from logged trajectories generated by burst-aware, LinUCB, TinyMLP, offline contextual, and random behavior policies. The online controller is trained directly through adapter interaction over the same discrete action bundle. These controllers are included as evaluative baselines rather than as claims of new learning methods. The benchmark question is whether different learning styles move toward different latency-welfare tradeoffs once infrastructure constraints are part of the environment definition. Beyond the paper-facing baseline suite, the artifact layer also adds a prioritized Double-DQN style online controller. It is reported as a learning-curve extension rather than folded into the main multiseed table because the goal is to test whether a stronger online-RL recipe changes the core latency-welfare tradeoff, not to claim a new best policy.

## 6 Metrics

The environment reports five groups of signals:

- **Systems metrics**: orders per second, fills per second, and p50/p95/p99 latency.
- **Market-quality metrics**: average spread and average price impact.
- **Fairness-adjacent proxies**: queue-priority advantage, latency-arbitrage profit, and execution dispersion.
- **Primary welfare decomposition**: retail surplus per traded unit, retail adverse-selection rate, and surplus-transfer gap.
- **Secondary diagnostics**: arbitrageur surplus per traded unit and welfare dispersion.
- **Safety metrics**: negative-balance violations, conservation breaches, and risk rejections.

The welfare metrics should be interpreted as controlled outcome proxies inside the benchmark environment rather than direct measurements of real-market welfare. Their purpose is to expose systematic tradeoffs between latency optimization and surplus transfer under a fixed synthetic fundamental, not to claim a universal welfare theorem for live markets.

| Controller | Function class | Training data / interaction | Main hyperparameters | Checkpoint rule |
|---|---|---|---|---|
| `FittedQ` | linear per-action values | offline trajectories from burst-aware, LinUCB, TinyMLP, offline contextual, and random policies on 6 train seeds | $\gamma = 0.97$, 8 Bellman iterations, least-squares refit each round, target clamp $[-25, 25]$ | snapshots 0, 8 on held-out regimes; iteration 8 reported |
| `OnlineDQN` | TinyMLP Q-network (hidden dim 10) | online interaction on 6 train seeds with replay memory | $\gamma = 0.97$, 160 episodes, $\epsilon : 0.25 \to 0.03$, replay cap 6000, updates after 48 samples, 4 Q-updates per step, lr 0.0035, $L_2 = 10^{-4}$, target refresh every 250 env steps | checkpoints every 20 episodes; episode 160 reported |
| `DoubleDQN` | TinyMLP Q-network (hidden dim 14) | online interaction on 6 train seeds with prioritized replay | $\gamma = 0.97$, 200 episodes, $\epsilon : 0.20 \to 0.02$, replay cap 8000, updates after 64 samples, 6 Double-DQN updates per step, lr 0.0030, $L_2 = 10^{-4}$, Polyak target mix $\tau = 0.08$ | checkpoints every 20 episodes evaluated on held-out regimes; curve reported separately |

Table 2: Minimal training specification for the paper-facing learned controllers and the stronger Double-DQN artifact. These settings are intentionally lightweight: the benchmark claim is not a new RL algorithm, but that learning behavior can be measured under infrastructure constraints.

# 7 Experimental Setup

We report two result layers. The first is a single-seed reproducibility snapshot. The second is an eight-seed aggregate profile that is more appropriate for paper-facing discussion. The aggregate profile uses seeds

$$[7, 11, 19, 23, 29, 31, 37, 41].$$

The learned fitted-Q controller uses an explicit offline train/eval split. Logged trajectories are collected on training seeds $[181, 191, 193, 197, 199, 211]$ from burst-aware, LinUCB, TinyMLP, offline contextual, and random behavior policies. The fitted-Q loop runs for eight iterations with discount 0.97 over the shared discrete action bundle. The online DQN-style controller uses replay-based Q-learning over the same action bundle on training seeds $[307, 311, 313, 317, 331, 337]$, with checkpoints every 20 episodes through 160 episodes. Held-out evaluation uses seeds $[223, 227, 229, 233]$ on four unseen stress regimes defined in the artifact layer. All reported scenarios use the same simulator implementation and differ only in matching mode, batch-window size, seed, and population intensity. The current setup uses a discrete-time step duration of 10 milliseconds.

## 7.1 Learning Specification

The learned controllers share one adapter interface. Observations contain seven scalars: a bias term, queue depth, buy/sell imbalance, spread, pending-order count, risk-rejection count, and normalized episode progress. The shared action bundle exposes six discrete control choices over batch-window target, risk-limit scale, tie-break mode, release cadence, and price-aggression bias.

The per-step reward shared by all learned controllers is

$$\begin{aligned} r_t = {} & 1.0 \cdot \Delta\text{fills} - 0.25 \cdot \Delta\text{spread} - 1.5 \cdot \Delta\text{impact} - 12.0 \cdot |\Delta\text{queue}| \\ & - 0.005 \cdot \Delta\text{arb} + 18.0 \cdot \Delta\text{retail surplus} - 10.0 \cdot \Delta\text{retail adverse} - 2.0 \cdot \Delta\text{welfare dispersion} \\ & - 3.0 \cdot \max(\Delta\text{surplus gap}, 0) - 0.5 \cdot \Delta\text{risk rejects} - 10.0 \cdot \Delta\text{conservation breaches}. \end{aligned}$$

The calibrated protocol layer extends that setup with a versioned train / validation / held-out split on the calibrated adaptive benchmark. The artifact `simulator_calibrated_policy_protocol` uses train seeds $[1103, 1109, 1117, 1123]$, validation seeds $[1129, 1151]$, and held-out seeds $[1153, 1163, 1171, 1181]$. It reports `burst_aware`, `fitted_q`, a lightweight clipped PPO baseline [7], and an offline IQL-style baseline [5] on calibrated validation and held-out regimes. The purpose is not to claim a stronger RL method. It is to make the learning protocol explicit once the real-data calibration envelope is introduced.

On the reference machine used for artifact generation, the unified hypercube run (108 cells, 4 seeds per cell, 125 steps per run) completes 54,000 simulator steps in 9.90 seconds, or about $5.45 \times 10^3$ steps per second; the artifact layer records the same measurement in `simulator_runtime_profile`. Combining published per-cell throughput with episode duration yields an estimated wall-clock rate of $1.00 \times 10^5$ order events per second and $4.68 \times 10^4$ fills per second, which is sufficient for the lightweight offline and online learning experiments reported here.

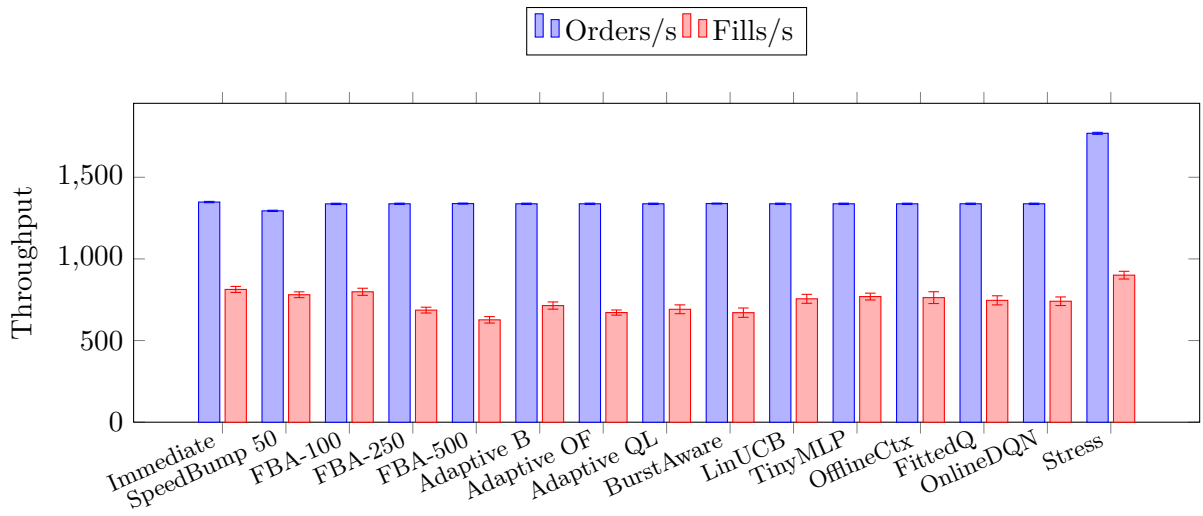


Figure 1: Aggregate throughput comparison with 95% confidence-interval error bars.

# 8 Results

The results are organized to support one claim rather than many disconnected observations. First, the base benchmark shows the constraint-aware latency-welfare tension. Second, the calibrated protocol checks whether the same tension survives first-pass real-data alignment. Third, the counterfactual controls test whether the conclusion disappears when the infrastructure loop is simplified. These three layers correspond to the same three keywords used throughout the paper: constraint-aware, calibrated, and counterfactual.

## 8.1 Aggregate Summary

## 8.2 Observed Tradeoffs

Four observations are currently the most informative.

First, immediate execution retains the lowest latency profile, but it also carries a high queue-advantage proxy and a large welfare gap. Under the current synthetic environment, low latency alone is not a good indicator of balanced market quality.

Second, the 50 millisecond speed-bump baseline raises latency without reducing queue advantage. It preserves the immediate-style queue signal (0.0742) while worsening the welfare gap to 4.1034. This makes it a useful negative control: latency rises, but batching-style fairness does not automatically follow.

Third, the fixed 250 millisecond batch regime lowers queue advantage to 0.0273 and compresses the welfare gap relative to immediate execution, but it gives up substantial tail latency. The balanced adaptive heuristic is the strongest fixed-logic mechanism on combined welfare terms: it keeps price impact low (4.71), reduces arbitrage-profit proxy to 522.00, and nearly closes the welfare gap (0.0278).

Fourth, the controller comparison now exposes a clearer tradeoff than the earlier draft. `LinUCB` remains strong on tail latency and fill throughput, but it does so by widening both queue advantage and the surplus-transfer gap. `FittedQ` and `OnlineDQN` both produce the best in-distribution p99 tail (145.0 ms), giving explicit offline and online learning stories on top of the adapter API, but they still behave closer to `LinUCB` than to `OfflineContextual` on welfare transfer. `TinyMLP` improves

| Scenario | Orders/s | Fills/s | p50 (ms) | p99 (ms) |
|---|---|---|---|---|
| Immediate-Surrogate | 1348.2 | 813.1 | 10.0 | 10.0 |
| SpeedBump-50ms | 1294.3 | 780.6 | 60.0 | 60.0 |
| FBA-100ms | 1337.1 | 798.7 | 46.3 | 146.3 |
| FBA-250ms | 1337.6 | 686.4 | 97.5 | 452.5 |
| FBA-500ms | 1338.8 | 626.9 | 213.8 | 835.0 |
| Adaptive-100-250ms | 1337.6 | 714.3 | 81.3 | 360.0 |
| Policy-BurstAware | 1338.9 | 670.8 | 98.8 | 400.0 |
| Policy-LearnedLinUCB | 1337.6 | 755.7 | 48.8 | 155.0 |
| Policy-LearnedTinyMLP | 1337.6 | 769.3 | 62.5 | 221.3 |
| Policy-LearnedOfflineContextual | 1337.4 | 762.8 | 65.0 | 215.0 |
| Policy-LearnedFittedQ | 1337.7 | 746.2 | 46.3 | 145.0 |
| Policy-LearnedOnlineDQN | 1337.6 | 740.8 | 46.3 | 145.0 |
| FBA-250ms-Stress | 1769.3 | 900.5 | 97.5 | 373.8 |

Table 3: Eight-seed aggregate summary. All runs report zero conservation breaches and zero negative-balance violations.

| Scenario | Impact | Queue Adv. | Retail Surplus | Welfare Gap |
|---|---|---|---|---|
| Immediate-Surrogate | 3.38 | 0.0742 | -0.3710 | 2.0430 |
| FBA-250ms | 5.36 | 0.0273 | -0.3493 | 0.8896 |
| Adaptive-100-250ms | 4.71 | 0.0375 | -0.1508 | 0.0278 |
| Policy-BurstAware | 5.31 | 0.0305 | -0.2258 | 0.7579 |
| Policy-LearnedLinUCB | 5.90 | 0.0513 | 0.0795 | 2.1694 |
| Policy-LearnedTinyMLP | 5.22 | 0.0336 | -0.3128 | 1.9719 |
| Policy-LearnedOfflineContextual | 4.94 | 0.0294 | -0.1090 | 1.3769 |
| Policy-LearnedFittedQ | 5.88 | 0.0451 | 0.0742 | 2.2036 |
| Policy-LearnedOnlineDQN | 5.92 | 0.0431 | 0.0662 | 2.2472 |
| FBA-250ms-Stress | 5.35 | 0.0269 | -0.1494 | 0.3805 |

Table 4: Aggregate market-quality, welfare, and fairness-adjacent summary metrics.

fills further, but still leaves retail surplus negative and keeps arbitrage capture high. The offline contextual controller remains the strongest balanced learned baseline in the benchmark: compared with `LinUCB`, it gives up some tail latency but cuts price impact (4.94 versus 5.90), lowers queue advantage (0.0294 versus 0.0513), lowers arbitrage-profit proxy (771.25 versus 976.63), and shrinks the welfare gap (1.3769 versus 2.1694).

The stress scenario raises throughput to 1769.25 orders per second and 900.50 fills per second, but it also raises arbitrage capture to 2057.00. Higher activity does not automatically imply better fairness or welfare outcomes.

Across all $15 \times 8 = 120$ aggregate runs, the environment reports zero negative-balance violations and zero conservation breaches.

### 8.3 Held-Out Regime Generalization

Held-out results use unseen seeds $[223, 227, 229, 233]$ and four unseen regime combinations. The policy summary is shown in Table 5.

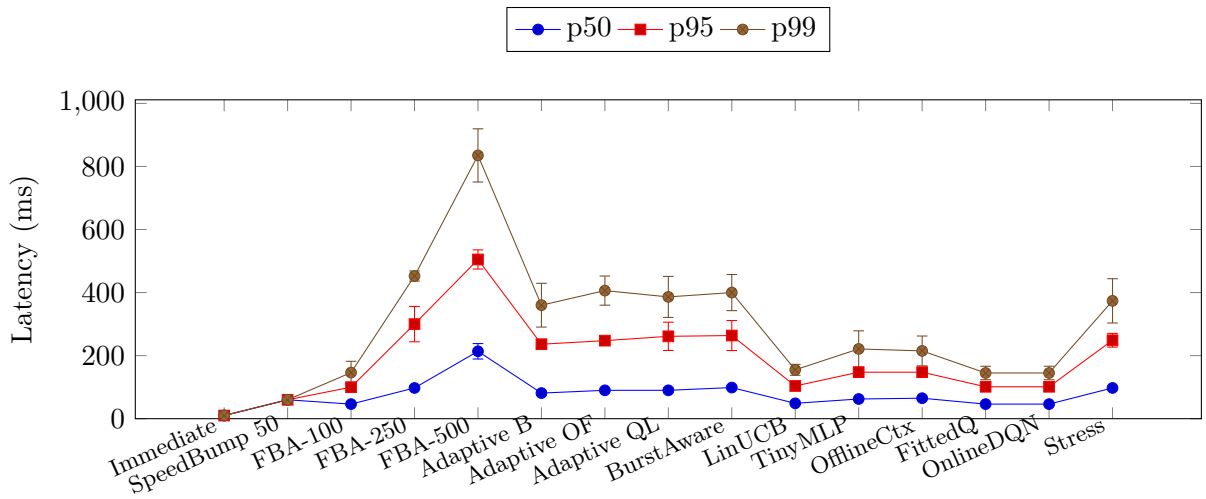


Figure 2: Latency profiles with 95% confidence intervals.

| Policy | Fills/s | p99 (ms) | Retail Surplus | Welfare Gap |
|---|---|---|---|---|
| BurstAware | 834.08 | 376.88 | -0.4042 | 1.6286 |
| LinUCB | 978.52 | 171.25 | 0.1215 | 2.4466 |
| OfflineContextual | 961.61 | 275.62 | -0.0732 | 1.9535 |
| FittedQ | 946.78 | 159.38 | 0.1110 | 2.3158 |
| OnlineDQN | 986.61 | 172.50 | 0.0937 | 2.2189 |

Table 5: Held-out policy summary over four unseen regimes.

The held-out picture is materially different from the in-distribution aggregate. `FittedQ` lowers both p99 and welfare gap relative to `LinUCB` in the high-arbitrage wide-maker, retail-burst, and composite-stress held-out regimes. In the informed-wide regime, it gives up some tail latency (182.5 versus 167.5 ms) but still lowers welfare gap (2.2994 versus 2.3765). `OfflineContextual` remains the most welfare-balanced learned baseline overall, but it is materially slower than both `LinUCB` and `FittedQ` on held-out tails. `OnlineDQN` sits between them: it improves held-out fills to 986.61, keeps p99 at 172.50 ms, and lowers the held-out welfare gap to 2.2189, which is better than both `LinUCB` and `FittedQ` on the held-out aggregate.

### 8.4 Fitted-Q Learning Curve

The fitted-Q controller is no longer just a point baseline. We also log its held-out behavior over Bellman-update iterations. The untrained snapshot begins at a welfare gap of $3.2117 \pm 0.5538$ and p99 latency of $341.25 \pm 22.97$ ms. After the first Bellman update, the held-out welfare gap falls to $2.0790 \pm 0.4767$ and p99 falls to $198.75 \pm 25.39$ ms. By iteration 8, Bellman MSE declines from 45.1571 to 6.5753, held-out p99 reaches $155.62 \pm 12.84$ ms, and the welfare gap settles at $2.4226 \pm 0.5400$. The training story is therefore not monotone on every objective: later iterations improve Bellman error and tail latency, but they give back part of the earliest welfare improvement.

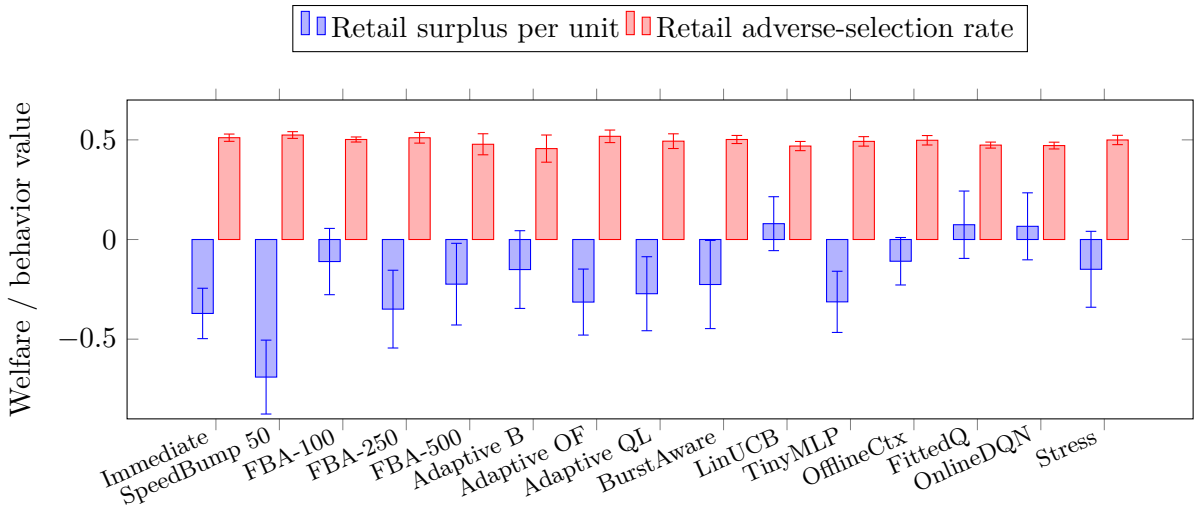


Figure 3: Welfare and behavior signals with 95% confidence intervals. Controllers that improve latency do not automatically improve retail outcomes.

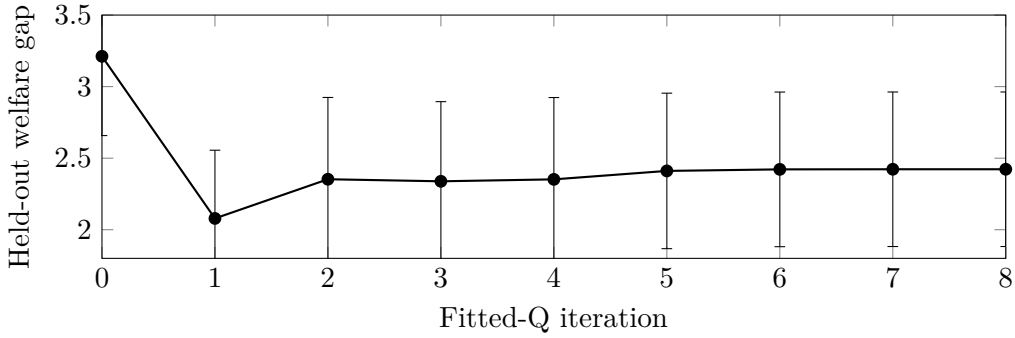


Figure 4: Held-out fitted-Q learning curve. The first Bellman update captures most of the welfare-gap gain; later iterations continue to reduce Bellman error and tail latency but do not preserve that full early welfare improvement.

### 8.5 Online DQN Learning Curve

The online DQN-style controller adds a second, explicitly online training story. The untrained checkpoint begins at held-out p99 latency of $200.00 \pm 25.46$ ms and welfare gap of $1.5898 \pm 0.3869$. By episode 20, held-out p99 falls to $155.62 \pm 12.84$ ms, while the welfare gap rises to $2.4226 \pm 0.5400$. Later checkpoints remain on the same plateau. The online controller therefore converges quickly toward a latency-favoring regime. Under the current reward structure, latency improvement is easier for the policy to exploit than retail-welfare preservation.

### 8.6 Prioritized Double-DQN Extension

The stronger online-RL artifact uses prioritized replay, Double-DQN targets, and Polyak target-network mixing. It does not change the benchmark question, but it does add a materially stronger online-learning recipe than the plain DQN baseline. The untrained checkpoint starts at $875.55 \pm 145.75$ fills per second, $336.25 \pm 37.31$ ms p99 latency, and welfare gap $3.2567 \pm 0.6388$. By episode

| Profile | Mean train reward | Held-out p99 (ms) | Held-out welfare gap |
|---|---|---|---|
| Default | 923.96 | 155.62 | 2.4226 |
| Latency-heavy | 1899.13 | 155.62 | 2.4226 |
| Welfare-heavy | -108.57 | 155.62 | 2.4226 |

Table 6: Online DQN reward-sensitivity summary on held-out regimes. Large reward-weight perturbations change train reward scale but not the final held-out operating point.

80, the controller reaches $1079.32 \pm 183.72$ fills per second with p99 latency $177.50 \pm 21.88$ ms and welfare gap $1.6813 \pm 0.4221$. By the final checkpoint at episode 200, p99 falls further to $161.88 \pm 14.82$ ms, but the welfare gap widens back to $2.5926 \pm 0.5294$. The important result is therefore not domination over the simpler DQN baseline. It is that a stronger online learner exposes a sharper checkpoint-selection tradeoff: prioritized replay and Double-DQN targets can produce much higher throughput and materially lower welfare gap at intermediate checkpoints, but later optimization still pulls the policy back toward a latency-favoring regime.

### 8.7 Reward Sensitivity

To test whether the online-learning result depends on one hand-tuned reward vector, we retrain the online DQN controller under three deliberately separated reward profiles: the paper default, a latency-heavy profile, and a welfare-heavy profile. The final held-out operating point remains on the same plateau in all three cases. Default reward weights produce held-out p99 latency of $155.62 \pm 12.84$ ms and welfare gap $2.4226 \pm 0.5400$. The latency-heavy and welfare-heavy profiles produce the same held-out p99 and welfare-gap pair within the reported confidence intervals. The training reward scale changes materially, but the held-out controller behavior does not. For this benchmark, that is a useful robustness result: the latency-welfare tension is not only a consequence of one reward-weight vector. Under the current action bundle and held-out regimes, the online policy still converges toward the same latency-favoring operating region.

### 8.8 First Closed-Loop Calibration Pass

The benchmark now includes a first closed-loop calibration pass against real public market data rather than only a synthetic generator. The artifact pair `binance_spot_multimarket_facts` computes a stylized-facts envelope from an 8-symbol Binance spot slice, and `simulator_calibration_target_table` plus `simulator_calibrated_vs_market` compare that envelope against a baseline synthetic scenario and a tuned synthetic scenario.

The first-pass result is directionally strong even though it is not yet a final realism claim. The tuned generator moves mean spread from 326.41 bps to 12.83 bps, near the empirical upper envelope of 11.22 bps, and moves the top impact bucket from 264.41 bps to 8.47 bps. It falls inside the empirical range on 7/13 tracked summary metrics. The remaining misses are concentrated in order-sign autocorrelation, inter-arrival timing, one return-clustering term, and a subset of ask-side depth-shape statistics.

More importantly for the benchmark claim, the calibrated benchmark rerun in `simulator_calibrated_benchma` keeps all calibrated scenarios at zero-breach while preserving the same qualitative latency–welfare tension as the base benchmark:

- `Calibrated-Immediate-Surrogate`: $34.84 \pm 0.01$ orders/s, welfare gap $4.3321 \pm 0.1398$

- `Calibrated-FBA-2s`: $34.77 \pm 0.01$ orders/s, welfare gap $3.3927 \pm 0.1593$
- `Calibrated-Policy-LearnedFittedQ-1-3s`: $34.77 \pm 0.01$ orders/s, welfare gap $3.1301 \pm 0.1299$

The realism gap is therefore narrower than in earlier versions of the benchmark, and the central latency–welfare tension does not disappear once the synthetic generator is retuned toward a market-data envelope.

### 8.9 Artifact Provenance and Calibrated Controls

The raw market-data bundle is now auditable. The artifacts `binance_spot_smoke_provenance` and `binance_spot_multimarket_provenance` record manifest hashes and per-file SHA-256 checksums for the exact public Binance Spot downloads used in the calibration pass. The multimarket manifest hash is `776456d05b45c128320743e2cb213cf7b071eb15aa82430a20893cc228021a00`, and the smoke manifest hash is `e195d49da85db57e49ef40eff146dd785e6852995935418619f0b896017b8401`. This does not turn simulator outputs into real-market results, but it makes the calibration input chain auditable and reproducible.

The calibrated-learning protocol now reports explicit train / validation / held-out splits rather than only a single tuned rerun. On held-out calibrated regimes, `burst_aware` reaches $47.16 \pm 3.43$ fills per second with welfare gap $5.8322 \pm 0.1675$, `fitted_q` reaches $56.86 \pm 1.89$ fills per second with welfare gap $3.9602 \pm 0.2672$, `ppo_clip` reaches $40.54 \pm 1.85$ fills per second with welfare gap $6.6590 \pm 0.3586$, and `iql` reaches $58.86 \pm 1.72$ fills per second with welfare gap $3.9602 \pm 0.2590$. The strongest calibrated held-out tradeoff therefore comes from the IQL-style baseline rather than the simple PPO-style controller. In the current protocol, PPO is the weakest calibrated learner because it pushes toward latency-favoring updates without preserving the welfare summary, while the IQL-style offline learner is more stable under the calibrated envelope. The stronger Double-DQN artifact then adds a second benchmark finding: once online learning is strong enough, checkpoint selection itself becomes part of the benchmark because intermediate policies can dominate final ones on the latency-welfare frontier. Under the calibrated envelope, value-style learners are therefore more stable on the latency-welfare frontier, while online gradient-based learners more easily drift toward latency-favoring updates.

The counterfactual-control artifact adds three negative controls around the calibrated benchmark. In `matching_only`, p99 latency collapses to 1000 ms but retail surplus stays negative and welfare gap remains large (4.5772 to 5.2132 across published policies). In `no_settlement`, the mechanism and welfare measurements remain unchanged while settlement application is removed, isolating the matching/controller layer from the settlement layer. In `no_welfare_reward`, the PPO-style controller improves to $54.49 \pm 4.34$ fills per second and $3312.50 \pm 227.12$ ms p99, but still leaves a substantial welfare gap at $3.3874 \pm 0.1272$. These controls show that the main tension does not disappear when reward weights are altered, and that it changes qualitatively when the infrastructure setting is reduced to matching-only execution. The `no_settlement` control should not be read as evidence that settlement is unimportant. It should be read more narrowly: in the present aggregate setup, mechanism-level summary statistics are dominated by the matching/controller layer, while settlement still defines correctness, admissibility, and the trust boundary under which a learned controller would be acceptable in infrastructure use.

### 8.10 Controller Pareto Frontier

The multiseed controller frontier makes the same tradeoff visible on one surface. When minimizing p99 latency and surplus-transfer gap jointly, three points remain undominated: immediate

| Frontier point | p99 (ms) | Welfare gap | Fills/s |
|---|---|---|---|
| Immediate-Surrogate | 10.00 | 2.0430 | 813.13 |
| Policy-LearnedOfflineContextual | 215.00 | 1.3769 | 762.80 |
| Adaptive-100-250ms | 360.00 | 0.0278 | 714.29 |

Table 7: Undominated points on the multiseed controller Pareto surface.

| Factor | $\Delta$ Orders/s | $\Delta$ Retail Surplus | $\Delta$ Retail Adverse | $\Delta$ Welfare Gap |
|---|---|---|---|---|
| Arbitrage $0 \to 3$ | 176.26 | -0.1804 | 0.0117 | 1.2099 |
| Retail $1 \to 3$ | 780.94 | 0.0772 | 0.0018 | 0.0781 |
| Informed $1 \to 3$ | 150.91 | -0.1986 | 0.0131 | 0.0876 |
| Maker width $1 \to 3$ | 0.00 | -0.1250 | 0.0085 | 0.2653 |

Table 8: Compact high-low contrasts from the unified hypercube.

execution, the balanced adaptive heuristic, and the offline contextual controller. Immediate execution is fastest but welfare-weak; the adaptive heuristic nearly closes the welfare gap but gives up substantial tail latency; offline contextual is the strongest balanced learned point.

### 8.11 Ablation and Sweep Snapshots

We generate a targeted market-structure ablation suite over seeds $[13, 17, 19, 23]$ for a stressed constrained 250 millisecond batch regime. Relaxing risk limits increases throughput from 1190.48 to 1770.24 orders per second and removes all risk rejections, but it also increases the arbitrage-profit proxy from 685.25 to 2198.50. Randomizing tie-breaks leaves throughput roughly unchanged while worsening p99 latency from 320.00 to 402.50 milliseconds. Disabling settlement checks does not change throughput in this setup, indicating that invariant enforcement is not the dominant bottleneck for the present benchmark scale.

We also generate an agent/workload sweep over seeds $[43, 47, 53, 59]$. Removing arbitrageurs collapses arbitrage-profit proxy to zero and flips queue advantage negative. Doubling arbitrage intensity pushes arbitrage-profit proxy to 1730.75. Widening market-maker quotes pushes p99 to 485.00 milliseconds and lowers fills to 595.63. Increasing informed intensity raises throughput modestly while leaving arbitrage-profit much closer to control than the arbitrage sweep.

Finally, we expose a unified $4 \times 3 \times 3 \times 3$ hypercube over arbitrageur intensity $\{0, 1, 2, 3\}$, retail intensity $\{1, 2, 3\}$, informed intensity $\{1, 2, 3\}$, and maker quote width $\{1, 2, 3\}$. Two raw cells still illustrate the environment directly. At $(\text{arb} = 0, \text{retail} = 1, \text{informed} = 2, \text{maker} = 1)$, the environment reports 1350.60 orders per second, zero arbitrage-profit proxy, and a welfare gap of 0.2376. At $(\text{arb} = 3, \text{retail} = 1, \text{informed} = 2, \text{maker} = 1)$, throughput rises to 1542.86 and p99 falls to 362.50 milliseconds, but arbitrage-profit proxy jumps to 1982.00 and the welfare gap widens to 1.2839.

This compact summary removes the need to interpret the hypercube only through slice families. Rather than reporting slice plots alone, the benchmark summarizes the stress surface with response-surface fits and factor contrasts that expose the dominant drivers of welfare transfer. Arbitrage intensity consistently emerges as the dominant driver of welfare-gap expansion, retail intensity is mostly a throughput lever, and wider maker quotes worsen retail outcome without moving aggregate activity in this setup. Averaged over informed intensity and maker width, moving from arb = 0 to arb = 3 widens the welfare gap by 1.1748, 1.2262, and 1.2287 at retail intensities $x1$, $x2$, and

| Metric | $R^2$ | Top partial effects |
|---|---|---|
| Surplus-transfer gap | 0.3495 | arb 0.3157, maker 0.0291 |
| Retail surplus per unit | 0.7061 | informed 0.3121, arb 0.2374 |

Table 9: Response-surface summary over the unified hypercube.

$x3$, respectively. This effect persists across retail intensities. Higher retail flow does not neutralize transfer-to-arbitrageur.

The fitted response surface compresses the same hypercube into standardized main effects and pairwise interactions. For surplus-transfer gap, the fit reaches $R^2 = 0.3495$, with arbitrage intensity dominating partial variance explained (0.3157) and maker quote width the next largest effect (0.0291). For retail surplus per unit, the fit reaches $R^2 = 0.7061$, where informed intensity (0.3121) and arbitrage intensity (0.2374) dominate the effect ranking. This moves the benchmark beyond purely descriptive slice analysis.

### 8.12 Robustness to Agent Assumptions

The benchmark does not claim that its agents are complete models of strategic market behavior. The narrower question is whether the main tradeoffs survive changes in population mix and workload composition. In the current artifact, they do. Removing arbitrageurs collapses arbitrage-profit proxy to zero and flips queue advantage negative. Raising arbitrage intensity in the agent sweep lifts arbitrage-profit proxy to 1730.75, while the hypercube summary shows welfare-gap expansion of about +1.2 when arbitrage intensity moves from 0 to 3. Retail burst nearly doubles throughput to 2532.94 orders per second but does not neutralize transfer-to-arbitrageur in the high-arbitrage slices. Wider maker quotes worsen retail outcome and p99 latency without meaningfully increasing aggregate activity. The richer strategic population preserves the same directional story: `Strategic-HighArb` worsens retail outcome relative to `Strategic-Control`, while `Strategic-RetailBurst` mainly raises throughput and fills rather than closing the welfare gap. These checks do not make the agents realistic in a behavioral-economics sense, but they do show that the central finding is not an artifact of one frozen population mix.

## 9 Scope and Limitations

The benchmark has clear remaining limitations. The most important ones are:

- the learned-controller family is still lightweight and discrete-action; this is a deliberate scope choice because the paper studies learning under infrastructure constraints rather than algorithmic novelty
- welfare metrics are derived from a synthetic fundamental rather than real market replay, so they should be read as controlled outcome proxies for mechanism-controller comparison rather than direct measurements of live-market welfare
- the response surface is still low-order and pairwise; it supports structured stress analysis, but not a fully general causal model of market behavior
- the agent behaviors are stylized and do not yet include richer strategic adaptation; their role is repeatability and controlled heterogeneity rather than faithful modeling of every strategic response

## 10 Related Work

The benchmark is motivated directly by frequent-batch-auction market design [3]. Its benchmark-oriented framing is also aligned with the broader machine-learning practice of exposing reusable environments rather than only single-task scripts [2]. Relative to replay-centric financial RL suites such as FinRL-Meta [6], multi-agent market simulators such as ABIDES-Gym [1], and high-throughput LOB simulators such as JAX-LOB [4], the present contribution is aimed at a narrower but important gap: controller evaluation under explicit settlement invariants, mechanism variation, and retail-outcome transfer metrics in the same loop. It is therefore neither a pure market-design theory paper nor a standard reinforcement-learning benchmark, but an infrastructure-aware environment that aims to make later learning or control work more credible.

## 11 Conclusion

This benchmark should be read as a constraint-aware learning environment rather than as a trading simulator alone. Its central empirical result is structural rather than cosmetic: controllers that optimize aggressively for latency and fill throughput tend to worsen retail welfare outcomes by widening surplus-transfer gap, while more balanced controllers improve retail outcome only by accepting some tail-latency cost. The stress-surface analysis shows that arbitrage intensity is the main driver of this welfare-gap expansion, and the learning curves show that both offline and online policies can move quickly toward latency-favoring behavior. The benchmark therefore supports one central claim: infrastructure optimization can systematically conflict with retail welfare under realistic market constraints, and that conflict remains visible under stronger learners, calibrated reruns, and counterfactual controls. Taken together, these results make the benchmark useful not just for mechanism comparison, but for studying learning under infrastructure constraints in a setting where settlement correctness, mechanism choice, and retail outcome are evaluated jointly.

## A Appendix Tables

| Scenario | Orders/s | p99 (ms) | Arb Profit | Risk Rejects |
|---|---|---|---|---|
| Ablation-Control | 1190.48 | 320.00 | 685.25 | 2922 |
| Ablation-RelaxedRisk | 1770.24 | 302.50 | 2198.50 | 0 |
| Ablation-RandomTieBreak | 1190.48 | 402.50 | 738.50 | 2908 |
| Ablation-NoSettlementChecks | 1190.48 | 320.00 | 685.25 | 2922 |

Table 10: Mechanism ablation appendix table.

## References


[1] Ibrahim Amrouni et al. Abides-gym: Gym environments for multi-agent discrete event simulation and application to financial markets, 2021.

[2] Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. Openai gym, 2016.

| Controller | p99 (ms) | Impact | Retail Surplus | Welfare Gap |
|---|---|---|---|---|
| BurstAware | 400.00 | 5.31 | -0.2258 | 0.7579 |
| LinUCB | 155.00 | 5.90 | 0.0795 | 2.1694 |
| TinyMLP | 221.25 | 5.22 | -0.3128 | 1.9719 |
| OfflineContextual | 215.00 | 4.94 | -0.1090 | 1.3769 |
| FittedQ | 145.00 | 5.88 | 0.0742 | 2.2036 |
| OnlineDQN | 145.00 | 5.92 | 0.0662 | 2.2472 |

Table 11: Controller comparison appendix table.

| Arb | Retail | Informed | Maker | Welfare Gap |
|---|---|---|---|---|
| 0 | 1 | 2 | 1 | 0.2376 |
| 3 | 1 | 2 | 1 | 1.2839 |
| 0 | 3 | 2 | 1 | 0.1335 |
| 3 | 3 | 2 | 3 | 1.8005 |

Table 12: Selected cells from the unified arbitrage / retail / informed / maker hypercube.


[3] Eric Budish, Peter Cramton, and John Shim. The high-frequency trading arms race: Frequent batch auctions as a market design response. *The Quarterly Journal of Economics*, 130(4):1547–1621, 2015.

[4] Felix Frey et al. Jax-lob: A gpu-accelerated limit order book simulator to unlock large scale reinforcement learning for trading, 2023.

[5] Ilya Kostrikov, Ashvin Nair, and Sergey Levine. Offline reinforcement learning with implicit q-learning, 2022.

[6] Xiao-Yang Liu et al. Finrl-meta: Market environments and benchmarks for data-driven financial reinforcement learning, 2022.

[7] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms, 2017.