When Simplified Evaluators Misrank Policies: Protocol-Level Failure in Ledger-Constrained Market Learning

Anonymous Authors

Abstract

Simplified evaluation can stop evaluating the policy that would actually be deployed. When settlement admissibility, welfare-sensitive outcomes, or protocol-level constraints are removed, the evaluator changes the object of comparison and can therefore distort policy ranking. We study that problem as *evaluation protocol misspecification* in a seeded ledger-constrained market environment with explicit conservation/non-negativity/replay invariants, shared train / validation / held-out splits, and a compact retail-welfare decomposition. The central empirical result is protocol-level evaluation failure: on a matched calibrated four-policy slice, replacing the full protocol with `matching_only` changes two of four ranks and yields Kendall $\tau = -0.20$; `no_welfare_reward` changes three of four ranks ($\tau = 0.60$); and `no_settlement` leaves the aggregate ranking unchanged ($\tau = 1.0$) while weakening the admissibility boundary. Under the full protocol, controllers lie on a stable p99-latency–welfare frontier: methods that improve tail latency and fill throughput often widen surplus-transfer gap, while more balanced methods recover retail-sensitive outcomes only by paying latency cost. In the matched calibrated comparison, behavior cloning and IQL tie on the strongest held-out operating point, a transferred fitted-Q reference remains competitive but slower on tail latency, and stronger online value learning is checkpoint-sensitive enough that naive final-iterate reporting changes the apparent winner. These patterns persist under held-out regimes, welfare-weight perturbations, strategic-population shifts, stress sweeps, and a first-pass Binance spot calibration envelope. The resulting contribution is a reproducible ledger-aware evaluation protocol showing that simplified evaluators can change admissibility, rankings, and operating points even when the candidate policy set is fixed.

1 Introduction

Simplifying an evaluator can change the object being evaluated. If admissibility constraints, settlement semantics, or welfare-sensitive outcomes are removed from the loop, then controller comparisons are no longer performed on the same task, and empirical conclusions can change even before any new training is done.

This paper studies that problem as *evaluation protocol misspecification*. The central question is not whether market infrastructure is complicated in the abstract. It is whether simplifying the evaluator changes feasibility, ranking, or operating point of the policies under comparison. Our empirical answer is yes. On a matched calibrated four-policy slice, `matching_only` changes two of four ranks and yields Kendall $\tau = -0.20$; `no_welfare_reward` changes three of four ranks ($\tau = 0.60$); and `no_settlement` preserves ranking but weakens the admissibility boundary. These are not merely different summaries of the same result. They are protocol failures in which the evaluator itself changes what it means for one controller to outperform another.

We study the problem in a seeded ledger-constrained market environment that combines explicit conservation/non-negativity/replay checks, immediate and batched execution regimes, a shared adapter API, and a compact retail-welfare decomposition. We use this environment as a controlled

Environment family	Synthetic/replay control	Mechanism variation	Settlement invariants	Learning API	Welfare summary
FinRL-Meta-style replay suites [5]	replay-heavy	limited	no	yes	no
ABIDES-Gym-style simulators [1]	yes	limited	no	yes	limited
JAX-LOB-style LOB simulators [4]	mostly synthetic	LOB-focused	no	limited	no
This environment	yes, seedable	immediate/batch/adaptive	yes	yes	yes

Table 1: Positioning relative to existing market-environment families. The distinctive feature is a learning-facing evaluation protocol with explicit settlement invariants, mechanism variation, and retail-outcome summaries in the same loop.

instance of a broader ML question: when policies are compared under feasibility constraints and welfare-sensitive objectives, which protocol details are necessary to preserve the identity of the evaluated object? Under the full protocol, controllers lie on a stable latency–welfare frontier: aggressive latency optimization improves p99 and fill throughput but tends to widen surplus-transfer gap, while more balanced controllers recover retail-sensitive outcomes only by paying some latency cost. In the matched calibrated comparison, logged-data baselines outperform the online PPO-style baseline under shared train / validation / held-out rules, and stronger online value learning exposes checkpoint sensitivity as a first-class evaluation issue rather than an implementation footnote.

Counterfactual controls make the claim sharper. The first cross experiment holds the policy set fixed and swaps the evaluator: the full protocol is compared against `matching_only` and `no_settlement`. The second cross experiment keeps the ledger-aware evaluator but changes the training objective through `no_welfare_reward`. The point is therefore not that every infrastructure component is equally responsible for rank reversal. It is that simplified evaluation changes which conclusions survive, while settlement invariants define the correctness and admissibility boundary under which those conclusions should be trusted.

Why protocol matching matters. Existing market environments usually emphasize one of three things: historical-replay reinforcement-learning pipelines, multi-agent market simulation, or high-throughput order-book execution. This protocol study targets the gap between them. Mechanism effects, controller behavior, settlement semantics, and welfare-sensitive outcomes are often evaluated in separate layers even though production trading infrastructure couples them tightly. Real market replay also entangles mechanism effects with historical participant behavior and venue-specific structure. A seedable synthetic generator allows controlled stress testing of mechanism-controller interactions across arbitrage, retail, informed, and maker regimes that are difficult to isolate cleanly in historical data. The goal is therefore not just another market RL environment. It is to test whether simplifying the evaluation protocol changes what appears to be a good controller.

This paper makes four concrete contributions:

1. It defines *protocol-level evaluation failure* in terms of feasibility failure, ranking failure, and operating-point failure, making explicit how evaluator simplification can change the admissibility set, the ranking of admissible policies, or the apparent Pareto surface.

2. It introduces a reproducible ledger-aware evaluation protocol in which mechanism variation, learned controllers, deterministic settlement checks, and welfare-sensitive outcomes are evaluated under one shared train / validation / held-out design.

3. It reports a matched calibrated comparison showing ranking reversal, frontier shift, and checkpoint sensitivity: behavior cloning and IQL dominate PPO under the matched protocol, while stronger online value learners reveal that final-iterate reporting can misstate the best available operating point.

4. It strengthens the external-validity and robustness story with a stronger learner family, measurement-robustness checks, richer action-coverage diagnostics, and a first closed-loop calibration pass against a real Binance spot stylized-facts envelope.

2 Protocol-Level Evaluation Failure under Settlement Constraints

We study a discrete-time environment in which a market state is advanced one simulator step at a time. At step t, the state is represented as

$$s_t = (B_t, S_t, X_t, f_t),$$

where B_t and S_t denote the buy and sell books, X_t is the vector of account states, and f_t is the latent synthetic fundamental used by the order-flow generator. A scenario additionally fixes a matching mode, a batch-window size, risk thresholds, and a population of agents.

The protocol study focuses on four concrete questions:

1. Do controller rankings change once settlement-aware and welfare-aware evaluation is used instead of matching-only summaries?
2. How do immediate, speed-bump, adaptive, and frequent-batch-auction execution differ in latency, fill behavior, and retail-sensitive outcomes?
3. Do offline/value-style and online learners exhibit different stability once checkpoint selection and held-out generalization are part of the protocol?
4. Do settlement invariants and welfare-sensitive metrics remain reproducible and interpretable under heterogeneous agents, stress scenarios, and calibration?

2.1 Failure Definition

Let P_{full} denote the full ledger-aware protocol and P_{simp} a simplified alternative such as matching-only evaluation or the no-welfare-reward control. Let Π be a fixed candidate policy set. For a policy $\pi \in \Pi$, let

$$A(\pi, P) \in \{0, 1\}$$

indicate admissibility under protocol P, where admissibility means zero conservation breaches and zero negative-balance violations. Let

$$S(\pi, P) = z(\text{fills/s}) - z(\text{p99}) + z(\text{retail surplus}) - z(\text{retail adverse}) - z(\text{surplus gap})$$

denote the fixed evaluation score used for leaderboard-style comparisons among admissible policies under protocol P.

We say that P_{simp} induces *protocol-level evaluation failure* on Π relative to P_{full} if any of the following occur:

1. **Feasibility failure**: there exists $\pi \in \Pi$ such that $A(\pi, P_{\text{simp}}) \neq A(\pi, P_{\text{full}})$.
2. **Ranking failure**: the ordering of admissible policies under $S(\cdot, P_{\text{simp}})$ differs from the ordering under $S(\cdot, P_{\text{full}})$, as witnessed by a top-1 reversal, a change in tied groups, or Kendall $\tau < 1$.
3. **Operating-point failure**: even when admissibility and top-1 identity are preserved, the metric location of one or more policies or the non-dominated frontier shifts materially under a fixed metric set.

This definition is evaluator-centric. *Training objective misspecification* changes the optimization problem and therefore can change the learned policy itself. *Evaluation protocol misspecification* changes the judgment rule applied to a fixed candidate policy set. The paper isolates the latter with cross-evaluator controls and uses `no_welfare_reward` as a bridge case showing that reward misspecification can amplify, but does not replace, evaluator misspecification. In the current artifact, the strongest evidence is for ranking failure and operating-point failure. `matching_only` and `no_welfare_reward` alter controller ordering, whereas `no_settlement` leaves the aggregate ordering unchanged and should therefore be interpreted more narrowly as isolating the correctness role of settlement rather than as evidence that settlement is irrelevant.

3 Benchmark Environment

3.1 Core Components

The environment couples seeded heterogeneous order flow, immediate/speed-bump/adaptive/batch execution, deterministic settlement application, and a metric layer that records systems, market-quality, and welfare-sensitive outcomes. Controllers interact with that environment through a common step-wise surface, `Reset()`, `Observe()`, `Step()`, and `Metrics()`, so heuristics, offline value learners, and online policy updates can be evaluated under one protocol.

The shared control bundle exposes five runtime channels: batch-window override for adaptive scenarios, risk-limit scaling, tie-break randomization, release-cadence control, and price-aggression bias [2]. The goal is not to exhaust the control design space. It is to provide a small but nontrivial action surface on which evaluation protocol, admissibility, and welfare-sensitive outcomes can all matter at once.

3.2 Determinism and Invariants

Each scenario is seeded. Given the same scenario configuration and seed, the environment is expected to produce the same accepted order counts, fill counts, and benchmark metrics. The current protocol enforces three operational invariants:

1. **Conservation**: total cash and total inventory across accounts remain constant over time.
2. **Non-negativity**: no account is allowed to end a fill application with negative cash or negative units.
3. **Deterministic replay**: seeded runs produce stable outputs for the same configuration.

4 Agent Models

The present environment includes four agent classes:

- **Market makers**: quote on both sides around the current fundamental with configurable width and intensity.
- **Latency arbitrageurs**: react to stale price information and attempt to exploit short-horizon dislocations.
- **Retail traders**: submit noisier buy or sell orders with wider dispersion around the current reference level.

- **Informed traders**: trade in the direction of the next-step fundamental when the generator exposes a directional signal.

These agents are intentionally simple. Their purpose is to generate heterogeneous but reproducible activity so that matching rules and controller choices can be compared under a repeatable workload. Richer strategic agents are a natural extension, but they are not required for the identification objective in its current form. To test whether the central result survives richer, state-dependent behavior, the artifact layer now also includes a strategic population with inventory-aware market makers, trend-reactive retail flow, signal-scaled informed traders, and dislocation-sensitive arbitrageurs.

5 Tasks and Baselines

The current environment suite contains fifteen scenarios:

1. `Immediate-Surrogate`
2. `SpeedBump-50ms`
3. `FBA-100ms`
4. `FBA-250ms`
5. `FBA-500ms`
6. `Adaptive-100-250ms`
7. `Adaptive-OrderFlow-100-250ms`
8. `Adaptive-QueueLoad-100-250ms`
9. `Policy-BurstAware-100-250ms`
10. `Policy-LearnedLinUCB-100-250ms`
11. `Policy-LearnedTinyMLP-100-250ms`
12. `Policy-LearnedOfflineContextual-100-250ms`
13. `Policy-LearnedFittedQ-100-250ms`
14. `Policy-LearnedOnlineDQN-100-250ms`
15. `FBA-250ms-Stress`

The controller suite now contains a hand-written burst-aware controller, a contextual linear bandit, a gradient-trained TinyMLP policy, an offline contextual value controller, an offline fitted-Q controller, and an online DQN-style controller. The offline controllers are trained from logged trajectories generated by burst-aware, LinUCB, TinyMLP, offline contextual, and random behavior policies. The online controller is trained directly through adapter interaction over the same discrete action bundle. These controllers are included to isolate protocol effects across distinct learning styles rather than to claim a new learner family. Beyond the paper-facing base suite, the calibrated protocol also includes a behavior-cloning baseline on the shared logged-action split, a clipped PPO

baseline, and an offline IQL-style baseline, while the artifact layer adds a prioritized Double-DQN style online controller. Taken together, the protocol suite now covers heuristic control, contextual bandits, supervised imitation, offline value learning, policy gradient, and stronger online value learning. The point is to test whether the protocol effect survives stronger learners, not to attribute the frontier to one weak baseline family.

6 Metrics

The environment reports five groups of signals:

- **Systems metrics**: orders per second, fills per second, and p50/p95/p99 latency.
- **Market-quality metrics**: average spread and average price impact.
- **Fairness-adjacent proxies**: queue-priority advantage, latency-arbitrage profit, and execution dispersion.
- **Primary welfare decomposition**: retail surplus per traded unit, retail adverse-selection rate, and surplus-transfer gap.
- **Secondary diagnostics**: arbitrageur surplus per traded unit and welfare dispersion.
- **Safety metrics**: negative-balance violations, conservation breaches, and risk rejections.

The welfare metrics should be interpreted as controlled outcome proxies inside the simulator environment rather than direct measurements of real-market welfare. Their purpose is to expose systematic tradeoffs between latency optimization and surplus transfer under a fixed synthetic fundamental, not to claim a universal welfare theorem for live markets. Their role in the protocol is nonetheless operational rather than decorative: across base and strategic population suites, surplus-transfer gap retains moderate positive correlation with queue advantage and price impact, and the welfare-gap ranking remains substantially stable across suites (Kendall $\tau = 0.6$). The measurement claim is therefore narrower than "this is true welfare," but stronger than "this is an arbitrary extra metric."

7 Experimental Protocol

We separate exploratory sweeps from a paper-facing primary protocol. The primary protocol is the calibrated adaptive environment configuration with fixed train / validation / held-out splits, a shared observation schema, a shared six-action control bundle, and explicit checkpoint rules. The primary reported axes are p99 latency and surplus-transfer gap; fills per second and retail surplus are secondary interpretation metrics, and the artifact layer additionally exposes a standardized leaderboard score that combines these terms under one fixed formula. The paper's question is therefore not which learner wins after uncontrolled tuning. It is whether method conclusions survive once protocol, admissibility, and welfare-sensitive evaluation are fixed. All headline controller claims in the paper are tied to this fixed protocol rather than to exploratory curve maxima.

We report two result layers. The first is a single-seed reproducibility snapshot. The second is an eight-seed aggregate profile that is more appropriate for paper-facing discussion. The aggregate profile uses seeds

$$[7, 11, 19, 23, 29, 31, 37, 41].$$

Track	Policies	Train data / seeds	Validation rule	Held-out role
Exploratory base suite	`FittedQ`, `OnlineDQN`	offline logs on $[181, \ldots, 211]$ or online interaction on $[307, \ldots, 337]$	none; final iterate used for curves	unseen stress regimes at $[223, \ldots, 233]$ for learning-dynamics analysis
Matched calibrated protocol	`behavior_clone`, `ppo_clip`, `iql`	calibrated train split on $[1103, 1109, 1117, 1123]$	fixed final epoch for BC; best validation checkpoint / iterate on $[1129, 1151]$ for PPO/IQL	calibrated held-out report on $[1153, 1163, 1171, 1181]$ only
Transferred calibrated reference	`fitted_q`	offline logs from exploratory split	no recalibration; evaluated as-is	calibrated held-out comparison only

Table 2: Protocol summary. The key separation is between exploratory learning-dynamics artifacts and the matched calibrated comparison used for paper-facing method claims.

Controller	Function class	Training data / interaction	Main hyperparameters	Checkpoint rule
`BehaviorClone`	TinyMLP classifier (hidden dim 10)	logged actions from burst-aware, LinUCB, TinyMLP, and offline contextual policies on calibrated train seeds	12 supervised epochs, lr 0.022, $L_2 = 10^{-4}$	fixed final epoch; validation score reported but not used for early stopping
`FittedQ`	linear per-action values	offline trajectories from burst-aware, LinUCB, TinyMLP, offline contextual, and random policies on 6 exploratory train seeds	$\gamma = 0.97$, 8 Bellman iterations, least-squares refit each round, target clamp $[-25, 25]$	snapshots 0..8 on held-out regimes; iteration 8 reported
`PPOClip`	TinyMLP policy (hidden dim 12)	online interaction on calibrated train seeds	80 episodes, clipped surrogate with $\epsilon = 0.18$, 3 policy epochs per episode, lr 0.010	checkpoint every 10 episodes; best validation score reported
`IQL`	TinyMLP actor + linear critics	logged transitions from calibrated train seeds	6 iterations, expectile 0.70, beta 0.80, weighted actor updates, lr 0.012	best validation iterate reported
`OnlineDQN`	TinyMLP Q-network (hidden dim 10)	online interaction on 6 exploratory train seeds with replay memory	$\gamma = 0.97$, 160 episodes, $\epsilon : 0.25 \to 0.03$, replay cap 6000, updates after 48 samples, 4 Q-updates per step, lr 0.0035, $L_2 = 10^{-4}$, target refresh every 250 env steps	checkpoints every 20 episodes; episode 160 reported
`DoubleDQN`	TinyMLP Q-network (hidden dim 14)	online interaction on 6 exploratory train seeds with prioritized replay	$\gamma = 0.97$, 200 episodes, $\epsilon : 0.20 \to 0.02$, replay cap 8000, updates after 64 samples, 6 Double-DQN updates per step, lr 0.0030, $L_2 = 10^{-4}$, Polyak target mix $\tau = 0.08$	checkpoints every 20 episodes evaluated on held-out regimes; curve reported separately

Table 3: Training specification for the matched calibrated baselines, the transferred fitted-Q reference, and the stronger Double-DQN artifact. These settings are intentionally controlled: the goal is to isolate protocol effects first, then test whether those effects survive stronger offline and online learners.

The exploratory layer is used for multiseed mechanism profiles and learning-dynamics curves. In that layer, the learned fitted-Q controller uses a dedicated offline train/eval split: logged trajectories are collected on training seeds $[181, 191, 193, 197, 199, 211]$ from burst-aware, LinUCB, TinyMLP, offline contextual, and random behavior policies, then evaluated on held-out seeds $[223, 227, 229, 233]$. The online DQN-style controller uses replay-based Q-learning on training seeds $[307, 311, 313, 317, 331, 337]$, again with held-out evaluation on $[223, 227, 229, 233]$. These exploratory curves are useful for learning dynamics, but they are not the source of the paper-facing leaderboard claim.

The paper-facing primary protocol is the versioned calibrated adaptive environment configuration. It uses calibrated train seeds $[1103, 1109, 1117, 1123]$, validation seeds $[1129, 1151]$, and held-out seeds $[1153, 1163, 1171, 1181]$ over fixed validation and held-out regime families. To avoid selection bias, held-out regimes are never used for checkpoint choice. PPO selects the checkpoint with best validation score, IQL keeps the best validation iterate, behavior cloning reports a fixed final-epoch model under the same split, and the earlier fitted-Q policy is reported only as a transferred offline reference rather than as part of the matched train / validation protocol.

All reported scenarios use the same simulator implementation and differ only in matching mode, batch-window size, seed, and population intensity. The current setup uses a discrete-time step duration of 10 milliseconds.

7.1 Learning Specification

The learned controllers share one adapter interface. Observations contain seven scalars: a bias term, queue depth, buy/sell imbalance, spread, pending-order count, risk-rejection count, and normalized episode progress. The shared action bundle exposes six discrete control choices over batch-window target, risk-limit scale, tie-break mode, release cadence, and price-aggression bias.

The per-step reward shared by all learned controllers is

$$\begin{aligned} r_t = {} & 1.0 \cdot \Delta\text{fills} - 0.25 \cdot \Delta\text{spread} - 1.5 \cdot \Delta\text{impact} - 12.0 \cdot |\Delta\text{queue}| \\ & - 0.005 \cdot \Delta\text{arb} + 18.0 \cdot \Delta\text{retail surplus} - 10.0 \cdot \Delta\text{retail adverse} - 2.0 \cdot \Delta\text{welfare dispersion} \\ & - 3.0 \cdot \max(\Delta\text{surplus gap}, 0) - 0.5 \cdot \Delta\text{risk rejects} - 10.0 \cdot \Delta\text{conservation breaches}. \end{aligned}$$

The calibrated protocol layer extends that setup with a versioned train / validation / held-out split on the calibrated adaptive environment configuration. The calibrated-policy artifact reports five policies on validation and held-out regimes: `burst_aware`, `behavior_clone`, `fitted_q`, `ppo_clip`, and `iql`. Only three of them should be read as a matched protocol family: `behavior_clone`, `ppo_clip`, and `iql` share the same observation schema, discrete action bundle, calibrated train /

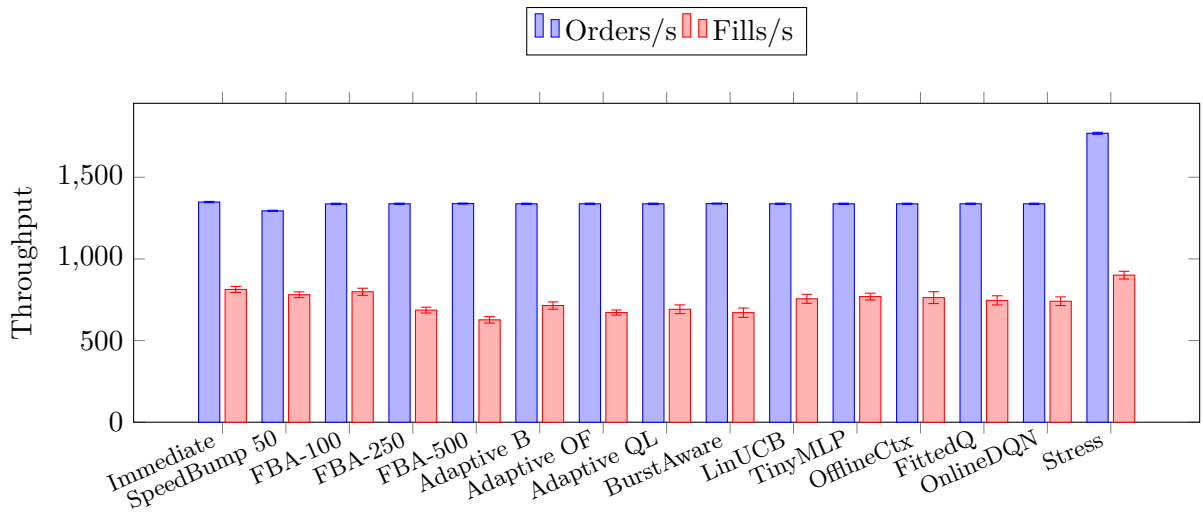

Figure 1: Aggregate throughput comparison with 95% confidence-interval error bars.

validation / held-out split, and evaluation budget. `fitted_q` remains useful, but it is a transferred offline reference trained under the earlier exploratory split rather than a member of the matched calibrated training protocol. This distinction matters because checkpoint rules and data splits are part of the protocol rather than incidental implementation details.

On the reference machine used for artifact generation, the unified hypercube run (108 cells, 4 seeds per cell, 125 steps per run) completes 54,000 simulator steps in 19.42 seconds, or about 2.78×10^3 steps per second; the runtime-profile artifact records the same measurement. Combining published per-cell throughput with episode duration yields an estimated wall-clock rate of 5.11×10^4 order events per second and 2.38×10^4 fills per second, which is sufficient for the lightweight offline and online learning experiments reported here.

8 Results

The results are organized around four layers: the latency–welfare frontier itself, learning dynamics, protocol effects, and robustness under calibration and stress. The main claim is not only that a latency–welfare conflict exists. It is that simplified evaluation protocols can hide or distort that conflict, while the full protocol exposes stable differences between controller families. Accordingly, Figure 2, Table 8, and Figure 6 should be read as the primary result set, with learning curves and auxiliary leaderboards serving as supporting diagnostics.

Figure 2 is the most direct statement of protocol-level ranking failure. On this fixed matched four-policy slice, the full protocol places `behavior_clone` and `iql` jointly at the top, but the `matching_only` simplification breaks that tie and promotes the imitation policy over the value-style one while also lifting `ppo_clip` above `burst_aware`. The causal interpretation is also sharper than in earlier drafts. `matching_only` collapses the release-cadence and batch-window dimensions back to immediate execution, so policies are effectively judged on a narrower latency/fills view. `no_welfare_reward` leaves the infrastructure loop intact but removes welfare-sensitive optimization pressure, which is enough to improve the PPO-style controller without eliminating the frontier. `no_settlement` keeps the same ranking because, in the current aggregate setup, the ordering is dominated by matching and reward design rather than by settlement application itself. The protocol question is therefore not cosmetic. Changing the evaluation loop changes what appears to be a

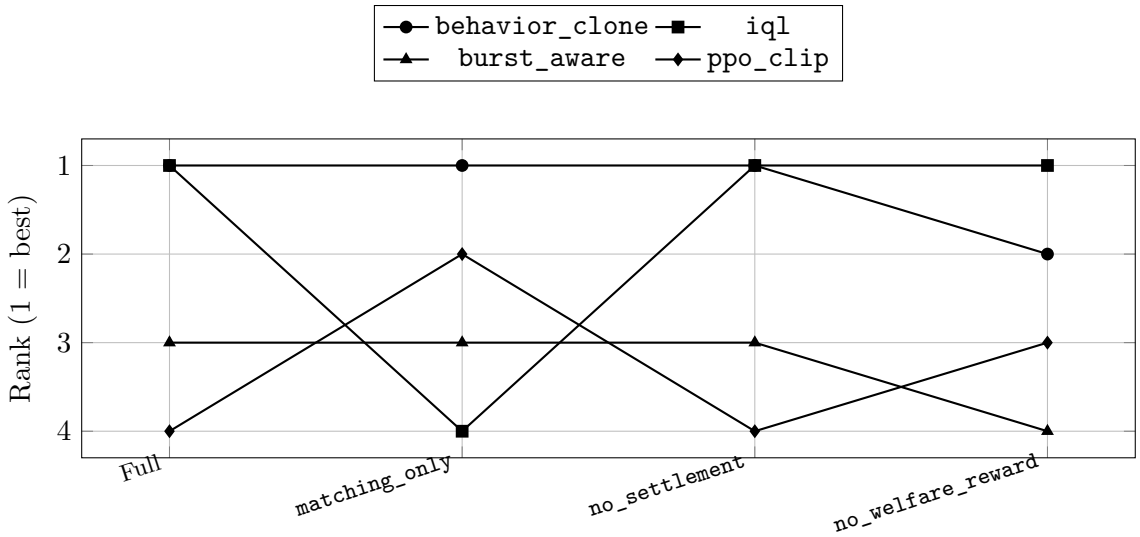

Figure 2: Method rankings change under evaluation protocol. The full ledger-aware protocol and `no_settlement` agree on the same ordering, while `matching_only` and `no_welfare_reward` materially reorder the policies.

good controller.

8.1 Aggregate Summary

8.2 Observed Tradeoffs

Four observations are currently the most informative.

First, immediate execution retains the lowest latency profile, but it also carries a high queue-advantage proxy and a large welfare gap. Under the current synthetic environment, low latency alone is not a good indicator of balanced market quality.

Second, the 50 millisecond speed-bump baseline raises latency without reducing queue advantage. It preserves the immediate-style queue signal (0.0742) while worsening the welfare gap to 4.1034. This makes it a useful negative control: latency rises, but batching-style fairness does not automatically follow.

Third, the fixed 250 millisecond batch regime lowers queue advantage to 0.0273 and compresses the welfare gap relative to immediate execution, but it gives up substantial tail latency. The balanced adaptive heuristic is the strongest fixed-logic mechanism on combined welfare terms: it keeps price impact low (4.71), reduces arbitrage-profit proxy to 522.00, and nearly closes the welfare gap (0.0278).

Fourth, the controller comparison now exposes a clearer tradeoff than the earlier draft. `LinUCB` remains strong on tail latency and fill throughput, but it does so by widening both queue advantage and the surplus-transfer gap. `FittedQ` and `OnlineDQN` both produce the best in-distribution p99 tail (145.0 ms), giving explicit offline and online learning stories on top of the adapter API, but they still behave closer to `LinUCB` than to `OfflineContextual` on welfare transfer. `TinyMLP` improves fills further, but still leaves retail surplus negative and keeps arbitrage capture high. The offline contextual controller remains the strongest balanced learned baseline under the current protocol: compared with `LinUCB`, it gives up some tail latency but cuts price impact (4.94 versus 5.90), lowers queue advantage (0.0294 versus 0.0513), lowers arbitrage-profit proxy (771.25 versus 976.63), and

Scenario	Orders/s	Fills/s	p50 (ms)	p99 (ms)
Immediate-Surrogate	1348.2	813.1	10.0	10.0
SpeedBump-50ms	1294.3	780.6	60.0	60.0
FBA-100ms	1337.1	798.7	46.3	146.3
FBA-250ms	1337.6	686.4	97.5	452.5
FBA-500ms	1338.8	626.9	213.8	835.0
Adaptive-100-250ms	1337.6	714.3	81.3	360.0
Policy-BurstAware	1338.9	670.8	98.8	400.0
Policy-LearnedLinUCB	1337.6	755.7	48.8	155.0
Policy-LearnedTinyMLP	1337.6	769.3	62.5	221.3
Policy-LearnedOfflineContextual	1337.4	762.8	65.0	215.0
Policy-LearnedFittedQ	1337.7	746.2	46.3	145.0
Policy-LearnedOnlineDQN	1337.6	740.8	46.3	145.0
FBA-250ms-Stress	1769.3	900.5	97.5	373.8

Table 4: Eight-seed aggregate summary. All runs report zero conservation breaches and zero negative-balance violations.

Scenario	Impact	Queue Adv.	Retail Surplus	Welfare Gap
Immediate-Surrogate	3.38	0.0742	-0.3710	2.0430
FBA-250ms	5.36	0.0273	-0.3493	0.8896
Adaptive-100-250ms	4.71	0.0375	-0.1508	0.0278
Policy-BurstAware	5.31	0.0305	-0.2258	0.7579
Policy-LearnedLinUCB	5.90	0.0513	0.0795	2.1694
Policy-LearnedTinyMLP	5.22	0.0336	-0.3128	1.9719
Policy-LearnedOfflineContextual	4.94	0.0294	-0.1090	1.3769
Policy-LearnedFittedQ	5.88	0.0451	0.0742	2.2036
Policy-LearnedOnlineDQN	5.92	0.0431	0.0662	2.2472
FBA-250ms-Stress	5.35	0.0269	-0.1494	0.3805

Table 5: Aggregate market-quality, welfare, and fairness-adjacent summary metrics.

shrinks the welfare gap (1.3769 versus 2.1694). This is already an evaluation effect: the methods that look strongest on p99 and fills are not the same methods that remain strongest once welfare-sensitive outcomes are treated as first-class metrics.

The stress scenario raises throughput to 1769.25 orders per second and 900.50 fills per second, but it also raises arbitrage capture to 2057.00. Higher activity does not automatically imply better fairness or welfare outcomes.

Across all $15 \times 8 = 120$ aggregate runs, the environment reports zero negative-balance violations and zero conservation breaches.

8.3 Held-Out Regime Generalization

Held-out results use unseen seeds $[223, 227, 229, 233]$ and four unseen regime combinations. The policy summary is shown in Table 6.

The held-out picture is materially different from the in-distribution aggregate. `FittedQ` lowers both p99 and welfare gap relative to `LinUCB` in the high-arbitrage wide-maker, retail-burst, and

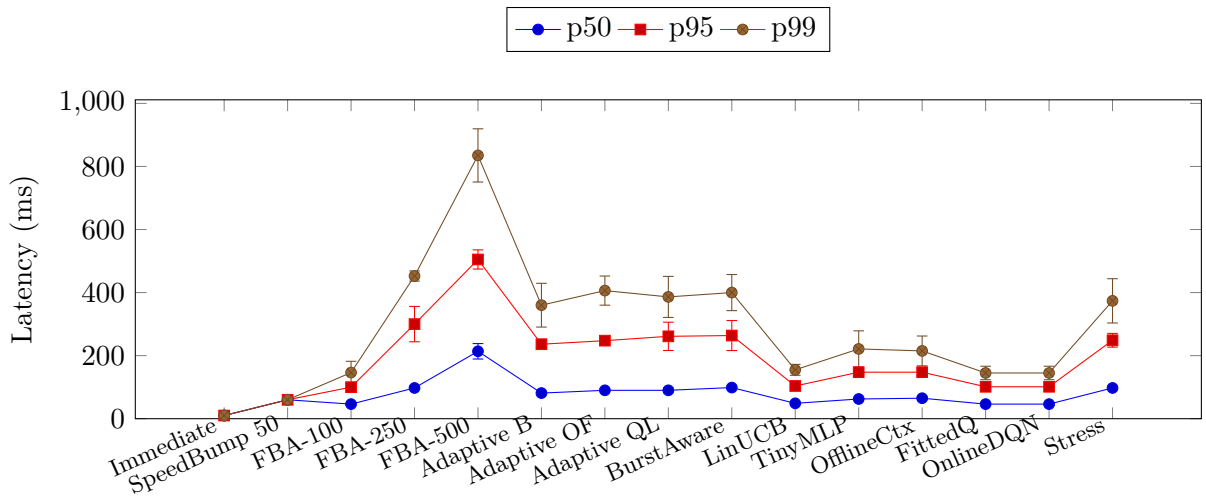

Figure 3: Latency profiles with 95% confidence intervals.

Policy	Fills/s	p99 (ms)	Retail Surplus	Welfare Gap
BurstAware	834.08	376.88	-0.4042	1.6286
LinUCB	978.52	171.25	0.1215	2.4466
OfflineContextual	961.61	275.62	-0.0732	1.9535
FittedQ	946.78	159.38	0.1110	2.3158
OnlineDQN	986.61	172.50	0.0937	2.2189

Table 6: Held-out policy summary over four unseen regimes.

composite-stress held-out regimes. In the informed-wide regime, it gives up some tail latency (182.5 versus 167.5 ms) but still lowers welfare gap (2.2994 versus 2.3765). `OfflineContextual` remains the most welfare-balanced learned baseline overall, but it is materially slower than both `LinUCB` and `FittedQ` on held-out tails. `OnlineDQN` sits between them: it improves held-out fills to 986.61, keeps p99 at 172.50 ms, and lowers the held-out welfare gap to 2.2189, which is better than both `LinUCB` and `FittedQ` on this exploratory held-out aggregate. That result should be read narrowly. These exploratory policies are trained under different budgets and different data sources, so the section is evidence about learning dynamics and attainable operating points, not a clean protocol-level offline-versus-online comparison.

8.4 Fitted-Q Learning Curve

The fitted-Q controller is no longer just a point baseline. We also log its held-out behavior over Bellman-update iterations. The untrained snapshot begins at a welfare gap of 3.2117 ± 0.5538 and p99 latency of 341.25 ± 22.97 ms. After the first Bellman update, the held-out welfare gap falls to 2.0790 ± 0.4767 and p99 falls to 198.75 ± 25.39 ms. By iteration 8, Bellman MSE declines from 45.1571 to 6.5753, held-out p99 reaches 155.62 ± 12.84 ms, and the welfare gap settles at 2.4226 ± 0.5400. The training story is therefore not monotone on every objective: later iterations improve Bellman error and tail latency, but they give back part of the earliest welfare improvement.

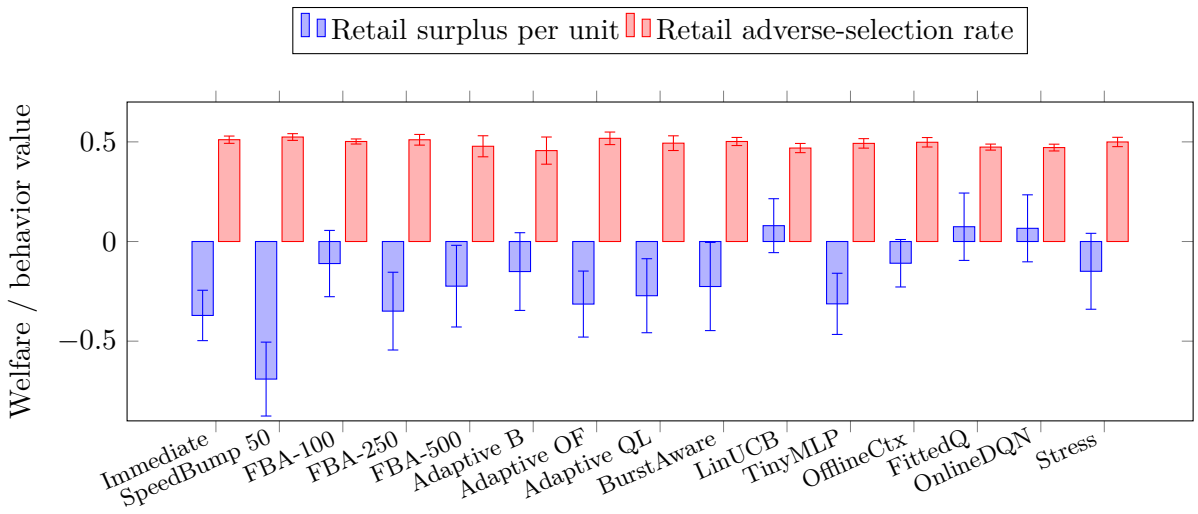

Figure 4: Welfare and behavior signals with 95% confidence intervals. Controllers that improve latency do not automatically improve retail outcomes.

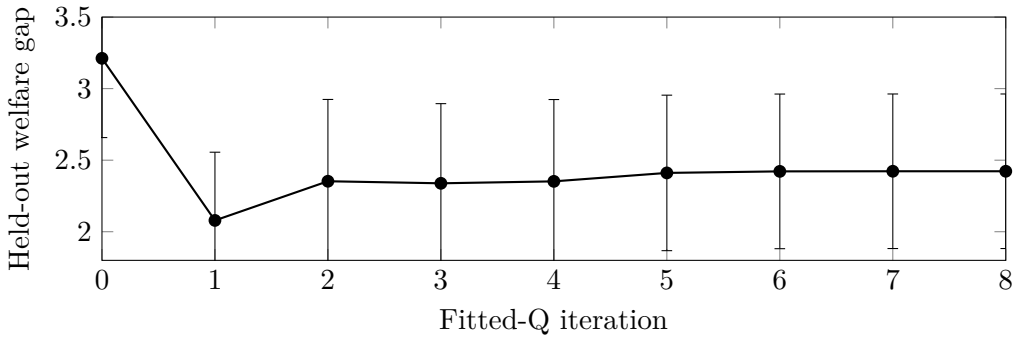

Figure 5: Held-out fitted-Q learning curve. The first Bellman update captures most of the welfare-gap gain; later iterations continue to reduce Bellman error and tail latency but do not preserve that full early welfare improvement.

8.5 Online DQN Learning Curve

The online DQN-style controller adds a second, explicitly online training story. The untrained checkpoint begins at held-out p99 latency of 200.00 ± 25.46 ms and welfare gap of 1.5898 ± 0.3869. By episode 20, held-out p99 falls to 155.62 ± 12.84 ms, while the welfare gap rises to 2.4226 ± 0.5400. Later checkpoints remain on the same plateau. The online controller therefore converges quickly toward a latency-favoring regime. Under the current reward structure, latency improvement is easier for the policy to exploit than retail-welfare preservation.

8.6 Prioritized Double-DQN Extension

The stronger online-RL artifact uses prioritized replay, Double-DQN targets, and Polyak target-network mixing. It does not change the paper's question, but it does add a materially stronger online-learning recipe than the plain DQN baseline. The untrained checkpoint starts at 875.55 ± 145.75 fills per second, 336.25 ± 37.31 ms p99 latency, and welfare gap 3.2567 ± 0.6388. By episode

Profile	Mean train reward	Held-out p99 (ms)	Held-out welfare gap
Default	923.96	155.62	2.4226
Latency-heavy	1899.13	155.62	2.4226
Welfare-heavy	-108.57	155.62	2.4226

Table 7: Online DQN reward-sensitivity summary on held-out regimes. Large reward-weight perturbations change train reward scale but not the final held-out operating point.

80, the controller reaches 1079.32 ± 183.72 fills per second with p99 latency 177.50 ± 21.88 ms and welfare gap 1.6813 ± 0.4221. By the final checkpoint at episode 200, p99 falls further to 161.88 ± 14.82 ms, but the welfare gap widens back to 2.5926 ± 0.5294. The final iterate therefore improves p99 by only 15.62 ms relative to episode 80, while giving back 0.9113 welfare-gap units and 145.64 fills per second. The important result is not domination over the simpler DQN baseline. It is that a stronger online learner exposes a sharper checkpoint-selection tradeoff: later optimization can still pull the policy back toward a latency-favoring regime, so checkpoint selection must be treated as part of the evaluation protocol rather than as an afterthought.

8.7 Reward Sensitivity

To test whether the online-learning result depends on one hand-tuned reward vector, we retrain the online DQN controller under three deliberately separated reward profiles: the paper default, a latency-heavy profile, and a welfare-heavy profile. The final held-out operating point remains on the same plateau in all three cases. Default reward weights produce held-out p99 latency of 155.62 ± 12.84 ms and welfare gap 2.4226 ± 0.5400. The latency-heavy and welfare-heavy profiles produce the same held-out p99 and welfare-gap pair within the reported confidence intervals. The training reward scale changes materially, but the held-out controller behavior does not. For this protocol study, that is a useful robustness result: the latency-welfare tension is not only a consequence of one reward-weight vector. Under the current action bundle and held-out regimes, the online policy still converges toward the same latency-favoring operating region.

8.8 First Closed-Loop Calibration Pass

The study now includes a first closed-loop calibration pass against real public market data rather than only a synthetic generator. A stylized-facts envelope from an 8-symbol Binance spot slice is used to compare a baseline synthetic scenario against a tuned synthetic scenario. The calibration targets are explicit: spread, impact, and depth-shape statistics are the primary quantities being matched, while order-sign autocorrelation, inter-arrival timing, and volatility-clustering terms are checked but not yet tightly fit. This should therefore be read as a realism anchor with auditable error bounds rather than a claim of full market reconstruction.

The first-pass result is directionally strong even though it is not yet a final realism claim. The tuned generator moves mean spread from 326.41 bps to 12.83 bps, near the empirical upper envelope of 11.22 bps, and moves the top impact bucket from 264.41 bps to 8.47 bps. It falls inside the empirical range on 7/13 tracked summary metrics. The remaining misses are concentrated in order-sign autocorrelation, inter-arrival timing, one return-clustering term, and a subset of ask-side depth-shape statistics. In other words, the calibration materially improves the market-facing envelope, but it does not yet calibrate strategic adaptation, long-range dependence, or full equilibrium feedback.

More importantly for the paper's claim, the calibrated protocol profile keeps all calibrated

scenarios at zero-breach while preserving the same qualitative latency–welfare tension as the base protocol:

- `Calibrated-Immediate-Surrogate`: 34.84 ± 0.01 orders/s, welfare gap 4.3321 ± 0.1398
- `Calibrated-FBA-2s`: 34.77 ± 0.01 orders/s, welfare gap 3.3927 ± 0.1593
- `Calibrated-Policy-LearnedFittedQ-1-3s`: 34.77 ± 0.01 orders/s, welfare gap 3.1301 ± 0.1299

The realism gap is therefore narrower than in earlier versions of the protocol, even though this remains a first-pass calibration rather than a high-fidelity market simulator. The central latency–welfare tension does not disappear once the synthetic generator is retuned toward a market-data envelope, which makes this calibration pass a useful external-validity anchor even while the paper's claim remains deliberately narrower than "the simulator reproduces a live market."

8.9 Protocol Effects and Counterfactual Controls

The raw market-data bundle is versioned with manifest hashes and per-file checksums in the artifact package. This does not turn simulator outputs into real-market results, but it does make the calibration input chain auditable and reproducible.

The calibrated-learning protocol now reports explicit train / validation / held-out splits rather than only a single tuned rerun. On held-out calibrated regimes, `burst_aware` reaches 47.16 ± 3.43 fills per second with welfare gap 5.8322 ± 0.1675, `behavior_clone` reaches 58.86 ± 1.72 fills per second with welfare gap 3.9602 ± 0.2590, `fitted_q` reaches 56.86 ± 1.89 fills per second with welfare gap 3.9602 ± 0.2672, `ppo_clip` reaches 40.54 ± 1.85 fills per second with welfare gap 6.6590 ± 0.3586, and `iql` reaches 58.86 ± 1.72 fills per second with welfare gap 3.9602 ± 0.2590. The strongest matched calibrated tradeoff therefore comes from logged-data baselines rather than from the PPO-style controller: `behavior_clone` and `iql` tie on the best held-out point, while `fitted_q` remains close but slower on p99 latency because it is transferred from the earlier offline split. A paired sign-flip comparison on the calibrated held-out regimes shows that `iql` improves both welfare gap and p99 latency relative to `ppo_clip` with exact $p = 3.1 \times 10^{-5}$ under the current protocol. The standardized calibrated leaderboard in `simulator_policy_leaderboard` therefore places `behavior_clone` and `iql` jointly at the top, followed by `fitted_q`, under one fixed score combining fills, p99, retail surplus, adverse selection, and surplus-transfer gap. Checkpoint sensitivity is therefore a main result rather than an appendix detail: once online learning is strong enough, the selection rule itself becomes part of the evaluation protocol because intermediate policies can dominate naive final iterates on the latency-welfare frontier.

One new diagnostic clarifies how this tied held-out point should be interpreted. The data-coverage artifact shows that the behavior-cloning split is not data-starved: it contains 7,696 logged samples over 6,810 rounded feature states and covers five of the six discrete actions, with mass split almost evenly between `balanced_mid` (49.29%) and `fast_passive` (49.14%). The IQL training set is broader still: 11,544 transitions over 10,635 rounded states with support on all six actions once random rollouts are added. Yet the policy-agreement artifact shows that `behavior_clone` and `iql` choose the same action on 100% of both validation and held-out reference states, and that action is `fast_passive`. The present tie should therefore be read as a structural collapse of the current 7-feature / 6-action protocol to one operating point, not as evidence that another pass of the same training budget would separate the methods. This is why richer observation/action design is a next-step requirement rather than a cosmetic extension.

The counterfactual-control artifact provides the two cross experiments that separate evaluator misspecification from reward misspecification. First, holding the policy set fixed and swapping the

Track	Selection rule	Selected iterate	Selected p99 (ms)	Selected ga
`BehaviorClone`	fixed report rule	epoch 12 = final	1500.00	3.960
`IQL`	best validation iterate	iter 6 = final	1500.00	3.960
`PPOClip`	best validation checkpoint	episode 80 = final budget	6000.00	6.659
`DoubleDQN`	dominant diagnostic checkpoint	episode 80	177.50	1.681
`DoubleDQN`	naive final iterate	episode 200	161.88	2.592

Table 8: Checkpoint sensitivity as a protocol choice. Under the matched calibrated protocol, reported iterates coincide with fixed final or best-validation rules. In the stronger exploratory Double-DQN run, the final iterate improves p99 but worsens welfare gap relative to the earlier dominant checkpoint.

evaluator shows protocol-level ranking failure directly. In `matching_only`, p99 latency collapses to 1000 ms but retail surplus stays negative and welfare gap remains large (4.4725 to 5.2132 across published policies); more importantly, relative to the full control protocol, two of four ranks move and Kendall $\tau = -0.20$. In `no_settlement`, the mechanism and welfare measurements remain unchanged while settlement application is removed, and the same policy ranking is preserved with Kendall $\tau = 1.0$. Second, keeping the ledger-aware evaluator but changing the training objective through `no_welfare_reward` shows that objective misspecification can also distort comparison: the PPO-style controller improves to 54.49 ± 4.34 fills per second and 3312.50 ± 227.12 ms p99, but still leaves a substantial welfare gap at 3.3874 ± 0.1272; the protocol ranking changes again, with three of four policy ranks moving and Kendall $\tau = 0.60$. These controls sharpen the claim. `matching_only` is the main rank-reversal source, `no_welfare_reward` produces an even larger reordering, and `no_settlement` should be read more narrowly as preserving the aggregate ordering while still defining correctness, admissibility, and the trust boundary under which a learned controller would be acceptable in infrastructure use.

8.10 Controller Pareto Frontier

The multiseed controller frontier makes the same tradeoff visible on one surface. When minimizing p99 latency and surplus-transfer gap jointly, three points remain undominated: immediate execution, the balanced adaptive heuristic, and the offline contextual controller. Immediate execution is fastest but welfare-weak; the adaptive heuristic nearly closes the welfare gap but gives up substantial tail latency; offline contextual is the strongest balanced learned point. Figure 6 makes the operating-point story explicit: the relevant comparison is not a single scalar winner, but how protocols move policies along or away from the latency–welfare surface.

8.11 Metric Robustness and Stress Robustness

Metric robustness is treated as a primary experiment rather than as appendix-only supporting evidence. Across base and strategic populations, surplus-transfer gap retains moderate positive correlation with queue advantage and price impact, while the welfare-gap ranking remains substantially stable across suites (Kendall $\tau = 0.6$). This does not prove that the welfare proxy is unique or complete. It does show that the paper's main metric is structured, moderately stable, and not an arbitrary one-off summary. The appendix then retains mechanism ablations, agent/workload sweeps, and strategic-agent snapshots as stress tests showing that the main claim is not tied to one frozen population mix, one risk setting, or one single market-maker specification. Across those

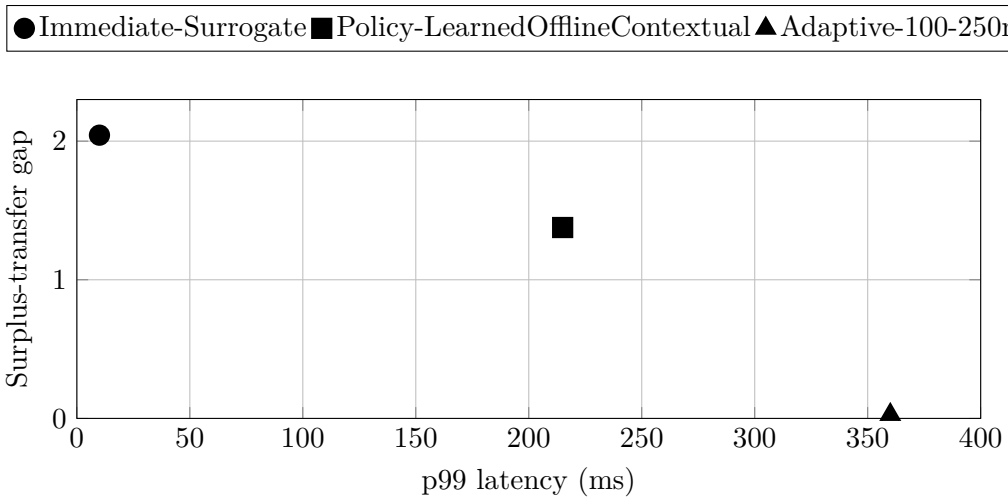

Figure 6: p99 latency–welfare Pareto surface over the multiseed controller family. Immediate execution is fastest but welfare-weak; the adaptive heuristic minimizes welfare gap; offline contextual occupies the strongest balanced learned point.

Measurement check	Statistic	Value
Gap vs queue advantage	Pearson correlation	0.3305
Gap vs price impact	Pearson correlation	0.3417
Base vs strategic ranking	Kendall τ on welfare gap	0.6000

Table 9: Compact measurement-robustness summary from the welfare artifact. The point is not that the proxy is perfect, but that it is structured and moderately stable rather than arbitrary.

checks, the same directional pattern persists: relaxing risk raises throughput but also arbitrage capture, retail burst loads activity without neutralizing welfare transfer, and richer strategic agents preserve the same arbitrage-driven deterioration in retail outcome.

Finally, we expose a unified $4 \times 3 \times 3 \times 3$ hypercube over arbitrageur intensity $\{0, 1, 2, 3\}$, retail intensity $\{1, 2, 3\}$, informed intensity $\{1, 2, 3\}$, and maker quote width $\{1, 2, 3\}$. Two raw cells still illustrate the environment directly. At $(\text{arb} = 0, \text{retail} = 1, \text{informed} = 2, \text{maker} = 1)$, the environment reports 1350.60 orders per second, zero arbitrage-profit proxy, and a welfare gap of 0.2376. At $(\text{arb} = 3, \text{retail} = 1, \text{informed} = 2, \text{maker} = 1)$, throughput rises to 1542.86 and p99 falls to 362.50 milliseconds, but arbitrage-profit proxy jumps to 1982.00 and the welfare gap widens to 1.2839.

This compact summary removes the need to interpret the hypercube only through slice families. Rather than reporting slice plots alone, the study summarizes the stress surface with response-surface fits and factor contrasts that expose the dominant drivers of welfare transfer. Arbitrage intensity consistently emerges as the dominant driver of welfare-gap expansion, retail intensity is mostly a throughput lever, and wider maker quotes worsen retail outcome without moving aggregate activity in this setup. Averaged over informed intensity and maker width, moving from arb = 0 to arb = 3 widens the welfare gap by 1.1748, 1.2262, and 1.2287 at retail intensities $x1$, $x2$, and $x3$, respectively. This effect persists across retail intensities. Higher retail flow does not neutralize transfer-to-arbitrageur.

The fitted response surface compresses the same hypercube into standardized main effects and

Factor	Δ Orders/s	Δ Retail Surplus	Δ Retail Adverse	Δ Welfare Gap
Arbitrage $0 \to 3$	176.26	-0.1804	0.0117	1.2099
Retail $1 \to 3$	780.94	0.0772	0.0018	0.0781
Informed $1 \to 3$	150.91	-0.1986	0.0131	0.0876
Maker width $1 \to 3$	0.00	-0.1250	0.0085	0.2653

Table 10: Compact high-low contrasts from the unified hypercube.

Metric	R^2	Top partial effects
Surplus-transfer gap	0.3495	arb 0.3157, maker 0.0291
Retail surplus per unit	0.7061	informed 0.3121, arb 0.2374

Table 11: Response-surface summary over the unified hypercube.

pairwise interactions. For surplus-transfer gap, the fit reaches $R^2 = 0.3495$, with arbitrage intensity dominating partial variance explained (0.3157) and maker quote width the next largest effect (0.0291). For retail surplus per unit, the fit reaches $R^2 = 0.7061$, where informed intensity (0.3121) and arbitrage intensity (0.2374) dominate the effect ranking. This moves the analysis beyond purely descriptive slice analysis.

8.12 Robustness to Agent Assumptions

The paper does not claim that its agents are complete models of strategic market behavior. The narrower question is whether the main tradeoffs survive changes in population mix and workload composition. In the current artifact, they do. Removing arbitrageurs collapses arbitrage-profit proxy to zero and flips queue advantage negative. Raising arbitrage intensity in the agent sweep lifts arbitrage-profit proxy to 1730.75, while the hypercube summary shows welfare-gap expansion of about +1.2 when arbitrage intensity moves from 0 to 3. Retail burst nearly doubles throughput to 2532.94 orders per second but does not neutralize transfer-to-arbitrageur in the high-arbitrage slices. Wider maker quotes worsen retail outcome and p99 latency without meaningfully increasing aggregate activity. The richer strategic population preserves the same directional story: `Strategic-HighArb` worsens retail outcome relative to `Strategic-Control`, while `Strategic-RetailBurst` mainly raises throughput and fills rather than closing the welfare gap. These checks do not make the agents realistic in a behavioral-economics sense, but they do show that the central finding is not an artifact of one frozen population mix.

9 Scope and Limitations

The current protocol and environment have clear remaining limitations. The most important ones are:

- the learned-controller family is still lightweight and discrete-action, and the current 7-feature observation compresses the infrastructure state aggressively; the new coverage diagnostic suggests that richer state/action structure is a more urgent next step than simply retraining the same small models for longer
- welfare metrics are derived from a synthetic fundamental rather than real market replay, so they

should be read as controlled outcome proxies for mechanism-controller comparison rather than direct measurements of live-market welfare

- the response surface is still low-order and pairwise; it supports structured stress analysis, but not a fully general causal model of market behavior
- the agent behaviors are stylized and do not yet include richer strategic adaptation; their role is repeatability and controlled heterogeneity rather than faithful modeling of every strategic response

10 Related Work

At a general level, this paper belongs to work on benchmark design, constrained decision making, and misspecified objectives/evaluators. The key distinction here is between *training objective misspecification* and *evaluation protocol misspecification*. The former changes the optimization target and may therefore change the learned policy. The latter changes the admissibility test, ranking rule, or operating-point comparison applied to a fixed policy set. Our claim is about the second failure mode, with `no_welfare_reward` serving as a bridge case showing how objective misspecification can interact with evaluator misspecification but should not be conflated with it.

Within market learning, the paper is motivated directly by frequent-batch-auction market design [3], but its framing is closer to evaluation-protocol work than to a pure mechanism-design paper. The closest domain-specific relatives are replay-centric financial RL suites such as FinRL-Meta [5], multi-agent simulators such as ABIDES-Gym [1], and high-throughput LOB simulators such as JAX-LOB [4]. Relative to those systems, the present contribution is aimed at a narrower gap: controller comparisons that survive explicit settlement admissibility, mechanism variation, and welfare-sensitive measurement in the same loop.

11 Conclusion

This paper makes one central claim: simplified evaluation can mislead conclusions about market-learning systems by changing admissibility, rankings, or operating points. The strongest evidence is the protocol-level rank shift in Figure 2: the simplified `matching_only` view does not preserve the ordering of the full protocol, while `no_settlement` preserves ranking but weakens the admissibility boundary. Across base runs, calibrated reruns, and counterfactual controls, controllers that optimize aggressively for latency and fill throughput tend to widen surplus-transfer gap, while logged-data baselines remain more stable on the latency–welfare frontier than online learners that drift toward latency-favoring operating points. The new coverage diagnostics sharpen the main limitation: the present top tie is not caused by missing action support in the train split, but by the fact that the current low-dimensional policy protocol collapses to one held-out operating point. More generally, in tasks with feasibility constraints and welfare-sensitive objectives, simplified evaluators can systematically distort policy comparison by changing which policies are admissible, how they are ranked, and where they appear to sit on the deployment-facing frontier.

Scenario	Orders/s	p99 (ms)	Arb Profit	Risk Rejects
Ablation-Control	1190.48	320.00	685.25	2922
Ablation-RelaxedRisk	1770.24	302.50	2198.50	0
Ablation-RandomTieBreak	1190.48	402.50	738.50	2908
Ablation-NoSettlementChecks	1190.48	320.00	685.25	2922

Table 12: Mechanism ablation appendix table.

Controller	p99 (ms)	Impact	Retail Surplus	Welfare Gap
BurstAware	400.00	5.31	-0.2258	0.7579
LinUCB	155.00	5.90	0.0795	2.1694
TinyMLP	221.25	5.22	-0.3128	1.9719
OfflineContextual	215.00	4.94	-0.1090	1.3769
FittedQ	145.00	5.88	0.0742	2.2036
OnlineDQN	145.00	5.92	0.0662	2.2472

Table 13: Controller comparison appendix table.

A Appendix Tables

References

[1] Ibrahim Amrouni et al. Abides-gym: Gym environments for multi-agent discrete event simulation and application to financial markets, 2021.

[2] Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. Openai gym, 2016.

[3] Eric Budish, Peter Cramton, and John Shim. The high-frequency trading arms race: Frequent batch auctions as a market design response. *The Quarterly Journal of Economics*, 130(4):1547–1621, 2015.

[4] Felix Frey et al. Jax-lob: A gpu-accelerated limit order book simulator to unlock large scale reinforcement learning for trading, 2023.

[5] Xiao-Yang Liu et al. Finrl-meta: Market environments and benchmarks for data-driven financial reinforcement learning, 2022.

Arb	Retail	Informed	Maker	Welfare Gap
0	1	2	1	0.2376
3	1	2	1	1.2839
0	3	2	1	0.1335
3	3	2	3	1.8005

Table 14: Selected cells from the unified arbitrage / retail / informed / maker hypercube.