

1. Open Cursor Settings → Tools and MCP
2. Click Add MCP Server → this will open a mcp.json file, paste the following and save:

```
{  
  "mcpServers": {  
    "red-connect": {  
      "url": "http://localhost:3000/mcp"  
    }  
  }  
}
```

3. Open Terminal, make sure you're in the correct place, should be something like:

PS C:\YOUR_FILE_PATH\brc-company-mcp-server>

- a. Then for READ-ONLY mode paste in:

```
$env:BRC_ALLOW_READ_SKILLS="true"  
  
$env:BRC_ALLOW_UPDATE_SKILLS="false"  
  
$env:BRC_ALLOW_DELETE_SKILLS="false"  
  
npm run start
```


- b. For all Customer level permission paste in:

```
$env:BRC_ALLOW_READ_SKILLS="true"  
  
$env:BRC_ALLOW_UPDATE_SKILLS="true"  
  
$env:BRC_ALLOW_DELETE_SKILLS="true"  
  
npm run start
```

You should get something like this:

```
PS C:\Users\Lauren.Dwyer\source\repos\mcp_v2\s2t2\brc-company-mcp-server>  
$env:BRC_ALLOW_READ_SKILLS="true"  
>> $env:BRC_ALLOW_UPDATE_SKILLS="true"  
>> $env:BRC_ALLOW_DELETE_SKILLS="true"  
>> npm run start  
>>  
  
> brc-company-mcp-server@1.4.0 start  
> node build/remote.js  
  
Warning: Server is binding to 0.0.0.0 without DNS rebinding protection. Co  
nsider using the allowedHosts option to restrict allowed hosts, or use aut  
hentication to protect your server.  
BRC MCP server (Streamable HTTP) running at http://localhost:3000/mcp  
□
```

4. Then go back to cursor settings → tools and MCP and toggle the MCP server on and off until you see the following:

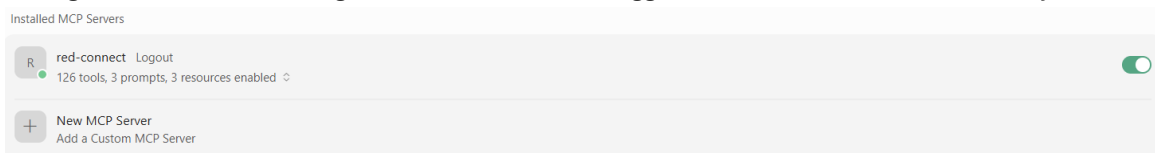

If it doesn't tell you the number of tools, prompts etc, then the server isn't connected.