


Cloud Assistant vs Local Pointer-First Assistant

Introductory comparison

Conventional cloud code assistant


Large context is commonly sent to an external model API

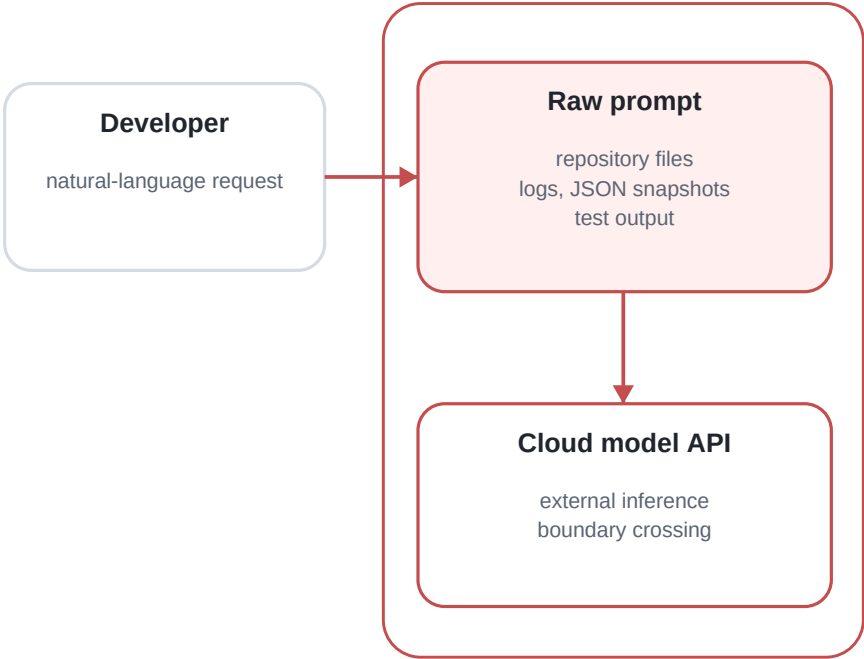

Privacy risk:
internal code and operational data
are embedded in the model context.

Proposed local pointer-first assistant

Raw internal data stays on local disk, store, and index

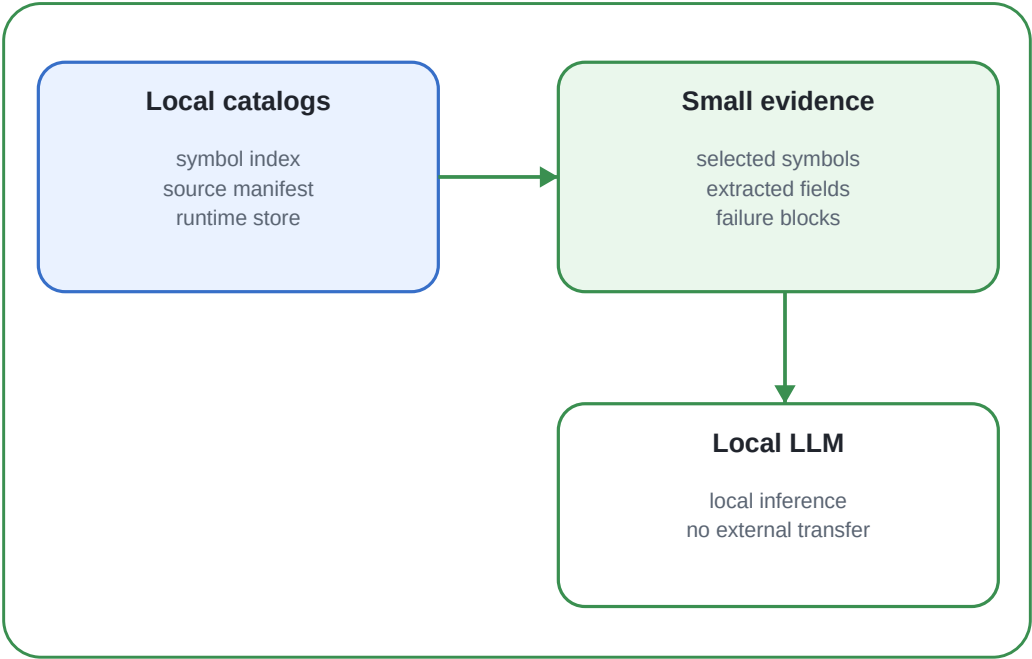

Design constraint:
LLM context is treated as evidence for current reasoning,
not as a raw data warehouse.