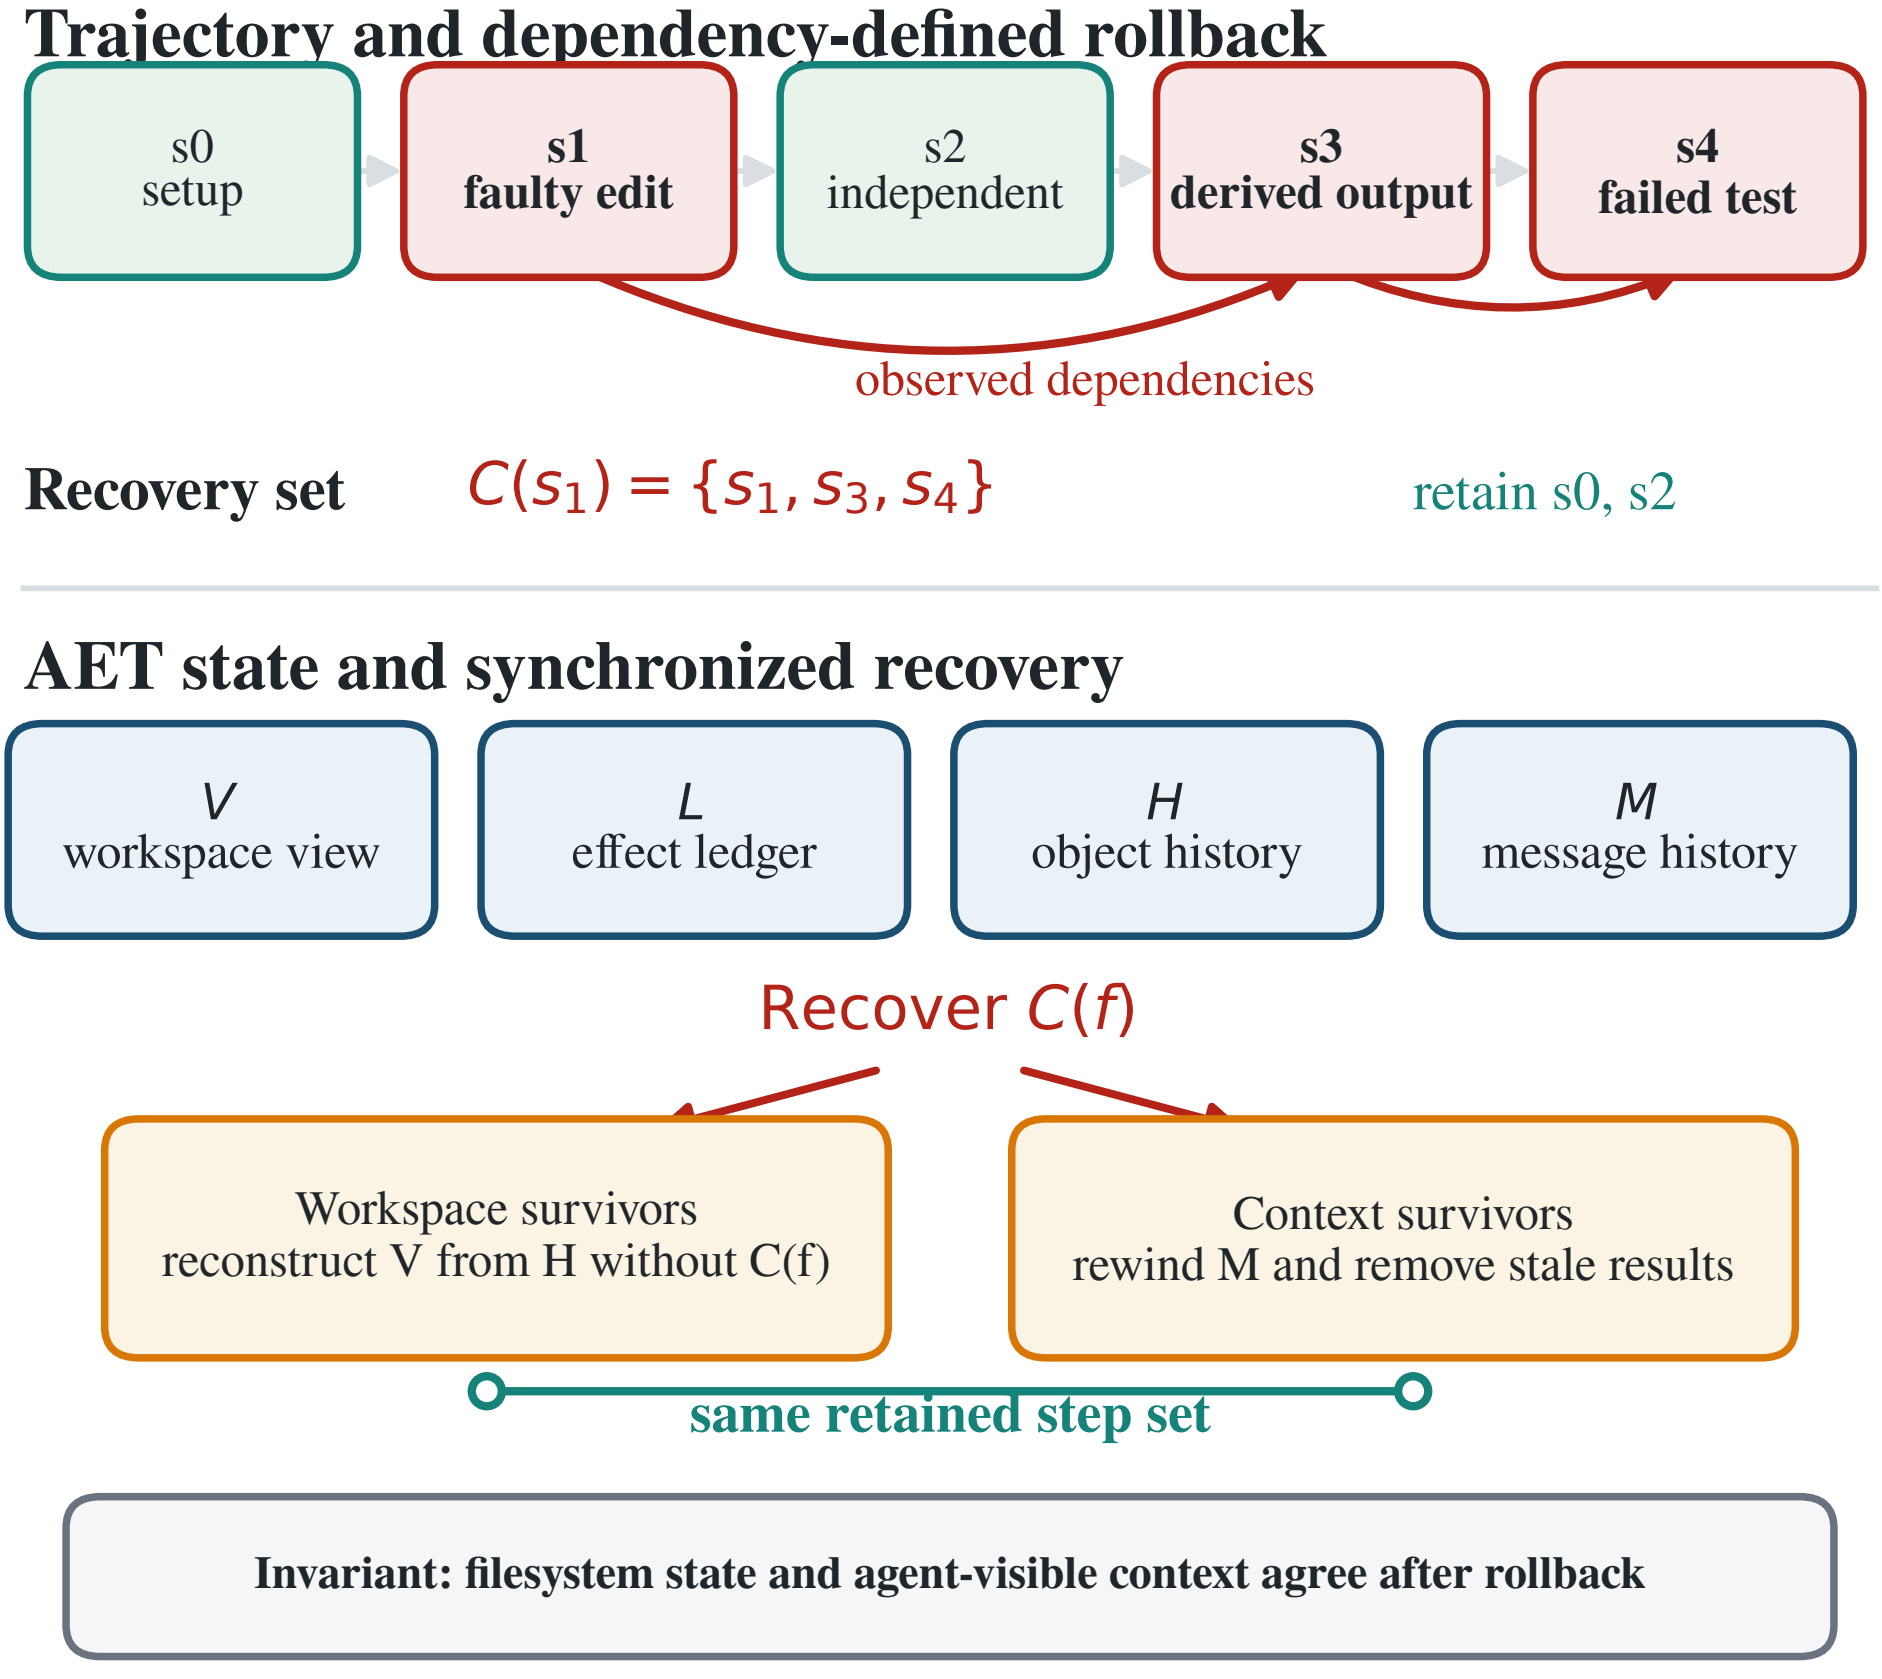
Trajectory and dependency-defined rollback
s0
setup
s1
faulty edit
s2
independent
s3
derived output
s4
failed test
observed dependencies
Recovery set
$C(s_1) = \{s_1, s_3, s_4\}$
retain s0, s2
AET state and synchronized recovery
V
workspace view
L
effect ledger
H
object history
M
message history
Recover C(f)
Workspace survivors
reconstruct V from H without C(f)
Context survivors
rewind M and remove stale results
same retained step set
Invariant: filesystem state and agent-visible context agree after rollback