


NAMA: BILQIS ROKHIMMATUL KHAJJAH MABRUROH

NIM: 242410101051

KELAS: A

AKTIVITAS MANDIRI 3 — Membuat Layout Master & Halaman-Halaman

1. Buat layout master: resources/views/layouts/app.blade.php dengan navbar, main content area (@yield('content')), dan footer

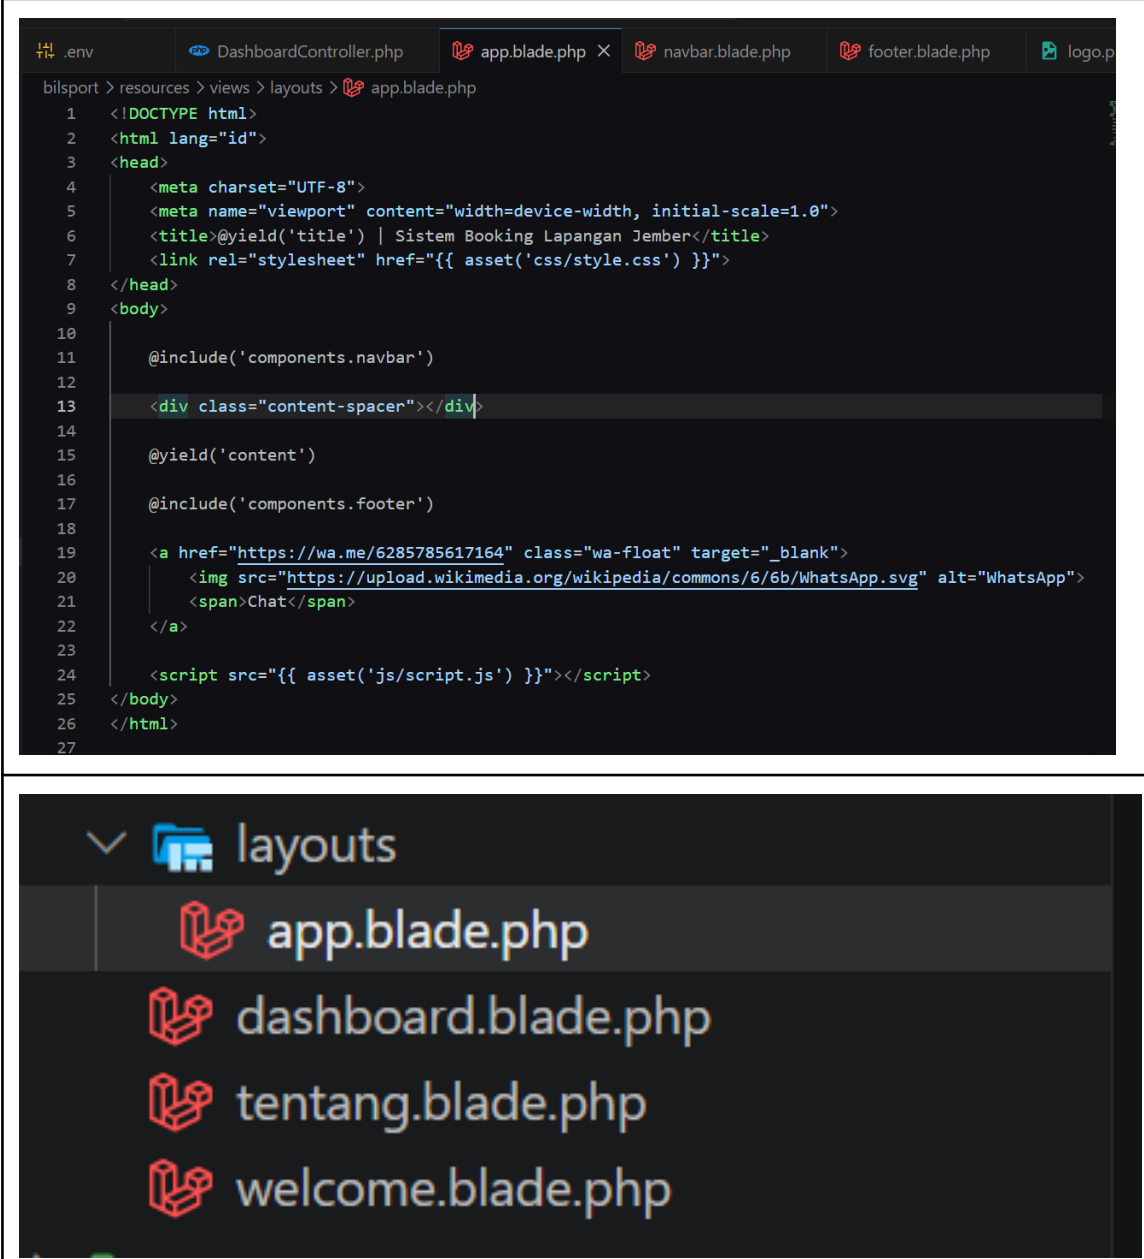


The image shows a code editor with a dark theme. The top bar displays several open files: .env, DashboardController.php, app.blade.php (active), navbar.blade.php, footer.blade.php, and logo.p. The main editor area shows the content of app.blade.php, which is a Blade template for a master layout. It includes a DOCTYPE declaration, HTML lang attribute, and a head section with meta tags for charset, viewport, and title. The body section includes @include directives for navbar and footer, a @yield placeholder for content, and a WhatsApp chat button. The file explorer on the right shows the 'layouts' directory with the following files: app.blade.php (selected), dashboard.blade.php, tentang.blade.php, and welcome.blade.php.


```
1 <!DOCTYPE html>
2 <html lang="id">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>@yield('title') | Sistem Booking Lapangan Jember</title>
7     <link rel="stylesheet" href="{{ asset('css/style.css') }}">
8 </head>
9 <body>
10
11     @include('components.navbar')
12
13     <div class="content-spacer"></div>
14
15     @yield('content')
16
17     @include('components.footer')
18
19     <a href="https://wa.me/6285785617164" class="wa-float" target="_blank">
20         
21         <span>Chat</span>
22     </a>
23
24     <script src="{{ asset('js/script.js') }}"></script>
25 </body>
26 </html>
27
```

layouts

- app.blade.php
- dashboard.blade.php
- tentang.blade.php
- welcome.blade.php

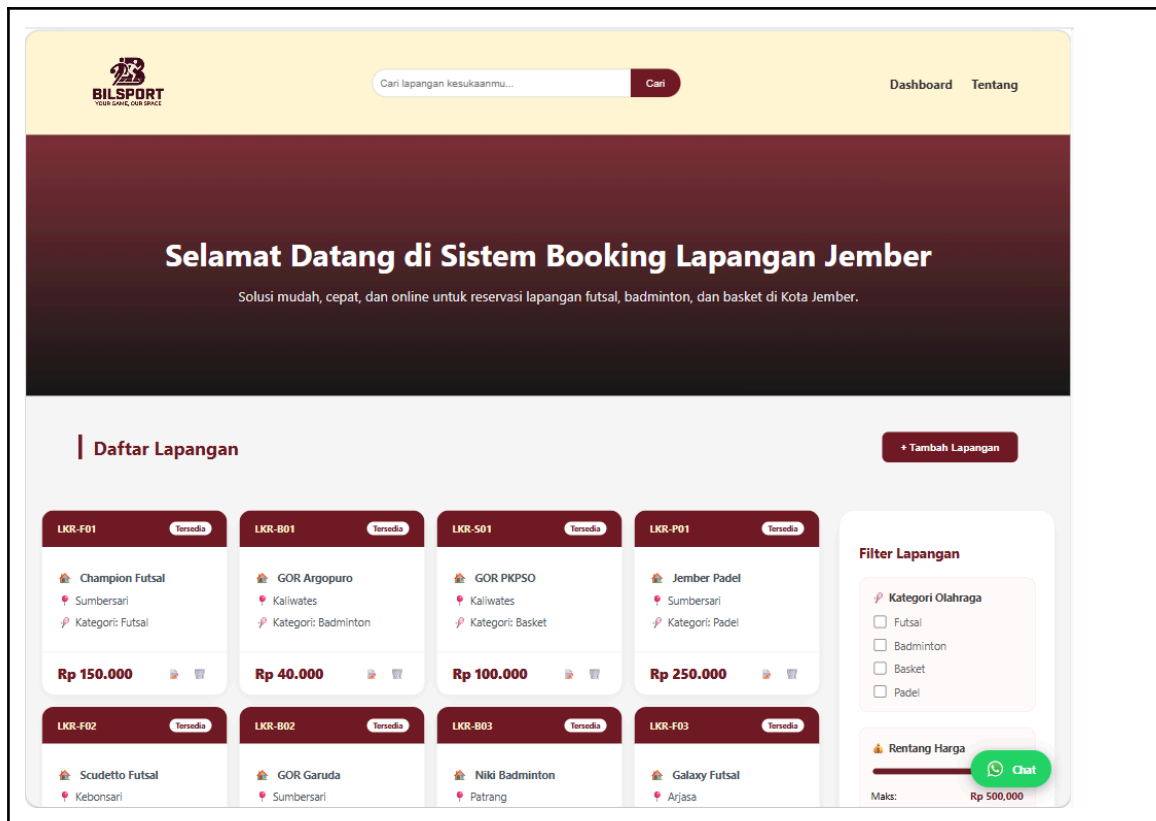


2. Buat partial: resources/views/partials/navbar.blade.php dan sisipkan dengan @include di layout

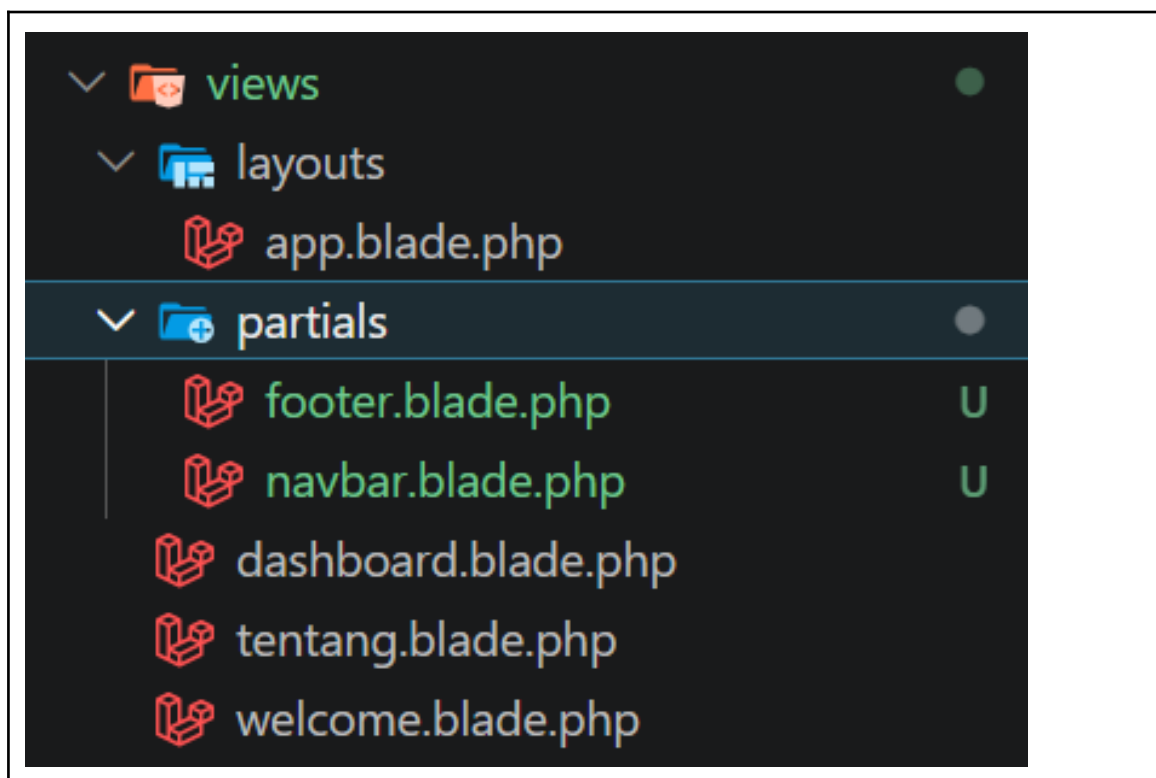


```

.env | DashboardController.php | app.blade.php M | navbar.blade.php U | footer.blade.php U
bilsport > resources > views > layouts > app.blade.php
1 <!DOCTYPE html>
2 <html lang="id">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>@yield('title') | Sistem Booking Lapangan Jember</title>
7     <link rel="stylesheet" href="{{ asset('css/style.css') }}">
8
9     @stack('scripts')
10 </head>
11 <body>
12
13     @include('partials.navbar')
14
15     <div class="content-spacer"></div>
16
17     @if(session('success'))
18         <div style="background: #d4edda; color: #155724; padding: 15px; margin: 20px 5%; border-radius: 10px;">
19             {{ session('success') }}
20         </div>
21     @endif
22
23     <main>
24         @yield('content')
25     </main>
26
27     @include('partials.footer')
28
29     <a href="https://wa.me/6285785617164" class="wa-float" target="_blank">

```

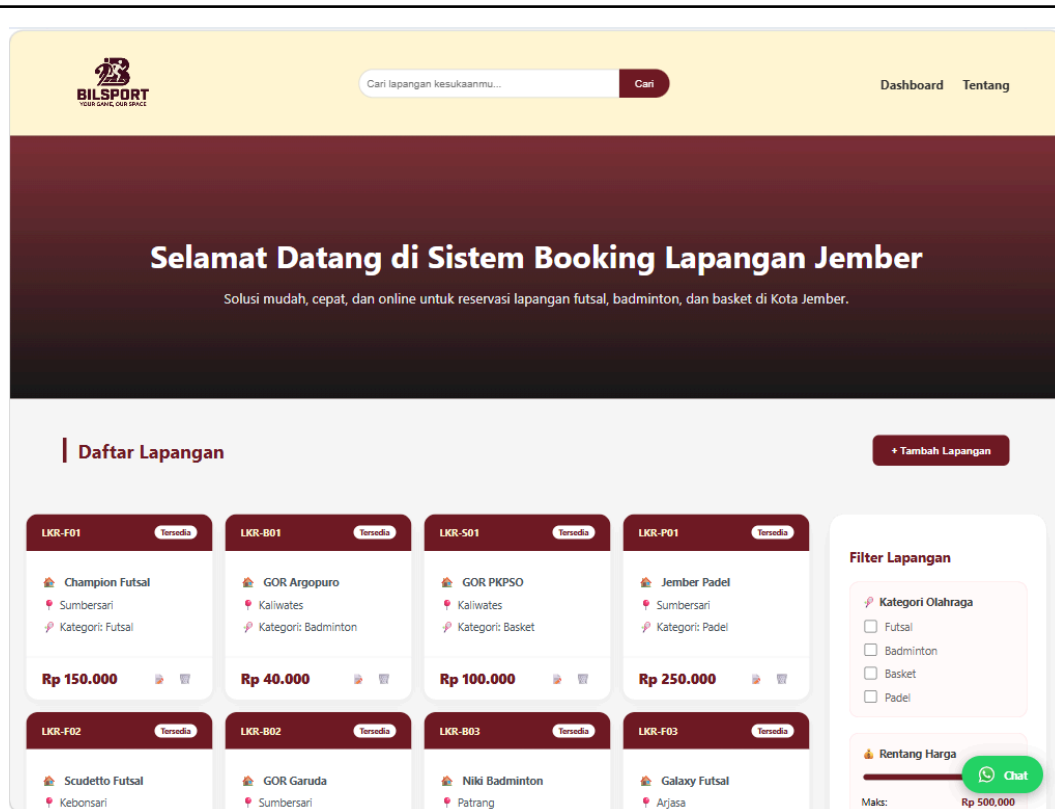


3. Buat halaman dashboard: resources/views/dashboard.blade.php yang @extends('layouts.app')

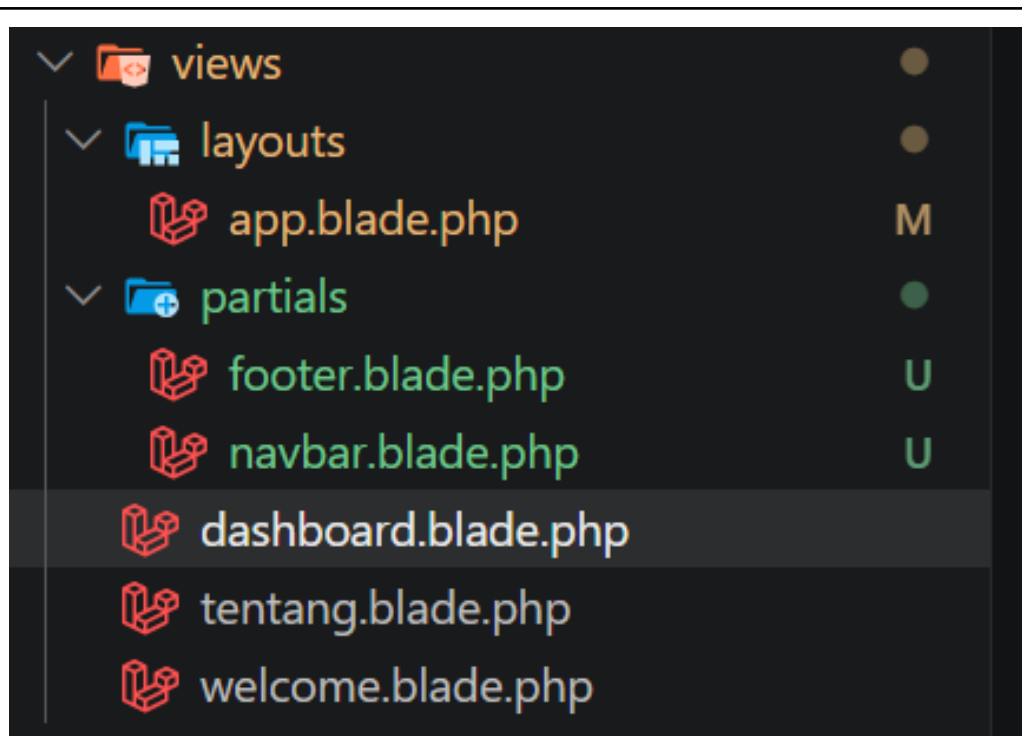


```
ip  app.blade.php M  dashboard.blade.php X  navbar.blade.php U  footer.blade.php U  logo.png

bilsport > resources > views > dashboard.blade.php
1  @extends('layouts.app')
2
3  @section('title', 'Beranda')
4
5  @section('content')
6      <section class="hero">
7          <h1>Selamat Datang di Sistem Booking Lapangan Jember</h1>
8          <p>Solusi mudah, cepat, dan online untuk reservasi lapangan futsal, badminton, dan basket di
9      </section>
10
11     <div class="header-halaman">
12         <div class="judul-kiri">
13             <h2 class="page-title">Daftar Lapangan</h2>
14         </div>
15         <div class="tombol-kanan">
16             <button class="btn-add-main" onclick="openModal('tambah')">+ Tambah Lapangan</button>
17         </div>
18     </div>
19
20     <main class="dashboard-container">
21         <section class="content-left">
22             <div id="cardGrid" class="card-grid-4"></div>
23
24             <div class="table-section-nanti" style="margin-top: 40px;">
25                 <h3 style="color: var(--maroon); margin-bottom: 15px;">Daftar Lengkap Data Lapangan</h3>
26                 <div class="table-container">
27                     <table class="modern-table">
28                         <thead>
29                         <tr>
```

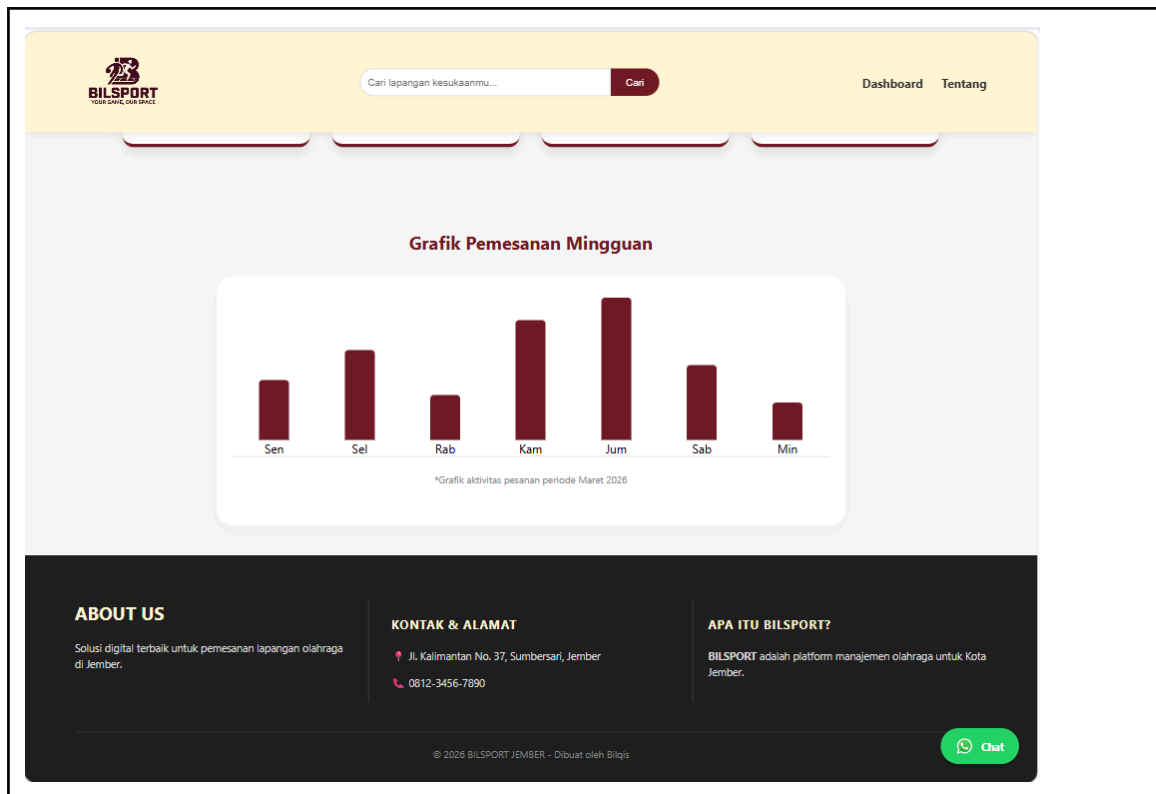

4. Tampilkan flash session message di layout: @if(session('success')) ... @endif


```
DashboardController.php M X app.blade.php M dashboard.blade.php navbar.blade.php
bilsport > app > Http > Controllers > DashboardController.php
1  <?php
2
3  namespace App\Http\Controllers;
4
5  use Illuminate\Http\Request;
6
7  class DashboardController extends Controller
8  {
9      public function index()
10     {
11         session()->flash('success', 'Anda masuk ke halaman dashboard');
12
13         return view('dashboard');
14     }
15 }
```

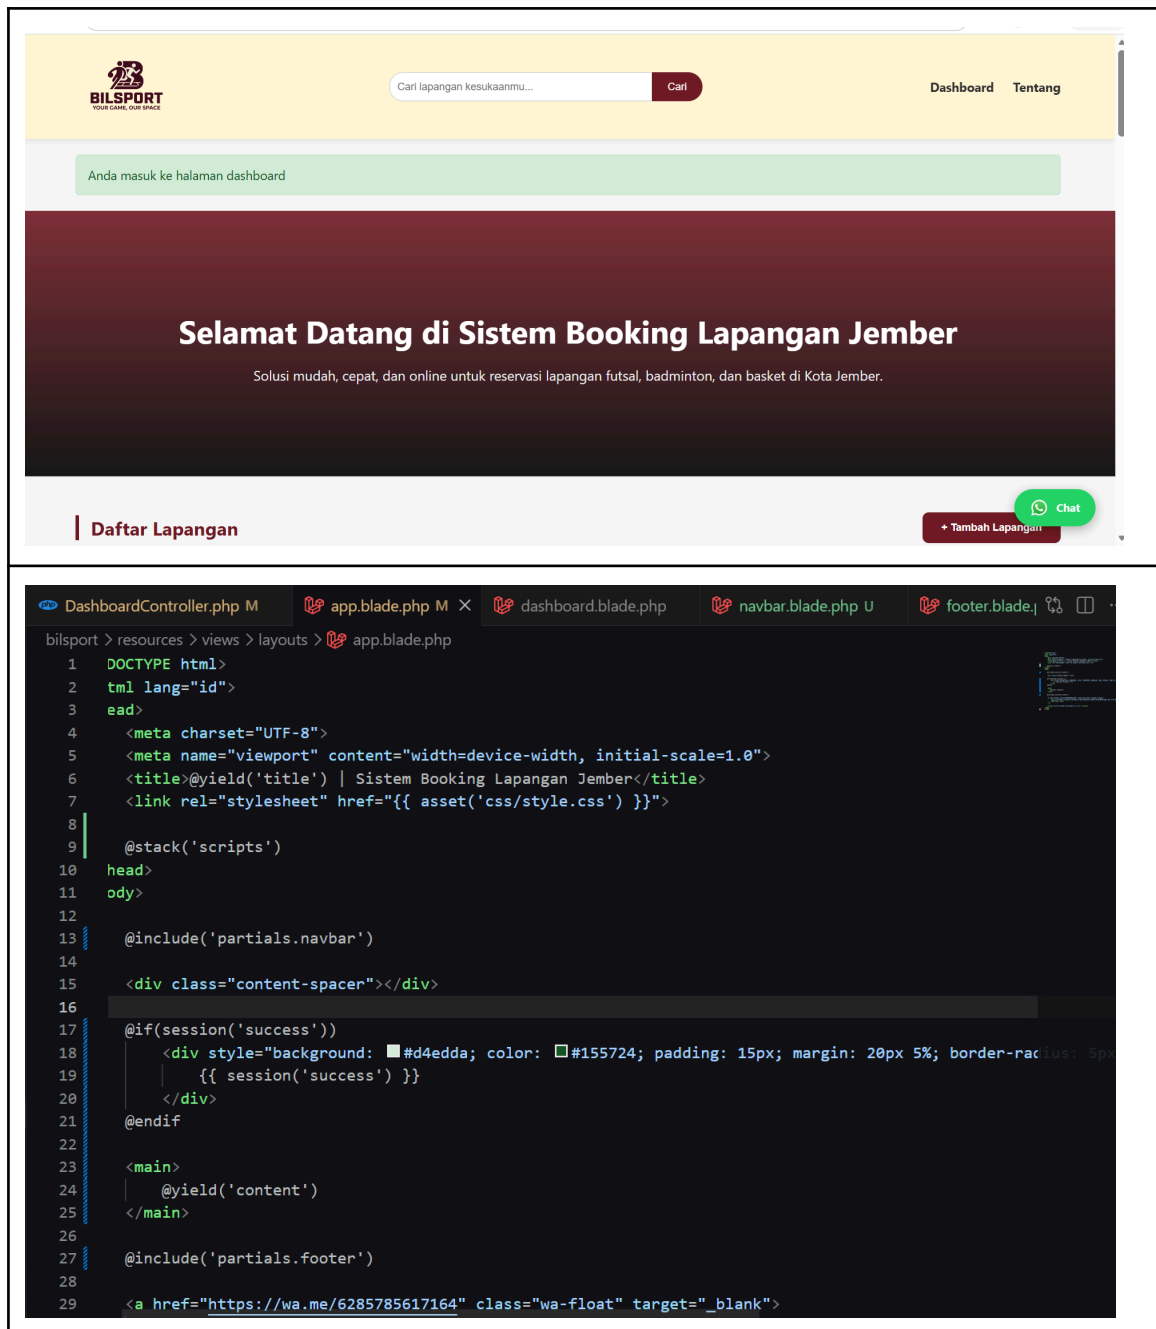


5. Buat komponen: resources/views/components/stat-card.blade.php (kartu statistik dengan props: judul, nilai, ikon, warna)

```
DashboardController.php M × app.blade.php M stat-card.blade.php U dashboard.blade.php M navbar.blade.php U
bilsport > app > Http > Controllers > DashboardController.php
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class DashboardController extends Controller
8 {
9     public function index()
10     {
11         $stats = [
12             ['judul' => 'Total Item', 'nilai' => '15', 'ikon' => '📦', 'warna' => 'maroon'],
13             ['judul' => 'Total Nilai Inventaris', 'nilai' => 'Rp 2.500.000', 'ikon' => '💰', 'warna' => 'green'],
14             ['judul' => 'Stok Menipis', 'nilai' => '3', 'ikon' => '⚠️', 'warna' => 'orange'],
15         ];
16
17         $lapangans = [
18             ['kode' => 'L001', 'kat' => 'Futsal', 'nama' => 'Galaxy Futsal', 'lok' => 'Gedung A', 'harga' => 'Rp 500.000']
19         ];
20     }
21 }
```

```
stat-card.blade.php U × dashboard.blade.php M navbar.blade.php U footer.blade.php U logo.png
bilsport > resources > views > components > stat-card.blade.php
1 <div class="stat-card" style="border-bottom: 5px solid {{ $warna }}; flex: 1; background: white; padding: 10px;">
2     <span style="font-size: 2rem;">{{ $ikon }}</span>
3     <h3 style="font-size: 14px; color: #777;">{{ $judul }}</h3>
4     <p style="font-size: 20px; font-weight: bold; margin: 0;">{{ $nilai }}</p>
5 </div>
```

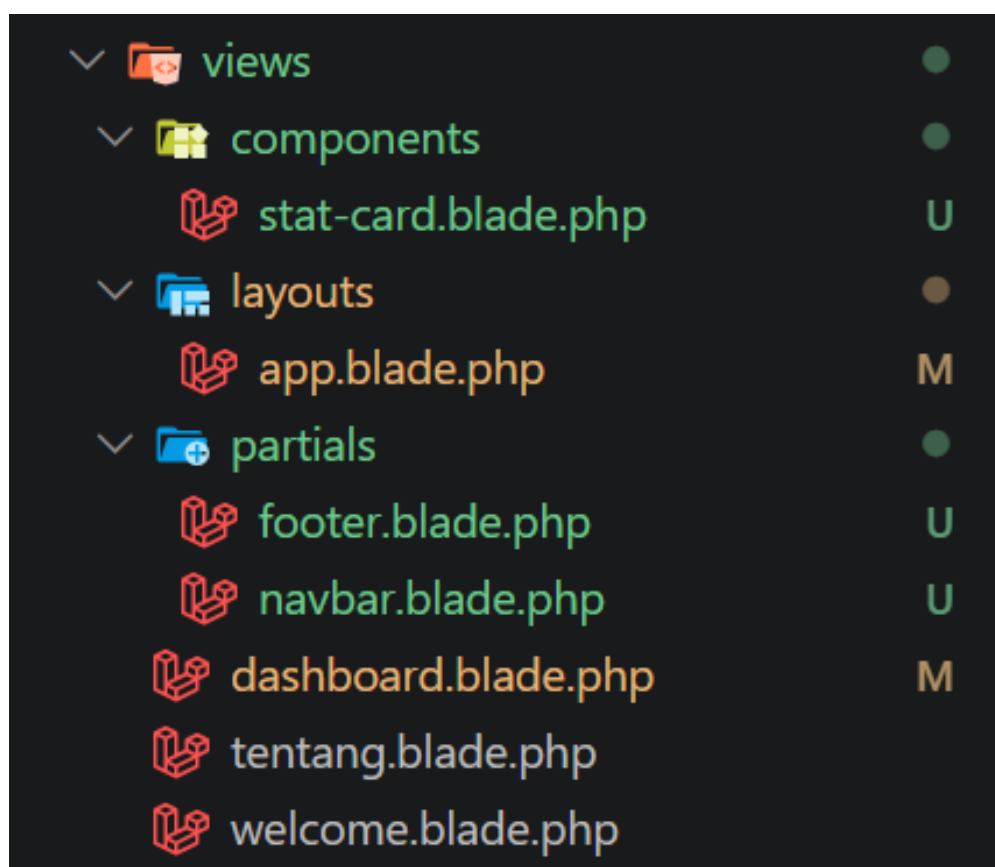

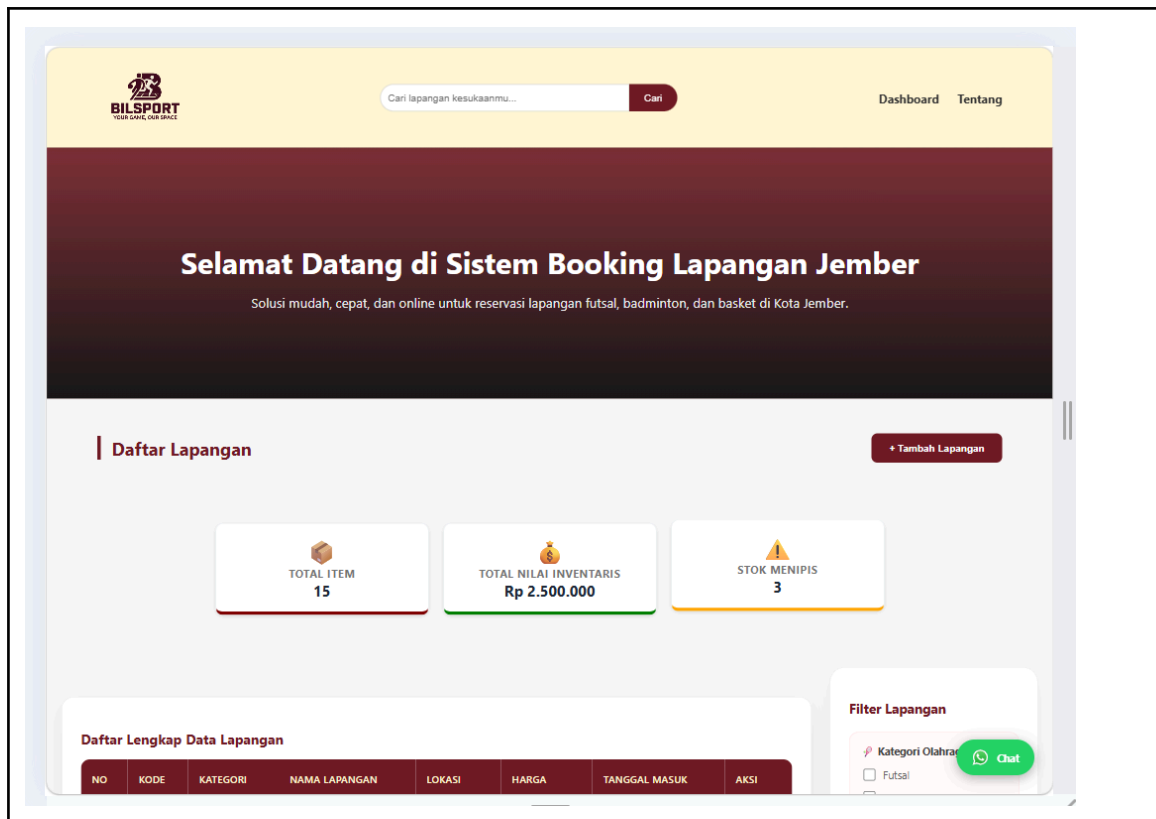

6. Gunakan @forelse di dashboard untuk loop array data dummy (jumlah mahasiswa, mata kuliah, dll)

```


DashboardController.php M X app.blade.php M stat-card.blade.php U dashboard.blade.php M navbar.k
bilsport > app > Http > Controllers > DashboardController.php
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class DashboardController extends Controller
8 {
9     public function index()
10     {
11         $stats = [
12             ['judul' => 'Total Item', 'nilai' => '15', 'ikon' => '📦', 'warna' => 'maroon'],
13             ['judul' => 'Total Nilai Inventaris', 'nilai' => 'Rp 2.500.000', 'ikon' => '💰', 'warna' => 'green'],
14             ['judul' => 'Stok Menipis', 'nilai' => '3', 'ikon' => '⚠️', 'warna' => 'orange'],
15         ];
16
17         $lapangans = [
18             ['kode' => 'L001', 'kat' => 'Futsal', 'nama' => 'Galaxy Futsal', 'lok' => 'Gedung A', 'harga' => 'Rp 50.000'],
19             ['kode' => 'L002', 'kat' => 'Badminton', 'nama' => 'PB Smash', 'lok' => 'Gedung B', 'harga' => 'Rp 30.000'],
20         ];
21
22         return view('dashboard', compact('stats', 'lapangans'));
23     }
24 }

```




```


DashboardController.php M  app.blade.php M  stat-card.blade.php U  dashboard.blade.php M X  navbar.t
bilsport > resources > views > dashboard.blade.php
5  @section('content')
32  <main class="dashboard-container">
33  <section class="content-left">
36  <div class="table-section-nanti" style="margin-top: 40px;">
38  <div class="table-container">
51  <thead>
52  <tbody id="listLapanganTable">
53  @forelse($lapangans as $key => $lp)
54  <tr>
55  <td>{{ $key + 1 }}</td>
56  <td>{{ $lp['kode'] }}</td>
57  <td>{{ $lp['kat'] }}</td>
58  <td>{{ $lp['nama'] }}</td>
59  <td>{{ $lp['lok'] }}</td>
60  <td>Rp {{ $lp['harga'] }}</td>
61  <td>{{ $lp['tgl'] }}</td>
62  <td>
63  <button class="btn-edit" style="background: #ffc107; border
64  </td>
65  </tr>
66  @empty
67  <tr>
68  <td colspan="8" style="text-align: center; padding: 20px;">Data 1
69  </tr>
70  @endforelse
71  </tbody>
72  </table>
73  </div>
74  </div>

```

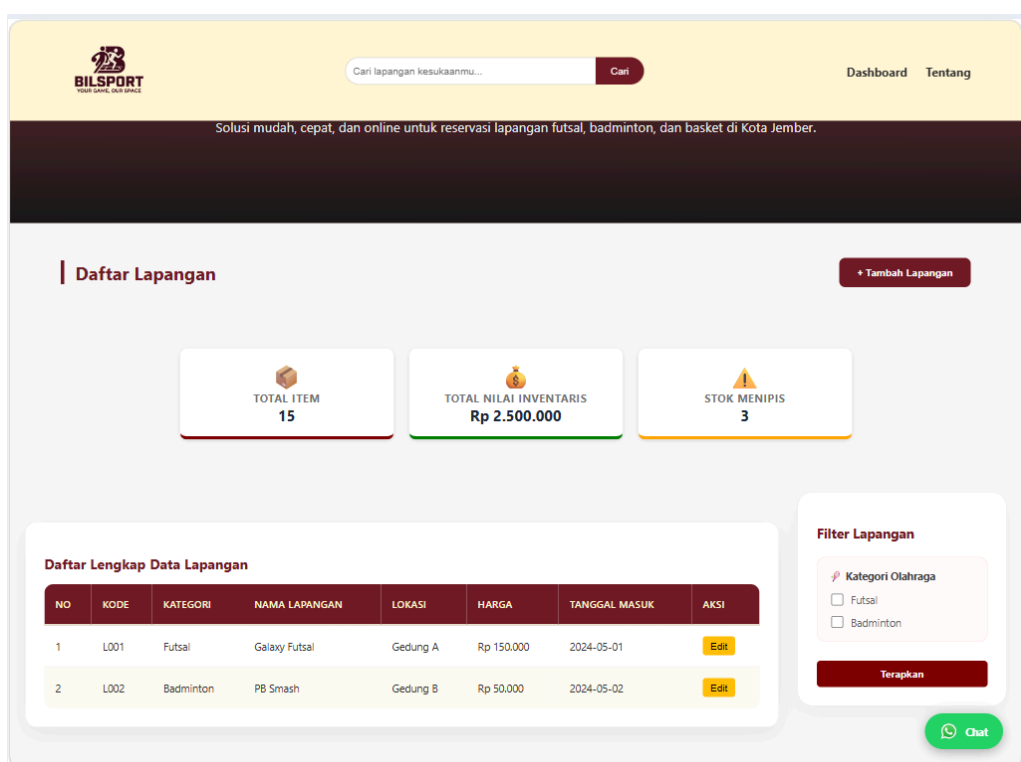


7. Buat halaman 'Tentang' dan 'Kontak' yang @extends layout yang sama

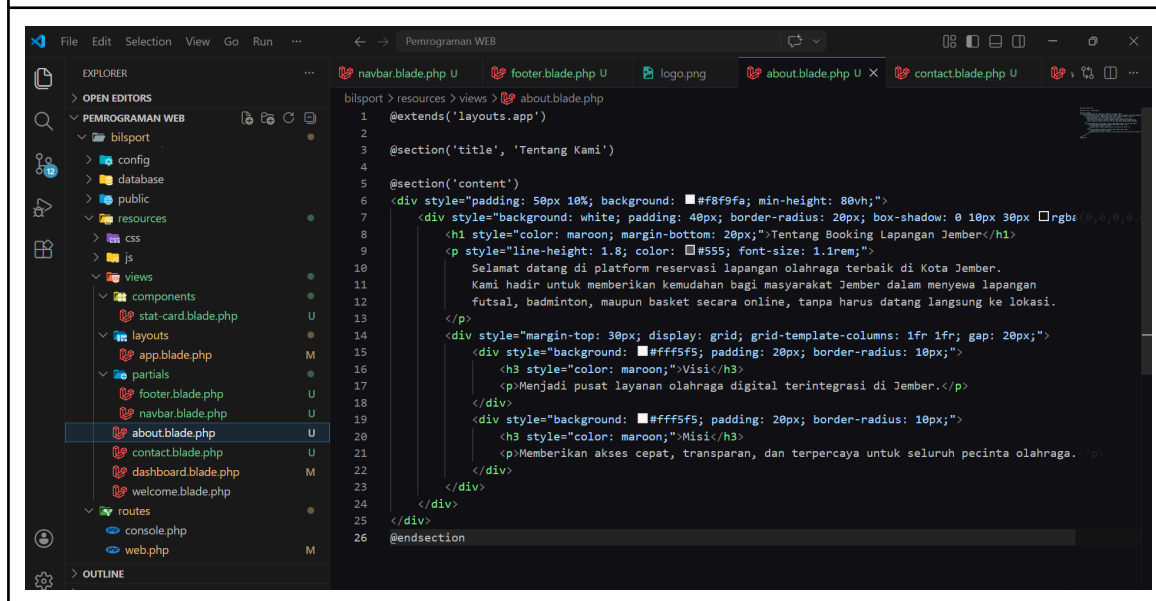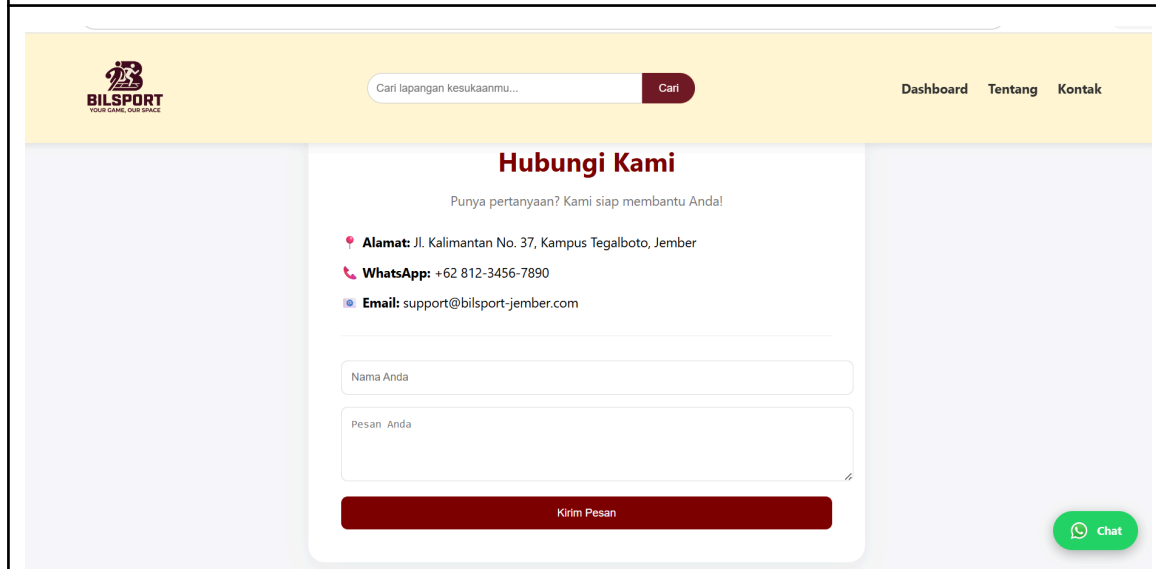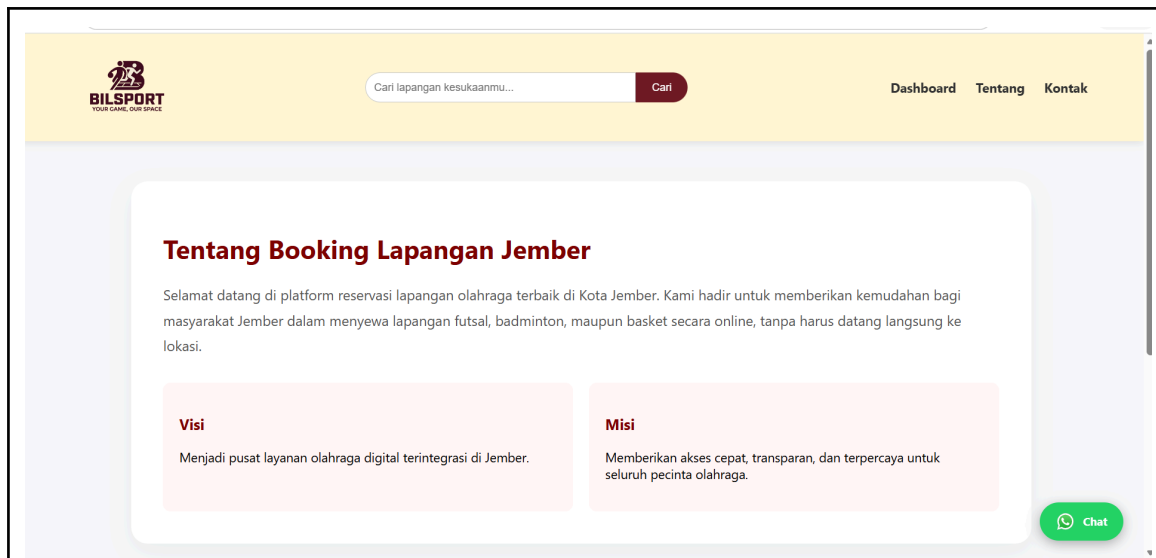

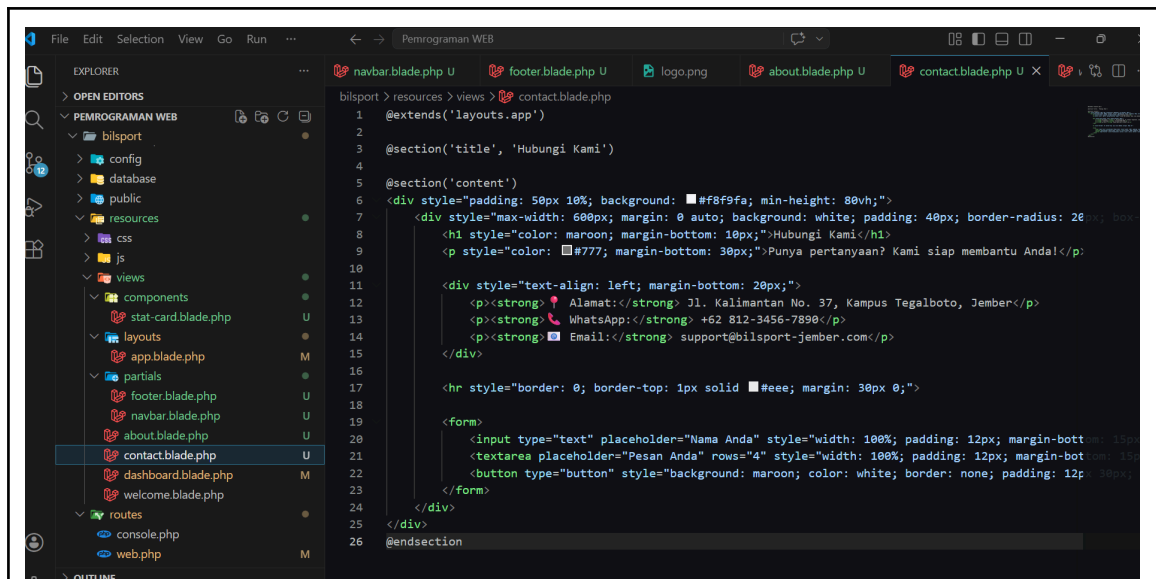

```
1 @extends('layouts.app')
2
3 @section('title', 'Hubungi Kami')
4
5 @section('content')
6 <div style="padding: 50px 10%; background: #f8f9fa; min-height: 80vh;">
7   <div style="max-width: 600px; margin: 0 auto; background: white; padding: 40px; border-radius: 20px; box-shadow: 0 0 10px #000;">
8     <h1 style="color: maroon; margin-bottom: 10px;">Hubungi Kami</h1>
9     <p style="color: #777; margin-bottom: 30px;">Punya pertanyaan? Kami siap membantu Anda!</p>
10
11     <div style="text-align: left; margin-bottom: 20px;">
12       <p><strong>📍 Alamat:</strong> Jl. Kalimantan No. 37, Kampus Tegalboto, Jember</p>
13       <p><strong>📞 WhatsApp:</strong> +62 812-3456-7890</p>
14       <p><strong>✉ Email:</strong> support@bilsport-jember.com</p>
15     </div>
16
17     <hr style="border: 0; border-top: 1px solid #eee; margin: 30px 0;">
18
19     <form>
20       <input type="text" placeholder="Nama Anda" style="width: 100%; padding: 12px; margin-bottom: 15px;">
21       <textarea placeholder="Pesan Anda" rows="4" style="width: 100%; padding: 12px; margin-bottom: 15px;">
22       <button type="button" style="background: maroon; color: white; border: none; padding: 12px 30px;">Kirim
23     </form>
24   </div>
25 </div>
26 @endsection
```

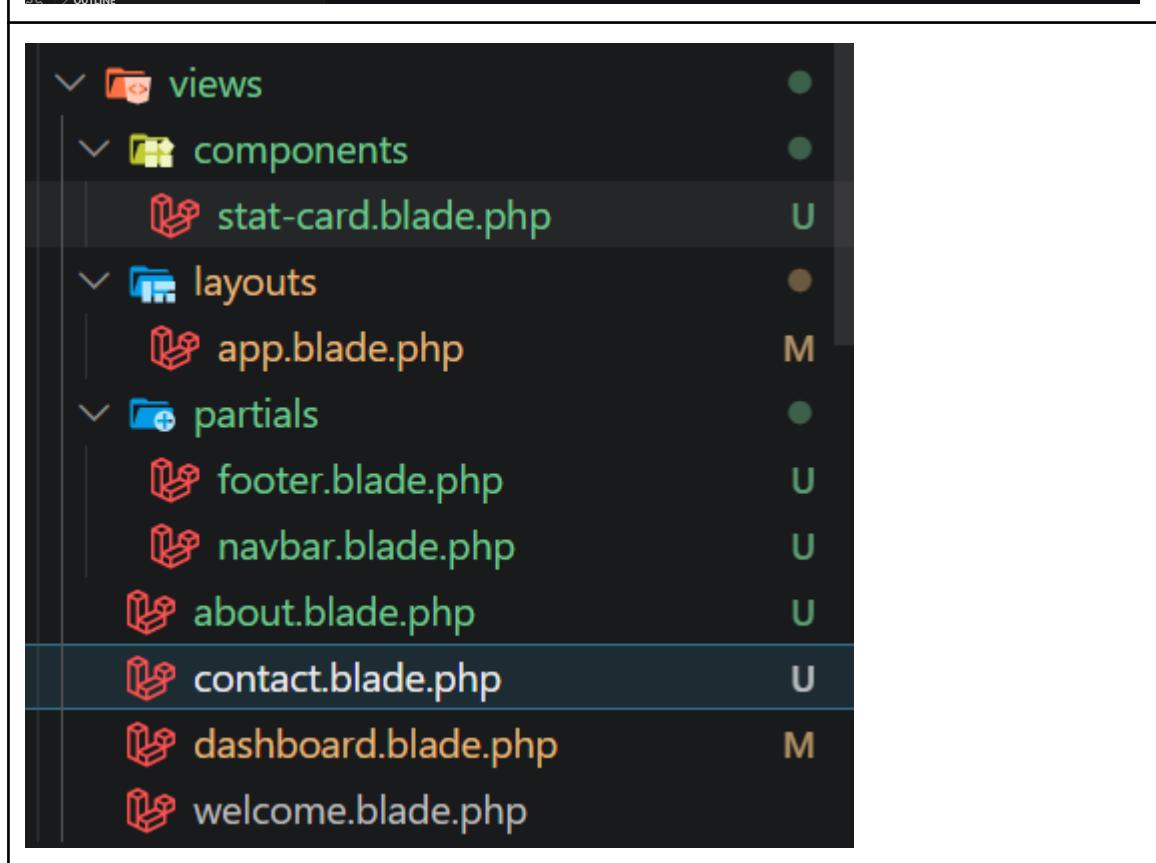

8. Gunakan `@push('scripts')` dan `@stack('scripts')` untuk menambahkan JavaScript spesifik per halaman

The image consists of two screenshots of a code editor, likely VS Code, showing the structure and content of a Laravel Blade application.

Top Screenshot: The left sidebar shows a file explorer with the following structure:

- stat-card.blade.php (U)
- layouts (M)
- app.blade.php (M)
- partials (M)
- footer.blade.php (U)
- navbar.blade.php (U)
- about.blade.php (U)
- contact.blade.php (U)
- dashboard.blade.php (M)
- welcome.blade.php (U)
- routes (M)
- console.php (M)
- web.php (M)

The main editor area shows the content of `app.blade.php` (lines 102-115):`102 <div style="width: 30px; height: 95%; background: maroon; border-radius: 5px;
103 </div>
104 <p style="color: #888; font-size: 12px; mt-3">Statistik Mingguan</p>
105 </div>
106 </section>
107 @endsection
108
109 @push('scripts')
110 <script>
111 console.log("Dashboard Blade Berhasil Dimuat!");
112 </script>
113 @endpush
114
115`

Bottom Screenshot: The left sidebar shows a different file structure:

- views (M)
- components (M)
- stat-card.blade.php (U)
- layouts (M)
- app.blade.php (M)
- partials (M)
- footer.blade.php (U)
- navbar.blade.php (U)
- about.blade.php (U)

The main editor area shows the content of `app.blade.php` (lines 30-37):`30 </script>
35 @stack('scripts')
36 </body>
37 </html>`

💡 *Tips: Gunakan `@include('partials.nama')` untuk memecah tampilan menjadi komponen kecil yang reusable. Ini membuat kode View lebih mudah dikelola.*



AKTIVITAS MANDIRI 4 — Migration, Model & Seeder

1. Buat Model dan Migration sekaligus: `php artisan make:model Mahasiswa -m`

```
C:\laragon\www\Pemrograman WEB\bilspport>php artisan make:model Lapangan -m

INFO Model [C:\laragon\www\Pemrograman WEB\bilspport\app\Models\Lapangan.php] created successfully.

INFO Migration [C:\laragon\www\Pemrograman WEB\bilspport\database\migrations\2026_05_05_131911_create_lapangans_table.php] created successfully.


C:\laragon\www\Pemrograman WEB\bilspport>
```

2. Edit file migration: tambahkan kolom nim, nama, email, jurusan (enum), ipk (decimal), semester, aktif (boolean), foto (nullable)

disini saya menyesuaikan dengan projek saya yaitu sewa lapangan

```
blade.php  contact.blade.php  app.js  web.php  2026_05_05_131911_create_lapangans_table.php

bilspport > database > migrations > 2026_05_05_131911_create_lapangans_table.php
1  <?php
2
3  use Illuminate\Database\Migrations\Migration;
4  use Illuminate\Database\Schema\Blueprint;
5  use Illuminate\Support\Facades\Schema;
6
7  return new class extends Migration
8  {
9      public function up(): void
10     {
11         Schema::create('lapangans', function (Blueprint $table) {
12             $table->id();
13             $table->string('kode_lapangan')->unique();
14             $table->string('nama_lapangan');
15             $table->enum('kategori', ['Futsal', 'Badminton', 'Basket', 'Padel']);
16             $table->string('lokasi');
17             $table->decimal('harga_per_jam', 10, 2);
18             $table->integer('stok_jam')->default(15);
19             $table->boolean('is_available')->default(true);
20             $table->string('foto_lapangan')->nullable();
21             $table->timestamps();
22         });
23     }
24 };
```

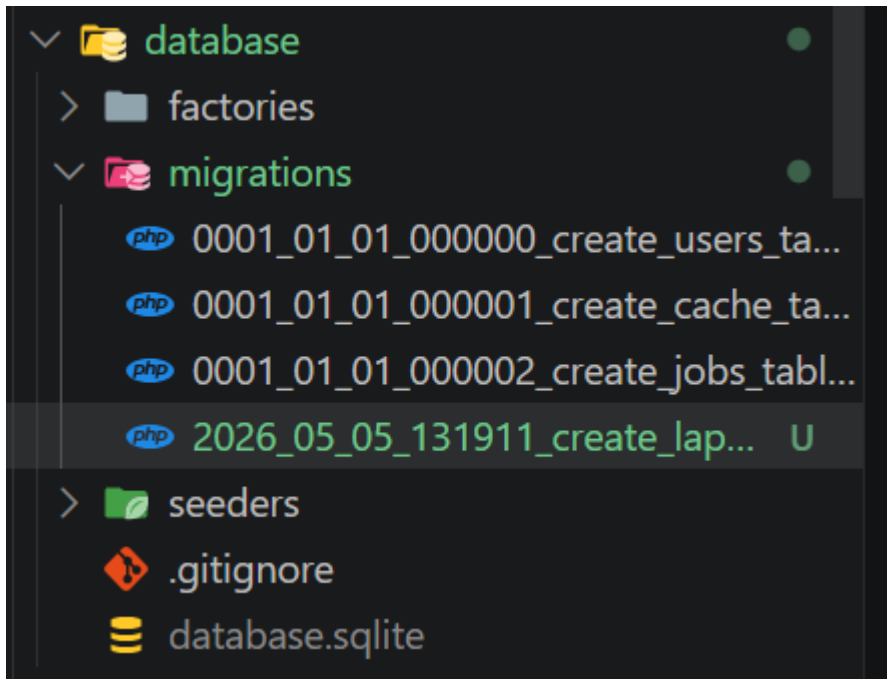


3. Jalankan migration: php artisan migrate — cek di phpMyAdmin bahwa tabel sudah terbuat

```
C:\laragon\www\Pemrograman WEB\bilsport>php artisan migrate

INFO Running migrations.

2026_05_05_131911_create_lapangans_table ..... 485.91ms DONE

C:\laragon\www\Pemrograman WEB\bilsport>
```

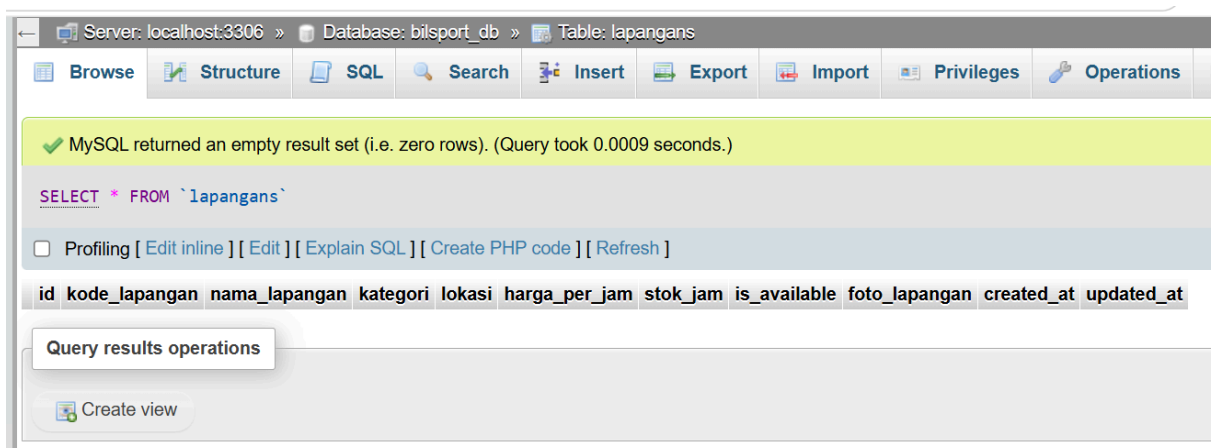

4. Edit Model Mahasiswa: isi \$fillable, tambahkan \$casts, dan buat local scope scopeAktif()

The screenshot shows the VS Code interface with the Explorer panel on the left displaying the project structure. The file `Lapangan.php` is selected under the `Models` directory. The main editor shows the code for `Lapangan.php`, which is a Laravel model extending `Model` and using `HasFactory`. The code includes attributes like `kode_lapangan`, `nama_lapangan`, `kategori`, `lokasi`, `harga_per_jam`, `stok_jam`, and `is_available`. It also defines casts for `is_available` (boolean) and `harga_per_jam` (double), and a `scopeTersedia` method that filters for available items.

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Lapangan extends Model
9 {
10     use HasFactory;
11
12     protected $fillable = [
13         'kode_lapangan', 'nama_lapangan', 'kategori',
14         'lokasi', 'harga_per_jam', 'stok_jam', 'is_available'
15     ];
16
17     protected $casts = [
18         'is_available' => 'boolean',
19         'harga_per_jam' => 'double',
20     ];
21
22     public function scopeTersedia($query)
23     {
24         return $query->where('is_available', true);
25     }
26 }
```

5. Buat seeder: php artisan make:seeder MahasiswaSeeder — isi dengan 5-10 data dummy

The terminal window shows the command `php artisan make:seeder LapanganSeeder` being executed in the directory `C:\laragon\www\Pemrograman WEB\bilsport`. The output indicates that the seeder was created successfully.

```
C:\laragon\www\Pemrograman WEB\bilsport>php artisan make:seeder LapanganSeeder


INFO Seeder [C:\laragon\www\Pemrograman WEB\bilsport\database\seeders\LapanganSeeder.php] created successfully.

C:\laragon\www\Pemrograman WEB\bilsport>
```

The screenshot shows the VS Code interface with the Explorer panel on the left. The file `LapanganSeeder.php` is selected under the `seeders` directory. The main editor shows the code for `LapanganSeeder`, which extends the `Seeder` class and implements the `run()` method. The method contains two arrays of dummy data for the `Lapangan` model, including details like `kode_lapangan`, `nama_lapangan`, `kategori`, `lokasi`, `harga_per_jam`, and `is_available`.

```
1 <?php
2
3 namespace Database\Seeders;
4
5 use Illuminate\Database\Console\Seeds\WithoutModelEvents;
6 use Illuminate\Database\Seeder;
7
8 class LapanganSeeder extends Seeder
9 {
10     public function run(): void
11     {
12         $data = [
13             [
14                 'kode_lapangan' => 'F01',
15                 'nama_lapangan' => 'Galaxy Futsal A',
16                 'kategori' => 'Futsal',
17                 'lokasi' => 'Indoor Gedung A',
18                 'harga_per_jam' => 150000,
19                 'is_available' => true
20             ],
21             [
22                 'kode_lapangan' => 'B01',
23                 'nama_lapangan' => 'PB Smash 1',
24                 'kategori' => 'Badminton',
25                 'lokasi' => 'Gedung Olahraga',
26                 'harga_per_jam' => 50000,
27                 'is_available' => true
28             ]
29         ];
30     }
31 }
```

6. Daftarkan seeder di DatabaseSeeder.php dan jalankan: php artisan db:seed

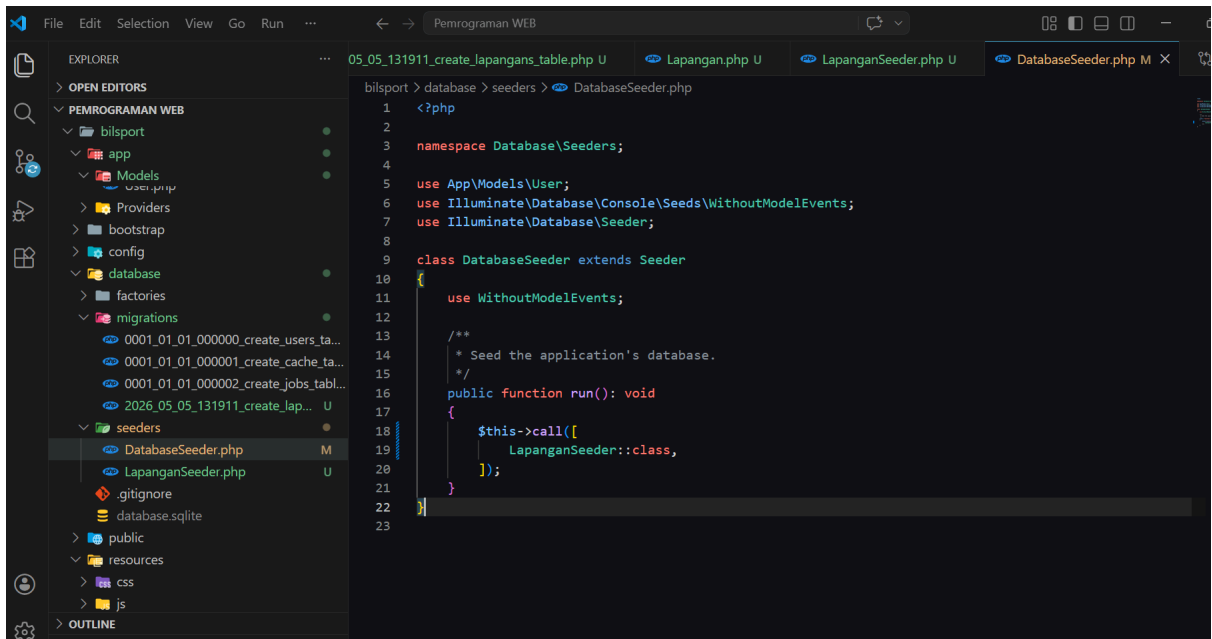

```
C:\laragon\www\Pemrograman WEB\bilsport>php artisan db:seed
```

```
INFO Seeding database.
```

```
Database\Seeders\LapanganSeeder ..... RUNNING  
Database\Seeders\LapanganSeeder ..... 297 ms DONE
```

```
C:\laragon\www\Pemrograman WEB\bilsport>
```

7. Buka php artisan tinker dan coba query: Mahasiswa::all(),
Mahasiswa::where('jurusan','SI')->get(), Mahasiswa::avg('ipk')

```
C:\laragon\www\Pemrograman WEB\bilsport>php artisan tinker  
Psy Shell v0.12.22 (PHP 8.3.30 - cli) by Justin Hileman  
New PHP manual is available (latest: 3.0.5). Update with `doc --update-manual`  
>
```

```
> App\Models\Lapangan::all();

= Illuminate\Database\Eloquent\Collection {#8070
  all: [
    App\Models\Lapangan {#8067
      id: 1,
      kode_lapangan: "F01",
      nama_lapangan: "Galaxy Futsal A",
      kategori: "Futsal",
      lokasi: "Indoor Gedung A",
      harga_per_jam: "150000.00",
      stok_jam: 15,
      is_available: 1,
      foto_lapangan: null,
      created_at: "2026-05-05 13:35:21",
      updated_at: "2026-05-05 13:35:21",
    },
    App\Models\Lapangan {#8066
      id: 2,
      kode_lapangan: "B01",
      nama_lapangan: "PB Smash 1",
      kategori: "Badminton",
      lokasi: "Gedung Olahraga",
      harga_per_jam: "50000.00",
      stok_jam: 15,
      is_available: 1,
      foto_lapangan: null,
      created_at: "2026-05-05 13:35:21",
      updated_at: "2026-05-05 13:35:21",
    },
    App\Models\Lapangan {#8069
      id: 3,
```

```

> App\Models\Lapangan::where('kategori', 'Futsal')->get();

= Illuminate\Database\Eloquent\Collection {#7372
  all: [
    App\Models\Lapangan {#7376
      id: 1,
      kode_lapangan: "F01",
      nama_lapangan: "Galaxy Futsal A",
      kategori: "Futsal",
      lokasi: "Indoor Gedung A",
      harga_per_jam: "150000.00",
      stok_jam: 15,
      is_available: 1,
      foto_lapangan: null,
      created_at: "2026-05-05 13:35:21",
      updated_at: "2026-05-05 13:35:21",
    },
  ],
}

>

```

```

> App\Models\Lapangan::avg('harga_per_jam');

= "133333.333333"

>

```


8. Coba buat relasi: buat tabel mata_kuliahs dan tabel pivot krs, lalu definisikan relasi belongsToMany di Model

disini sama buat relasinya untuk lapangan dan user

```
2026_05_05_131911_create_lapangans_table.php U X Lapangan.php U LapanganSeeder.php U DatabaseSeeder.php U
bilsport > database > migrations > 2026_05_05_131911_create_lapangans_table.php
1  <?php
2
3  use Illuminate\Database\Migrations\Migration;
4  use Illuminate\Database\Schema\Blueprint;
5  use Illuminate\Support\Facades\Schema;
6
7  return new class extends Migration
8  {
9      public function up(): void
10     {
11         Schema::create('lapangans', function (Blueprint $table) {
12             $table->id();
13             $table->foreignId('user_id')->nullable()->constrained()->onDelete('cascade');
14
15             $table->string('kode_lapangan')->unique();
16             $table->string('nama_lapangan');
17             $table->enum('kategori', ['Futsal', 'Badminton', 'Basket']);
18             $table->string('lokasi');
19             $table->decimal('harga_per_jam', 10, 2);
20             $table->boolean('is_available')->default(true);
21             $table->timestamps();
22         });
23     }
24 };
25
```

```
EXPLORER
> OPEN EDITORS
PEMROGRAMAN WEB
  bilsport
    app
      Http\Controllers
        Controller.php
        DashboardController.php
      Models
        Lapangan.php U
        User.php
      Providers
    bootstrap
    config
    database
    factories
    migrations
      0001_01_01_000000_create_users_ta...
      0001_01_01_000001_create_cache_ta...
      0001_01_01_000002_create_jobs_tabl...
      2026_05_05_131911_create_lap... U
    seeders
      DatabaseSeeder.php M
      LapanganSeeder.php U
      .gitignore
  OUTLINE

bilsport > app > Models > Lapangan.php
1  <?php
2
3  namespace App\Models;
4
5  use Illuminate\Database\Eloquent\Factories\HasFactory;
6  use Illuminate\Database\Eloquent\Model;
7
8  class Lapangan extends Model
9  {
10     use HasFactory;
11
12     protected $fillable = [
13         'user_id', 'kode_lapangan', 'nama_lapangan', 'kategori', 'lokasi', 'harga_per_jam', 'is_available'
14     ];
15
16     public function user()
17     {
18         return $this->belongsTo(User::class);
19     }
20
21     public function scopeTersedia($query)
22     {
23         return $query->where('is_available', true);
24     }
25 }
```

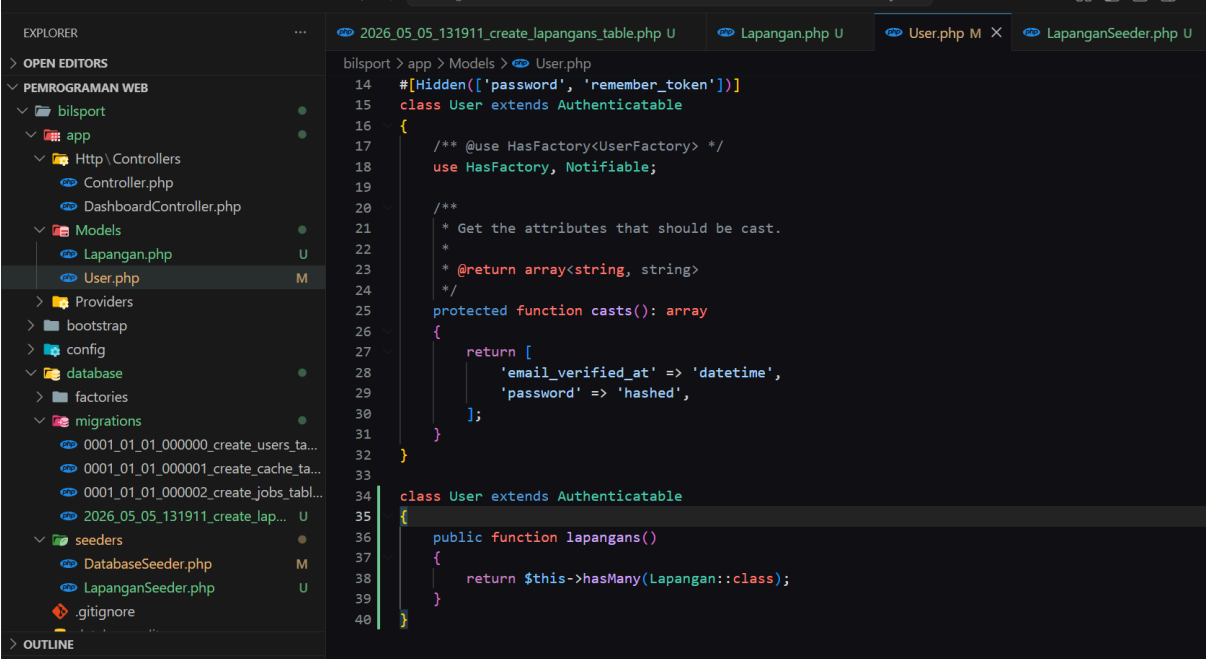

The screenshot shows a code editor with a file explorer on the left and a code editor on the right. The file explorer shows the project structure, including the 'app' directory, 'Models' directory, and 'seeds' directory. The 'User.php' file is selected in the 'Models' directory. The code editor shows the following code:

```
14 #[Hidden(['password', 'remember_token'])]
15 class User extends Authenticatable
16 {
17     /** @use HasFactory<UserFactory> */
18     use HasFactory, Notifiable;
19
20     /**
21      * Get the attributes that should be cast.
22      *
23      * @return array<string, string>
24      */
25     protected function casts(): array
26     {
27         return [
28             'email_verified_at' => 'datetime',
29             'password' => 'hashed',
30         ];
31     }
32 }
33
34 class User extends Authenticatable
35 {
36     public function lapangans()
37     {
38         return $this->hasMany(Lapangan::class);
39     }
40 }
```

💡 *Tips: Di Tinker, bisa langsung uji query Eloquent tanpa membuat halaman. Sangat berguna untuk eksplorasi dan debugging.*