

lab14

Diana Furlan

```
##Data import
```

```
library(DESeq2)
```

```
Loading required package: S4Vectors
```

```
Loading required package: stats4
```

```
Loading required package: BiocGenerics
```

```
Attaching package: 'BiocGenerics'
```

```
The following objects are masked from 'package:stats':
```

```
IQR, mad, sd, var, xtabs
```

```
The following objects are masked from 'package:base':
```

```
anyDuplicated, aperm, append, as.data.frame, basename, cbind,  
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,  
get, grep, grepl, intersect, is.unsorted, lapply, Map, mapply,  
match, mget, order, paste, pmax, pmax.int, pmin, pmin.int,  
Position, rank, rbind, Reduce, rownames, sapply, saveRDS, setdiff,  
table, tapply, union, unique, unsplit, which.max, which.min
```

```
Attaching package: 'S4Vectors'
```

The following object is masked from 'package:utils':

findMatches

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Attaching package: 'IRanges'

The following object is masked from 'package:grDevices':

windows

Loading required package: GenomicRanges

Loading required package: GenomeInfoDb

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Warning: package 'matrixStats' was built under R version 4.4.2

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,

```
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars
```

Loading required package: Biobase

Welcome to Bioconductor

```
Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.
```

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

```
rowMedians
```

The following objects are masked from 'package:matrixStats':

```
anyMissing, rowMedians
```

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

colData = read.csv(metaFile, row.names=1)
countData = read.csv(countFile, row.names=1)

head(countData)
```

```
length SRR493366 SRR493367 SRR493368 SRR493369 SRR493370
ENSG00000186092 918 0 0 0 0 0
```

ENSG00000279928	718	0	0	0	0	0
ENSG00000279457	1982	23	28	29	29	28
ENSG00000278566	939	0	0	0	0	0
ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
	SRR493371					
ENSG00000186092	0					
ENSG00000279928	0					
ENSG00000279457	46					
ENSG00000278566	0					
ENSG00000273547	0					
ENSG00000187634	258					

```
head(colData)
```

	condition
SRR493366	control_sirna
SRR493367	control_sirna
SRR493368	control_sirna
SRR493369	hoxa1_kd
SRR493370	hoxa1_kd
SRR493371	hoxa1_kd

to remove the troublesome first column from countData

```
countData <- as.matrix(countData[,2:length(colnames(countData))])
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000186092	0	0	0	0	0	0
ENSG00000279928	0	0	0	0	0	0
ENSG00000279457	23	28	29	29	28	46
ENSG00000278566	0	0	0	0	0	0
ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

to filter countData to exclude genes (i.e. rows) where we have 0 read count across all samples (i.e. columns).

```
countData <- countData[rowSums(countData) > 0,]
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504
ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

##DESeq Analysis

```
library(DESeq2)
```

```
dds <- DESeqDataSetFromMatrix(countData = countData, colData = colData, design =~ condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
dds
```

```

class: DESeqDataSet
dim: 15975 6
metadata(1): version
assays(4): counts mu H cooks
rownames(15975): ENSG00000279457 ENSG00000187634 ... ENSG00000276345
               ENSG00000271254
rowData names(22): baseMean baseVar ... deviance maxCooks
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371
colData names(2): condition sizeFactor

```

##Result visualization

```

res = results(dds, contrast = c("condition", "hoxa1_kd", "control_sirna"))
summary(res)

```

```

out of 15975 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)      : 4349, 27%
LFC < 0 (down)    : 4396, 28%
outliers [1]      : 0, 0%
low counts [2]    : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results


```

Volcano Plot

```

plot( res$log2FoldChange, -log(res$padj) )

```

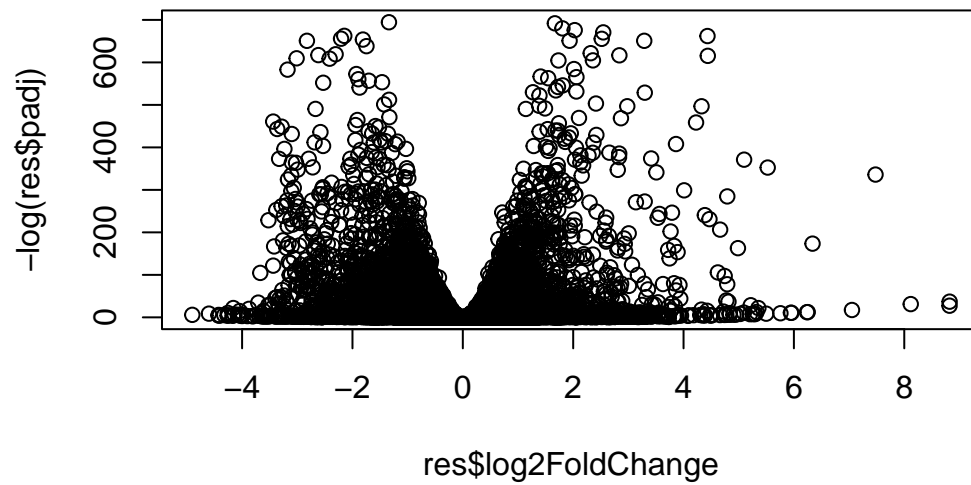

adding colors


```
# color vector for all genes
mycols <- rep("gray", nrow(res) )

mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

#blue adjusted p-value < 0.01 and absolute fold change more than 2

inds <- (res$padj<0.01) & (abs(res$log2FoldChange) > 2 )
mycols[ inds ] <- "blue"

plot( res$log2FoldChange, -log(res$padj), col=mycols, xlab="Log2(FoldChange)", ylab="-Log(P-")
```

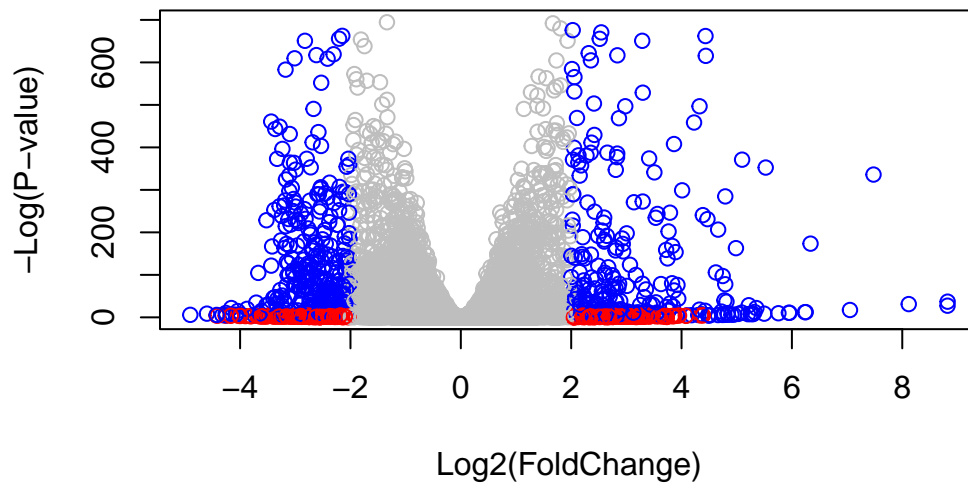

##Add Annotation

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"       "ENSEMBL"     "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"      "EVIDENCE"    "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"          "GOALL"       "IPI"          "MAP"
[16] "OMIM"        "ONTOLOGY"    "ONTOLOGYALL" "PATH"         "PFAM"
[21] "PMID"        "PROSITE"     "REFSEQ"      "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol = mapIds(org.Hs.eg.db,
                     keys= rownames(res),
                     keytype="ENSEMBL",
                     column="SYMBOL",
                     multiVals="first")
```


'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,  
  keys = rownames(res),  
  keytype = "ENSEMBL",  
  column = "ENTREZID",  
  multiVals = "first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,  
  keys = row.names(res),  
  keytype = "ENSEMBL",  
  column = "ENTREZID",  
  multiVals = "first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1_kd vs control_sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	symbol	entrez	name	
	<numeric>	<character>	<character>	<character>	
ENSG00000279457	6.86555e-01	NA	NA	NA	
ENSG00000187634	5.15718e-03	SAMD11	148398	148398	
ENSG00000188976	1.76549e-35	NOC2L	26155	26155	

ENSG00000187961	1.13413e-07	KLHL17	339451	339451
ENSG00000187583	9.19031e-01	PLEKHN1	84069	84069
ENSG00000187642	4.03379e-01	PERM1	84808	84808
ENSG00000188290	1.30538e-24	HES4	57801	57801
ENSG00000187608	2.37452e-02	ISG15	9636	9636
ENSG00000188157	4.21963e-16	AGRN	375790	375790
ENSG00000237330	NA	RNF223	401934	401934

#reorder these results by adjusted p-value and save them to a CSV file in your current project directory.

```
res = res[order(res$pvalue),]
write.csv(res, file = "deseq_results.csv")
```

##Pathway Analysis

```
library(pathview)
```


 Pathview is an open source software package distributed under GNU General Public License version 3 (GPLv3). Details of GPLv3 is available at <http://www.gnu.org/licenses/gpl-3.0.html>. Particullary, users are required to formally cite the original Pathview paper (not just mention it) in publications or products. For details, do citation("pathview") within R.

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

#####

```
library(gage)
```

```
library(gageData)
```

```
data(kegg.sets.hs)
data(sigmet.idx.hs)
```

```
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"
[161] "9583" "9615"
```

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

1266	54855	1465	51232	2034	2317
-2.422719	3.201955	-2.313738	-2.059631	-1.888019	-1.649792

```
keggres = gage(foldchanges, gsets=kegg.sets.hs)
```

```
less=down pathways
```

```
head(keggres$less)
```

	p.geomean	stat.mean	p.val
hsa04110 Cell cycle	8.995727e-06	-4.378644	8.995727e-06
hsa03030 DNA replication	9.424076e-05	-3.951803	9.424076e-05
hsa03013 RNA transport	1.375901e-03	-3.028500	1.375901e-03
hsa03440 Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114 Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03

	q.val	set.size	exp1
hsa04110 Cell cycle	0.001448312	121	8.995727e-06
hsa03030 DNA replication	0.007586381	36	9.424076e-05
hsa03013 RNA transport	0.073840037	144	1.375901e-03
hsa03440 Homologous recombination	0.121861535	28	3.066756e-03
hsa04114 Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory C:/Users/marie/OneDrive/Favoritos/BIMM143/lab14/class14
```

```
Info: Writing image file hsa04110.pathview.png
```

```
pathview(gene.data=foldchanges, pathway.id="hsa04110", kegg.native=FALSE)
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Warning: reconcile groups sharing member nodes!
```

```
      [,1] [,2]
[1,] "9"  "300"
[2,] "9"  "306"
```

Info: Working in directory C:/Users/marie/OneDrive/Favoritos/BIMM143/lab14/class14

Info: Writing image file hsa04110.pathview.pdf

```
keggrespathways <- rownames(keggres$greater)[1:5]
# Extract the 8 character long IDs part of each string
keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

to draw plots for all the top 5 pathways.

```
pathview(gene.data=foldchanges, pathway.id = keggresids, species="hsa")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/marie/OneDrive/Favoritos/BIMM143/lab14/class14

Info: Writing image file hsa04640.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/marie/OneDrive/Favoritos/BIMM143/lab14/class14

Info: Writing image file hsa04630.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/marie/OneDrive/Favoritos/BIMM143/lab14/class14

Info: Writing image file hsa00140.pathview.png

'select()' returned 1:1 mapping between keys and columns


Info: Working in directory C:/Users/marie/OneDrive/Favoritos/BIMM143/lab14/class14


Info: Writing image file hsa04142.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/marie/OneDrive/Favoritos/BIMM143/lab14/class14

Info: Writing image file hsa04330.pathview.png

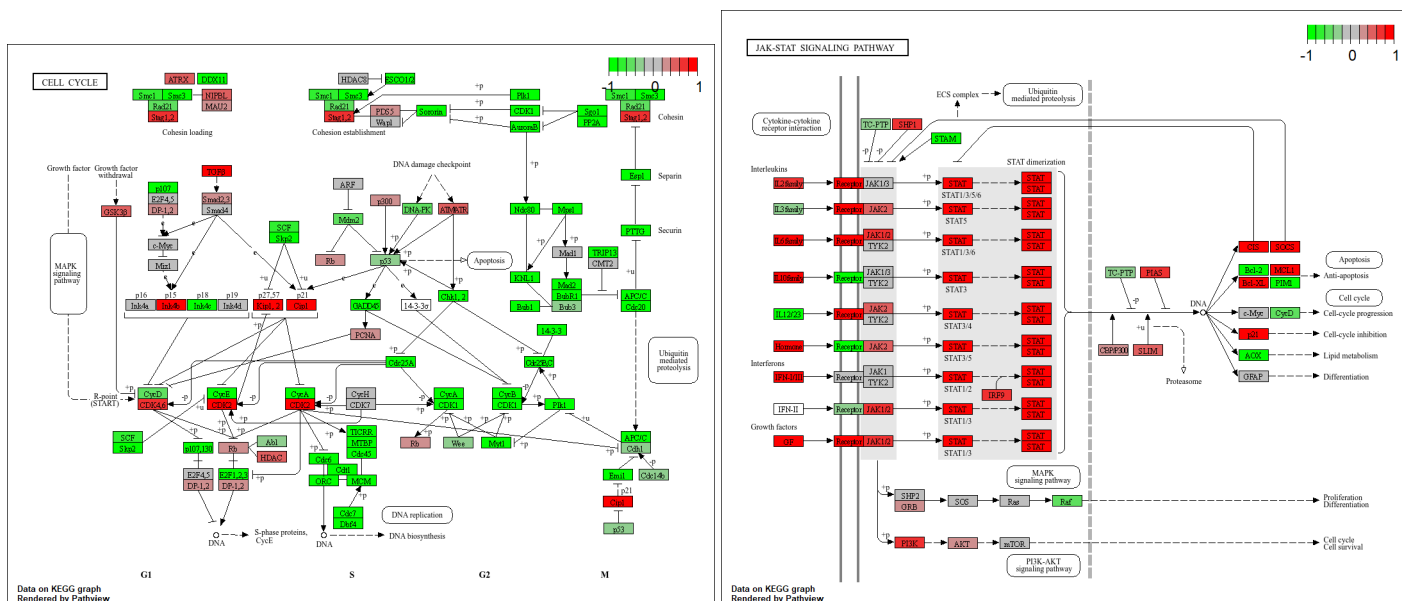

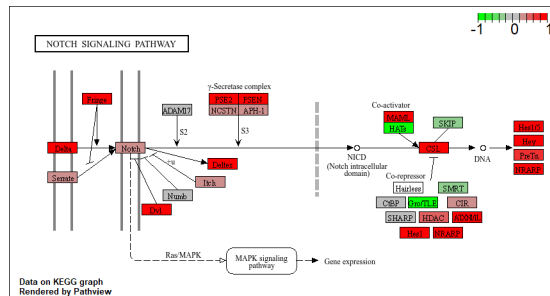

5 down-regulated pathway

```
keggrespathways <- rownames(keggres$less)[1:5]
# Extract the 8 character long IDs part of each string
keggresid = substr(keggrespathways, start=1, stop=8)
keggresid
```

```
[1] "hsa04110" "hsa03030" "hsa03013" "hsa03440" "hsa04114"
```

##Save Results

```
write.csv(res, file="Lab14_annotated.csv")
```

##Section 3. Gene Oncology

```
data(go.sets.hs)
data(go.subs.hs)

gobpsets = go.sets.hs[go.subs.hs$BP]

gobpres = gage(foldchanges, gsets=gobpsets, same.dir=TRUE)

lapply(gobpres, head)
```

\$greater		p.geomean	stat.mean	p.val
GO:0007156	homophilic cell adhesion	8.519724e-05	3.824205	8.519724e-05
GO:0002009	morphogenesis of an epithelium	1.396681e-04	3.653886	1.396681e-04
GO:0048729	tissue morphogenesis	1.432451e-04	3.643242	1.432451e-04

G0:0007610	behavior	1.925222e-04	3.565432	1.925222e-04
G0:0060562	epithelial tube morphogenesis	5.932837e-04	3.261376	5.932837e-04
G0:0035295	tube development	5.953254e-04	3.253665	5.953254e-04
		q.val	set.size	exp1
G0:0007156	homophilic cell adhesion	0.1951953	113	8.519724e-05
G0:0002009	morphogenesis of an epithelium	0.1951953	339	1.396681e-04
G0:0048729	tissue morphogenesis	0.1951953	424	1.432451e-04
G0:0007610	behavior	0.1967577	426	1.925222e-04
G0:0060562	epithelial tube morphogenesis	0.3565320	257	5.932837e-04
G0:0035295	tube development	0.3565320	391	5.953254e-04

\$less

		p.geomean	stat.mean	p.val
G0:0048285	organelle fission	1.536227e-15	-8.063910	1.536227e-15
G0:0000280	nuclear division	4.286961e-15	-7.939217	4.286961e-15
G0:0007067	mitosis	4.286961e-15	-7.939217	4.286961e-15
G0:0000087	M phase of mitotic cell cycle	1.169934e-14	-7.797496	1.169934e-14
G0:0007059	chromosome segregation	2.028624e-11	-6.878340	2.028624e-11
G0:0000236	mitotic prometaphase	1.729553e-10	-6.695966	1.729553e-10
		q.val	set.size	exp1
G0:0048285	organelle fission	5.841698e-12	376	1.536227e-15
G0:0000280	nuclear division	5.841698e-12	352	4.286961e-15
G0:0007067	mitosis	5.841698e-12	352	4.286961e-15
G0:0000087	M phase of mitotic cell cycle	1.195672e-11	362	1.169934e-14
G0:0007059	chromosome segregation	1.658603e-08	142	2.028624e-11
G0:0000236	mitotic prometaphase	1.178402e-07	84	1.729553e-10

\$stats

	stat.mean	exp1
G0:0007156	homophilic cell adhesion	3.824205
G0:0002009	morphogenesis of an epithelium	3.653886
G0:0048729	tissue morphogenesis	3.643242
G0:0007610	behavior	3.565432
G0:0060562	epithelial tube morphogenesis	3.261376
G0:0035295	tube development	3.253665

##Reactome Analysis

```
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8147"
```

```
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```