

BINARY NINJAZ

Harvest

User Manual

Letanyan Arumugam	14228123
Sizo Duma	15245579
Teboho Mokoena	14415888
John Ojo	15096794
Kevin Reid	15008739
Shaun Yates	16007493

STAKEHOLDERS

SAMAC:

Barry Christie

Contents

1	Testing Process	1
1.0.1	Test Specification	1
1.0.2	Implementation of Tests	2
1.0.3	Test Reporting	2
1.1	Testing Frequency	2
2	Testing Tools	3
2.1	Android	3
2.1.1	JUnit	3
2.1.2	Espresso	3
2.1.3	Execution	3
2.2	iOS	4
2.2.1	XCTest	4
2.2.2	Execution	4
2.3	Web	6
2.3.1	Execution	6
3	History	6
3.1	Android	6
3.2	iOS	6
3.3	Web	6

List of Figures

1	Android Studio Test Example	4
2	iOS Xcode Test Start	5
3	iOS Xcode Test Example	5

1 Testing Process

In this section, the testing process, based on IEEE-829, will be illustrated. This process will fulfil the requirements stated in this document.

Three phases within the testing process can be identified, namely:

1. Test specification,
2. Test implementation,
3. Test reporting.

Each phase is now elaborated.

1.0.1 Test Specification

The test specification can be subdivided into 2 parts. On the one hand, there is *planning and verification*, on the other there is *Analysis, design, and implementation*.

Planning and verification may consist of the following activities:

- Specifying the scope and the risks, and defining the objectives of the tests;
- Determining the strategy;
- Taking decisions with regard to what must be tested, what roles apply, how the test activities will take place and how the outcomes of the tests will be implemented;
- Planning of the test design activities;
- Planning of implementation and evaluation.

During the *analysis, design, and implementation* phase, the test objectives will be transformed into specific test conditions and test cases. This may involve the following activities:

- A review of the test base (such as requirements, architecture, design, and interfaces);
- Evaluation of the testability of the test base and the test objects;

- Identification and prioritisation of the test conditions;
- Designing of the test cases;
- Identifying the necessary test data in order to support the test cases;
- Designing the test environment and identifying the infrastructure and tools.

1.0.2 Implementation of Tests

The implementation of tests forms the phase in which the test procedures and scripts are implemented and the results of these (including incidents) are logged. This may involve the following activities:

- Implementation of the tests, manually or by means of a tool;
- Logging the results of the implementation;
- Comparing the results with the result that had been predicted;
- Reporting any setbacks in the form of incidents and analysing these in order to identify the cause;
- Repeating the tests as a result of the incidents identified.

1.0.3 Test Reporting

Test Reporting forms the phase in which the implementation of the tests is compared with the objectives. This may involve the following tasks:

- Checking of the test logs and the list of defects and comparing these to the exit criteria specified in the test plan;
- Investigating whether additional tests are required;
- Writing a summary report.

1.1 Testing Frequency

Since tests are used to validate the continued performance of a module—or the system as a whole—tests should be run after each module is finished being modified or created. Larger integration tests can take place less frequently, such as after a new feature is finished being implemented or modified.

2 Testing Tools

There are many types of tests that can be run, in the case of **Harvest**, Unit, UI, and Integration tests are run.

2.1 Android

2.1.1 JUnit

JUnit is a unit testing framework for the Java Environment, and as such is used for testing the Android—programmed in Java—implementation of **Harvest**. Android development was carried out using the Android Studio IDE, which facilitates easy use and set up of the JUnit framework. Android Studio also recommends the use of JUnit. For the reasons given, JUnit was selected to run unit tests on Android.

Android unit tests can be found [here](#).

2.1.2 Espresso

Espresso, like JUnit, is integrated into, and recommended by, Android Studio, and therefore is used to facilitate UI testing on Android.

Android UI tests can be found [here](#).

2.1.3 Execution

Both UI and Unit tests are executed in the same manner for Android, the primary difference being that a UI test will need to run on a connected device or virtual machine.

In order to run a unit or UI test for Android, one must open the file containing the desired test(s) using Android Studio as in figure 2.1.3. Once there, one can right click on the green ‘test’ button in the margin, then they can select to run the tests, the results of which will be seen at the bottom of the IDE.

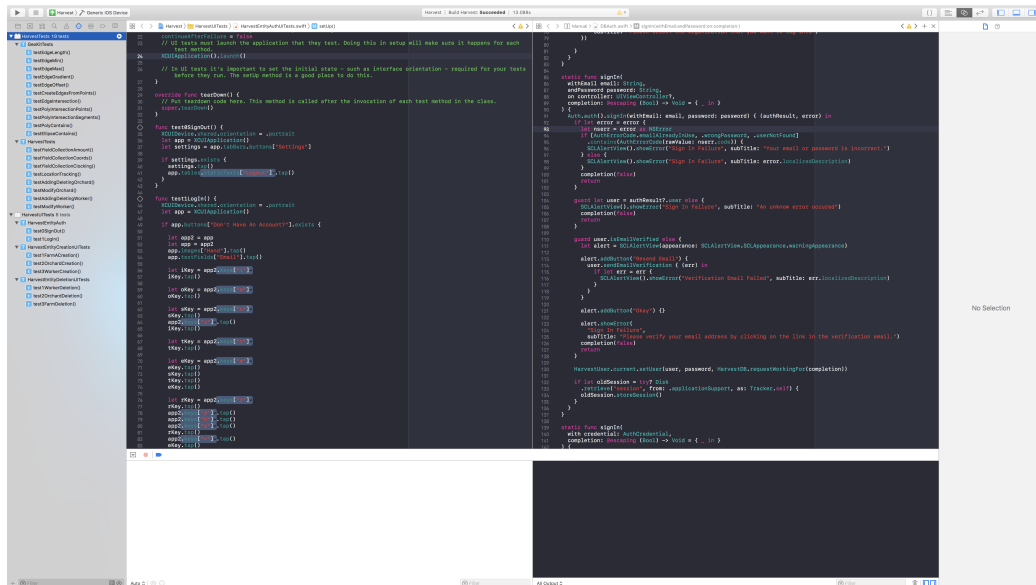


Figure 2: iOS Xcode Test Start

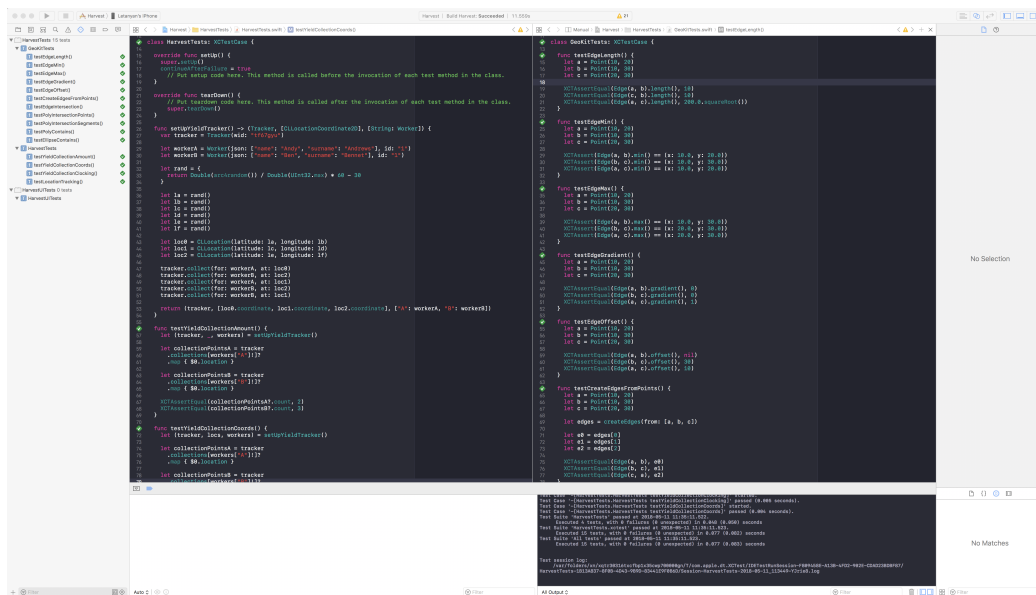


Figure 3: iOS Xcode Test Example

2.3 Web

2.3.1 Execution

3 History

3.1 Android

Android test logs can found here.

3.2 iOS

iOS test logs can be found [here](#).

3.3 Web

Web test logs can be found here.