

Series (colour)

Cramér–Rao bound

raw input

denoised, $\lambda = \text{RL}$

raw - denoised

paired spot set

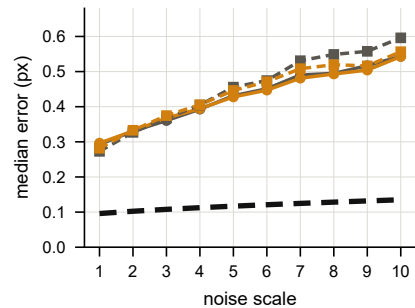
Filter (line, marker), panels A–D

least squares

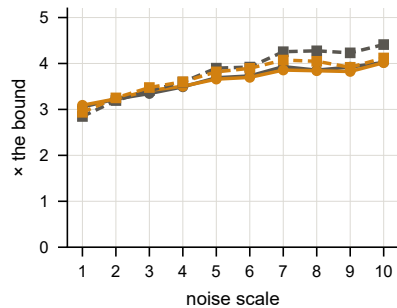
maximum likelihood

A

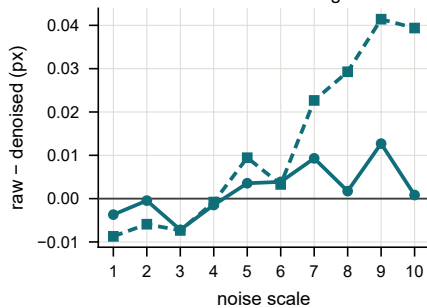
Localization error

**B**

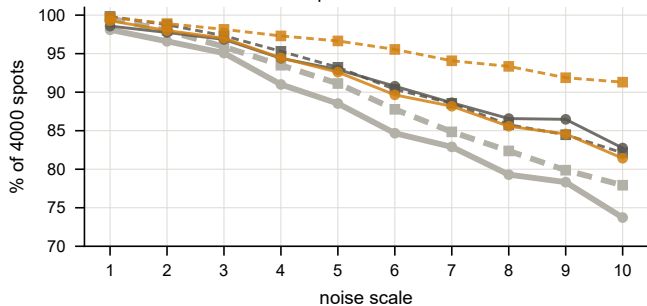
Error / Cramér–Rao bound

**C**

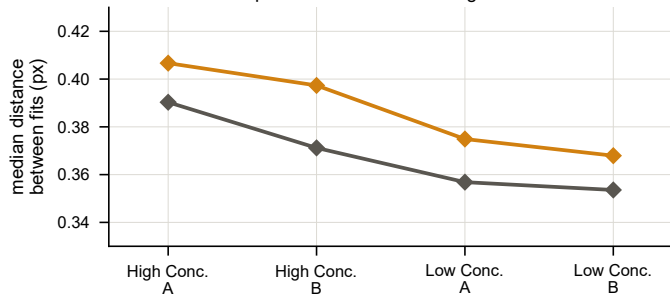
Effect of denoising

**D**

Spots retained

**E**

Experimental — estimator agreement



Panel E — distance between two estimators

max. likelihood on raw vs least squares on denoised

max. likelihood on raw vs least squares on raw