

# Using R and Bioconductor for Proteomics Data Analysis.

Laurent Gatto

[lg390@cam.ac.uk](mailto:lg390@cam.ac.uk)

Cambridge Center for Proteomics  
University of Cambridge

May 24, 2013

---

## Abstract

This vignette shows and executes the code presented in the manuscript *Using R for proteomics data analysis*. It also aims at being a general overview useful for new users who wish to explore the R environment and programming language for the analysis of proteomics data.

*Keywords:* bioinformatics, proteomics, mass spectrometry, tutorial.

---

# Contents

---

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Introduction</b>   | <b>3</b>  |
| 1.1      | General R resources . . . . .                                       | 3         |
| 1.2      | Getting help . . . . .  | 3         |
| 1.3      | Installation . . . . .  | 4         |
| 1.4      | External dependencies . . . . .                                     | 4         |
| 1.5      | Obtaining the code . . . . .  | 5         |
| 1.6      | Prepare the working environment . . . . .                           | 5         |
| <b>2</b> | <b>Data standards and input/output</b>                              | <b>6</b>  |
| 2.1      | The <b>mzR</b> package . . . . .                                    | 6         |
| <b>3</b> | <b>Raw data abstraction with MSnExp objects</b>                     | <b>7</b>  |
| 3.1      | mgf read/write support . . . . .                                    | 10        |
| <b>4</b> | <b>Quantitative proteomics</b>                                      | <b>10</b> |
| 4.1      | The mzTab format . . . . .  | 10        |
| 4.2      | Working with raw data . . . . .                                     | 14        |
| 4.3      | The <b>MALDIquant</b> package . . . . .                             | 18        |
| 4.4      | Working with peptide sequences . . . . .                            | 22        |
| 4.5      | The <b>isobar</b> package . . . . .                                 | 28        |
| 4.6      | The <b>synapter</b> package . . . . .                               | 31        |
| <b>5</b> | <b>MS<sup>2</sup> spectra identification</b>                        | <b>31</b> |
| 5.1      | Preparation of the input data . . . . .                             | 31        |
| 5.2      | Performing the search . . . . .                                     | 32        |
| 5.3      | Import and analyse results . . . . .                                | 32        |
| <b>6</b> | <b>Annotation</b>   | <b>33</b> |
| <b>7</b> | <b>Other packages</b>   | <b>35</b> |
| 7.1      | Bioconductor packages . . . . .                                     | 35        |
| 7.2      | The Chemometrics and Computational Physics CRAN Task View . . . . . | 35        |
| 7.3      | Other CRAN packages . . . . .                                       | 36        |
| <b>8</b> | <b>Session information</b>  | <b>38</b> |

# 1 Introduction

---

This document illustrates some existing R infrastructure for the analysis of proteomics data. It presents the code for the use cases taken from [7].

There are however numerous additional R resources distributed by the Bioconductor<sup>1</sup> and CRAN<sup>2</sup> repositories, as well as packages hosted on personal websites. Section 7 on page 35 tries to provide a wider picture of available packages, without going into details.

## 1.1 General R resources

The reader is expected to have basic R knowledge to find the document helpful. There are numerous R introductions freely available, some of which are listed below.

From the R project web-page:

- **An Introduction to R** is based on the former *Notes on R*, gives an introduction to the language and how to use R for doing statistical analysis and graphics. [[browse HTML](#) | [download PDF](#)]
- Several introductory tutorials in the [contributed documentation](#) section.

Relevant background on the R software and its application to computational biology in general and proteomics in particular can also be found in [7]. For details about the Bioconductor project, the reader is referred to [9].

## 1.2 Getting help

All R packages come with ample documentation. Every command (function, class or method) a user is susceptible to use is documented. The documentation can be accessed by preceding the command by a `?` in the R console. For example, to obtain help about the `library` function, that will be used in the next section, one would type `?library`. In addition, all Bioconductor packages come with at least one vignette (this document is the vignette that comes with the **RforProteomics** package), a document that combines text and R code that is executed before the pdf is assembled. To look up all vignettes that come with a package, say **RforProteomics** and then open the vignette of interest, one uses the `vignette` function as illustrated below. More details can be found in `?vignette`.

```
> ## list all the vignettes in the RforProteomics
> ## package
> vignette(package = "RforProteomics")
> ## Open the vignette called RforProteomics
> vignette("RforProteomics", package = "RforProteomics")
> ## or just
> vignette("RforProteomics")
```

---

<sup>1</sup><http://www.bioconductor.org>

<sup>2</sup><http://cran.r-project.org/web/packages/>

R has several mailing lists<sup>3</sup>. The most relevant here being the main R-help list, *for discussion about problem and solutions using R*. This one is for general R content and is not suitable for bioinformatics or proteomics questions.

Bioconductor also offers several mailing lists<sup>4</sup> dedicated to bioinformatics matters and Bioconductor packages. The main Bioconductor list is the most relevant one. It is possible to post<sup>5</sup> questions without subscribing to the list.

It is important to read and comply to the posting guides ([here](#) and [here](#)) to maximise the chances to obtain good responses. It is important to specify the software versions using the `sessionInfo()` functions (see an example output at the end of this document, on page 38). If the question involves some code, make sure to isolate the relevant portion and report it with your question, trying to make your code/example reproducible<sup>6</sup>.

All lists have browsable archives.

### 1.3 Installation

The package should be installed using as described below:

```
> ## only first time you install Bioconductor
> ## packages
> source("http://www.bioconductor.org/biocLite.R")
> ## else
> library("BiocInstaller")
> biocLite("RforProteomics")
```

To install all dependencies (78 packages) and reproduce the code in the vignette, replace the last line in the code chunk above with:)

```
> biocLite("RforProteomics", dependencies = TRUE)
```

Finally, the package can be loaded with

```
> library("RforProteomics")
```

```
This is the 'RforProteomics' version 1.0.3.
Run 'RforProteomics()' in R or visit
'http://lgatto.github.com/RforProteomics/' to get started.
```

### 1.4 External dependencies

Some packages used in the document depend on external libraries that need to be installed prior to the R packages:

**mzR** depends on the Common Data Format<sup>7</sup> (CDF) to CDF-based raw mass-spectrometry data. On linux, the `libcdf` library is required. On debian-based systems, for instance, one needs to install the `libnetcdf-dev` package.

<sup>3</sup><http://www.r-project.org/mail.html>

<sup>4</sup><http://bioconductor.org/help/mailling-list/>

<sup>5</sup><http://bioconductor.org/help/mailling-list/mailform/>

<sup>6</sup><https://github.com/hadley/devtools/wiki/Reproducibility>

<sup>7</sup><http://cdf.gsfc.nasa.gov/>

**IPPD** (and others) depend on the **XML** package which requires the `libxml2` infrastructure on linux. On debian-based systems, one needs to install `libxml2-dev`.

**biomaRt** performs on-line requests using the `curl`<sup>8</sup> infrastructure. On debian-based systems, you one needs to install `libcurl-dev` or `libcurl4-openssl-dev`.

## 1.5 Obtaining the code

The code in this document describes all the examples presented in [7] and can be copy, pasted and executed. It is however more convenient to have it in a separate text file for better interaction with R (using `ESS`<sup>9</sup> for emacs or `RStudio`<sup>10</sup> for instance) to easily modify and explore it. This can be achieved with the `Stangle` function. One needs the Sweave source of this document (a document combining the narration and the R code) and the `Stangle` then specifically extracts the code chunks and produces a clean R source file. If the package is installed, the following code chunk will create a `RforProteomics.R` file in your working directory containing all the annotated source code contained in this document.

```
> ## gets the vignette source
> rnwfile <- dir(system.file(package = "RforProteomics",
+                             dir = "doc/vigsrc"),
+               full.name = TRUE,
+               pattern = "RforProteomics.Rnw")
> ## produces the R file in the working directory
> Stangle(rnwfile)
```

Writing to file `RforProteomics.R`

Alternatively, you can obtain the `Rnw` file on the github page <https://github.com/lgatto/RforProteomics/blob/master/inst/doc/vigsrc/RforProteomics.Rnw>.

## 1.6 Prepare the working environment

The packages that we will depend on to execute the examples will be loaded in the respective sections. Here, we pre-load packages that provide general functionality used throughout the document.

```
> library("RColorBrewer") ## Color palettes
> library("ggplot2")      ## Convenient and nice plotting
> library("reshape2")     ## Flexibly reshape data
```

---

<sup>8</sup><http://curl.haxx.se/>

<sup>9</sup><http://ess.r-project.org/>

<sup>10</sup><http://rstudio.org/>

## 2 Data standards and input/output

### 2.1 The mzR package

The **mzR** package [3] provides a unified interface to various mass spectrometry open formats. This code chunk, taken mainly from the `openMSfile` documentation illustrated how to open a connection to an raw data file. The example mzML data is taken from the **msdata** data package. The code below would also be applicable to an mzXML, mzData or netCDF file.

```
> ## load the required packages
> library("mzR") ## the software package
> library("msdata") ## the data package
> ## below, we extract the relevant example file
> ## from the local 'msdata' installation
> filepath <- system.file("microtofq", package = "msdata")
> file <- list.files(filepath, pattern = "MM14.mzML",
+   full.names = TRUE, recursive = TRUE)
> ## creates a connection to the mzML file
> mz <- openMSfile(file)
> ## demonstration of data access
> basename(fileName(mz))

[1] "MM14.mzML"

> isInitialized(mz)

[1] TRUE

> runInfo(mz)

$scanCount
[1] 112

$lowMz
[1] 0

$highMz
[1] 0

$dStartTime
[1] 270.3

$dEndTime
[1] 307.7

$msLevels
[1] 1

> instrumentInfo(mz)
```

```
$manufacturer
[1] "Unknown"

$model
[1] "instrument model"

$ionisation
[1] "electrospray ionization"

$analyzer
[1] "mass analyzer type"

$detector
[1] "detector type"

> ## once finished, it is good to explicitly close
> ## the connection
> close(mz)
```

**mzR** is used by other packages, like **MSnbase** [8], **TargetSearch** [5] and **xcms** [11, 1, 12], that provide a higher level abstraction to the data.

### 3 Raw data abstraction with MSnExp objects

---

**MSnbase** [8] provides base functions and classes for MS-based proteomics that allow facile data and meta-data processing, manipulation and plotting (see for instance figure 1 on page 9).

```
> library("MSnbase")
> ## uses a simple dummy test included in the
> ## package
> mzXML <- dir(system.file(package = "MSnbase", dir = "extdata"),
+             full.name = TRUE, pattern = "mzXML$")
> basename(mzXML)

[1] "dummyiTRAQ.mzXML"

> ## reads the raw data into and MSnExp instance
> raw <- readMSData(mzXML, verbose = FALSE)
> raw

Object of class "MSnExp"
Object size in memory: 0.2 Mb
- - - Spectra data - - -
MS level(s): 2
Number of MS1 acquisitions: 1
Number of MSn scans: 5
Number of precursor ions: 5
```


```
4 unique MZs
Precursor MZ's: 437.8 - 716.34
MSn M/Z range: 100 2017
MSn retention times: 25:1 - 25:2 minutes
- - - Processing information - - -
Data loaded: Fri May 24 00:09:02 2013
MSnbase version: 1.8.0
- - - Meta data - - -
phenoData
  rowNames: 1
  varLabels: sampleNames fileNumbers
  varMetadata: labelDescription
Loaded from:
  dummyiTRAQ.mzXML
protocolData: none
featureData
  featureNames: X1.1 X2.1 ... X5.1 (5 total)
  fvarLabels: spectrum
  fvarMetadata: labelDescription
experimentData: use 'experimentData(object)'

> ## Extract a single spectrum
> raw[[3]]

Object of class "Spectrum2"
Precursor: 645.4
Retention time: 25:2
Charge: 2
MSn level: 2
Peaks count: 2125
Total ion count: 150838188
```



```
> plot(raw, full = TRUE)
```

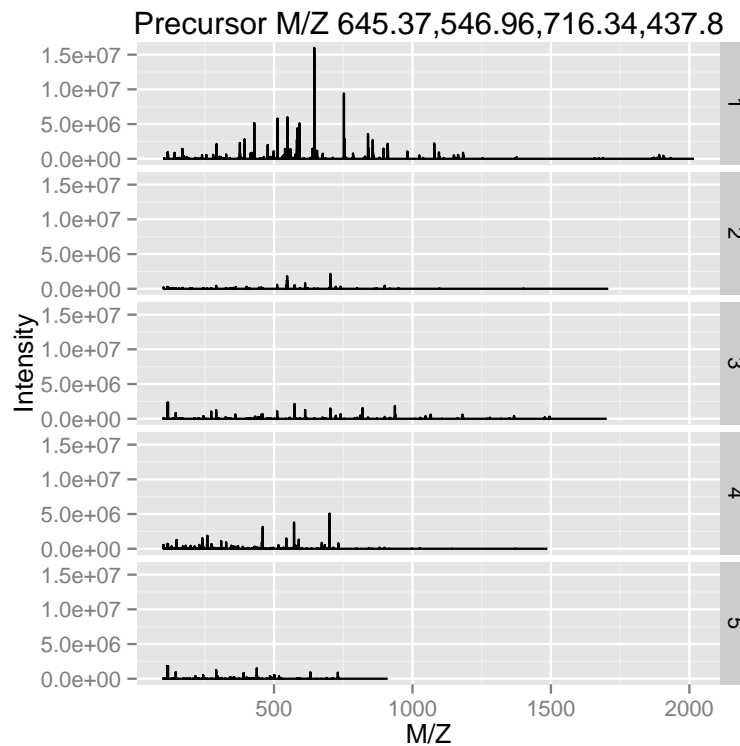

```
> plot(raw[[3]], full = TRUE, reporters = iTRAQ4)
```

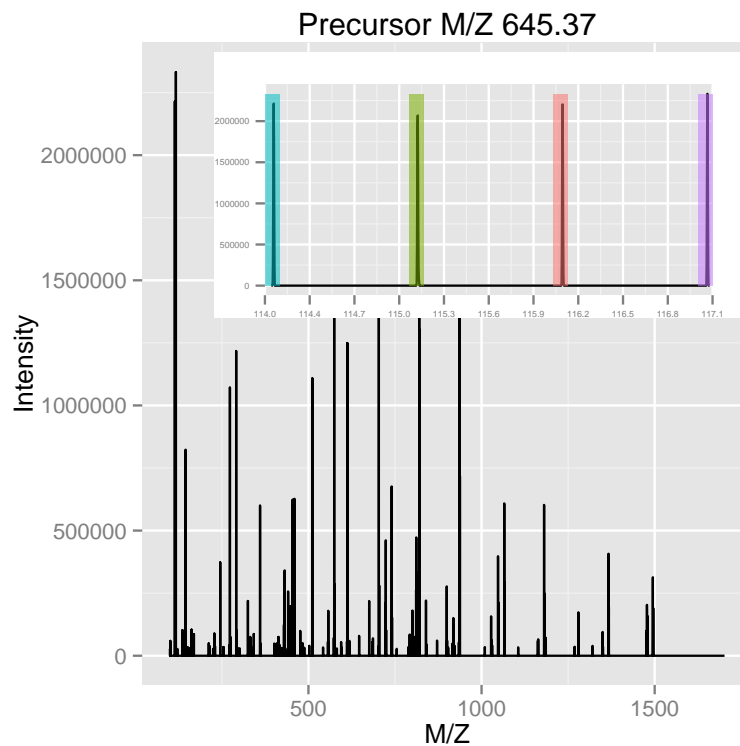


Figure 1: The plot method can be used on experiments, i.e. spectrum collections (left), or individual spectra (right).

### 3.1 mgf read/write support

Read and write support for data in the mgf<sup>11</sup> and mzTab<sup>12</sup> formats are available via the readMgfData/writeMgfData and readMzTabData/writeMzTabData functions, respectively. An example for the latter is shown in the next section.

## 4 Quantitative proteomics

As an running example throughout this document, we will use a TMT 6-plex data set, PXD000001 to illustrate quantitative data processing. The code chunk below first downloads this data file from the ProteomeXchange server using the getPXD000001mzTab function from the RforProteomics package.

### 4.1 The mzTab format

The first code chunk downloads the data, reads it into R and generates an MSnSet instance and then calculates protein intensities by summing the peptide quantitation data. Figure 2 illustrates the intensities for 5 proteins.

```
> ## Downloads the experiment
> mztab <- getPXD000001mzTab()
> mztab ## the mzTab file name

[1] "./F063721.dat-mztab.txt"

> ## Load mzTab peptide data
> qnt <- readMzTabData(mztab, what = "PEP")

Detected a metadata section
Detected a peptide section

> sampleNames(qnt) <- reporterNames(TMT6)
> head(exprs(qnt))

  TMT6.126 TMT6.127 TMT6.128 TMT6.129 TMT6.130 TMT6.131
1 10630132 11238708 12424917 10997763  9928972 10398534
2 11105690 12403253 13160903 12229367 11061660 10131218
3  1183431  1322371  1599088  1243715  1306602  1159064
4   5384958   5508454   6883086   6136023   5626680   5213771
5 18033537 17926487 21052620 19810368 17381162 17268329
6   9873585 10299931 11142071 10258214  9664315   9518271

> ## combine into proteins
> ## - using the 'accession' feature meta data
> ## - sum the peptide intensities
> protqnt <- combineFeatures(qnt,
+                           groupBy = fData(qnt)$accession,
+                           fun = sum)

Combined 1528 features into 404 using user-defined function
```

<sup>11</sup>[http://www.matrixscience.com/help/data\\_file\\_help.html#GEN](http://www.matrixscience.com/help/data_file_help.html#GEN)

<sup>12</sup><https://code.google.com/p/mztab/>

```

> cls <- brewer.pal(5, "Set1")
> matplot(t(tail(exprs(protqnt), n = 5)), type = "b",
+         lty = 1, col = cls,
+         ylab = "Protein intensity (summed peptides)",
+         xlab = "TMT reporters")
> legend("topright", tail(featureNames(protqnt), n=5),
+       lty = 1, bty = "n", cex = .8, col = cls)

```

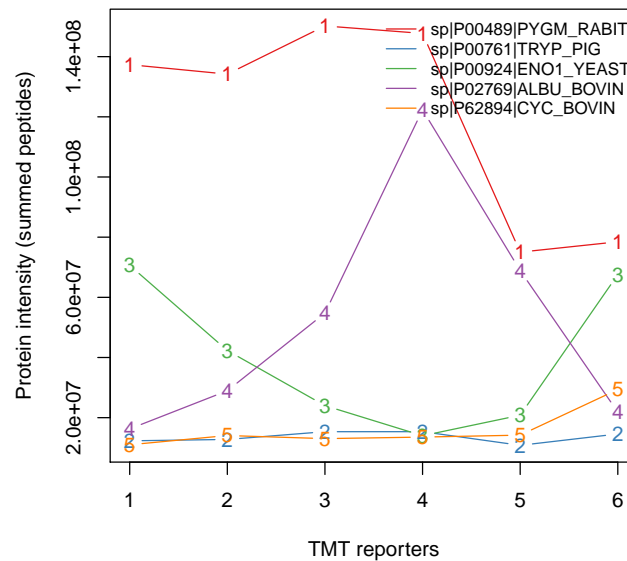


Figure 2: Protein quantitation data.

```

> qntS <- normalise(qnt, "sum")
> qntV <- normalise(qntS, "vs")
> qntV2 <- normalise(qnt, "vs")
>
> acc <- c("P00489", "P00924", "P02769", "P62894", "CYC")
>
> idx <- sapply(acc, grep, fData(qnt)$accession)
> idx2 <- sapply(idx, head, 3)
> small <- qntS[unlist(idx2), ]
>
> idx3 <- sapply(idx, head, 10)
> medium <- qntV[unlist(idx3), ]
>
> m <- exprs(medium)
> colnames(m) <- c("126", "127", "128", "129", "130",
+                 "131")
> rownames(m) <- fData(medium)$accession
> rownames(m)[grep("CYC", rownames(m))] <- "CYT"
> rownames(m)[grep("ENO", rownames(m))] <- "ENO"

```

```
> rownames(m)[grep("ALB", rownames(m))] <- "BSA"
> rownames(m)[grep("PYGM", rownames(m))] <- "PHO"
> rownames(m)[grep("ECA", rownames(m))] <- "Background"
>
> cls <- c(brewer.pal(length(unique(rownames(m))) - 1,
+ "Set1"), "grey")
> names(cls) <- unique(rownames(m))
> wbccl <- colorRampPalette(c("white", "darkblue"))(256)

> heatmap(m, col = wbccl, RowSideColors = cls[rownames(m)])
```

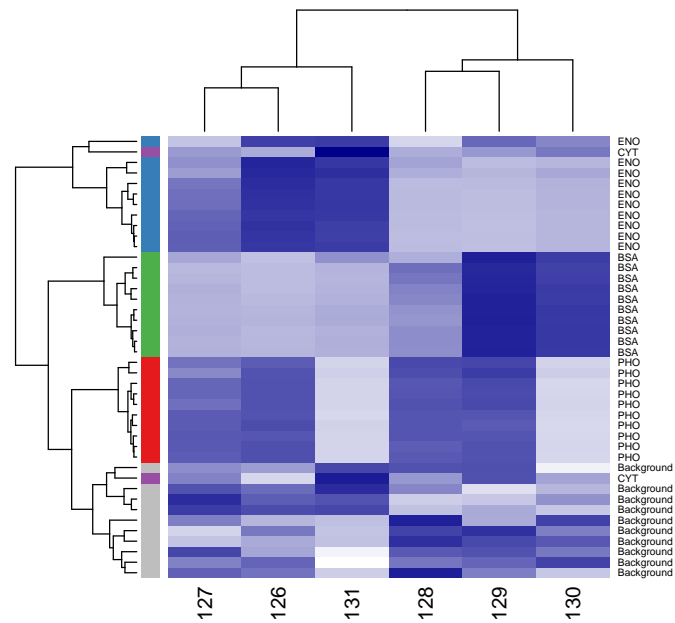


Figure 3: A heatmap.

```

> dfr <- data.frame(exprs(small),
+                   Protein = as.character(fData(small)$accession),
+                   Feature = featureNames(small),
+                   stringsAsFactors = FALSE)
> colnames(dfr) <- c("126", "127", "128", "129", "130", "131",
+                   "Protein", "Feature")
> dfr$Protein[dfr$Protein == "sp|P00924|ENO1_YEAST"] <- "ENO"
> dfr$Protein[dfr$Protein == "sp|P62894|CYC_BOVIN"] <- "CYT"
> dfr$Protein[dfr$Protein == "sp|P02769|ALBU_BOVIN"] <- "BSA"
> dfr$Protein[dfr$Protein == "sp|P00489|PYGM_RABIT"] <- "PHO"
> dfr$Protein[grep("ECA", dfr$Protein)] <- "Background"
> dfr2 <- melt(dfr)

```

*Using Protein, Feature as id variables*

```

> ggplot(aes(x = variable, y = value, colour = Protein),
+         data = dfr2) +
+   geom_point() +
+   geom_line(aes(group=as.factor(Feature)), alpha = 0.5) +
+   facet_grid(. ~ Protein) + theme(legend.position="none") +
+   labs(x = "Reporters", y = "Normalised intensity")

```

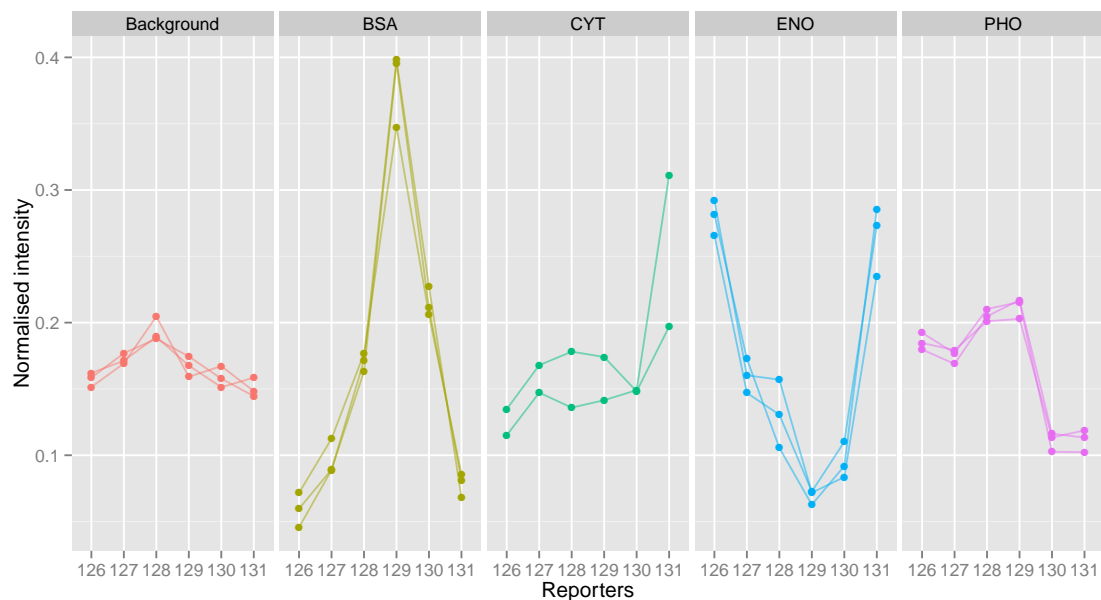


Figure 4: Spikes plot using ggplot2.

## 4.2 Working with raw data

```
> mzxml <- getPXD000001mzXML()
> rawms <- readMSData(mzxml, centroided = TRUE, verbose = FALSE)
> qntms <- quantify(rawms, reporters = TMT7, method = "max",
+   verbose = FALSE, parallel = FALSE)
>
> d <- data.frame(Signal = rowSums(exprs(qntms)[, 1:6]),
+   Incomplete = exprs(qntms)[, 7])
> d <- log(d)
> cls <- rep("#00000050", nrow(qnt))
> pch <- rep(1, nrow(qnt))
> cls[grepl("P02769", fData(qnt)$accession)] <- "gold4" ## BSA
> cls[grepl("P00924", fData(qnt)$accession)] <- "dodgerblue" ## ENO
> cls[grepl("P62894", fData(qnt)$accession)] <- "springgreen4" ## CYT
> cls[grepl("P00489", fData(qnt)$accession)] <- "darkorchid2" ## PHO
> pch[grepl("P02769", fData(qnt)$accession)] <- 19
> pch[grepl("P00924", fData(qnt)$accession)] <- 19
> pch[grepl("P62894", fData(qnt)$accession)] <- 19
> pch[grepl("P00489", fData(qnt)$accession)] <- 19
```

```
> mzp <- plotMzDelta(rawms, reporters = TMT6, verbose = FALSE) +
+   ggtitle("")
```

*Scale for 'x' is already present. Adding another scale for 'x', which will replace the existing scale.*

```
> mzp
```

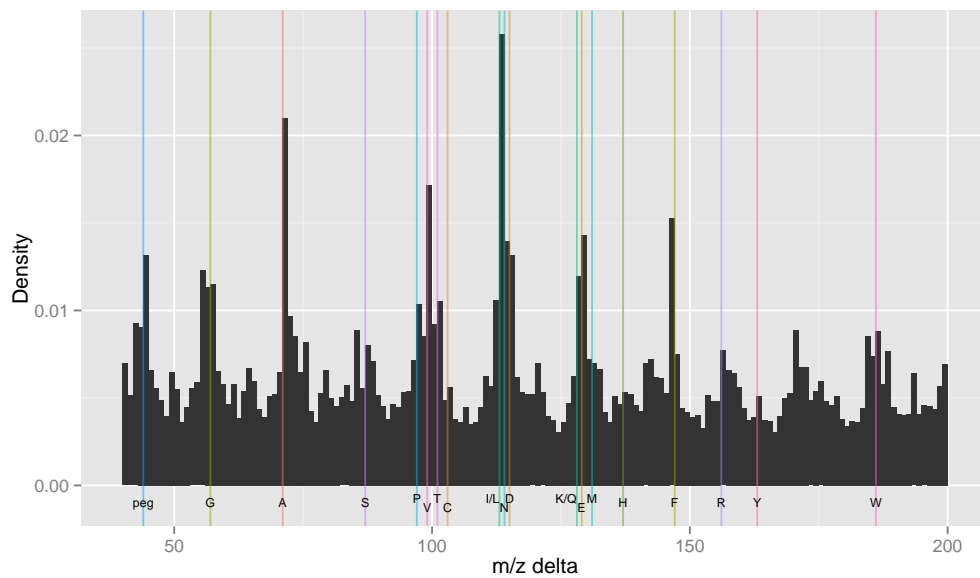


Figure 5: A m/z delta plot.

```
> plot(Signal ~ Incomplete, data = d,
+       xlab = expression(Incomplete~dissociation),
+       ylab = expression(Sum~of~reporters~intensities),
+       pch = 19,
+       col = "#4582B380")
> grid()
> abline(0, 1, lty = "dotted")
> abline(lm(Signal ~ Incomplete, data = d), col = "darkblue")
```

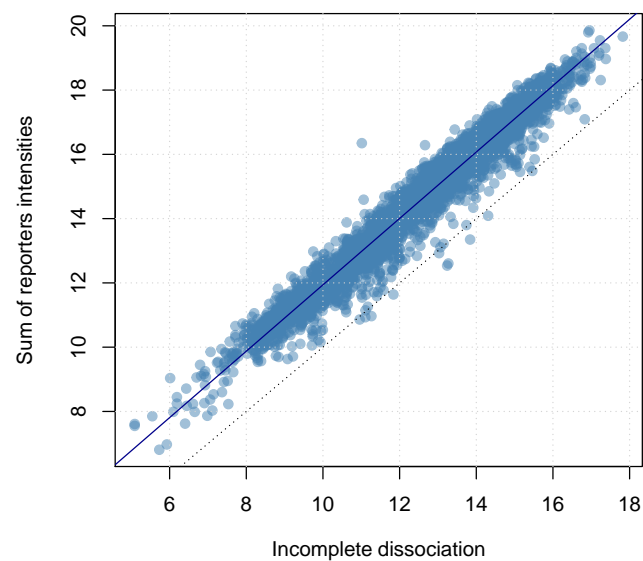


Figure 6: Incomplete dissociation.



```
> MAplot(qnt[, c(4, 2)], cex = 0.9, col = cls, pch = pch,  
+       show.statistics = FALSE)
```

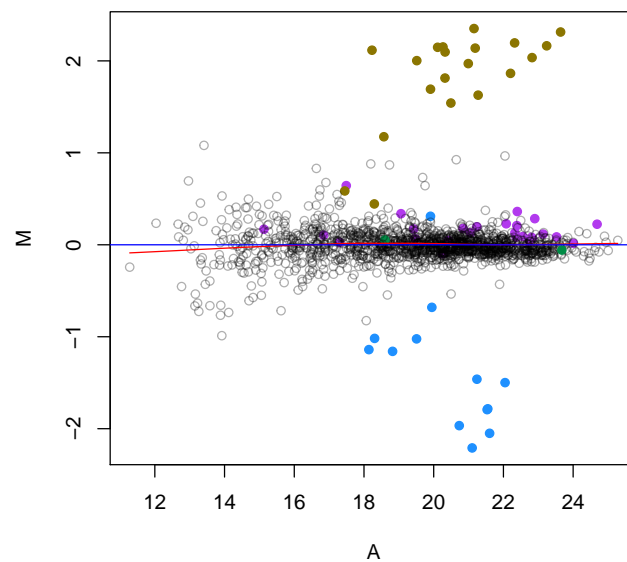


Figure 7: MAplot on an MSnSet instance.

### 4.3 The MALDIquant package

This section illustrates some of **MALDIquant**'s data processing capabilities [10]. The code is taken from the `processing-peaks.R` script downloaded from the package homepage<sup>13</sup>.

#### Loading the data

```
> ## load packages
> library("MALDIquant")
> library("MALDIquantForeign")
> ## getting test data
> datapath <-
+   file.path(system.file("Examples",
+                           package = "readBrukerFlexData"),
+             "2010_05_19_Gibb_C8_A1")
> dir(datapath)

[1] "0_A1" "0_A2"

> sA1 <- importBrukerFlex(datapath, verbose=FALSE)
> # in the following we use only the first spectrum
> s <- sA1[[1]]
>
> summary(mass(s))

      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
 1000    2370    4330    4720    6870   10000

> summary(intensity(s))

      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
      4      180    1560    2840    4660   32600

> head(as.matrix(s))

      mass intensity
[1,]  999.9     11278
[2,] 1000.1     11350
[3,] 1000.3     10879
[4,] 1000.5     10684
[5,] 1000.7     10740
[6,] 1000.9     10947
```

#### Preprocessing

<sup>13</sup><http://strimmerlab.org/software/malDIquant/>

```
> plot(s)
```

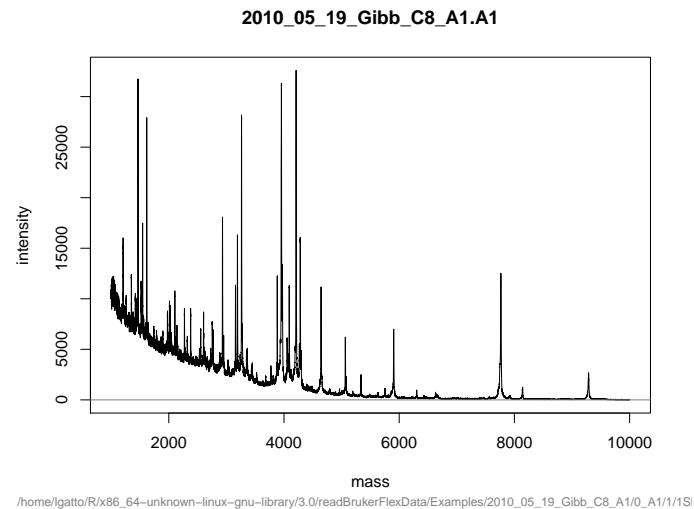


Figure 8: Spectrum plotting in MALDIquant.

```
> ## sqrt transform (for variance stabilization)
> s2 <- transformIntensity(s, fun = sqrt)
> s2

S4 class type           : MassSpectrum
Number of m/z values    : 22431
Range of m/z values     : 999.939 - 10001.925
Range of intensity values: 2e+00 - 1.805e+02
Name                    : 2010_05_19_Gibb_C8_A1.A1
File                    : /home/lgatto/R/x86_64-unknown-linux-gnu-library/3.0/read

>
> ## smoothing - 5 point moving average
> s3 <- transformIntensity(s2, movingAverage, halfWindowSize = 2)
> s3

S4 class type           : MassSpectrum
Number of m/z values    : 22427
Range of m/z values     : 1000.324 - 10000.705
Range of intensity values: 3.606e+00 - 1.792e+02
Name                    : 2010_05_19_Gibb_C8_A1.A1
File                    : /home/lgatto/R/x86_64-unknown-linux-gnu-library/3.0/read

>
> ## baseline subtraction
> s4 <- removeBaseline(s3, method = "SNIP")
> s4

S4 class type           : MassSpectrum
Number of m/z values    : 22427
```

```
Range of m/z values      : 1000.324 - 10000.705
Range of intensity values: 0e+00 - 1.414e+02
Name                     : 2010_05_19_Gibb_C8_A1.A1
File                     : /home/lgatto/R/x86_64-unknown-linux-gnu-library/3.0/read
```

## Peak picking

```
> ## peak picking
> p <- detectPeaks(s4)
> length(p) # 181


[1] 181

> peak.data <- as.matrix(p) # extract peak information
```

```

> par(mfrow = c(2, 3))
> x1 <- range(mass(s))
> # use same xlim on all plots for better
> # comparison
> plot(s, sub = "", main = "1: raw", xlim = x1)
> plot(s2, sub = "", main = "2: variance stabilisation",
+      xlim = x1)
> plot(s3, sub = "", main = "3: smoothing", xlim = x1)
> plot(s4, sub = "", main = "4: base line correction",
+      xlim = x1)
> plot(s4, sub = "", main = "5: peak detection", xlim = x1)
> points(p)
> top20 <- intensity(p) %in% sort(intensity(p), decreasing = TRUE)[1:20]
> labelPeaks(p, index = top20, underline = TRUE)
> plot(p, sub = "", main = "6: peak plot", xlim = x1)
> labelPeaks(p, index = top20, underline = TRUE)

```

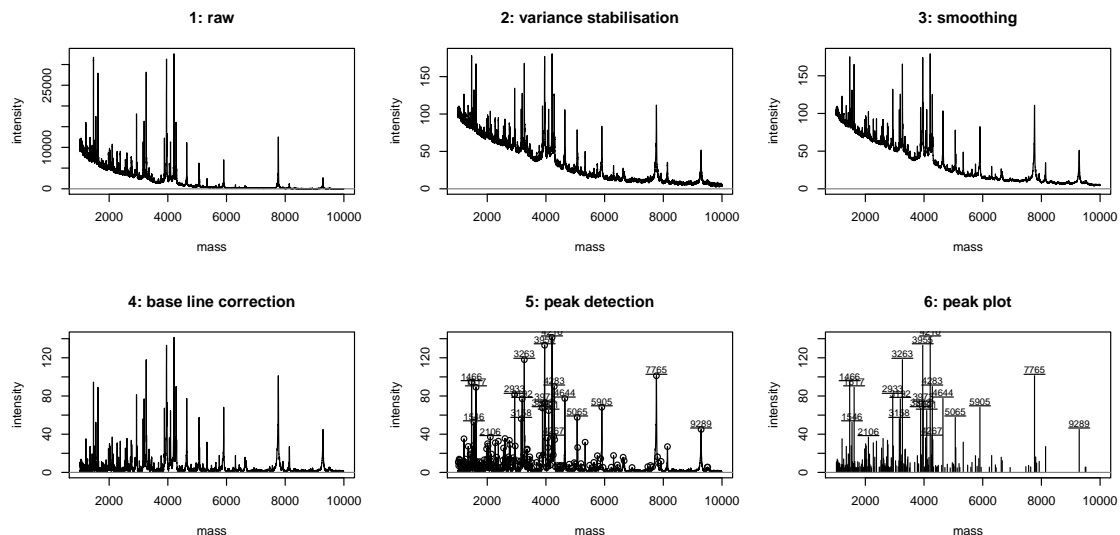

## 4.4 Working with peptide sequences

```

> library(IPPD)
> library(BRAIN)
> atoms <- getAtomsFromSeq("SIVPSGASTGVHEALEMR")
> unlist(atoms)

  C   H   N   O   S
77 129  23  27   1

>
> library(Rdisop)
> pepmol <- getMolecule(paste0(names(atoms),
+                             unlist(atoms),
+                             collapse = ""))
> pepmol

$formula
[1] "C77H129N23O27S"

$score
[1] 1

$exactmass
[1] 1840

$charge
[1] 0

$parity
[1] "e"

$valid
[1] "Valid"

$DBE
[1] 25

$isotopes
$isotopes[[1]]
      [,1]      [,2]      [,3]      [,4]      [,5]
[1,] 1839.9149 1840.9177 1841.9197 1.843e+03 1.844e+03
[2,]   0.3427   0.3353   0.1961 8.474e-02 2.953e-02
      [,6]      [,7]      [,8]      [,9]     [,10]
[1,] 1.845e+03 1.846e+03 1.847e+03 1.848e+03 1.849e+03
[2,] 8.692e-03 2.226e-03 5.066e-04 1.040e-04 1.950e-05

>

```

```

> ##
> library(OrgMassSpecR)
> data(itraqdata)
>
> simplottest <-
+   itraqdata[featureNames(itraqdata) %in% paste0("X", 46:47)]
> sim <- SpectrumSimilarity(as(simplottest[[1]], "data.frame"),
+                           as(simplottest[[2]], "data.frame"),
+                           top.lab = "itraqdata[['X46']]",
+                           bottom.lab = "itraqdata[['X47']]",
+                           b = 25)

```

|    | mz    | intensity.top | intensity.bottom |
|----|-------|---------------|------------------|
| 1  | 114.1 | 0             | 44               |
| 2  | 114.1 | 0             | 53               |
| 3  | 114.1 | 0             | 43               |
| 4  | 115.1 | 0             | 25               |
| 5  | 364.7 | 25            | 0                |
| 6  | 374.2 | 0             | 39               |
| 7  | 374.2 | 0             | 45               |
| 8  | 374.2 | 0             | 35               |
| 9  | 388.2 | 0             | 35               |
| 10 | 388.3 | 0             | 75               |
| 11 | 388.3 | 0             | 100              |
| 12 | 388.3 | 0             | 90               |
| 13 | 388.3 | 35            | 53               |
| 14 | 388.3 | 100           | 53               |
| 15 | 388.3 | 90            | 53               |
| 16 | 388.3 | 53            | 53               |
| 17 | 388.3 | 75            | 53               |
| 18 | 414.3 | 31            | 0                |
| 19 | 414.3 | 27            | 0                |
| 20 | 487.3 | 0             | 33               |
| 21 | 487.3 | 0             | 37               |
| 22 | 487.3 | 0             | 28               |
| 23 | 603.3 | 42            | 0                |
| 24 | 603.4 | 55            | 0                |
| 25 | 603.4 | 48            | 0                |
| 26 | 603.4 | 27            | 0                |
| 27 | 615.3 | 0             | 28               |
| 28 | 615.3 | 0             | 56               |
| 29 | 615.4 | 0             | 70               |
| 30 | 615.4 | 0             | 59               |
| 31 | 615.4 | 26            | 32               |
| 32 | 615.4 | 44            | 32               |
| 33 | 615.4 | 56            | 32               |
| 34 | 615.4 | 47            | 32               |
| 35 | 702.4 | 27            | 0                |


```

36 702.4      30      0
37 728.4      0     28
38 728.5     64     29
39 728.5     64     29
40 728.5     42     29
41 728.5     42     29
42 803.4     30      0
43 803.5     38      0
44 803.5     32      0
45 827.5     28      0
46 827.5     35      0
47 827.5     30      0
48 1128.6    36      0
49 1128.6    40      0
50 1128.7    29      0

> title(main = paste("Spectrum similarity", round(sim, 3)))

```

### Spectrum similarity 0.422

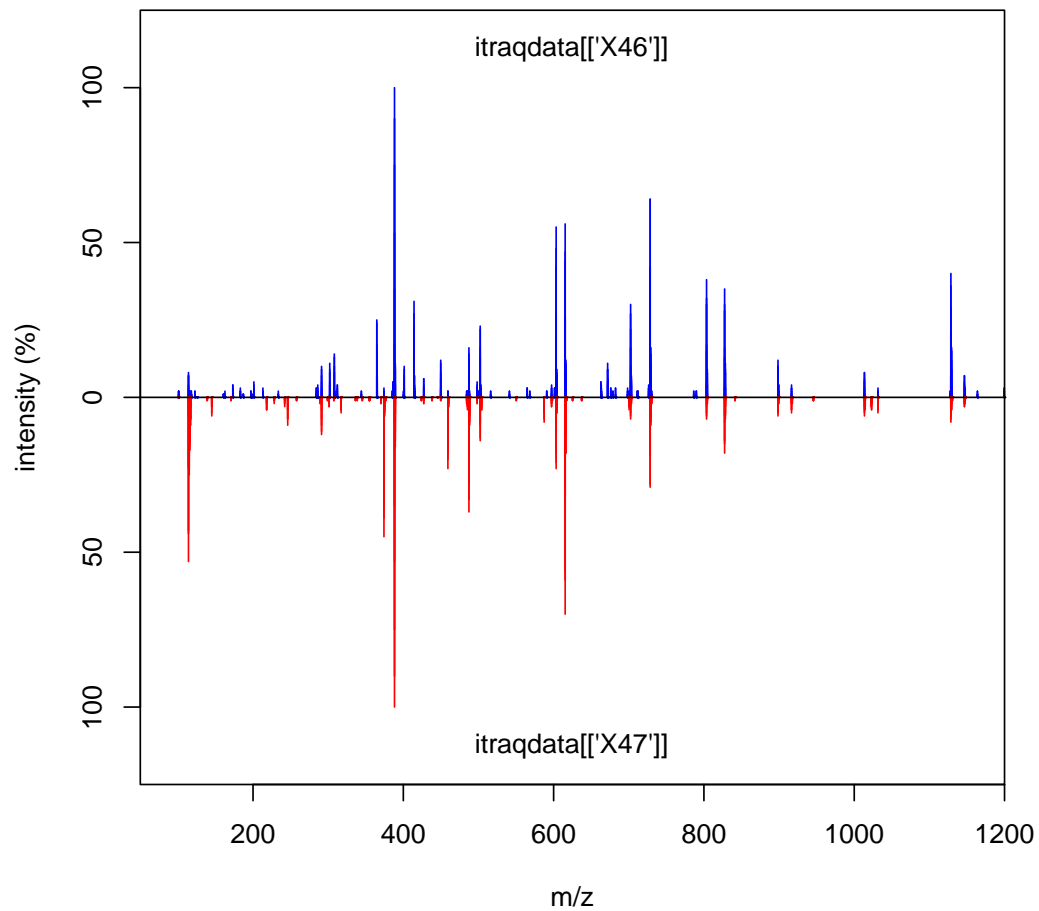



```

>
> MonoisotopicMass(formula = list(C = 2, O = 1, H=6))

[1] 46.04

> molecule <- getMolecule("C2H5OH")
> molecule$exactmass

[1] 46.04

> ## x11()
> ## plot(t(.pepmol$isotopes[[1]]), type = "h")
>
> ## x <- IsotopicDistribution(formula = list(C = 2, O = 1, H=6))
> ## t(molecule$isotopes[[1]])
> ## par(mfrow = c(2,1))
> ## plot(t(molecule$isotopes[[1]]), type = "h")
> ## plot(x[, c(1,3)], type = "h")
>
> ## data(myo500)
> ## masses <- c(147.053, 148.056)
> ## intensities <- c(93, 5.8)
> ## molecules <- decomposeIsotopes(masses, intensities)
>
> ## experimental eno peptides
> exppep <-
+   as.character(fData(qnt[grep("ENO", fData(qnt)[, 2]), ])[, 1]) ## 13
> minlength <- min(nchar(exppep))
>
> eno <- download.file("http://www.uniprot.org/uniprot/P00924.fasta",
+                     destfile = "P00924.fasta")
> eno <- paste(readLines("P00924.fasta")[-1], collapse = "")
> enopep <- Digest(eno, missed = 1)
> nrow(enopep) ## 103

[1] 103

> sum(nchar(enopep$peptide) >= minlength) ## 68

[1] 68

> pepcnt <- enopep[enopep[, 1] %in% exppep, ]
> nrow(pepcnt) ## 13

[1] 13

> ## example code to generate an Texshade image to
> ## be included directly in a Latex document or R

```

```

> ## vignette
>
> ## seq1file <- 'seq1.tex'
> ## cat('\begin{texshade}{Figures/P00924.fasta}
> ## \setsize{numbering}{footnotesize}
> ## \setsize{residues}{footnotesize}
> ## \residuesperline*{70}
> ## \shadingmode{functional} \hideconsensus
> ## \vsepspace{1mm} \hidenames
> ## \noblockskip\n', file = seq1file) tmp <-
> ## sapply(1:nrow(pepcnt), function(i) { col <-
> ## ifelse((i %% 2) == 0, 'Blue', 'RoyalBlue')
> ## cat('\shaderegion{1}{', pepcnt$start[i],
> ## '..', pepcnt$stop[i], '{White}{', col,
> ## '}\n', file = seq1file, append = TRUE) })
> ## cat('\end{texshade} \caption{Visualising
> ## observed peptides for the Yeast enolase
> ## protein. Peptides are shaded in blue and
> ## black. The last peptide is a mis-cleavage and
> ## overlaps with
> ## \texttt{IEEELGDNAVFA GENFHHGDK}.)}
> ## \label{fig:seq} \end{center}
> ## \end{figure}\n\n', file = seq1file,
> ## append = TRUE)

```

## <sup>15</sup>N incorporation

```

> ## 15N example
> ## incorporation rates from 0, 0.1, ..., 0.9, 0.95, 1
> incrate <- c(seq(0, 0.9, 0.1), 0.95, 1)
> inc <- lapply(incrate, function(inc)
+               IsotopicDistributionN("YEVQGEVFTKPQLWP", inc))
> par(mfrow = c(4,3))
> for (i in 1:length(inc))
+   plot(inc[[i]][, c(1, 3)], xlim = c(1823, 1848),
+        type = "h",
+        main = paste0("15N incorporation at ", incrate[i]*100, "%"))

```

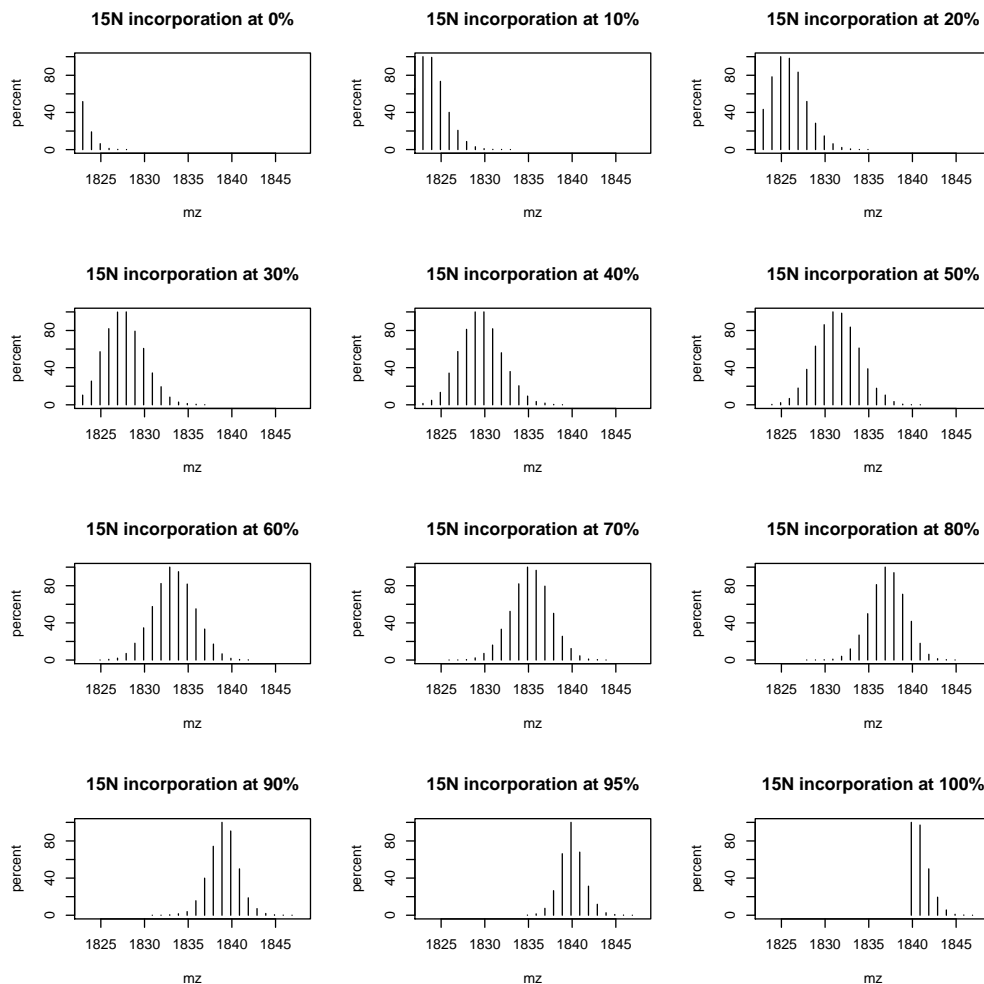


Figure 10: Isotopic envelope for the YEVQGEVFTKPQLWP peptide at different  $^{15}\text{N}$  incorporation rates.

## 4.5 The isobar package

The **isobar** package [2] provides methods for the statistical analysis of isobarically tagged MS<sup>2</sup> experiments.

```
> library(isobar)
>
> ## Prepare the PXD000001 data for isobar analysis
> .ions <- exprs(qnt)
> .mass <- matrix(mz(TMT6), nrow(qnt), byrow=TRUE, ncol = 6)
> colnames(.ions) <- colnames(.mass) <-
+   reporterTagNames(new("TMT6plexSpectra"))
> rownames(.ions) <- rownames(.mass) <-
+   paste(fData(qnt)$accession, fData(qnt)$sequence, sep = ".")
> pgtbl <- data.frame(spectrum = rownames(.ions),
+                     peptide = fData(qnt)$sequence,
+                     modif = ":",
+                     start.pos = 1,
+                     protein = fData(qnt)$accession,
+                     accession = fData(qnt)$accession)
> x <- new("TMT6plexSpectra", pgtbl, .ions, .mass)
> featureData(x)$proteins <- as.character(fData(qnt)$accession)
>
> x <- correctIsotopeImpurities(x) ## using identity matrix here

LOG: isotopeImpurities.corrected: TRUE

> x <- normalize(x, per.file = FALSE)

LOG: is.normalized: TRUE
LOG: normalization.multiplicative.factor channel 126: 1.1229
LOG: normalization.multiplicative.factor channel 127: 1.0766
LOG: normalization.multiplicative.factor channel 128: 1
LOG: normalization.multiplicative.factor channel 129: 1.0537
LOG: normalization.multiplicative.factor channel 130: 1.1524
LOG: normalization.multiplicative.factor channel 131: 1.1154

> ## spikes
> spks <- c(protein.g(proteinGroup(x), "P00489"),
+           protein.g(proteinGroup(x), "P00924"),
+           protein.g(proteinGroup(x), "P02769"),
+           protein.g(proteinGroup(x), "P62894"))
>
> cls2 <- rep("#00000040", nrow(x))
> pch2 <- rep(1, nrow(x))
> cls2[grep("P02769", featureNames(x))] <- "gold4" ## BSA
> cls2[grep("P00924", featureNames(x))] <- "dodgerblue" ## ENO
> cls2[grep("P62894", featureNames(x))] <- "springgreen4" ## CYT
> cls2[grep("P00489", featureNames(x))] <- "darkorchid2" ## PHO
> pch2[grep("P02769", featureNames(x))] <- 19
```

```

> pch2[grep("P00924", featureNames(x))] <- 19
> pch2[grep("P62894", featureNames(x))] <- 19
> pch2[grep("P00489", featureNames(x))] <- 19
>
> nm <- NoiseModel(x)
[1] 0.07345 941.47896 2.82447

> ib.background <- subsetIBSpectra(x, protein=spks,
+                                direction = "exclude")
> nm.background <- NoiseModel(ib.background)
[1] 0.01346 2.85121 0.84631

> ib.spks <- subsetIBSpectra(x, protein = spks,
+                            direction="include",
+                            specificity="reporter-specific")
> nm.spks <- NoiseModel(ib.spks, one.to.one=FALSE, pool=TRUE)

4 proteins with more than 10 spectra, taking top 50.
[1] 1.000e-10 5.829e+00 6.610e-01


>
> ratios <- 10^estimateRatio(x, nm,
+                            channel1="127", channel2="129",
+                            protein = spks,
+                            combine = FALSE)[, "lratio"]
>
> res <- estimateRatio(x, nm,
+                      channel1="127", channel2="129",
+                      protein = unique(fData(x)$proteins),
+                      combine = FALSE,
+                      sign.level = 0.01)[, c(1, 2, 6, 8)]
> res <- as.data.frame(res)
> res$lratio <- -(res$lratio)
>
> cls3 <- rep("#00000050", nrow(res))
> pch3 <- rep(1, nrow(res))
> cls3[grep("P02769", rownames(res))] <- "gold4" ## BSA
> cls3[grep("P00924", rownames(res))] <- "dodgerblue" ## ENO
> cls3[grep("P62894", rownames(res))] <- "springgreen4" ## CYT
> cls3[grep("P00489", rownames(res))] <- "darkorchid2" ## PHO
> pch3[grep("P02769", rownames(res))] <- 19
> pch3[grep("P00924", rownames(res))] <- 19
> pch3[grep("P62894", rownames(res))] <- 19
> pch3[grep("P00489", rownames(res))] <- 19
>
> rat.exp <- c(PHO = 2/2,
+             ENO = 5/1,
+             BSA = 2.5/10,
+             CYT = 1/1)

```

```

> par(mfrow = c(1, 2))
> maplot(x, noise.model = c(nm.background, nm.spks, nm),
+       channel1 = "127", channel2 = "129", pch = 19, col = cls2,
+       main = "Spectra MA plot")
> abline(h = 1, lty = "dashed", col = "grey")
> legend("topright", c("BSA", "ENO", "CYT", "PHO"), pch = 19,
+       col = c("gold4", "dodgerblue", "springgreen4",
+               "darkorchid2"), bty = "n", cex = 0.7)
> plot(res$lratio, -log10(res$p.value.rat), col = cls3,
+       pch = pch3, xlab = expression(log[10] ~ fold -
+       change), ylab = expression(-log[10] ~ p - value),
+       main = "Protein volcano plot", xlim = c(-0.7, 0.7))
> grid()
> abline(h = -log10(0.01), lty = "dotted")
> abline(v = log10(c(2, 0.5)), lty = "dotted")
> abline(v = -0.003, col = "springgreen4", lty = "dashed",
+       lwd = 2)
> abline(v = 0.003, col = "darkorchid2", lty = "dashed",
+       lwd = 2)
> abline(v = log10(5), col = "dodgerblue", lty = "dashed",
+       lwd = 2)
> abline(v = log10(0.25), col = "gold4", lty = "dashed",
+       lwd = 2)
> points(res[spks, "lratio"], -log10(res[spks, "p.value.rat"]),
+       col = c("darkorchid2", "dodgerblue", "gold4", "springgreen4"),
+       pch = 19)

```

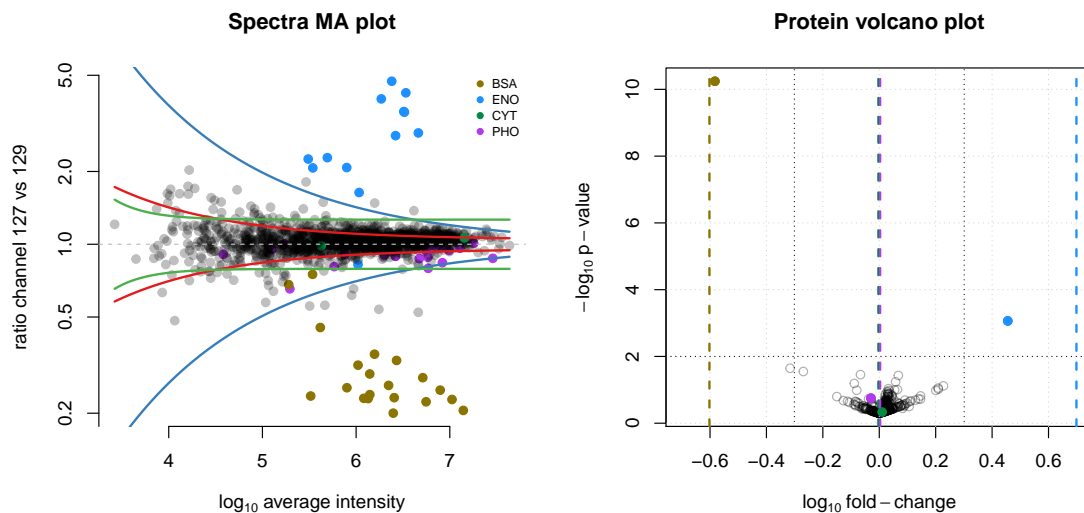Figure 11: Result from the **isobar** pipeline.

## 4.6 The synapter package

The **synapter** package comes with a detailed vignette that describes how to prepare the MS<sup>E</sup> data and then process it in R. Several interfaces are available provided the user with maximum control, easy batch processing capabilities or a graphical user interface. The conversion into MSnSet instances and filter and combination thereof as well as statistical analysis are also described.

```
> ## open the synapter vignette
> library("synapter")
> synapterGuide()
```

## 5 MS<sup>2</sup> spectra identification

A recent addition to Bioconductor 2.12 is the **rTANDEM** package, that provides a direct interface to the X!Tandem software [4]. A typical **rTANDEM** pipeline comprises

1. Prepare the input data.
2. Run the search.
3. Import the search results and extract the peptides and proteins

Using example code/data from the **rTANDEM** vignette/package, these steps are executed as described below.

### 5.1 Preparation of the input data

```
> library(rTANDEM)
> taxonomy <- rTTaxo(taxon = "yeast",
+                   format = "peptide",
+                   URL = system.file(
+                       "extdata/fasta/scd.fasta.pro",
+                       package="rTANDEM"))
> param <- rTParam()
> param <- setParamValue(param,
+                         'protein', 'taxon',
+                         value="yeast")
> param <- setParamValue(param, 'list path',
+                         'taxonomy information', taxonomy)
> param <- setParamValue(param,
+                         'list path', 'default parameters',
+                         value = system.file(
+                             "extdata/default_input.xml",
+                             package="rTANDEM"))
> param <- setParamValue(param, 'spectrum', 'path',
+                         value = system.file(
```

```

+             "extdata/test_spectra.mgf",
+             package="rTANDEM"))
> param <- setParamValue(param, 'output', 'xsl path',
+             value = system.file(
+             "extdata/tandem-input-style.xsl",
+             package="rTANDEM"))
> param <- setParamValue(param, 'output', 'path',
+             value = paste(getwd(),
+             "output.xml", sep="/"))

```

## 5.2 Performing the search

The analysis is run using the `tandem` function (see also the `rtandem` function), which returns the results data file path (only the file name is displayed below).

```

> resultPath <- tandem(param)

Loading spectra
(mgf). loaded.
Spectra matching criteria = 242
Starting threads . started.
Computing models:
testin sequences modelled = 5 ks
Model refinement:
partial cleavage ..... done.
unanticipated cleavage ..... done.
modified N-terminus ..... done.
finishing refinement ... done.
Creating report:
initial calculations ..... done.
sorting ..... done.
finding repeats ..... done.
evaluating results ..... done.
calculating expectations ..... done.
writing results ..... done.

Valid models = 31
Unique models = 30
Estimated false positives = 1 +/- 1

> basename(resultPath)

[1] "output.2013_05_24_00_09_54.t.xml"

```

## 5.3 Import and analyse results



```

> res <- GetResultsFromXML(resultPath)
> ## the inferred proteins
> proteins <- GetProteins(res, log.expect = -1.3, min.peptides = 2)
> proteins[, -(4:5), with = FALSE]

  uid expect.value  label description num.peptides
1:  576      -19.4 YCR012W   YCR012W         4
2: 2281      -14.0 YGR234W   YGR234W         3
3: 1811       -8.3 YFR053C   YFR053C         2
4:    4       -6.5 YAL005C   YAL005C         2
5: 3517       -6.5 YLL024C   YLL024C         2

> ## the identified peptides for YFR053C
> peptides <- GetPeptides(protein.uid = 1811, results = res,
+   expect = 0.05)
> peptides[, c(1:4, 9, 10:16), with = FALSE]

  pep.id prot.uid spectrum.id spectrum.mh tandem.score
1: 102.1.1    1811        102      942.5         31.9
2: 250.1.1    1811        250     1212.6         35.0
  mh  delta peak.count missed.cleavages
1: 942.5 -0.0220      NA              0
2: 1212.6 0.0079      NA              0
  start.position end.position  sequence
1:          166      173  INEGILQR
2:          437      447  DIYGWTGDASK

```

More details are provided in the vignette available with (`vignette("rTANDEM")`), for instance the extraction of degenerated peptides, i.e. peptides found in multiple proteins.

## 6 Annotation

In this section, we briefly present some Bioconductor annotation infrastructure.

We start with the **hpar** package, an interface to the *Human Protein Atlas* [13, 14], to retrieve subcellular localisation information for the ENSG00000002746 ensemble gene.

```

> id <- "ENSG00000002746"
> library("hpar")
> getHpa(id, "SubcellularLoc")

  Gene                                     Main.location
24 ENSG00000002746 Nucleus but not nucleoli;Cytoplasm
  Other.location Expression.type Reliability
24                                     APE      High

```

Below, we make use of the human annotation package **org.Hs.eg.db** and the Gene Ontology annotation package **GO.db** to retrieve the same information as above.

```

> library(org.Hs.eg.db)
> library(GO.db)
> ans <- select(org.Hs.eg.db, keys = id, cols = c("ENSEMBL",
+        "GO", "ONTOLOGY"), keytype = "ENSEMBL")
> ans <- ans[ans$ONTOLOGY == "CC", ]
> ans

```

|   | ENSEMBL         | GO         | EVIDENCE | ONTOLOGY |
|---|-----------------|------------|----------|----------|
| 2 | ENSG00000002746 | GO:0005634 | IDA      | CC       |
| 3 | ENSG00000002746 | GO:0005737 | IDA      | CC       |

```

> sapply(as.list(GOTERM[ans$GO]), slot, "Term")

GO:0005634  GO:0005737
"nucleus"  "cytoplasm"

```

Finally, this information can also be retrieved from on-line databases using the **biomaRt** package [6].

```

> library("biomaRt")
> ensembl <- useMart("ensembl", dataset = "hsapiens_gene_ensembl")
> efilter <- "ensembl_gene_id"
> eattr <- c("go_id", "name_1006", "namespace_1003")
> bmres <- getBM(attributes = eattr, filters = efilter,
+        values = id, mart = ensembl)
> bmres[bmres$namespace_1003 == "cellular_component",
+        "name_1006"]

[1] "nucleus"  "cytoplasm"

```

## 7 Other packages

### 7.1 Bioconductor packages

This section provides a complete list of packages available in the relevant Bioconductor version 2.13 (as of May 24, 2013) *biocView*<sup>14</sup> categories. Tables 1, 2 and 3 represent the packages for the Proteomics (35 packages), MassSpectrometry (21 packages) and MassSpectrometryData (6 experiment packages) categories.

| Package         | Title   |
|-----------------|---|
| ASEB            | Predict Acetylated Lysine Sites   |
| BRAIN           | Baffling Recursive Algorithm for Isotope distributionN calculations   |
| CellNOptR       | Training of boolean logic models of signalling networks using prior knowledge networks and perturbation data.                                       |
| ChemmineR       | Cheminformatics of Drug-like Small Molecule Data  |
| cisPath         | Visualization of the Shortest Functional Paths between Proteins.  |
| clippda         | A package for the clinical proteomic profiling data analysis  |
| CNORdt          | Add-on to CellNOptR: Discretized time treatments  |
| CNORfeeder      | Integration of CellNOptR to add missing links   |
| CNORode         | ODE add-on to CellNOptR   |
| deltaGseg       | deltaGseg   |
| eiR             | Accelerated similarity searching of small molecules   |
| fmcsR           | Flexible Maximum Common Substructure (FMCS) Searching   |
| GraphPAC        | Identification of Mutational Clusters in Proteins via a Graph Theoretical Approach.   |
| hpar            | Human Protein Atlas in R  |
| iPAC            | Identification of Protein Amino acid Clustering   |
| IPPD            | Isotopic peak pattern deconvolution for Protein Mass Spectrometry by template matching  |
| isobar          | Analysis and quantitation of isobarically tagged MSMS proteomics data   |
| LPEadj          | A correction of the local pooled error (LPE) method to replace the asymptotic variance adjustment with an unbiased adjustment based on sample size. |
| MassSpecWavelet | Mass spectrum processing by wavelet-based algorithms  |
| MSnbase         | MSnbase: Base Functions and Classes for MS-based Proteomics   |
| mzR             | parser for netCDF, mzXML, mzData and mzML files (mass spectrometry data)  |
| PAnnBuilder     | Protein annotation data package builder   |
| pathview        | a tool set for pathway based data integration and visualization   |
| PCpheno         | Phenotypes and cellular organizational units  |
| plgem           | Detect differential expression in microarray and proteomics datasets with the Power Law Global Error Model (PLGEM)                                  |
| PLPE            | Local Pooled Error Test for Differential Expression with Paired High-throughput Data  |
| ppiStats        | Protein-Protein Interaction Statistical Package   |
| PROcess         | Ciphergen SELDI-TOF Processing  |
| procoil         | Prediction of Oligomerization of Coiled Coil Proteins   |
| RCASPAR         | A package for survival time prediction based on a piecewise baseline hazard Cox regression model.   |
| RpsiXML         | R interface to PSI-MI 2.5 files   |
| rTANDEM         | Encapsulate X!Tandem in R.  |
| ScISI           | In Silico Interactome   |
| SLGI            | Synthetic Lethal Genetic Interaction  |
| synapter        | Label-free data analysis pipeline for optimal identification and quantitation   |

Table 1: Packages available under the Proteomics *biocViews* category.

### 7.2 The Chemometrics and Computational Physics CRAN Task View

The CRAN task view on Chemometrics and Computational Physics<sup>15</sup> lists 67 packages, including a set of packages for mass spectrometry and proteomics, some of which are illustrated in this document. The most relevant (non Bioconductor) packages are summarised below.

<sup>14</sup><http://www.bioconductor.org/packages/devel/BiocViews.html>

<sup>15</sup><http://cran.r-project.org/web/views/ChemPhys.html>

| Package         | Title   |
|-----------------|---|
| apComplex       | Estimate protein complex membership using AP-MS protein data                    |
| BRAIN           | Baffling Recursive Algorithm for Isotope distributionN calculations             |
| CAMERA          | Collection of annotation related methods for mass spectrometry data             |
| flagme          | Analysis of Metabolomics GC/MS Data   |
| gaga            | GaGa hierarchical model for high-throughput data analysis                       |
| iontree         | Data management and analysis of ion trees from ion-trap mass spectrometry       |
| isobar          | Analysis and quantitation of isobarically tagged MSMS proteomics data           |
| MassArray       | Analytical Tools for MassArray Data   |
| MassSpecWavelet | Mass spectrum processing by wavelet-based algorithms                            |
| MSnbase         | MSnbase: Base Functions and Classes for MS-based Proteomics                     |
| mzR             | parser for netCDF, mzXML, mzData and mzML files (mass spectrometry data)        |
| PAPi            | Predict metabolic pathway activity based on metabolomics data                   |
| PROcess         | Ciphergen SELDI-TOF Processing  |
| Rdisop          | Decomposition of Isotopic Patterns  |
| Risa            | Converting experimental metadata from ISA-tab into Bioconductor data structures |
| RMassBank       | Workflow to process tandem MS files and build MassBank records                  |
| rols            | An R interface to the Ontology Lookup Service                                   |
| rTANDEM         | Encapsulate X!Tandem in R.  |
| synapter        | Label-free data analysis pipeline for optimal identification and quantitation   |
| TargetSearch    | A package for the analysis of GC-MS metabolite profiling data.                  |
| xcms            | LC/MS and GC/MS Data Analysis   |

Table 2: Packages available under the MassSpectrometry *biocViews* category.

| Package        | Title  |
|----------------|--|
| faahKO         | Saghatelian et al. (2004) FAAH knockout LC/MS data   |
| gcspikelite    | Spike-in data for GC/MS data and methods within flagme                                       |
| msdata         | Various Mass Spectrometry raw data example files   |
| RforProteomics | Companion package to the 'Using R and Bioconductor for proteomics data analysis' publication |
| RMassBankData  | Test dataset for RMassBank   |
| synapterdata   | Data accompanying the synapter package   |

Table 3: Experimental Packages available under the MassSpectrometryData *biocViews* category.

**MALDIquant** provides tools for quantitative analysis of MALDI-TOF mass spectrometry data, with support for baseline correction, peak detection and plotting of mass spectra

(<http://cran.r-project.org/web/packages/MALDIquant/index.html>).

**OrgMassSpecR** is for organic/biological mass spectrometry, with a focus on graphical display, quantification using stable isotope dilution, and protein hydrogen/deuterium exchange experiments

(<http://cran.r-project.org/web/packages/OrgMassSpecR/index.html>).

**FTICRMS** provides functions for Analyzing Fourier Transform-Ion Cyclotron Resonance Mass Spectrometry Data

(<http://cran.r-project.org/web/packages/FTICRMS/index.html>).

**titan** provides a GUI to analyze mass spectrometric data on the relative abundance of two substances from a titration series

(<http://cran.r-project.org/web/packages/titan/index.html>).

## 7.3 Other CRAN packages

Finally, **diger**<sup>16</sup>, which is available on CRAN but not listed in the Chemometrics and Computational Physics Task View, provides a GUI interface for analysing 2D DIGE data.

<sup>16</sup><http://cran.r-project.org/web/packages/diger/index.html>

It allows to perform correlation analysis, score plot, classification, feature selection and power analysis for 2D DIGE experiment data.

Suggestions for additional R packages are welcome and will be added to the vignette. Please send suggestions and possibly a short description and/or a example utilisation with code to [lg390@cam.ac.uk](mailto:lg390@cam.ac.uk). The only requirement is that the package must be available on an official package channel (CRAN, Bioconductor, R-forge, Omegahat), i.e. not only available through a personal web page.

## 8 Session information

---

All software and respective versions used in this document, as returned by `sessionInfo()` are detailed below.

- R version 3.0.1 Patched (2013-05-22 r62774), x86\_64-unknown-linux-gnu
- Base packages: base, datasets, graphics, grDevices, methods, parallel, stats, utils
- Other packages: AnnotationDbi 1.22.5, Biobase 2.20.0, BiocGenerics 0.6.0, biomaRt 2.16.0, Biostrings 2.28.0, bitops 1.0-5, BRAIN 1.6.0, data.table 1.8.8, DBI 0.2-7, digest 0.6.3, ggplot2 0.9.3.1, GO.db 2.9.0, hpar 1.2.0, IPPD 1.8.0, IRanges 1.18.1, isobar 1.6.0, knitr 1.2, lattice 0.20-15, MALDIquant 1.6, MALDIquantForeign 0.4, MASS 7.3-26, Matrix 1.0-12, msdata 0.1.13, MSnbase 1.8.0, mzR 1.6.0, org.Hs.eg.db 2.9.0, OrgMassSpecR 0.3-12, plyr 1.8, PolynomF 0.94, RColorBrewer 1.0-5, Rcpp 0.10.3, RcppClassic 0.9.3, Rdisop 1.20.0, reshape2 1.2.2, RforProteomics 1.0.3, rols 1.2.1, RSQLite 0.11.3, rTANDEM 1.0.0, XML 3.96-1.1, xtable 1.7-1
- Loaded via a namespace (and not attached): affy 1.38.1, affyio 1.28.0, base64enc 0.1-1, BiocInstaller 1.10.1, codetools 0.2-8, colorspace 1.2-2, dichromat 2.0-0, distr 2.4, downloader 0.3, evaluate 0.4.3, formatR 0.7, grid 3.0.1, gtable 0.1.2, impute 1.34.0, labeling 0.1, limma 3.16.3, munsell 0.4, preprocessCore 1.22.0, proto 0.3-10, RCurl 1.95-4.1, readBrukerFlexData 1.6.3, readMzXmlData 2.6, R.methodsS3 1.4.2, R.oo 1.13.0, R.utils 1.23.2, scales 0.2.3, sfsmisc 1.0-23, SSOAP 0.8-0, startupmsg 0.8, stats4 3.0.1, stringr 0.6.2, tools 3.0.1, vsn 3.28.0, XMLSchema 0.7-2, zlibbioc 1.6.0

## References

---

- [1] H. P. Benton, D. M. Wong, S. A. Trauger, and G. Siuzdak. XCMS2: processing tandem mass spectrometry data for metabolite identification and structural characterization. *Anal Chem*, 80(16):6382–9, Aug 2008.
- [2] F. P. Breitwieser, A. Müller, L. Dayon, T. KÄucher, A. Hainard, P. Pichler, U. Schmidt-Erfurth, G. Superti-Furga, J. C. Sanchez, K. Mechtler, K. L. Bennett, and J. Colinge. General statistical modeling of data from protein relative expression isobaric tags. *J Proteome Res*, 10(6):2758–66, Jun 2011.
- [3] M. C. Chambers, B. Maclean, R. Burke, D. Amodei, D. L. Ruderman, S. Neumann, L. Gatto, B. Fischer, B. Pratt, J. Egertson, K. Hoff, D. Kessner, N. Tasman, N. Shulman, B. Frewen, T. A. Baker, M. Y. Brusniak, C. Paulse, D. Creasy, L. Flashner, K. Kani, C. Moulding, S. L. Seymour, L. M. Nuwaysir, B. Lefebvre, F. Kuhlmann, J. Roark, P. Rainer, S. Detlev, T. Hemenway, A. Huhmer, J. Langridge, B. Connolly, T. Chadick, K. Holly, J. Eckels, E. W. Deutsch, R. L. Moritz, J. E. Katz, D. B. Agus, M. MacCoss, D. L. Tabb, and P. Mallick. A cross-platform toolkit for mass spectrometry and proteomics. *Nat Biotechnol*, 30(10):918–20, Oct 2012.

- [4] R. Craig and R. C. Beavis. Tandem: matching proteins with tandem mass spectra. *Bioinformatics*, 20(9):1466–7, Jun 2004.
- [5] A. Cuadros-Inostroza, C. Caldana, H. Redestig, J. Lisec, H. Pena-Cortes, L. Willmitzer, and M. A. Hannah. TargetSearch - a Bioconductor package for the efficient pre-processing of GC-MS metabolite profiling data. *BMC Bioinformatics*, 10:428, 2009.
- [6] S. Durinck, Y. Moreau, A. Kasprzyk, S. Davis, B. De Moor, A. Brazma, and W. Huber. Biomart and bioconductor: a powerful link between biological databases and microarray data analysis. *Bioinformatics*, 21(16):3439–40, Aug 2005.
- [7] L. Gatto and A. Christoforou. Using R for proteomics data analysis. *BBA - Proteins and Proteomics (submitted)*, 2013.
- [8] L. Gatto and K. S. Lilley. MSnbase – an R/Bioconductor package for isobaric tagged mass spectrometry data visualization, processing and quantitation. *Bioinformatics*, 28(2):288–9, Jan 2012.
- [9] R. C. Gentleman, V. J. Carey, D. M. Bates, B. Bolstad, M. Dettling, S. Dudoit, B. Ellis, L. Gautier, Y. Ge, J. Gentry, K. Hornik, T. Hothorn, W. Huber, S. Iacus, R. Irizarry, F. Leisch, C. Li, M. Maechler, A. J. Rossini, G. Sawitzki, C. Smith, G. Smyth, L. Tierney, J. Y. H. Yang, and J. Zhang. Bioconductor: open software development for computational biology and bioinformatics. *Genome Biol*, 5(10):–80, 2004.
- [10] S. Gibb and K. Strimmer. MALDIquant: a versatile R package for the analysis of mass spectrometry data. *Bioinformatics*, 28(17):2270–1, Sep 2012.
- [11] C. A. Smith, E. J. Want, G. O’Maille, R. Abagyan, and G. Siuzdak. XCMS: processing mass spectrometry data for metabolite profiling using nonlinear peak alignment, matching, and identification. *Anal Chem*, 78(3):779–87, Feb 2006.
- [12] R. Tautenhahn, C. Böttcher, and S. Neumann. Highly sensitive feature detection for high resolution LC/MS. *BMC Bioinformatics*, 9:504, 2008.
- [13] M. Uhlén, E. Björling, C. Agaton, C. A.-K. A. Szgyarto, B. Amini, E. Andersen, A.-C. C. Andersson, P. Angelidou, A. Asplund, C. Asplund, L. Berglund, K. Bergström, H. Brumer, D. Cerjan, M. Ekström, A. Elobeid, C. Eriksson, L. Fagerberg, R. Falk, J. Fall, M. Forsberg, M. G. G. Björklund, K. Gumbel, A. Halimi, I. Hallin, C. Hamsten, M. Hansson, M. Hedhammar, G. Hercules, C. Kampf, K. Larsson, M. Lindskog, W. Lodewyckx, J. Lund, J. Lundeborg, K. Magnusson, E. Malm, P. Nilsson, J. Odling, P. Oksvold, I. Olsson, E. Oster, J. Ottosson, L. Paavilainen, A. Persson, R. Rimini, J. Rockberg, M. Runeson, A. Sivertsson, A. Sköllerö, J. Steen, M. Stenvall, F. Sterky, S. Strömberg, M. Sundberg, H. Tegel, S. Tourle, E. Wahlund, A. Waldén, J. Wan, H. Wernérus, J. Westberg, K. Wester, U. Wrethagen, L. L. L. Xu, S. Hober, and F. Pontén. A human protein atlas for normal and cancer tissues based on antibody proteomics. *Molecular & cellular proteomics : MCP*, 4(12):1920–1932, Dec. 2005.

- [14] M. Uhlen, P. Oksvold, L. Fagerberg, E. Lundberg, K. Jonasson, M. Forsberg, M. Zwahlen, C. Kampf, K. Wester, S. Hober, H. Wernerus, L. Björling, and F. Ponten. Towards a knowledge-based Human Protein Atlas. *Nature biotechnology*, 28(12):1248–1250, Dec. 2010.