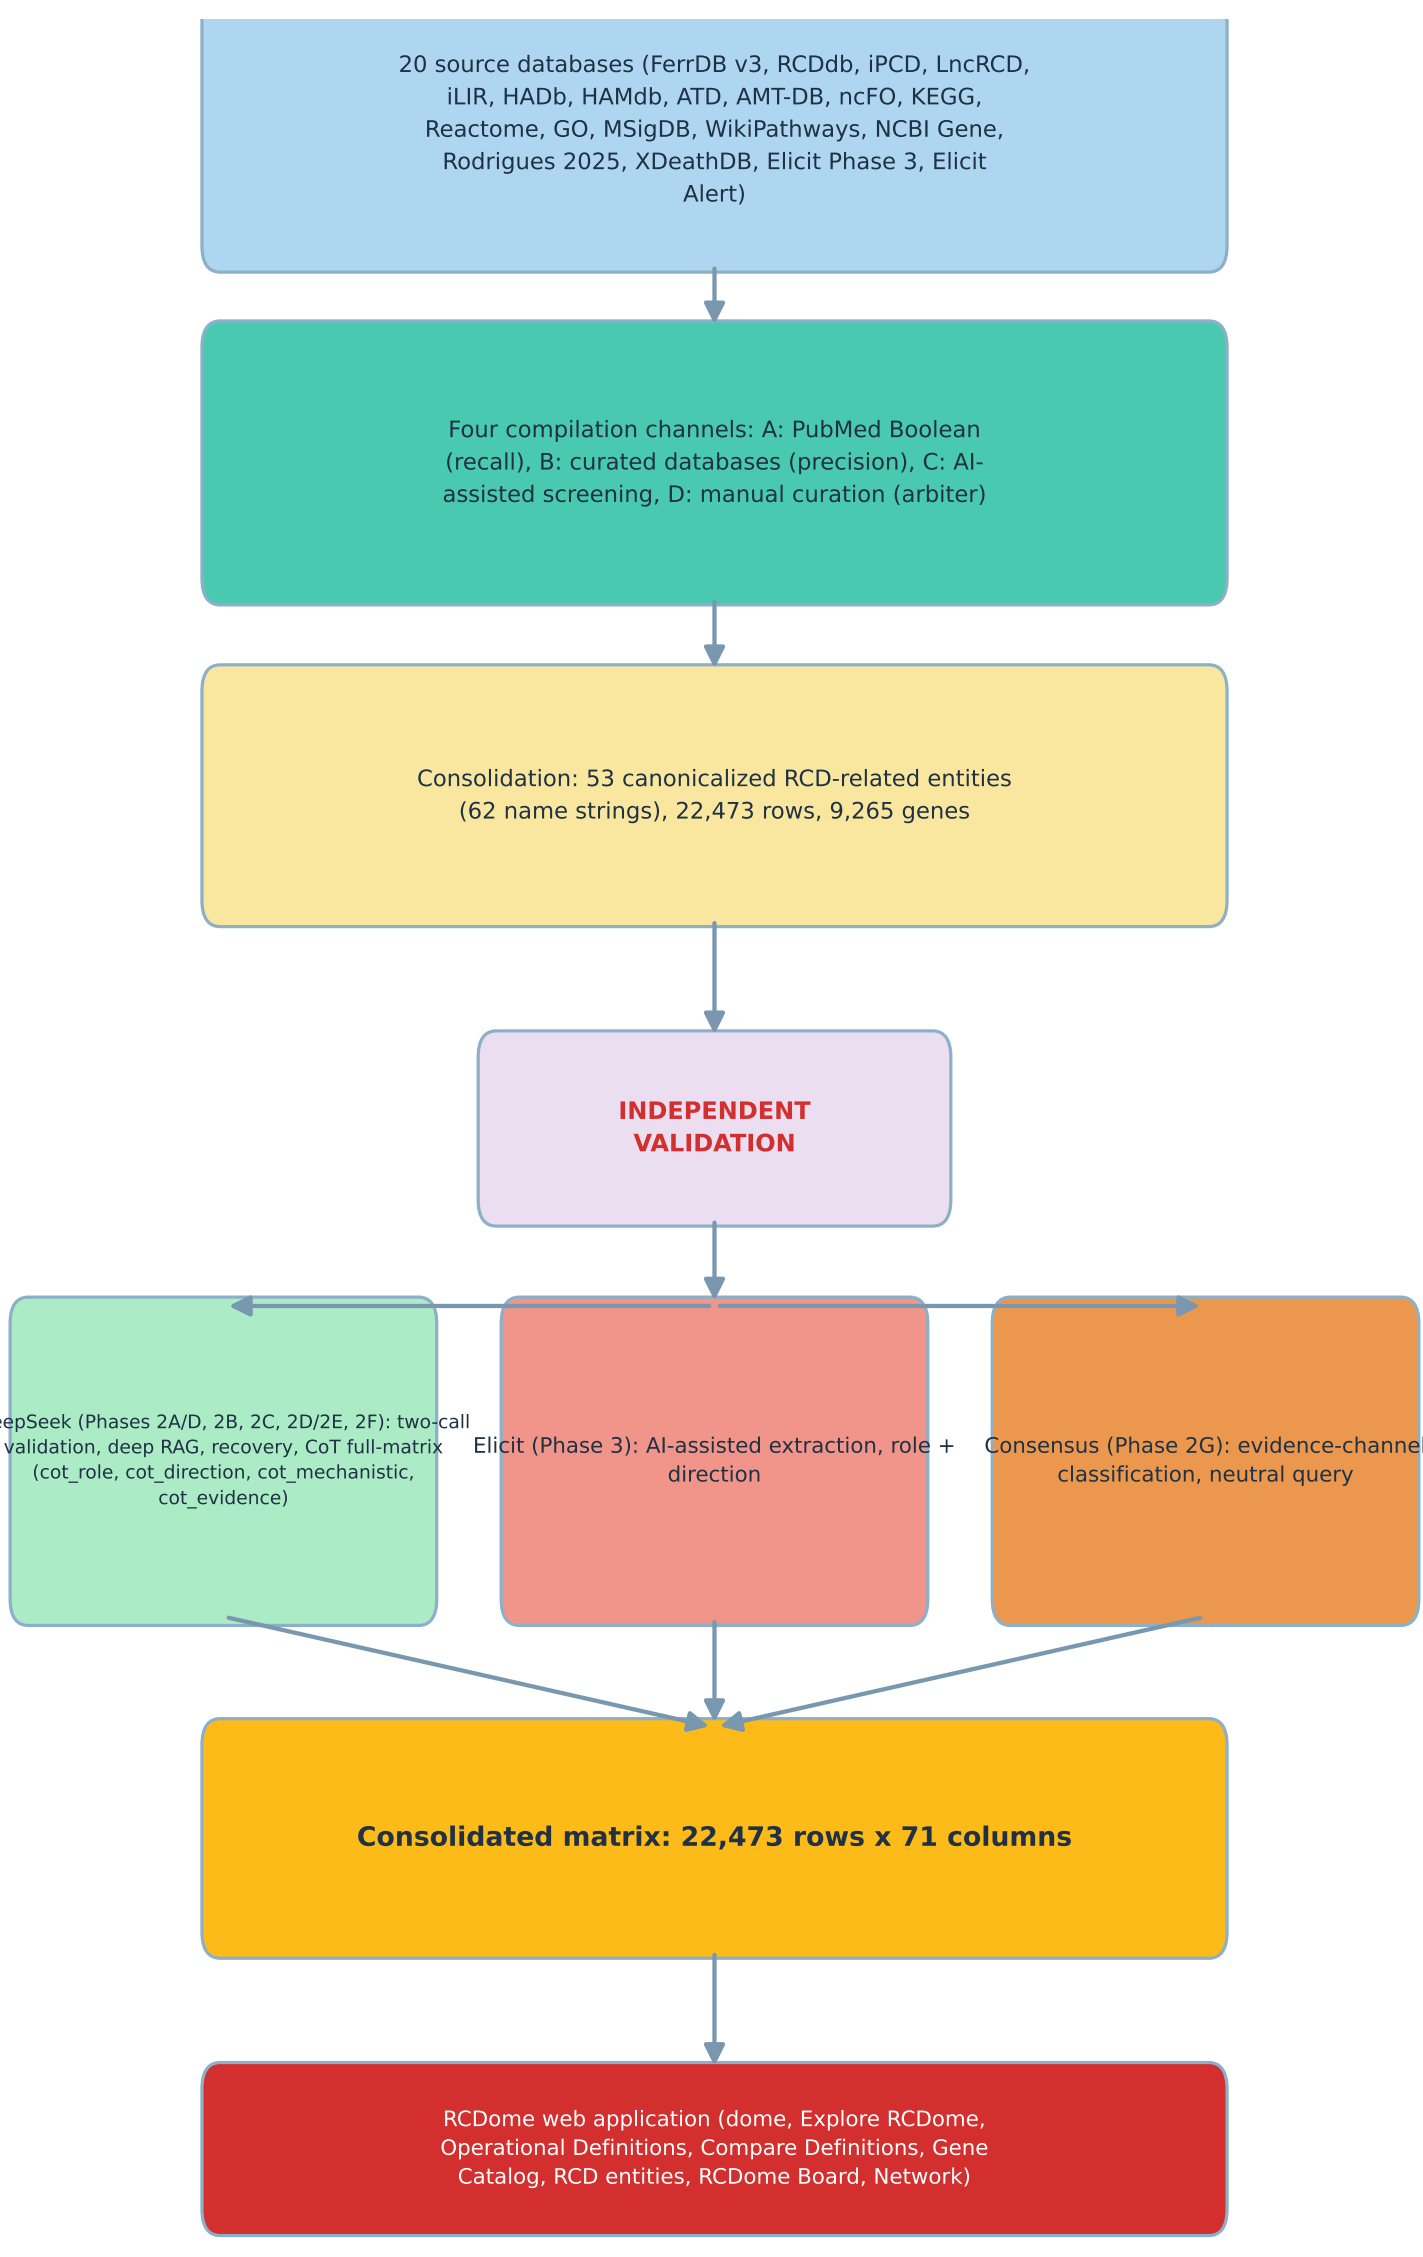
20 source databases (FerrDB v3, RCDdb, iPCD, LncRCD, iLIR, HADb, HAMdb, ATD, AMT-DB, ncFO, KEGG, Reactome, GO, MSigDB, WikiPathways, NCBI Gene, Rodrigues 2025, XDeathDB, Elicit Phase 3, Elicit Alert)
Four compilation channels: A: PubMed Boolean (recall), B: curated databases (precision), C: AI-assisted screening, D: manual curation (arbiter)
Consolidation: 53 canonicalized RCD-related entities (62 name strings), 22,473 rows, 9,265 genes
INDEPENDENT VALIDATION
DeepSeek (Phases 2A/D, 2B, 2C, 2D/2E, 2F): two-call validation, deep RAG, recovery, CoT full-matrix (cot_role, cot_direction, cot_mechanistic, cot_evidence)
Elicit (Phase 3): AI-assisted extraction, role + direction
Consensus (Phase 2G): evidence-channel classification, neutral query
Consolidated matrix: 22,473 rows x 71 columns
RCDome web application (dome, Explore RCDome, Operational Definitions, Compare Definitions, Gene Catalog, RCD entities, RCDome Board, Network)