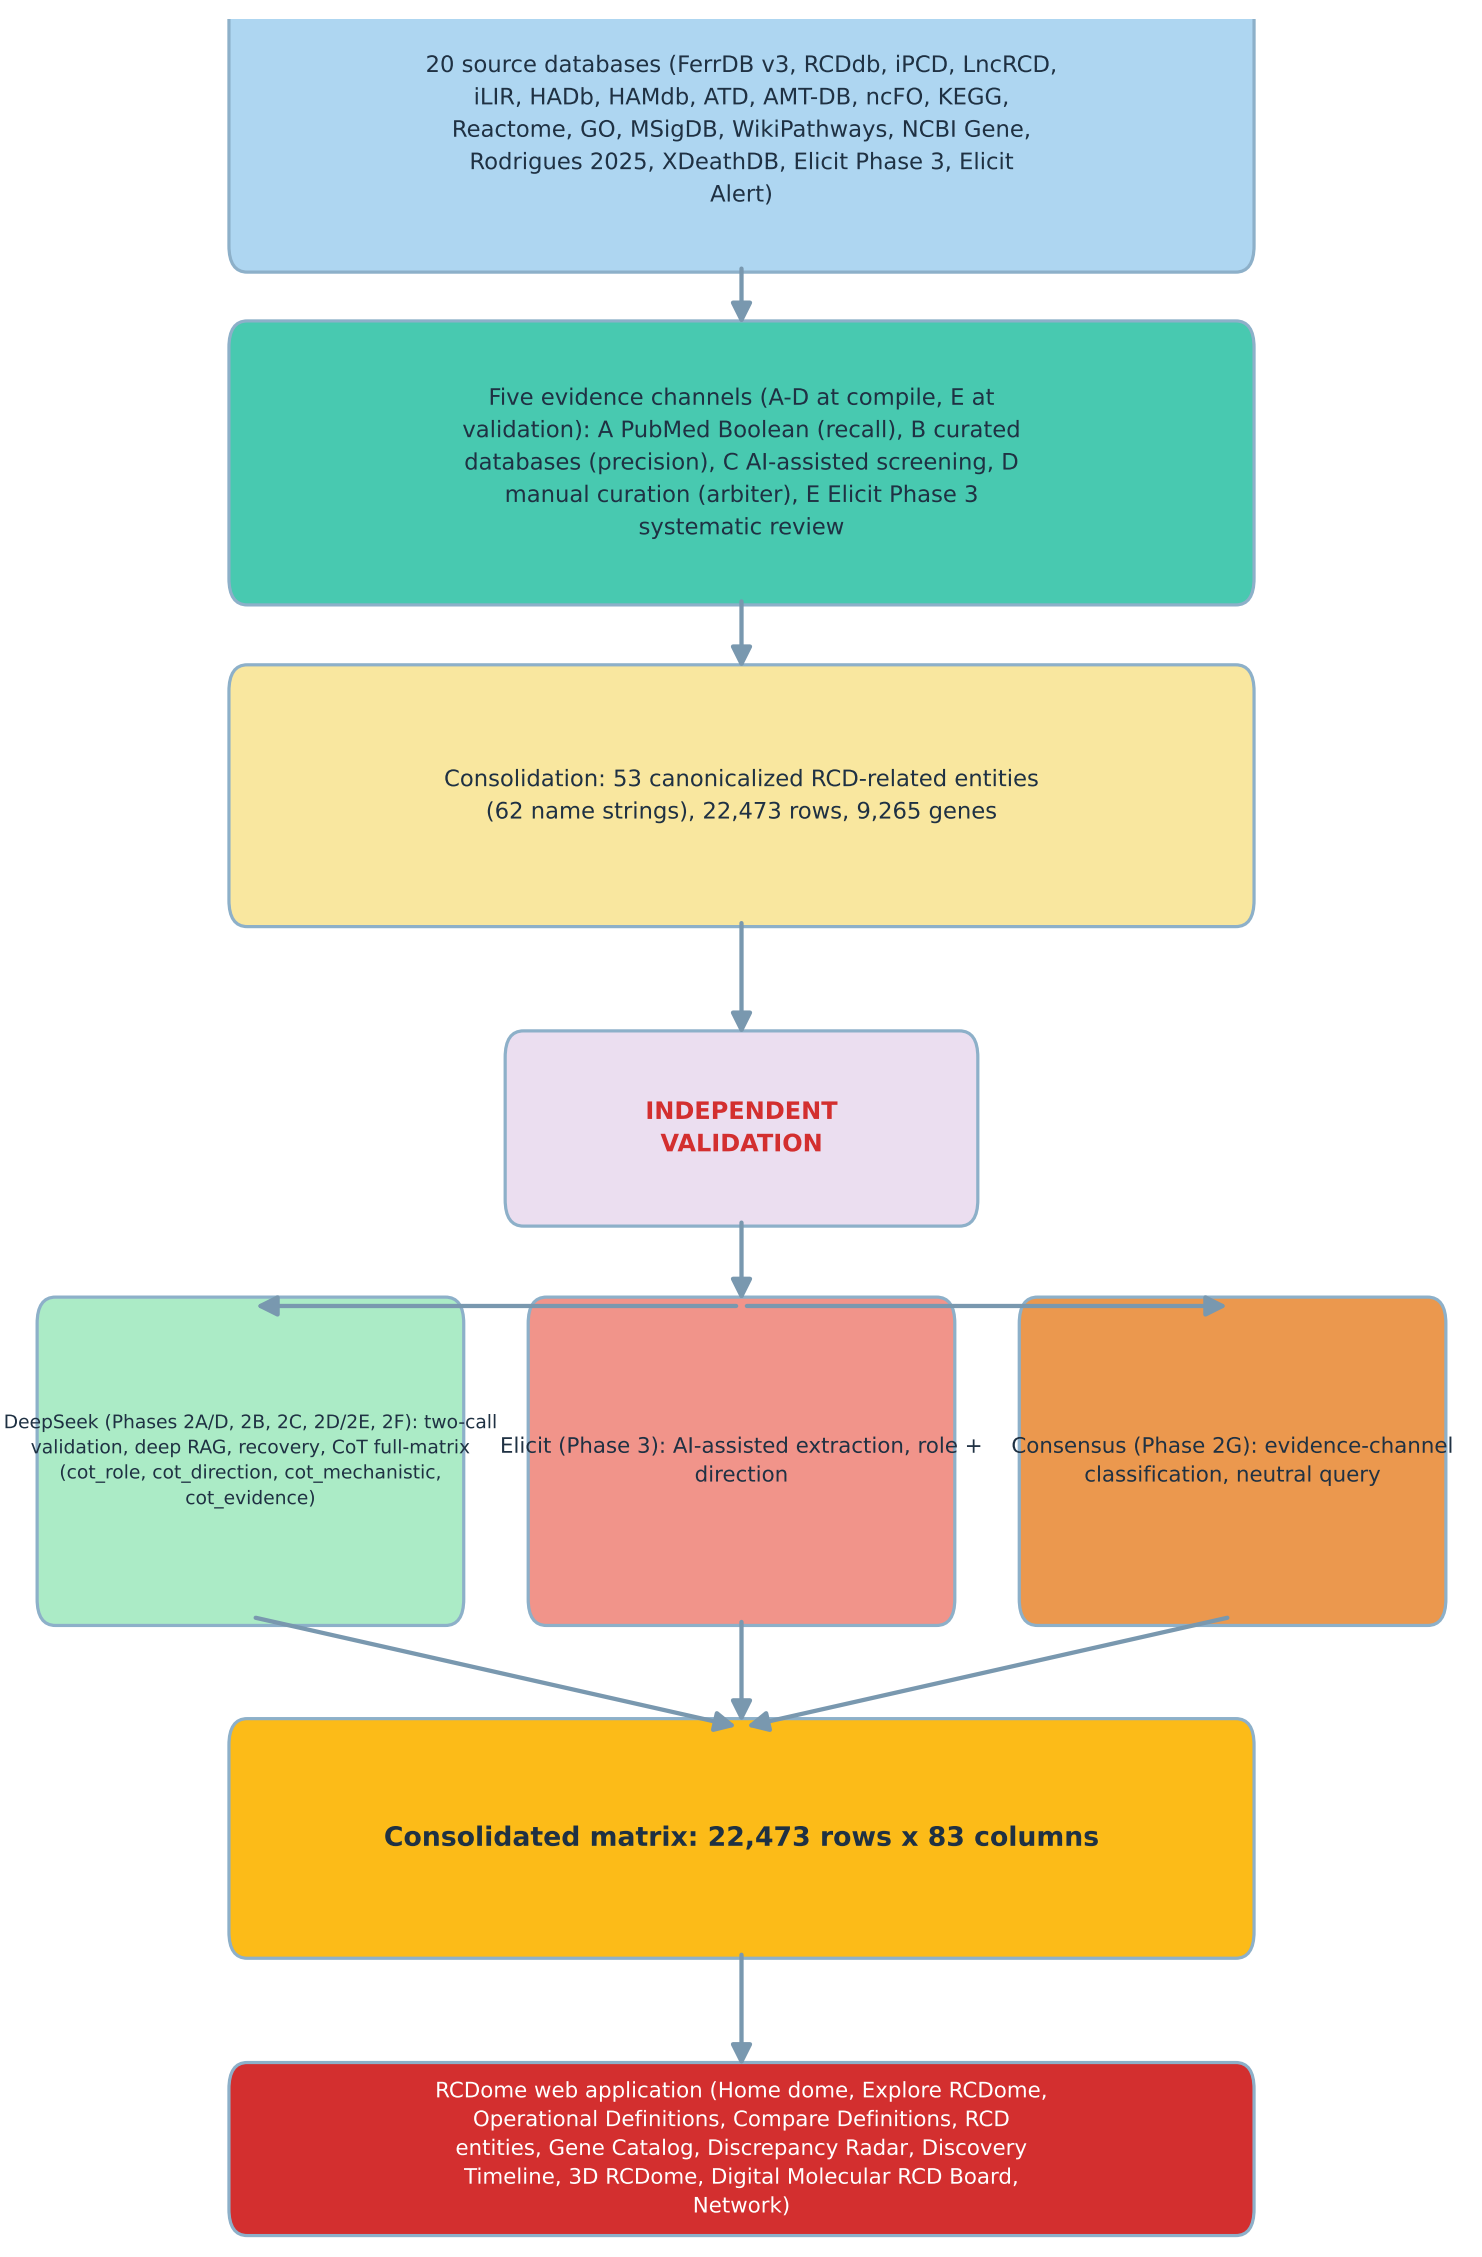
20 source databases (FerrDB v3, RCDdb, iPCD, LncRCD, iLIR, HADb, HAMdb, ATD, AMT-DB, ncFO, KEGG, Reactome, GO, MSigDB, WikiPathways, NCBI Gene, Rodrigues 2025, XDeathDB, Elicit Phase 3, Elicit Alert)
Five evidence channels (A-D at compile, E at validation): A PubMed Boolean (recall), B curated databases (precision), C AI-assisted screening, D manual curation (arbiter), E Elicit Phase 3 systematic review
Consolidation: 53 canonicalized RCD-related entities (62 name strings), 22,473 rows, 9,265 genes
INDEPENDENT VALIDATION
DeepSeek (Phases 2A/D, 2B, 2C, 2D/2E, 2F): two-call validation, deep RAG, recovery, CoT full-matrix (cot_role, cot_direction, cot_mechanistic, cot_evidence)
Elicit (Phase 3): AI-assisted extraction, role + direction
Consensus (Phase 2G): evidence-channel classification, neutral query
Consolidated matrix: 22,473 rows x 83 columns
RCDome web application (Home dome, Explore RCDome, Operational Definitions, Compare Definitions, RCD entities, Gene Catalog, Discrepancy Radar, Discovery Timeline, 3D RCDome, Digital Molecular RCD Board, Network)