


`lift("foo.Rmd")` → `render_docker("foo.Rmd")` → Containerized Report

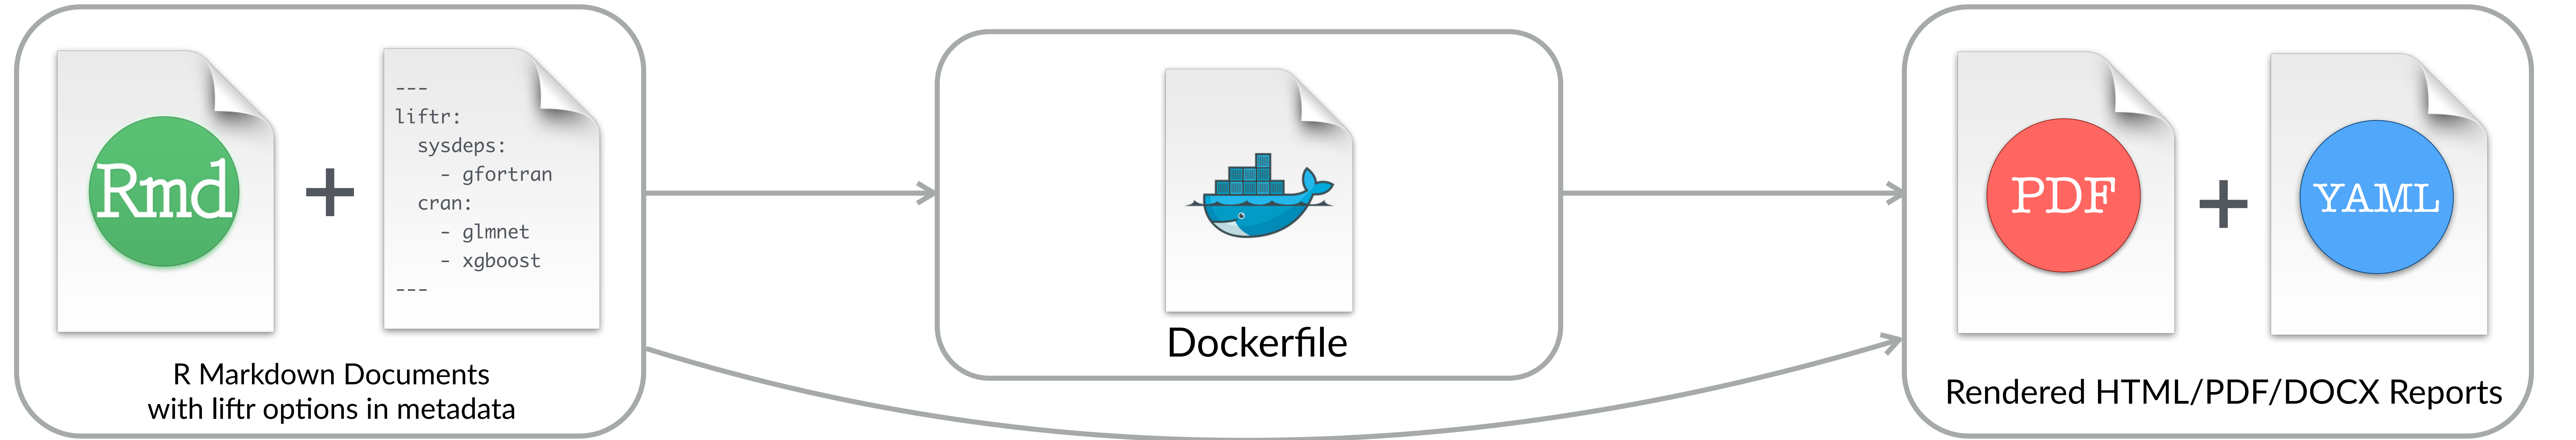

Introduce additional R Markdown metadata for containerizing reports.

Parse metadata in the document, and generate Dockerfile.

Build Docker image, run the container, and render the RMD document.