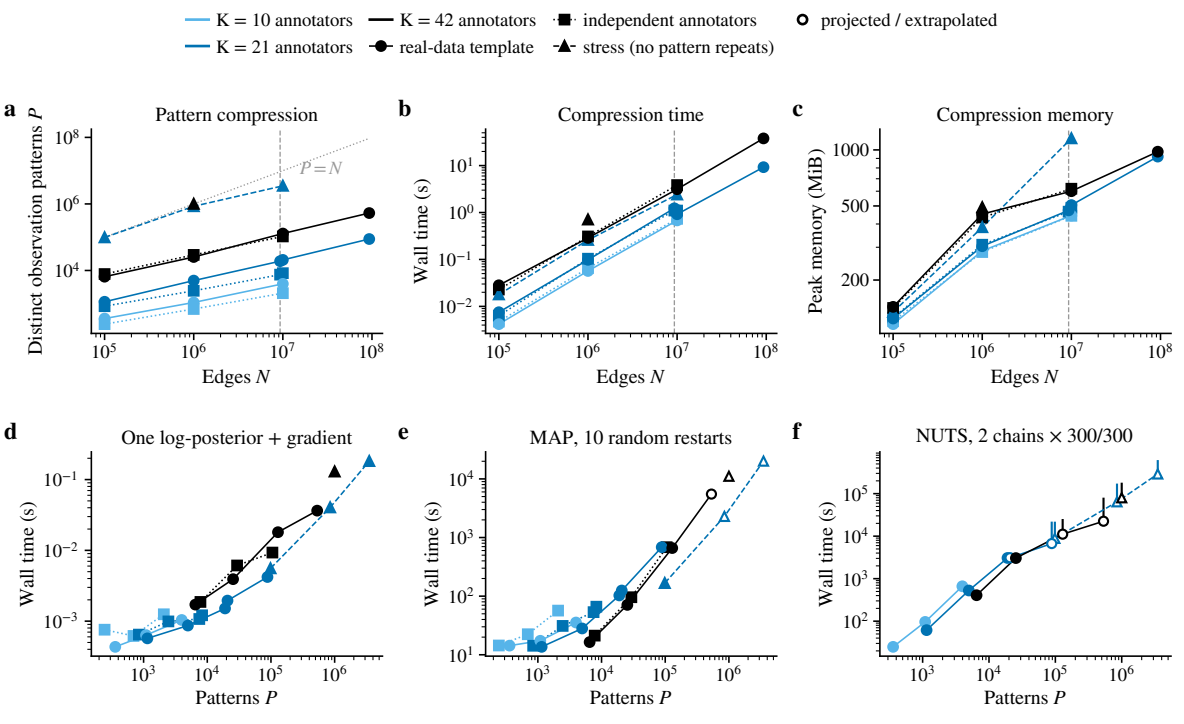
K = 10 annotators
K = 21 annotators
K = 42 annotators
real-data template
independent annotators
stress (no pattern repeats)
projected / extrapolated
a
Pattern compression
Distinct observation patterns P
P = N
Edges N
b
Compression time
Wall time (s)
Edges N
c
Compression memory
Peak memory (MiB)
Edges N
d
One log-posterior + gradient
Wall time (s)
Patterns P
e
MAP, 10 random restarts
Wall time (s)
Patterns P
f
NUTS, 2 chains × 300/300
Wall time (s)
Patterns P