

Payment	
paymentID 🔑	int
reservationID	int
amount	decimal(10,2)
paymentStatus	varchar(20)
transactionDetails	varchar(255)

int —o¬

int


int

datetime

varchar(20)

varchar(20)

RestaurantManager		
managerID 🔑	int	
name	varchar(255)	
contactInfo	varchar(255)	

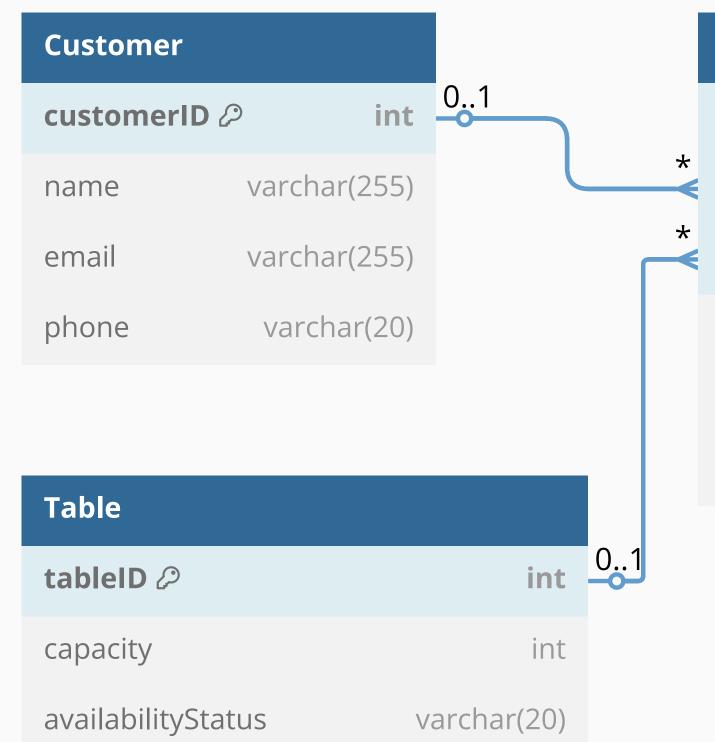

	Reservation		
	reservationID &) int	
=	customerID	int	
=	tableID	int	
	date	datetime	
	time	varchar(20)	
	status	varchar(20)	

Payment	
paymentID 🔑	int
reservationID	int
amount	decimal(10,2)
paymentStatus	varchar(20)
transactionDetails	varchar(255)

RestaurantManager		
managerID 🔑	int	
name	varchar(255)	
contactInfo	varchar(255)	