

# Test Run Report



## Test Run Overview


---

Started	16 May 2023, 11:29:19
Ended	16 May 2023, 11:37:53
Duration (mm:ss)	08:34.351

## Test Results Summary

---

Passed	1
Failed	0
Skipped	0

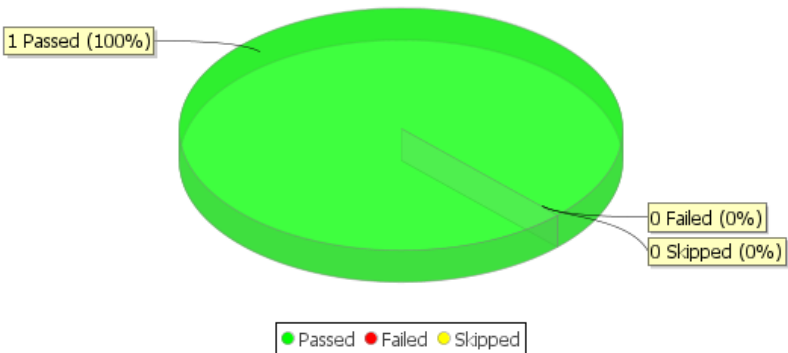

## Test Case Summary

---

- tests
  - Callable
    - Create Case.testcase

- successful
- successful
- successful

## Create Case.testcase

### Summary

Started 16 May 2023, 11:29:19  
Ended 16 May 2023, 11:37:29  
Duration (mm:ss) 08:10.674  
Outcome ● successful

### Output

#### ● Salesforce Connect: admin (Test)

⌚ 11:29:19(00:00.018)

① Connecting to Salesforce as admin

⚙ Connection details. Connection name: admin, result name: admin, result scope: Test, urlString: sf:user=regressionorg@provartesting.com.training;password={password};environment=SANDBOX;lightningMode=true, environment: <default>, userName: regressionorg@provartesting.com.training, password: [supplied] securityToken: [empty]

⚙ Create object id log file.

⚙ Opening Partner connection

⚙ Opening SOAP connection

⚙ Opening Metadata connection

① Successfully connected to Salesforce as admin

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> RowNumber = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Status = PrimitiveValueImpl [ value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Type = PrimitiveValueImpl [ value: Problem, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Origin = PrimitiveValueImpl [ value: Phone, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 1 rows from Parameter Value Source.

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> RowNumber = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ContactName = PrimitiveValueImpl [ value: Biraj Check\_LastF1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> AccountName = PrimitiveValueImpl [ value: ProvarEY, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 1 rows from Parameter Value Source.

#### ● Creation of Case

⌚ 11:29:32(00:12.766)

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> RowNumber = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Status = PrimitiveValueImpl [ value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Type = PrimitiveValueImpl [ value: Problem, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Origin = PrimitiveValueImpl [ value: Phone, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 1 rows from Parameter Value Source.

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> RowNumber = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ContactName = PrimitiveValueImpl [ value: Biraj Check\_LastF1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> AccountName = PrimitiveValueImpl [ value: ProvarEY, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 1 rows from Parameter Value Source.

## On SF Case (Inquiry) New screen

11:29:32(00:12.817)

Start of With Screen. Connection Name: admin, target: sf:ui:target?object=Case&action=New&recordType=Inquiry

Opening Chrome webdriver instance to https://test.salesforce.com/

Add Chrome browser specific capabilities

Successfully opened Chrome webdriver to https://test.salesforce.com/

Not populating record types for Salesforce Object - no objectMetadata. Connection: admin, object: Document, metadataTrace: null

Opening Page context. Name: screen, data: null, frame: null

Opening Salesforce user home page

Navigate to home page

Perform page load wait

Successfully opened user home page

Switched focus to main window. URL: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/o/Case/list?filterName=00B0J000008hwKuUAI

Clicking the New Button

Find action link element using xpath: `//*[@contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'forceListViewManager')]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1928:0')]`

Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

Clicking WebElement. WebElement [tag: input, text: 012200000006wQMAAY]

Clicking WebElement. WebElement [tag: button, text: Next]

Going to update browser window handles.

Update browser window handles.

Successfully updated browser window handles.

## UI Fill

11:34:01(04:41.912)

Start of UI Fill. Connection: admin

Processing Named Value. Name: Status, Value: PrimitiveValueImpl [ value: New, valueId=2e, createdUpdateSeq=4, updatedUpdateSeq=4]

Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/div[contains(@class, 'records-record-layout-section') or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][2]/div[contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')] and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text) and (./text()[normalize-space()='Status'] or ./text()='Status')]/ancestor::div[1]`

Find field using relative xpath: `./*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

Waiting for element to be present. Timeout(seconds): 10

Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@9b7e351d -> unknown locator]] -> xpath: ./*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]]`

Got webElement. tagName: BUTTON, id: combobox-button-232, type: button, class: slds-combobox\_\_input slds-input\_faux slds-combobox\_\_input-value

Typing value. tagName: BUTTON, type: button, value: New, blur: false

Clicking WebElement. WebElement [tag: button, text: New]

Clicking WebElement. WebElement [tag: div, text: New --None-- On Hold Escalated New Working]

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]

Processing Named Value. Name: Type, Value: PrimitiveValueImpl [ value: Problem, valueId=30, createdUpdateSeq=4, updatedUpdateSeq=4]

Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/div[contains(@class, 'records-record-layout-section') or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][2]/div[contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')] and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text) and (./text()[normalize-space()='Status'] or ./text()='Status')]/ancestor::div[1]`

and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )//  
\*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/\*[self::records-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]]//\*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element\_\_label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element\_\_label')) or (self::div and contains(@class, 'test-id\_\_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Type'] or ./text() = 'Type')]/ancestor::div[1]

① Find field using relative xpath: `//*[@self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Waiting for element to be present. Timeout(seconds): 10

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@d4484fba -> unknown locator]] -> xpath: //*[@self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Got webElement. tagName: BUTTON, id: combobox-button-240, type: button, class: slds-combobox\_\_input slds-input\_faux slds-combobox\_\_input-value

① Typing value. tagName: BUTTON, type: button, value: Problem, blur: false

① Clicking WebElement. WebElement [tag: button, text: --None--]

① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Problem Feature Request Question]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]

① Processing Named Value. Name: Origin, Value: PrimitiveValueImpl [ value: Phone, valueId=32, createdUpdateSeq=4, updatedUpdateSeq=4]

① Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )//  
*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::records-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Case Origin'] or ./text() = 'Case Origin')]/ancestor::div[1]`

① Find field using relative xpath: `//*[@self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Waiting for element to be present. Timeout(seconds): 10

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@d4484fd7 -> unknown locator]] -> xpath: //*[@self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Got webElement. tagName: BUTTON, id: combobox-button-249, type: button, class: slds-combobox\_\_input slds-input\_faux slds-combobox\_\_input-value

① Typing value. tagName: BUTTON, type: button, value: Phone, blur: false

① Clicking WebElement. WebElement [tag: button, text: --None--]

① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Email Phone Web]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]

① Going to update browser window handles.

✳ Update browser window handles.

① Successfully updated browser window handles.

## ● Set the Account Name reference to ProvarEY

🕒 11:34:10(04:50.866)

① Start of Interact. Connection: admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3AObject%3FObject%3DCase%26field%3DAccountId, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3AObject%3FObject%3DCase%26field%3DAccountId

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: `https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=168421703710799057&recordTypeId=012200000006wQMAAY`

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )//  
*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::records-record-layout-section or (self::section or self::div)`

```
and contains(@class,'forcePageBlockSection'))][1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Account Name'] or ./text() = 'Account Name'))/ancestor::div[1]
```

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of `&lt;default&gt;`; wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@d4484ff2 -> unknown locator]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: combobox-input-354, type: text, class: slds-combobox\_\_input slds-input

① Typing value. tagName: INPUT, type: text, value: ProvarEY, blur: false

① Clicking WebElement. WebElement [tag: lightning-base-combobox-formatted-text, text: ProvarEY]

① Doing after wait. waitUrl: default

① End of `&lt;default&gt;`; wait.

① Going to update browser window handles.

✳ Update browser window handles.

① Successfully updated browser window handles.

## ● Set the Contact Name reference to Biraj Check\_LastF1

⌚ 11:34:15(04:56.550)

① Start of Interact. Connection: admin, Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: `https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=168421703710799057&recordTypeId=012200000006wQMAAY`

① Interaction: ui:interaction?name=set

```
① Finding field placeholder using xpath: //*[contains(@class,'active') and ( (contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal')))) or (self::section and ((contains(@class,'oneConsoleTab') and ancestor::div[contains(@class,'active') and (contains(@class,'oneWorkspace') or contains(@class,'navexWorkspace')) and not(contains(@class,'hasPinnedRegionTemplate') and contains(@class,'hasActiveSubtab')))) or (contains(@class,'tabContent') and ancestor::div[contains(@class,'wsTabset') and not(contains(@class,'wsTabBarHidden'))]) and ancestor::div[contains(@class,'active') and (contains(@class,'oneWorkspace') or contains(@class,'navexWorkspace')) and contains(@class,'hasPinnedRegionTemplate') and contains(@class,'hasActiveSubtab')))) )]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*((self::records-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Contact Name'] or ./text() = 'Contact Name'))/ancestor::div[1]
```

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of `&lt;default&gt;`; wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@d4485011 -> unknown locator]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: combobox-input-348, type: text, class: slds-combobox\_\_input slds-input

① Typing value. tagName: INPUT, type: text, value: Biraj Check\_LastF1, blur: false

① Clicking WebElement. WebElement [tag: lightning-base-combobox-formatted-text, text: Biraj Check\_LastF1]

① Doing after wait. waitUrl: default

① End of `&lt;default&gt;`; wait.

① Going to update browser window handles.

✳ Update browser window handles.

① Successfully updated browser window handles.

## ● Click the Save button

⌚ 11:34:22(05:03.538)

① Start of Interact. Connection: admin, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26action%3Dsave, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3AObject%3FObject%3DCase%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/o/Case/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST\_VIEW&uid=168421703710799057&recordTypeId=012200000006wQMAAY

① Interaction: ui:interaction?name=action

① Find action link element using xpath: `//*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/*[self::a or self::button]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: `[[ChromeDriver$EnhancerByCGLIB$$dace278c: chrome on XP (8e497a253b884a6cca464be162a8e66e)] -> xpath: //*[contains(@class, 'active') and ( (contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/*[self::a or self::button]]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

⚙ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view

① Injecting script to get created object ID from aura component

📄 Storing created Salesforce Object ID. Result Name: CaseId, created ID: 5001x00000H1Ft3AAF, location: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view

① Logging Salesforce Object Id for clean up. Object Name: Case, id: 5001x00000H1Ft3AAF

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view

① Going to update browser window handles.

⚙ Update browser window handles.

① Successfully updated browser window handles.

## ● SOQL Query: select CaseNumber from Case Where

⌚ 11:34:30(05:11.070)

Id='5001x00000H1Ft3AAF'=>CaseRows

① Reading a Salesforce object. Connection Name: admin, Query: select CaseNumber from Case Where Id='5001x00000H1Ft3AAF'

① Query successful. Row Count: 1.

## ● On SF Cases tab (Today's Opened Cases)

⌚ 11:34:32(05:13.558)

① Start of With Screen. Connection Name: admin, target: sf:ui:target?object=Case&action=List&tab=standard-Case&application=standard\_\_LightningService&listView=Today\_s\_Opened\_Cases

① Opening Salesforce Tab. Tab Name: standard-Case, Url: /one/one.app#/sObject/Case/home?filterName=00B0J000008hwKu

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view

① Hover>Clicking WebElement. WebElement [tag: button, text: Show Navigation Menu]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Cases, href: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/o/Case/home]

① Hover>Clicking WebElement. WebElement [tag: span, text: Recently Viewed]

① Clicking WebElement. WebElement [tag: span, text: Today's Opened Cases]

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● With Case rows {CaseNumber = \$CaseRows.CaseNumber}

⌚ 11:34:37(05:18.485)

① Start of With Row. Connection Name: admin, target: sf:ui:locator:row?table=List%2FlistView%2FlistTable

① Find element using xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody//tr

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 1

① Populated the row elements.

① Applying row locator to rows. Row Count: 1, Row Locator: {CaseNumber = \$CaseRows.CaseNumber}

① Testing row number 1

① Resolving EqualTo. 00121550 = 00121550, result: true

① Row number 1 matched

① The row locator matched 1 row.

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● Click the Case field

⌚ 11:34:40(05:21.488)

① Start of Interact. Connection: admin, Locator: ui:locator?name=CaseNumber&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DCaseNumber, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=CaseNumber&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DCaseNumber

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/o/Case/list?filterName=00B0J000008hwKuUAI

① Interaction: ui:interaction?name=action

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: [[[[ChromeDriver\$EnhancerByCGLIB\$\$dace278c: chrome on XP (8e497a253b884a6cca464be162a8e66e) -> xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'listViewContent') or contains(@class, 'listViewContainer')]/tbody//tr] -> xpath: th//span/\*[self::a or self::span[not(contains(@class, 'photoContainer') or contains(@class, 'uiImage'))]]]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: 00121550, href: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/5001x00000H1Ft3AAF/view]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null



① Main window reselected. Window: main

① Switched focus to main window. URL: <https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view>

① Going to update browser window handles.

⚙ Update browser window handles.

① Successfully updated browser window handles.

## ● On SF Case (Inquiry) View screen

🕒 11:34:45(05:26.700)

① Start of With Screen. Connection Name: admin, target: sf:ui:target?object=Case&action=View&recordType=Inquiry&noOverride=true

⚠ Not populating record types for Salesforce Object - no objectMetadata. Connection: admin, object: Calendar, metadataTrace: null

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: <https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view>

① Activating detailTab tab

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]

① Going to update browser window handles.

⚙ Update browser window handles.

① Successfully updated browser window handles.

## ● Click the Account Name reference

🕒 11:35:10(05:50.862)

① Start of Interact. Connection: admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field%3DAccountId, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=AccountId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DCase%26field%3DAccountId

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view>

① Interaction: ui:interaction?name=action

① Activating detailTab tab

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[ (self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))][1//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Account Name' or (.) ='Account Name'])]/following-sibling::div[1]/*[ (self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]`

① Waiting for element to be present. Timeout(seconds): 10

① Finding elements using relativePath: `./a`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: `[[[ChromeDriver$EnhancerByCGLIB$dace278c: chrome on XP (8e497a253b884a6cca464be162a8e66e) -> xpath: //*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[ (self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))][1//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Account Name' or (.) ='Account Name'])]/following-sibling::div[1]/*[ (self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]] -> xpath: ./*[ (self::a and not(contains(@class, 'changeOwnerLink')) or (self::span and contains(@class, 'owner-name') and not(self::span/a)))]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, href: <https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/view>]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.



⚡ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/view?ws=%2F lightning%2Fr%2FCase%2F5001x00000H1Ft3AAF%2Fview

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● On SF Account (test1) View screen

⌚ 11:35:18(05:59.327)

① Start of With Screen. Connection Name: admin, target: sf:ui:target?object=Account&action=View&recordType=test1&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/view?ws=%2F lightning%2Fr%2FCase%2F5001x00000H1Ft3AAF%2Fview

① Activating detailTab tab

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● Click the Cases Go To List button

⌚ 11:36:06(06:47.550)

① Start of Interact. Connection: admin, Locator: ui:locator?name=GoToList&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3DGoToList%26relationship%3DCases, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=GoToList&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DAccount%26action%3DGoToList%26relationship%3DCases

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/view?ws=%2F lightning%2Fr%2FCase%2F5001x00000H1Ft3AAF%2Fview

① Interaction: ui:interaction?name=action

① RelationshipName: Cases, boundObject class: com.provar.plugins.forcedotcom.core.model.SfActionLink

① Activating relatedListsTab tab

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Related, href: javascript:void(0)]

① Scrolling related list into view: (( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]][8]//\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]

① Find action link element in related list using xpath: (( /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] ] | /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))] ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]][8]//\*[(self::article and contains(@class, 'slds-card')) or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]]//a[./span[contains(@class, 'view-all-label')]]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of &lt;default> wait.

ⓘ Found element: [[ChromeDriver\$EnhancerByCGLIB\$dace278c: chrome on XP (8e497a253b884a6cca464be162a8e66e)] -> xpath: ((//\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]) | //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]) | //ancestor::div[contains(@class, 'oneRecordHomeFlexipage')])/\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]] [8]//\*[self::article and contains(@class, 'slds-card')] or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]/a[./span[contains(@class, 'view-all-label')]]]

ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: View All Cases, href: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/related/Cases/view]

ⓘ Doing after wait. waitUrl: default

ⓘ End of &lt;default> wait.

ⓘ Going to update browser window handles.

⚡ Update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ All Sub-Test Steps were successful.

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/related/Cases/view?ws=%2Flightning%2F%2FCCase%2F5001x00000H1Ft3AAF%2Fview

ⓘ Going to update browser window handles.

⚡ Update browser window handles.

ⓘ Successfully updated browser window handles.

## ● On SF Account (test1) Cases related list

⌚ 11:36:22(07:02.848)

ⓘ Start of With Screen. Connection Name: admin, target: sf:ui:target?object=Account&relatedList=Cases&recordType=test1

ⓘ Opening Page context. Name: screen, data: null, frame: null

ⓘ Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/related/Cases/view?ws=%2Flightning%2F%2FCCase%2F5001x00000H1Ft3AAF%2Fview

ⓘ Going to update browser window handles.

⚡ Update browser window handles.

ⓘ Successfully updated browser window handles.

## ● With Cases rows {CASES\_CASE\_NUMBER = \$CaseRows[1].casenumber}

⌚ 11:36:22(07:03.565)

ⓘ Start of With Row. Connection Name: admin, target: sf:ui:locator:row?table=Cases%2FCasesTable

ⓘ Find element using xpath: /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]) | //div[contains(@class, 'listViewContent')]/tbody/tr

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Populating webelement cells into the row Row Count: 12

ⓘ Populated the row elements.

ⓘ Applying row locator to rows. Row Count: 12, Row Locator: {CASES\_CASE\_NUMBER = \$CaseRows[1].casenumber}

ⓘ Testing row number 1

ⓘ Resolving EqualTo. 00121534 = 00121550, result: false

- ① Testing row number 2
- ① Resolving EqualTo. 00121535 = 00121550, result: false
- ① Testing row number 3
- ① Resolving EqualTo. 00121536 = 00121550, result: false
- ① Testing row number 4
- ① Resolving EqualTo. 00121537 = 00121550, result: false
- ① Testing row number 5
- ① Resolving EqualTo. 00121539 = 00121550, result: false
- ① Testing row number 6
- ① Resolving EqualTo. 00121540 = 00121550, result: false
- ① Testing row number 7
- ① Resolving EqualTo. 00121541 = 00121550, result: false
- ① Testing row number 8
- ① Resolving EqualTo. 00121542 = 00121550, result: false
- ① Testing row number 9
- ① Resolving EqualTo. 00121543 = 00121550, result: false
- ① Testing row number 10
- ① Resolving EqualTo. 00121544 = 00121550, result: false
- ① Testing row number 11
- ① Resolving EqualTo. 00121547 = 00121550, result: false
- ① Testing row number 12
- ① Resolving EqualTo. 00121550 = 00121550, result: true
- ① Row number 12 matched
- ① The row locator matched 1 row.
- ① Going to update browser window handles.
- ✦ Update browser window handles.
- ① Successfully updated browser window handles.

## ● UI Assert

⌚ 11:36:29(07:09.932)

- ① Start of UiAssert. Connection: admin
- ① Resolving field CASES\_CASE\_NUMBER
- ① Switched focus to main window. URL: <https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/related/Cases/view?ws=%2F lightning%2Fr%2F Case%2F5001x00000H1Ft3AAF%2Fview>
- ① Doing before wait. waitUrl: default
- ① End of &lt;default>; wait.
- ① Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on XP (8e497a253b884a6cca464be162a8e66e)] -> xpath: // \*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: th/span//\*[self::a or self::span[not(contains(@class, 'photoContainer') or contains(@class, 'uiImage'))]]]
- ① Asserting field attributes: CASES\_CASE\_NUMBER
- ① Asserting Attribute: value to 00121550
- ✅ Assertion successful.00121550 EqualTo 00121550
- ① Object read successfully. Result Name: Values
- ① Going to update browser window handles.
- ✦ Update browser window handles.
- ① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/related/Cases/view?ws=%2Fflightning%2Fr%2FCCase%2F5001x00000H1Ft3AAF%2Fview>

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● On MyPageObject page

⌚ 11:36:33(07:14.027)

① Start of With Screen. Connection Name: admin, target: ui:pageobject:target?pageld=pageobjects.MyPageObject

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● Click the Close Provar EY

⌚ 11:36:33(07:14.507)

① Start of Interact. Connection: admin, Locator: ui:pageobject:field?field=closeProvarEY&pageld=pageobjects.MyPageObject, before wait: default, after wait: default, auto retry: default

① Locator: ui:pageobject:field?field=closeProvarEY&pageld=pageobjects.MyPageObject

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/related/Cases/view?ws=%2Fflightning%2Fr%2FCCase%2F5001x00000H1Ft3AAF%2Fview>

① Interaction: ui:interaction?name=action

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [org.openqa.selenium.remote.RemoteWebElement@d4486dc3 -> unknown locator]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Close ProvarEY]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/related/Cases/view?ws=%2Fflightning%2Fr%2FCCase%2F5001x00000H1Ft3AAF%2Fview>

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● On SF Case (Inquiry) View screen

⌚ 11:36:40(07:21.465)

① Start of With Screen. Connection Name: admin, target: sf:ui:target?object=Case&action=View&recordType=Inquiry&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: <https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Account/0011x00001mWMTIAA4/related/Cases/view?ws=%2Fflightning%2Fr%2FCCase%2F5001x00000H1Ft3AAF%2Fview>

① Hover>Clicking WebElement. WebElement [tag: a, text: Case 00121550, href: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view]

① Clicking WebElement. WebElement [tag: a, text: Case 00121550, href: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view]

① Activating detailTab tab

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]

① Going to update browser window handles.

⚙ Update browser window handles.

① Successfully updated browser window handles.

## ● Click the Contact Name reference

⌚ 11:36:45(07:25.761)

① Start of Interact. Connection: admin, Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=ContactId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DCase%26field%3DContactId

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Case/5001x00000H1Ft3AAF/view

① Interaction: ui:interaction?name=action

① Activating detailTab tab

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))[1]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()='Contact Name' or (.) = 'Contact Name'])/following-sibling::div[1]/*((self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]`

① Waiting for element to be present. Timeout(seconds): 10

① Finding elements using relativePath: `./a`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of &lt;default> wait.

① Found element: `[[[ChromeDriver$EnhancerByCGLIB$dace278c: chrome on XP (8e497a253b884a6cca464be162a8e66e)] -> xpath: //*[@contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))[1]/div[contains(@class, 'labelCol') or contains(@class, 'field-label-container')] and (span/text()[normalize-space()='Contact Name' or (.) = 'Contact Name'])/following-sibling::div[1]/*((self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value')))] -> xpath: ./*((self::a and not(contains(@class, 'changeOwnerLink')) or (self::span and contains(@class, 'owner-name') and not(self::span/a))))]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, href: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXlrAAP/view]

① Doing after wait. waitUrl: default

① End of &lt;default> wait.

① Going to update browser window handles.

⚙ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://d1x000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXlrAAP/view?ws=%2Fflightning%2F%2FCase%2F5001x00000H1Ft3AAF%2Fview

① Going to update browser window handles.

⚙️ Update browser window handles.

📁 Successfully updated browser window handles.

## ● On SF Contact (test1) View screen

🕒 11:36:53(07:34.401)

📁 Start of With Screen. Connection Name: admin, target: sf:ui:target?object=Contact&action=View&recordType=test1&noOverride=true

📁 Opening Page context. Name: screen, data: null, frame: null

📁 Switched focus to main window. URL: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXlRAAP/view?ws=%2Flightning%2Fr%2FCCase%2F5001x00000H1Ft3AAF%2Fview

📁 Activating detailTab tab

📁 Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]

📁 Going to update browser window handles.

⚙️ Update browser window handles.

📁 Successfully updated browser window handles.

## ● Click the Cases Go To List button

🕒 11:37:08(07:49.007)

📁 Start of Interact. Connection: admin, Locator: ui:locator?name=GoToList&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DGoToList%26relationship%3DCases, before wait: default, after wait: default, auto retry: default

📁 Locator: ui:locator?name=GoToList&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DGoToList%26relationship%3DCases

📁 Interaction: ui:interaction?name=action

📁 Switched focus to main window. URL: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXlRAAP/view?ws=%2Flightning%2Fr%2FCCase%2F5001x00000H1Ft3AAF%2Fview

📁 Interaction: ui:interaction?name=action

📁 RelationshipName: Cases, boundObject class: com.provar.plugins.forcedotcom.core.model.SfActionLink

📁 Activating relatedListsTab tab

📁 Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Related, href: javascript:void(0)]

📁 Scrolling related list into view: (( //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')])//\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/2//\*[self::article and contains(@class, 'slds-card')] or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]

📁 Find action link element in related list using xpath: (( //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')])//\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/2//\*[self::article and contains(@class, 'slds-card')] or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))])//a[//span[contains(@class, 'view-all-label')]]

📁 Waiting for element to be present. Timeout(seconds): 10

📁 Doing before wait. waitUrl: default

📁 End of <default> wait.

📁 Found element: [[ChromeDriver\$EnhancerByCGLIB\$dace278c: chrome on XP (8e497a253b884a6cca464be162a8e66e)] -> xpath: (( //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] | //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) ] /ancestor::div[contains(@class, 'oneRecordHomeFlexipage')])//\*[self::list-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::list-related-list-single-container)]]/2//\*[self::article and contains(@class, 'slds-card')] or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))])//a[//span[contains(@class, 'view-all-label')]]



```
'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]])) ]]/ancestor::div[contains(@class, 'oneRecordHomeFlexipage')]]/*[self::lst-related-list-single-container or self::div[contains(@class, 'forceRelatedListContainer') or contains(@class, 'forceRelatedListSingleContainer') and not(ancestor::lst-related-list-single-container)]]][2]/*[self::article and contains(@class, 'slds-card')] or (self::div and contains(@class, 'forceRelatedListPreviewAdvancedGrid'))]/a[./span[contains(@class, 'view-all-label')]]]
```

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: View All Cases, href: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXlrAAP/related/Cases/view]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXlrAAP/related/Cases/view?ws=%2Flightning%2F%2FCCase%2F5001x00000H1Ft3AAF%2Fview

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● On SF Contact (test1) Cases related list

⌚ 11:37:20(08:00.947)

① Start of With Screen. Connection Name: admin, target: sf:ui:target?object=Contact&relatedList=Cases&recordType=test1

① Opening Page context. Name: screen, data: null, frame: null

① Switched focus to main window. URL: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXlrAAP/related/Cases/view?ws=%2Flightning%2F%2FCCase%2F5001x00000H1Ft3AAF%2Fview

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● With Cases rows {CASES\_CASE\_NUMBER = \$CaseRows[1].casenumber}

⌚ 11:37:20(08:01.476)

① Start of With Row. Connection Name: admin, target: sf:ui:locator:row?table=Cases%2FCasesTable

① Find element using xpath: /\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'listViewContent')]/tbody//tr

① Waiting for element to be present. Timeout(seconds): 10

① Populating webelement cells into the row Row Count: 12

① Populated the row elements.

① Applying row locator to rows. Row Count: 12, Row Locator: {CASES\_CASE\_NUMBER = \$CaseRows[1].casenumber}

① Testing row number 1

① Resolving EqualTo. 00121550 = 00121550, result: true

① Row number 1 matched

① The row locator matched 1 row.

① Going to update browser window handles.

⚡ Update browser window handles.

① Successfully updated browser window handles.

## ● UI Assert

⌚ 11:37:22(08:03.420)

① Start of UiAssert. Connection: admin

① Resolving field CASES\_CASE\_NUMBER



① Switched focus to main window. URL: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXIrAAP/related/Cases/view?ws=%2Fflightning%2Fr%2FCCase%2F5001x00000H1Ft3AAF%2Fview

① Doing before wait. waitUrl: default

① End of &lt;default&gt; wait.

① Found element: [[[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on XP (8e497a253b884a6cca464be162a8e66e)] -> xpath: //\*[contains(@class, 'active') and ( (self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) )]/div[contains(@class, 'listViewContent')]/tbody/tr]] -> xpath: th//span//\*[self::a or self::span[not(contains(@class, 'photoContainer') or contains(@class, 'uiImage'))]]]

① Asserting field attributes: CASES\_CASE\_NUMBER

① Asserting Attribute: value to 00121550

✅ Assertion successful.00121550 EqualTo 00121550

① Object read successfully. Result Name: Values

① Going to update browser window handles.

⚙️ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Going to update browser window handles.

⚙️ Update browser window handles.

① Successfully updated browser window handles.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://d1x0000008idweay--training.sandbox.lightning.force.com/lightning/r/Contact/0031x00001TJXIrAAP/related/Cases/view?ws=%2Fflightning%2Fr%2FCCase%2F5001x00000H1Ft3AAF%2Fview

① Going to update browser window handles.

⚙️ Update browser window handles.

① Successfully updated browser window handles.

## ● Read Object: Case = 5001x00000H1Ft3AAF

⌚ 11:37:26(08:07.227)

① Reading a Salesforce object. Connection Name: admin, Name: Case, Id: 5001x00000H1Ft3AAF, field count: 2

⚙️ Executing SQL query: select Status, Subject from Case where id = '5001x00000H1Ft3AAF'

① Object read successfully. Result Name: CaseRead

✅ Result assertion 'Check Status' successful: 'New' = 'New'

## ⚠️ Extract Salesforce Layout=>

⌚ 11:37:29(08:10.672)

## ⚠️ Assert Salesforce Layout=>

⌚ 11:37:29(08:10.672)