


There are several possible solutions. An example solution:

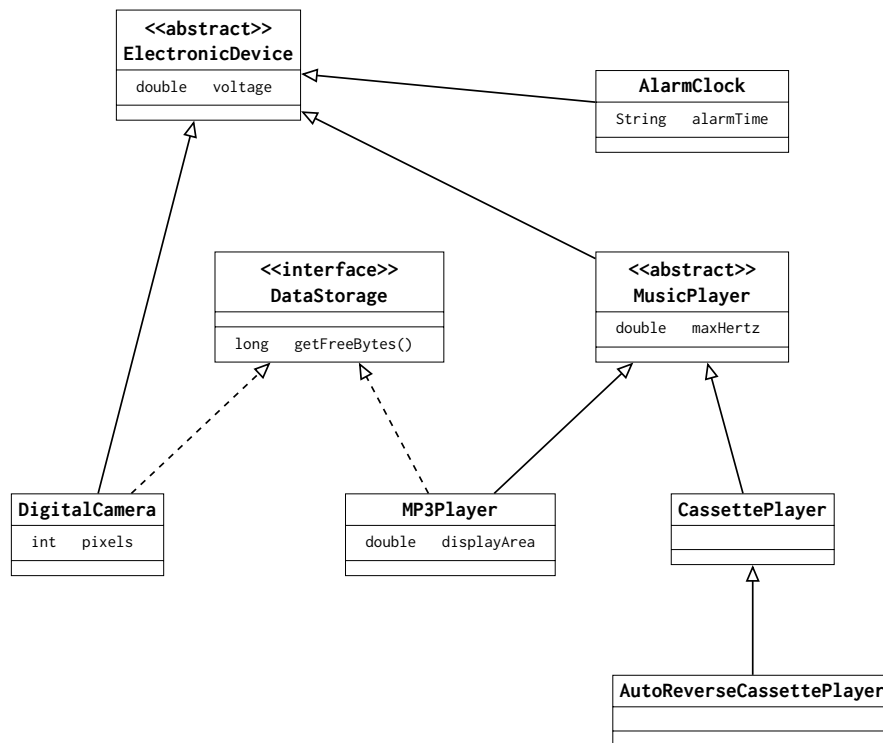

Remarks:

- It would probably make sense to have an abstract method `playMusic()` in class **MusicPlayer**, implemented by subclasses in class-specific ways. However, the initial analysis does not really mention such a functionality. Thus, it would be good to revisit the analysis to determine whether we want this functionality in our model or not.
- Another alternative could be to remove class **AutoReverseCassettePlayer** and to make `autoReverse` a boolean field in class **CassettePlayer**.