Sri Lanka Institute of Information Technology

IT2130 – Operating Systems and System Administration
Year 2, Semester 2- 2026

Practical Answer Submission

Practical Sheet No: 03

Student ID	IT24102555
Student Name	Weerathunga B.A
Campus/ Center name	SLIIT-Malabe
Specialization	Data Science
Batch No	Y2.S2-WD-DS-01.02

Activity 1

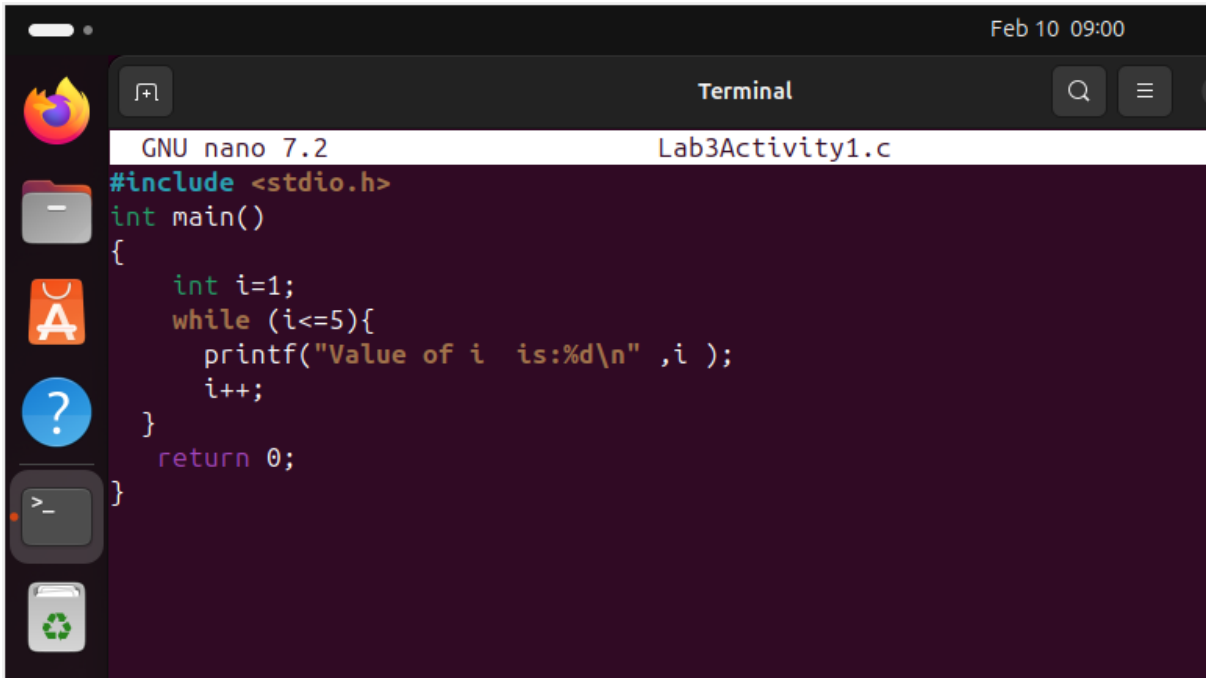
Feb 10 09:00
Terminal
GNU nano 7.2
Lab3Activity1.c
#include <stdio.h>
int main()
{
int i=1;
while (i<=5){
printf("Value of i is:%d\n" ,i);
i++;
}
return 0;
}

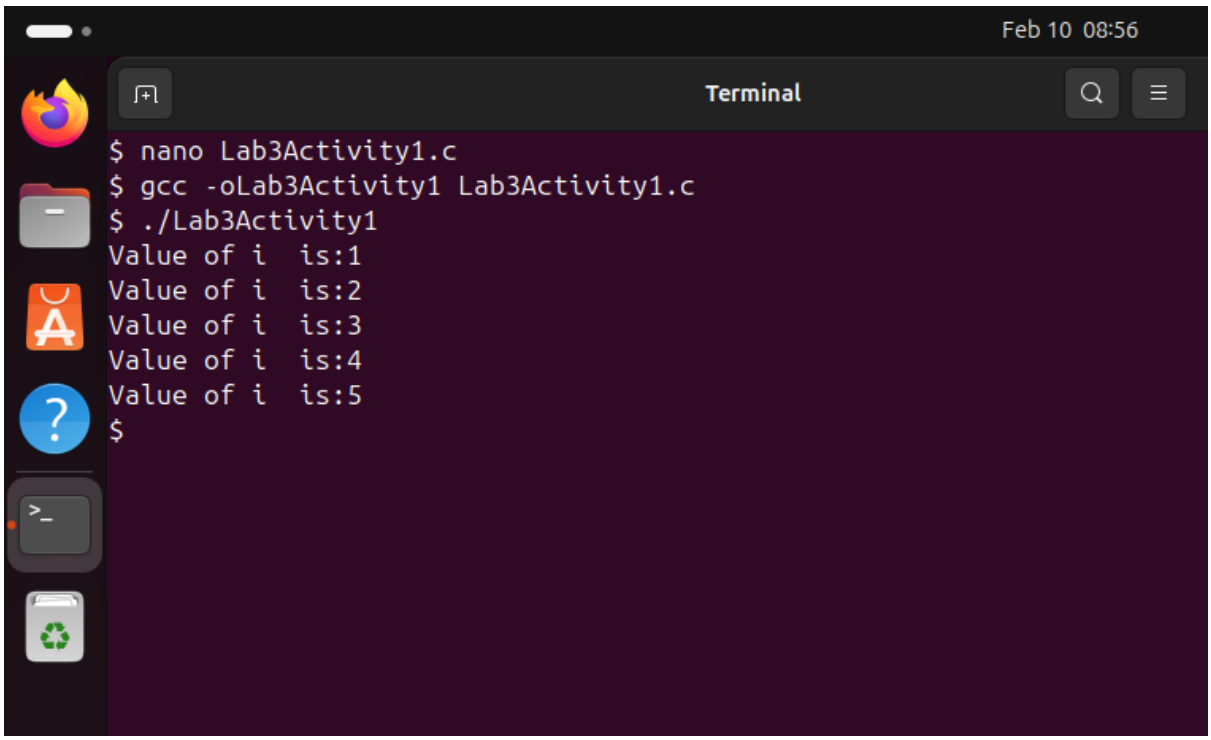
Feb 10 08:56
Terminal
$ nano Lab3Activity1.c
$ gcc -oLab3Activity1 Lab3Activity1.c
$ ./Lab3Activity1
Value of i is:1
Value of i is:2
Value of i is:3
Value of i is:4
Value of i is:5
$

Activity 2

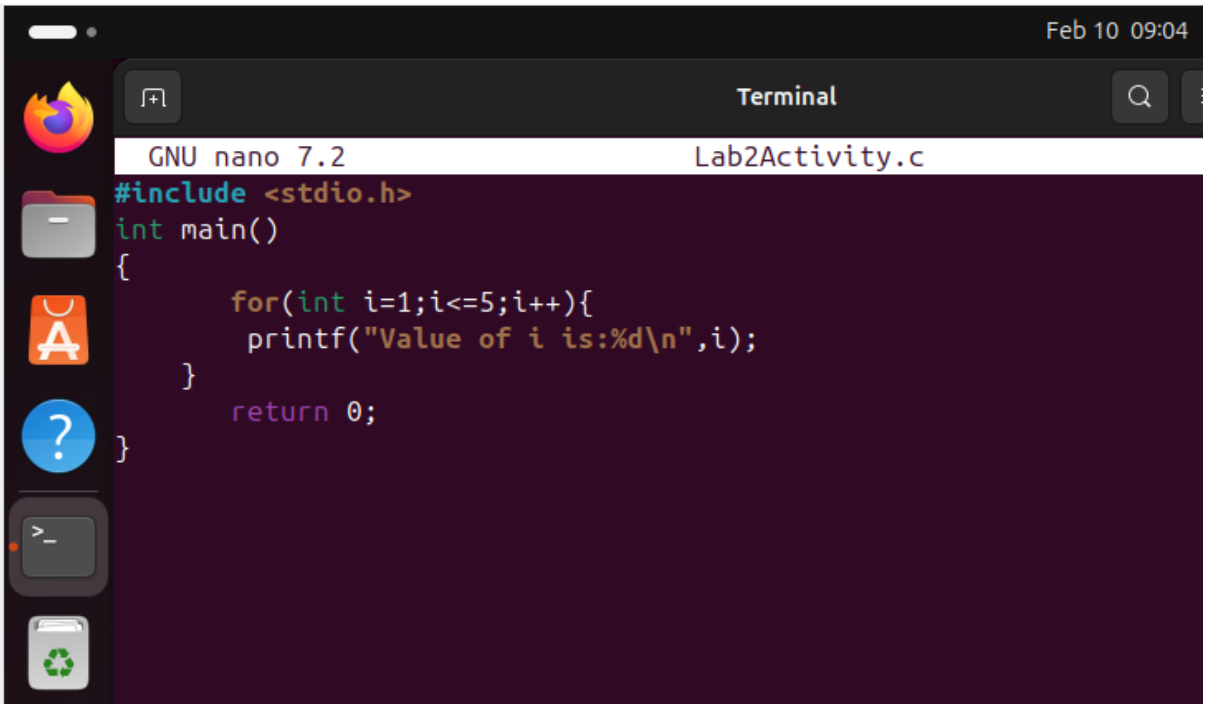
Feb 10 09:04
Terminal
GNU nano 7.2
Lab2Activity.c
#include <stdio.h>
int main()
{
for(int i=1;i<=5;i++){
printf("Value of i is:%d\n",i);
}
return 0;
}

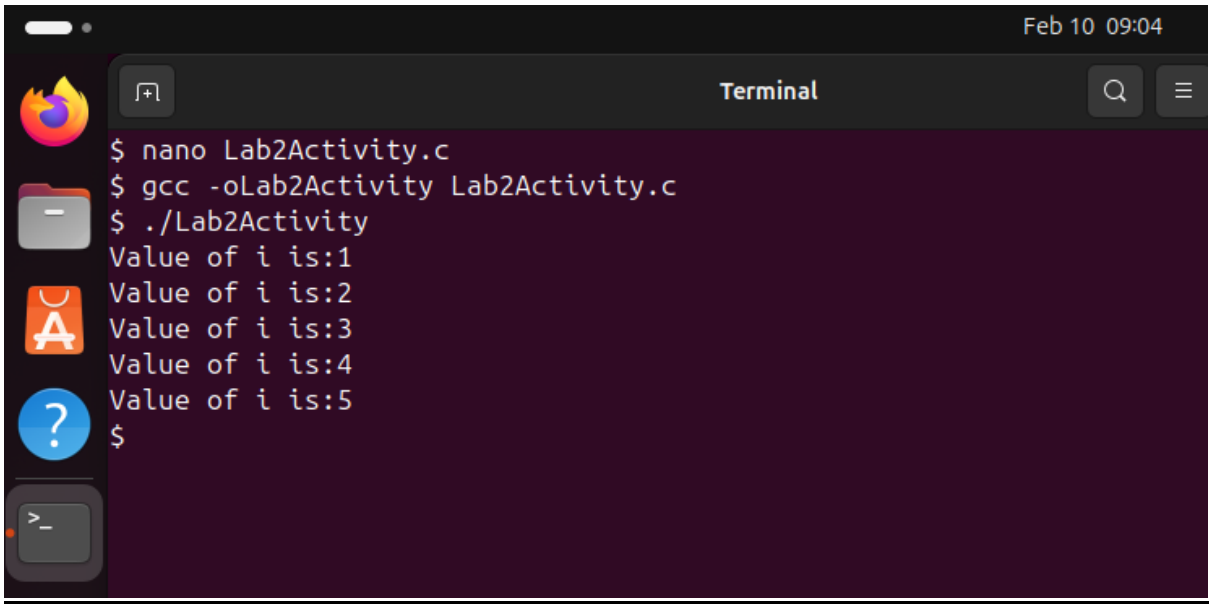
Feb 10 09:04
Terminal
$ nano Lab2Activity.c
$ gcc -oLab2Activity Lab2Activity.c
$ ./Lab2Activity
Value of i is:1
Value of i is:2
Value of i is:3
Value of i is:4
Value of i is:5
$

Activity 3

Feb 10 09:23

Terminal

GNU nano 7.2 Lab2Activity3.c

```
#include <stdio.h>
int main()
{
    int i,j;
    for (i=1;i<=5;i++){
        for(j=1;j<=i;j++){
            printf("%d",j);
        }
       printf("\n");
   }
      return 0;
}
```

Feb 10 09:22

Terminal

```
$ nano Lab2Activity3.c
$ gcc -oLab2Activity3 Lab2Activity3.c
$ ./Lab2Activity3
1
12
123
1234
12345
$
```

Activity 4

```
GNU nano 7.2                                   Lab2Activity4.c
#include<stdio.h>
int main()
{
   float data[12];
   int i;
   int maxMonth =0,minMonth=0;

   printf("Enter monthly average rainfall for 12 months:\n");
   for(int i=0;i<12;i++){
      printf("Month %d:",i+1);
      scanf("%f",&data[i]);
 }
   for(i=1;i<12;i++){
    if(data[i]>data[maxMonth]){
         maxMonth=i;
   }
    if(data[i]<data[minMonth]){
         minMonth=i;
   }
}
  printf("\n Maximum rainfall:%f mm in Month %d\n",data[maxMonth],maxMonth+1);
  printf("\n Minimum rainfall:%f mm in Month %d\n",data[minMonth],minMonth+1);
  return 0;
}
```

```
$ nano Lab2Activity4.c
$ gcc -oLab2Activity4 Lab2Activity4.c
$ ./Lab2Activity4
Enter monthly average rainfall for 12 months:
Month 1:10
Month 2:20
Month 3:30
Month 4:40
Month 5:50
Month 6:60
Month 7:70
Month 8:80
Month 9:90
Month 10:20
Month 11:30
Month 12:40

 Maximum rainfall:90.000000 mm in Month 9

 Minimum rainfall:10.000000 mm in Month 1
$
```

Activity 5

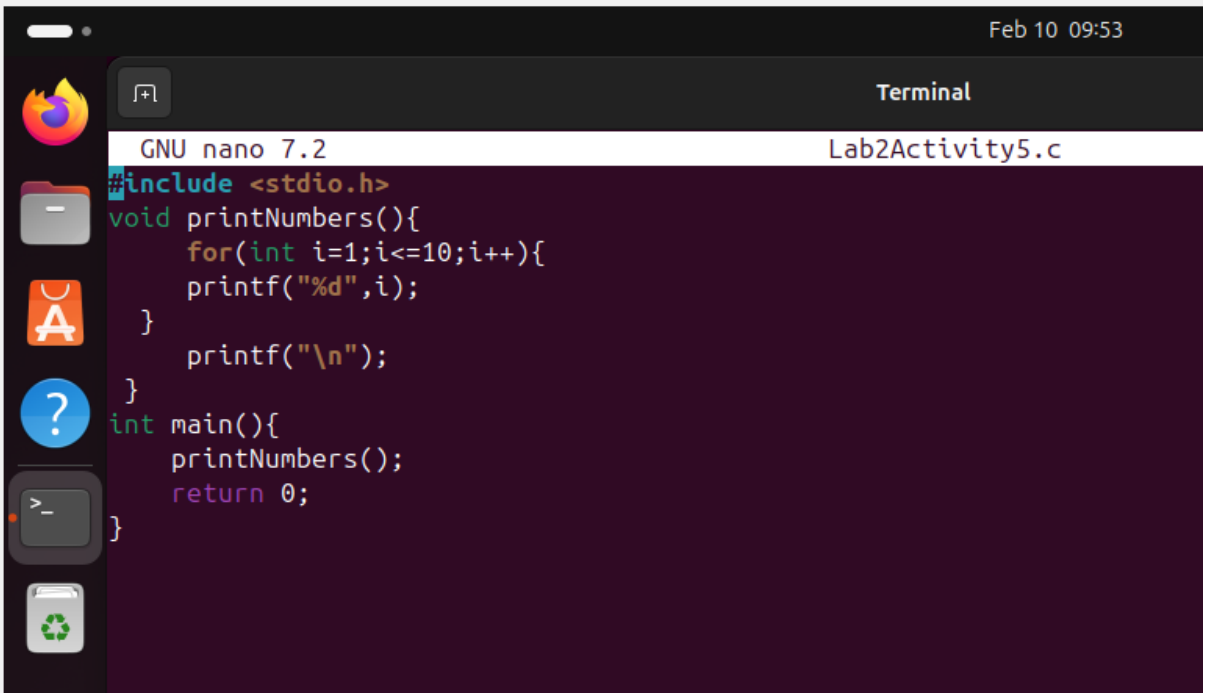
Feb 10 09:53
Terminal
GNU nano 7.2
Lab2Activity5.c
#include <stdio.h>
void printNumbers(){
for(int i=1;i<=10;i++){
printf("%d",i);
}
printf("\n");
}
int main(){
printNumbers();
return 0;
}

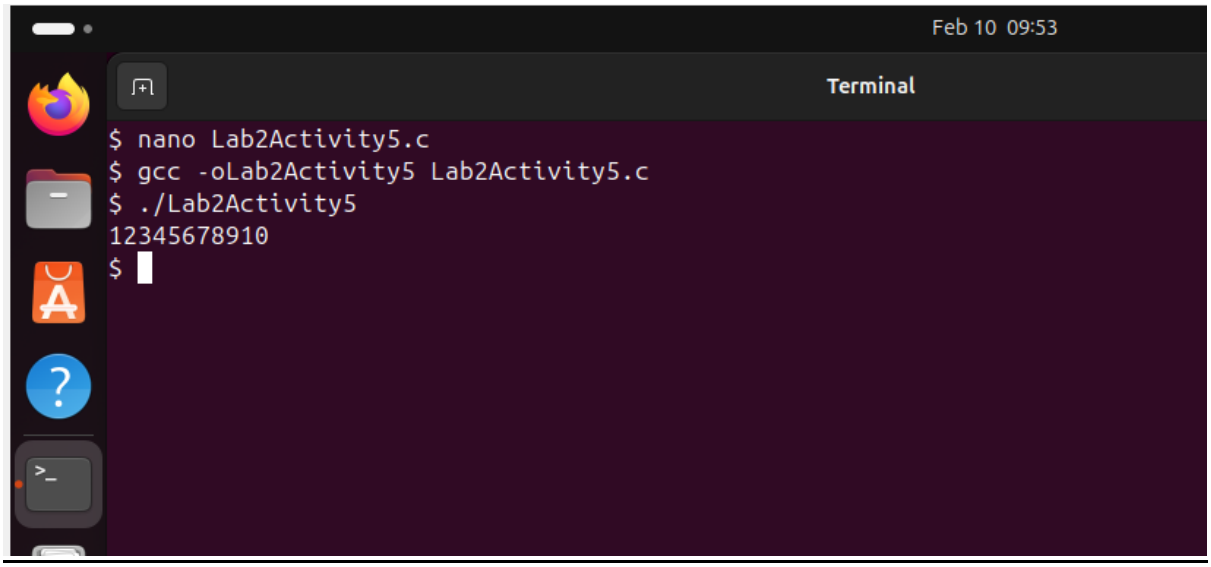
Feb 10 09:53
Terminal
$ nano Lab2Activity5.c
$ gcc -oLab2Activity5 Lab2Activity5.c
$ ./Lab2Activity5
12345678910
$

Activity 6

Feb 10 10:18

Terminal

GNU nano 7.2 Lab2Activity6.c

```c
#include <stdio.h>

void getmarks(double *m1, double *m2, double *m3);
double calcAvg(double m1,double m2,double m3);
void finalGrade(double avg);

int main(){
   double mark1, mark2, mark3, average;

   getmarks(&mark1, &mark2, &mark3);
   average=calcAvg(mark1, mark2, mark3);
   finalGrade(average);

  return 0;
}

void getmarks(double *m1, double *m2, double *m3){
    printf("Enter mark 1:");
    scanf("%lf",m1);
    printf("Enter mark 2:");
    scanf("%lf",m2);
    printf("Enter mark 3:");
    scanf("%lf",m3);
```

Feb 10 10:18

Terminal

GNU nano 7.2 Lab2Activity6.c

```c
    scanf("%lf",m2);
    printf("Enter mark 3:");
    scanf("%lf",m3);

}
double calcAvg(double m1,double m2,double m3){
   return(m1+m2+m3)/3.0;
}
void finalGrade(double avg){
   printf("\nAverage Mark:%2f\n",avg);

   if(avg>=75)
     printf("Grade: A\n");
   else if(avg>=65)
     printf("Grade: B\n");
   else if(avg>=55)
     printf("Grade: C\n");
   else if(avg>=45)
     printf("Grade: D\n");
   else if(avg>=35)
     printf("Grade: E\n");
   else
     printf("Grade: F(Fail)\n");
}
```

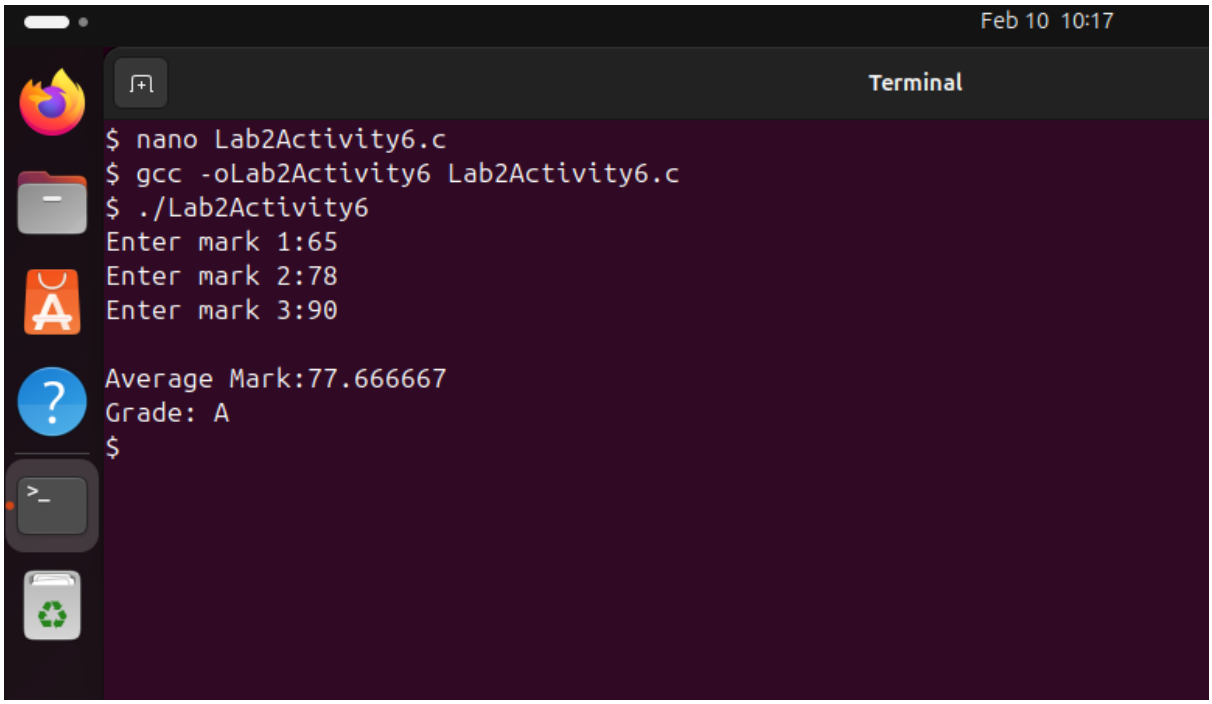
Feb 10 10:17
Terminal
$ nano Lab2Activity6.c
$ gcc -oLab2Activity6 Lab2Activity6.c
$ ./Lab2Activity6
Enter mark 1:65
Enter mark 2:78
Enter mark 3:90
Average Mark:77.666667
Grade: A
$