ASSIGNMENT-3

---

1. Display all the employee's information whose job is Clerk.

QUERY : SELECT * FROM emp WHERE job = 'CLERK';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE job = 'CLERK'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

---

2. Display all the employee's information whose employee number is 7788.
QUERY : SELECT * FROM emp WHERE empno = 7788;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE empno = 7788
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20

---

3. Display all the employee's information whose commission is greater than his salary.

QUERY : SELECT * FROM emp WHERE comm > sal;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE comm > sal
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7654	MARTIN	SALESMAN	7698	1981-09-28	1250.00	1400.00	30

---

4. Display all the employee's information those who are drawing a salary between 1000 and 2700.

QUERY : SELECT * FROM emp WHERE sal BETWEEN 1000 AND 2700;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE sal BETWEEN 1000 AND 2700
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7499	ALLEN	SALESMAN	7698	1981-02-20	1600.00	300.00	30
7521	WARD	SALESMAN	7698	1981-02-22	1250.00	500.00	30
7654	MARTIN	SALESMAN	7698	1981-09-28	1250.00	1400.00	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10
7844	TURNER	SALESMAN	7698	1981-09-08	1500.00	0.00	30
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

---

5. Display all the employee's information whose employee number falls within a certain list.

QUERY : SELECT * FROM emp WHERE empno IN (7369, 7499, 7521);

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE empno IN (7369, 7499, 7521)
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7499	ALLEN	SALESMAN	7698	1981-02-20	1600.00	300.00	30
7521	WARD	SALESMAN	7698	1981-02-22	1250.00	500.00	30

---

6. Display all the employee's information those whose commission is not known.
QUERY : SELECT * FROM emp WHERE comm IS NULL;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE comm IS NULL
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20
7839	KING	PRESIDENT	*NULL*	1981-11-17	5000.00	*NULL*	10
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7902	FORD	ANALYST	7566	1981-12-03	3000.00	*NULL*	20
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

---

7. Display all the employee's information whose employee name starts with an alphabet 'S'.
QUERY : SELECT * FROM emp WHERE ename LIKE 'S%' ;

OUTPUT :

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE ename LIKE 'S%'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20

8. Display all the employee's information whose employee name's third alphabet is 'O'.
QUERY : SELECT * FROM emp WHERE ename LIKE '__O%';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE ename LIKE '__O%'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20

---

9. Display all the employee's information whose employee name is of four characters only.
QUERY : SELECT * FROM emp WHERE ename LIKE '____';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE ename LIKE '____'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7521	WARD	SALESMAN	7698	1981-02-22	1250.00	500.00	30
7839	KING	PRESIDENT	*NULL*	1981-11-17	5000.00	*NULL*	10
7902	FORD	ANALYST	7566	1981-12-03	3000.00	*NULL*	20

---

10. Display all the employee's information whose job is like "MANAGER".

QUERY : SELECT * FROM emp WHERE job LIKE '%MANAGER%';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE job LIKE '%MANAGER%'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10

11. From Q.No. 4 to Q.No. 10, write the queries using in negative sense.

11.4 (negative of Q4)
QUERY : SELECT * FROM emp WHERE sal NOT BETWEEN 1000 AND 2700;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE sal NOT BETWEEN 1000 AND 2700
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20
7839	KING	PRESIDENT	*NULL*	1981-11-17	5000.00	*NULL*	10
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7902	FORD	ANALYST	7566	1981-12-03	3000.00	*NULL*	20

11.5 (negative of Q5)

QUERY : SELECT * FROM emp WHERE empno NOT IN (7369, 7499, 7521);

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE empno NOT IN (7369, 7499, 7521)
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7654	MARTIN	SALESMAN	7698	1981-09-28	1250.00	1400.00	30
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20
7839	KING	PRESIDENT	*NULL*	1981-11-17	5000.00	*NULL*	10
7844	TURNER	SALESMAN	7698	1981-09-08	1500.00	0.00	30
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7902	FORD	ANALYST	7566	1981-12-03	3000.00	*NULL*	20
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

11.6 (negative of Q6)

QUERY : SELECT * FROM emp WHERE comm IS NOT NULL;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE comm IS NOT NULL
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7499	ALLEN	SALESMAN	7698	1981-02-20	1600.00	300.00	30
7521	WARD	SALESMAN	7698	1981-02-22	1250.00	500.00	30
7654	MARTIN	SALESMAN	7698	1981-09-28	1250.00	1400.00	30
7844	TURNER	SALESMAN	7698	1981-09-08	1500.00	0.00	30

11.7 (negative of Q7)

QUERY : SELECT * FROM emp WHERE ename NOT LIKE 'S%';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE ename NOT LIKE 'S%'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7499	ALLEN	SALESMAN	7698	1981-02-20	1600.00	300.00	30
7521	WARD	SALESMAN	7698	1981-02-22	1250.00	500.00	30
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7654	MARTIN	SALESMAN	7698	1981-09-28	1250.00	1400.00	30
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10
7839	KING	PRESIDENT	*NULL*	1981-11-17	5000.00	*NULL*	10
7844	TURNER	SALESMAN	7698	1981-09-08	1500.00	0.00	30
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7902	FORD	ANALYST	7566	1981-12-03	3000.00	*NULL*	20
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

11.8 (negative of Q8)

QUERY : SELECT * FROM emp WHERE ename NOT LIKE '__O%';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE ename NOT LIKE '__O%'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7499	ALLEN	SALESMAN	7698	1981-02-20	1600.00	300.00	30
7521	WARD	SALESMAN	7698	1981-02-22	1250.00	500.00	30
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7654	MARTIN	SALESMAN	7698	1981-09-28	1250.00	1400.00	30
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10
7839	KING	PRESIDENT	*NULL*	1981-11-17	5000.00	*NULL*	10
7844	TURNER	SALESMAN	7698	1981-09-08	1500.00	0.00	30
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7902	FORD	ANALYST	7566	1981-12-03	3000.00	*NULL*	20
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

11.9 (negative of Q9)
QUERY : SELECT * FROM emp WHERE ename NOT LIKE '____';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE ename NOT LIKE '____'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7499	ALLEN	SALESMAN	7698	1981-02-20	1600.00	300.00	30
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7654	MARTIN	SALESMAN	7698	1981-09-28	1250.00	1400.00	30
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20
7844	TURNER	SALESMAN	7698	1981-09-08	1500.00	0.00	30
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

11.10 (negative of Q10)
QUERY : SELECT * FROM emp WHERE job NOT LIKE '%MANAGER%';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE job NOT LIKE '%MANAGER%'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7499	ALLEN	SALESMAN	7698	1981-02-20	1600.00	300.00	30
7521	WARD	SALESMAN	7698	1981-02-22	1250.00	500.00	30
7654	MARTIN	SALESMAN	7698	1981-09-28	1250.00	1400.00	30
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20
7839	KING	PRESIDENT	*NULL*	1981-11-17	5000.00	*NULL*	10
7844	TURNER	SALESMAN	7698	1981-09-08	1500.00	0.00	30
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7902	FORD	ANALYST	7566	1981-12-03	3000.00	*NULL*	20
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

---

12. Display the sum of salary and commission for each employee.
QUERY : SELECT ename, sal, comm, sal + comm AS total FROM emp;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT ename, sal, comm, sal + comm AS total FROM emp
```

ename	sal	comm	total
SMITH	800.00	*NULL*	*NULL*
ALLEN	1600.00	300.00	1900.00
WARD	1250.00	500.00	1750.00
JONES	2975.00	*NULL*	*NULL*
MARTIN	1250.00	1400.00	2650.00
BLAKE	2850.00	*NULL*	*NULL*
CLARK	2450.00	*NULL*	*NULL*
SCOTT	3000.00	*NULL*	*NULL*
KING	5000.00	*NULL*	*NULL*
TURNER	1500.00	0.00	1500.00
ADAMS	1100.00	*NULL*	*NULL*
JAMES	950.00	*NULL*	*NULL*
FORD	3000.00	*NULL*	*NULL*
MILLER	1300.00	*NULL*	*NULL*

13. Display the sum of salary and commission for each employee by replacing commission with 100 for employees whose commission is not known or commission is 0.
QUERY : SELECT ename, sal + NVL(NULLIF(comm, 0), 100) AS total FROM emp;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT ename, sal + COALESCE(NULLIF(comm, 0), 100.00) AS total FROM emp
```

ename	total
SMITH	900.00
ALLEN	1900.00
WARD	1750.00
JONES	3075.00
MARTIN	2650.00
BLAKE	2950.00
CLARK	2550.00
SCOTT	3100.00
KING	5100.00
TURNER	1600.00
ADAMS	1200.00
JAMES	1050.00
FORD	3100.00
MILLER	1400.00

---

14. Display each employee's name, annual remuneration by giving a suitable alias for annual remuneration.
QUERY : SELECT ename, sal * 12 AS annual_remuneration FROM emp;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT ename, sal * 12 AS annual_remuneration FROM emp
```

ename	annual_remuneration
SMITH	9600.00
ALLEN	19200.00
WARD	15000.00
JONES	35700.00
MARTIN	15000.00
BLAKE	34200.00
CLARK	29400.00
SCOTT	36000.00
KING	60000.00
TURNER	18000.00
ADAMS	13200.00
JAMES	11400.00
FORD	36000.00
MILLER	15600.00

---

15. Display all the employee's information whose salary is greater than 2000 and job is according to your choice.
QUERY : SELECT * FROM emp WHERE sal > 2000 AND job = 'MANAGER';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE sal > 2000 AND job = 'MANAGER'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10

---

16. Display all the employee's information whose salary is greater than 3000 or job is according to your choice.
QUERY : SELECT * FROM emp WHERE sal > 3000 OR job = 'CLERK';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE sal > 3000 OR job = 'CLERK'
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7839	KING	PRESIDENT	*NULL*	1981-11-17	5000.00	*NULL*	10
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20
7900	JAMES	CLERK	7698	1981-12-03	950.00	*NULL*	30
7934	MILLER	CLERK	7782	1982-01-23	1300.00	*NULL*	10

---

17. Display all the employees who are working under department 20 and not drawing a salary greater than 2000.
QUERY : SELECT * FROM emp WHERE deptno = 20 AND NOT sal > 2000;

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE deptno = 20 AND NOT sal > 2000
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7369	SMITH	CLERK	7902	1980-12-17	800.00	*NULL*	20
7876	ADAMS	CLERK	7788	1983-01-12	1100.00	*NULL*	20

---

18. Display all the employees who are drawing a salary greater than 2000 and whose job is either manager or job of your choice.
QUERY : SELECT * FROM emp WHERE sal > 2000 AND job IN ('MANAGER', 'ANALYST');

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command

SQL command

```
SELECT * FROM emp WHERE sal > 2000 AND job IN ('MANAGER', 'ANALYST')
```

empno	ename	job	mgr	hiredate	sal	comm	deptno
7566	JONES	MANAGER	7839	1981-04-02	2975.00	*NULL*	20
7698	BLAKE	MANAGER	7839	1981-05-01	2850.00	*NULL*	30
7782	CLARK	MANAGER	7839	1981-06-09	2450.00	*NULL*	10
7788	SCOTT	ANALYST	7566	1982-12-09	3000.00	*NULL*	20
7902	FORD	ANALYST	7566	1981-12-03	3000.00	*NULL*	20

---

19. Display the names like WARD, FORD from EMP table using pattern matching.
QUERY : SELECT ename FROM emp WHERE ename LIKE '__RD';

OUTPUT:

PostgreSQL » Server » mca_26_db » schema_26mmce51 » SQL command


SQL command

```
SELECT ename FROM emp WHERE ename LIKE '__RD'
```

ename
WARD
FORD

20. Write a query using a pattern matching to display the names like SMITH_CLERK, ADAMS_CLERK from EMP table. HINT: USE CONCATENATION and LIKE Operator.
QUERY : SELECT ename || '_' || job AS name_job FROM emp WHERE ename || '_' || job LIKE 'SMITH_CLERK' ESCAPE '\' OR ename || '_' || job LIKE 'ADAMS_CLERK' ESCAPE '\';

OUTPUT:

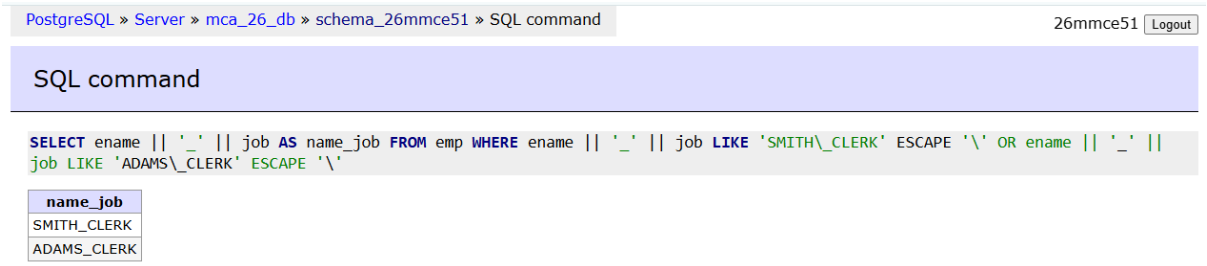

21. Write a query using a pattern matching to display the names like %ALLEN_SALESMAN, %ADAMS_CLERK from EMP table. HINT: USE CONCATENATION and LIKE Operator.
QUERY : SELECT ename || '_' || job AS name_job FROM emp WHERE ename || '_' || job LIKE '%ALLEN_SALESMAN' ESCAPE '\' OR ename || '_' || job LIKE '%ADAMS_CLERK' ESCAPE '\';

OUTPUT:

