

Directives

❑ Chỉ thị assembler lưu hoặc cấp phát program objects.

❑ Program structure

.text: store objects in the code segment (these are instructions)

.data: store objects in data segment (static variables)

.ktext, .kdata: code and data segments for kernel (OS)

❑ Variable declaration (allocation)

.byte/.half/.word: store listed values as bytes/halves/words


.ascii/.asciiz: string and null-terminated string

.space: reserved specified number of bytes

syscall

- ❑ **Print decimal** integer to standard output (the console).
- ❑ Argument(s):
 - | \$v0 = 1
 - | \$a0 = number to be printed
- ❑ Return value: none


```
li $v0, 1           # service 1 is print integer
li $a0, 0x307        # the interger to be printed is 0x307
syscall             # execute
```

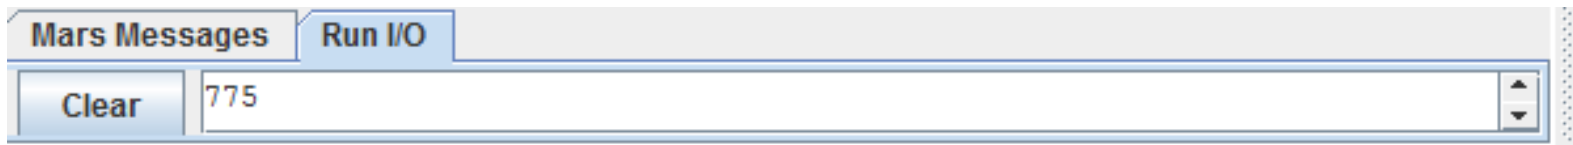

syscall

- ❑ **Print string** to standard output (the console).
- ❑ **Argument(s)**
 - | \$v0 = 4
 - | \$a0 = address of null terminated string to print
- ❑ **Return value:** none

```
.data
Message: .asciiz "Bomon \nKy thuat May tinh"
.text
    li    $v0, 4
    la    $a0, Message
    syscall
```

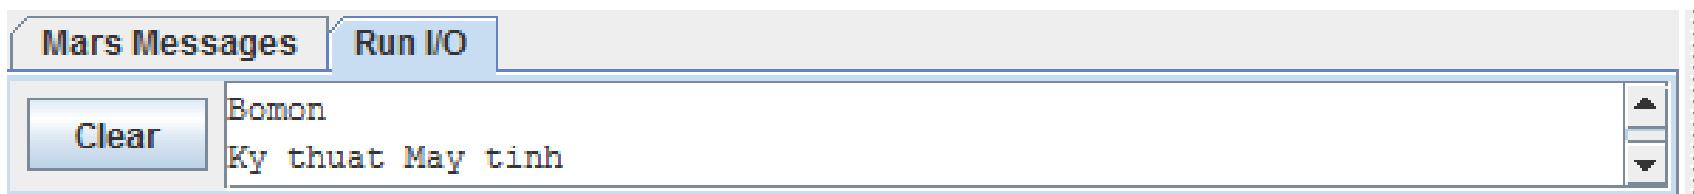

Hello World

```
.data    #Data segment
x:       .word    0x01020304    # x is a word
message: .asciiz  "Dept. of Computer Engineering"
.text    #Code segment to store instructions
    la    $a0, message    #load string address to a0
    li    $v0, 4           #function $v0 = 4
    syscall               #call system routine

    addi   $t1,$zero,2      #$t1 = 2
    addi   $t2,$zero,3      #$t2 = 3
    add    $t0, $t1, $t2    #$t0 = $t1 + $t2
```

❑ Chạy và quan sát

- | Text, data segment
- | la, li, syscall

❑ Bài tập: viết các lệnh để gán giá trị 0x2023 cho x

syscall

- ❑ **Read integer** from standard input (the console).

- ❑ **Argument**

 - | \$v0 = 5

- ❑ **Return value**

 - | \$v0 = contains integer read

```
li    $v0, 5
syscall
```

syscall

- ❑ **Read string** from standard input
- ❑ Argument(s):
 - | \$v0 = 8
 - | \$a0 = address of input buffer
 - | \$a1 = maximum number of characters to read
- ❑ Return value: none
- ❑ Note: for specified length n , string can be no longer than $n-1$.
 - | If less than that, adds newline to end.
 - | In either case, then pads with null byte
- ❑ String can be declared with *.space*

syscall

```
.data
Message: .space 100      # string with max len = 99
.text
    li    $v0, 8
    la    $a0, Message
    li    $a1, 100
    syscall
```

syscall

❑ **Print a character** to standard output.


❑ Arguments

| \$v0 = 11

| \$a0 = character to print (at LSB)

❑ Return value: none

```
li $v0, 11
li $a0, 'k'
syscall
```

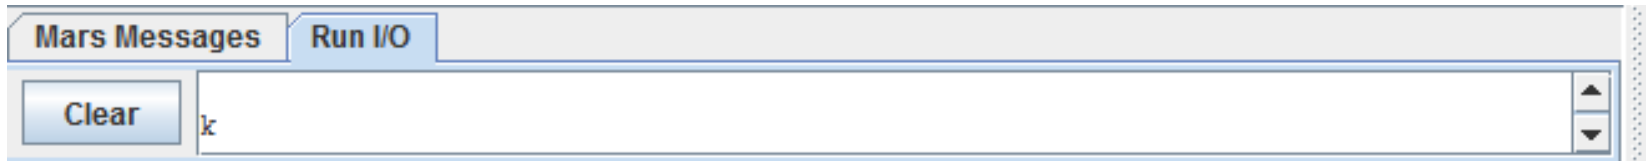

syscall

- ❑ **Read a character** from standard input.
- ❑ Argument(s):
 - | \$v0 = 12
- ❑ Return value:
 - | \$v0 contains the character read

syscall

❑ ConfirmDialog

❑ Argument(s):

| \$v0 = 50

| \$a0 = address of the null-terminated message string

❑ Return value: \$a0 = value of selected option

0: Yes 1: No 2: Cancel

```
.data
```


```
Message: .asciiz "You are taking IT3030E, aren't you?"
```

```
.text
```

```
li    $v0, 50
```

```
la    $a0, Message
```

```
syscall
```

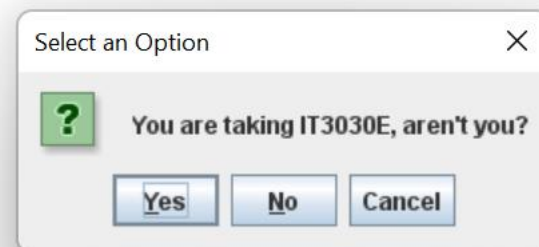

syscall

- ❑ exit: terminate the program
- ❑ Argument
 - | \$v0 = 10
- ❑ Return value: none