

TinyExpr++ Reference Manual

Blake Madden

TinyExpr++ Reference Manual

Copyright © 2023 Blake Madden

Some rights reserved.

Published in the United States

This book is distributed under a Creative Commons Attribution-NonCommercial-Sharealike 4.0 License.



That means you are free:

- **To Share** – copy and redistribute the material in any medium or format.
- **To Adapt** – remix, transform, and build upon the material.

The licensor cannot revoke these freedoms as long as you follow the license terms:

- **Attribution** – You must give appropriate credit, provide a link to the license, and indicate if changes were made. You may do so in any reasonable manner, but not in any way that suggests the licensor endorses you or your use.
- **NonCommercial** – You may not use the material for commercial purposes.
- **Share Alike** – If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original.

No additional restrictions —You may not apply legal terms or technological measures that legally restrict others from doing anything the license permits.

Contents

| | | |
|-----------|--|-----------|
| 1 | Overview | 1 |
| 1.1 | Features | 1 |
| I | User Guide | 3 |
| 2 | Usage | 5 |
| 3 | Operators | 7 |
| 3.1 | Compatability Note | 8 |
| 4 | Functions | 9 |
| 5 | Constants | 13 |
| 6 | Comments | 15 |
| II | Developer Guide | 17 |
| 7 | Building | 19 |
| 7.1 | Requirements | 19 |
| 8 | Usage | 21 |
| 8.1 | Error Handling | 22 |
| 9 | Examples | 23 |
| 9.1 | Example 1 | 23 |
| 9.2 | Example 2: Binding Custom Variables | 23 |
| 9.3 | Example 3: Calling a Free Function | 24 |
| 9.4 | Example 4: Non-US Formatted Formulas | 25 |
| 9.5 | Example 5: Binding to Custom Classes | 26 |

| | |
|--|---------------|
| 10 Custom Extensions | 29 |
| 10.1 Binding to Custom Functions | 29 |
| 10.2 Binding to Custom Classes | 29 |
| 11 Non-US Formatted Formulas | 31 |
| 12 How it Works | 33 |
| 12.1 Grammar | 34 |
| 13 Compile-time Options | 35 |
| 13.1 TE_POW_FROM_RIGHT | 35 |
| 14 Embedded Programming | 37 |
| 14.1 Performance | 37 |
| 14.2 Volatility | 37 |
| 14.3 Exception Handling | 38 |
| 14.4 Virtual Functions | 39 |
| III Appendix | 41 |
| References | 43 |

List of Tables

| | | |
|-----|---------------------------------|----|
| 3.1 | Operators | 7 |
| 4.1 | Math Functions | 9 |
| 4.2 | Statistical Functions | 11 |
| 4.3 | Logic Functions | 11 |
| 5.1 | Math Constants | 13 |
| 5.2 | Logical Constants | 13 |
| 5.3 | Number Formats | 13 |

Chapter 1

Overview

This is the reference manual for *TinyExpr++*, the C++ version of the *TinyExpr* (Winkle) formula parsing library. (This manual includes documentation from *TinyExpr* by Lewis Van Winkle.)

TinyExpr++ is a small parser and evaluation library for solving math expressions from C++. It's open-source, free, easy-to-use, and self-contained in a single source and header file pair.

1.1 Features

- C++17 with no dependencies.
- Single source file and header file.
- Simple and fast.
- Implements standard operator precedence.
- Implements logical and comparison operators.
- Exposes standard C math functions (`sin`, `sqrt`, `ln`, etc.), as well as some Excel-like functions (e.g., `AVERAGE()` and `IF()`).
- Can add custom functions and variables easily.
- Can bind constants at eval-time.
- Supports variadic functions (taking between 1-7 arguments).
- Case insensitive.
- Supports non-US formulas (e.g., `POW(2,2; 2)` instead of `POW(2.2, 2)`).
- Supports C and C++ style comments within math expressions.
- Released under the zlib license - free for nearly any use.
- Easy to use and integrate with your code.
- Thread-safe; parser is in a self-contained object.

Part I

User Guide

Chapter 2

Usage

TinyExpr++ is a formula-solving library which accepts math and logic expressions such as:

```
ABS(((5+2) / (ABS(-2))) * -9 + 2) - 5^2
```

Applications using *TinyExpr++* may provide context-specific variables that you can use in your expressions. For example, in a spreadsheet application, values representing cells such as C1 and D2 may be available. This would enable the use of expressions such as:

```
SUM(C1, C2, C3, D1, D2, D3)
```

As another example, in a statistical program, the values N_OBS and P_LEVEL may be available. This would make an expression such as this possible:

```
IF(AND(P_LEVEL < .05, N_OBS >= 30),  
    P_LEVEL,  
    NAN)
```

Please consult your application's documentation for which custom variables and functions it may provide for its formulas.

Chapter 3

Operators

The following operators are supported within math expressions:

Table 3.1: Operators

| Operator | Description |
|----------|--|
| * | Multiplication. |
| / | Division. |
| % | Modulus: Divides two values and returns the remainder. |
| + | Addition. |
| - | Subtraction. |
| ^ | Exponentiation. The number in front of ^ is the base, the number after it is the power to raise it to. |
| = | Equals. |
| < | Less than. |
| > | Greater than. |
| <> | Not equal to. |
| != | Not equal to. |
| >= | Greater than or equal to. |
| <= | Less than or equal to. |
| & | Logical conjunction (AND). |
| | Logical alternative (OR). |
| () | Groups sub-expressions, overriding the order of operations. |

For operators, the order of precedence is:

| Operator | Description |
|-------------|---|
| () | Instructions in parentheses are executed first. |
| ^ | Exponentiation. |
| *, /, and % | Multiplication, division, and modulus. |
| + and - | Addition and subtraction. |

3.1 Compatability Note

The % character acts as a modulus operator in *TinyExpr++*, which is different from most spreadsheet programs. In programs such as *LibreOffice Calc* and *Excel*, % is used to convert a number to a percentage. For example, =20% would yield 0.20 in Excel. In *TinyExpr++*, however, 20% will result in a syntax error as it is expecting a binary (modulus) operation.

Chapter 4

Functions

The following built-in functions are available:

Table 4.1: Math Functions

| Function | Description |
|--------------------------------|--|
| ABS(Number) | Absolute value of Number . |
| ACOS(Number) | Returns the arccosine, or inverse cosine, of Number . The arccosine is the angle whose cosine is number. The returned angle is given in radians in the range 0 (zero) to PI. |
| ASIN(Number) | Returns the arcsine, or inverse sine function, of Number , where $-1 \leq \text{Number} \leq 1$. The arcsine is the angle whose sine is Number . The returned angle is given in radians where $-\pi/2 \leq \text{angle} \leq \pi/2$. |
| ATAN(x) | Returns the principal value of the arc tangent of x , expressed in radians.. |
| ATAN2(y, x) | Returns the principal value of the arc tangent of y,x , expressed in radians. |
| BITLSHIFT(Number, ShiftAmount) | Returns Number left shifted by the specified number (ShiftAmount) of bits. |
| BITRSHIFT(Number, ShiftAmount) | Returns Number right shifted by the specified number (ShiftAmount) of bits. |
| CEIL(Number) | Smallest integer not less than Number . CEIL(-3.2) = -3 CEIL(3.2) = 4 |
| CLAMP(Number, Start, End) | Constrains Number within the range of Start and End . |
| COMBIN(Number, NumberChosen) | Returns the number of combinations for a given number (NumberChosen) of items from Number of items. Note that for combinations, order of items is not important. |
| COS(Number) | Cosine of the angle Number in radians. |
| COSH(Number) | Hyperbolic cosine of Number . |
| COT(Number) | Cotangent of Number . |
| EXP(Number) | Euler to the power of Number . |

| Function | Description |
|------------------------------|--|
| FAC(Number) | Returns the factorial of Number . The factorial of Number is equal to $1*2*3*...*$ Number |
| FACT(Number) | Alias for FAC() |
| FLOOR(Number) | Returns the largest integer not greater than Number . FLOOR(-3.2) = -4 FLOOR(3.2) = 3 |
| LN(Number) | Natural logarithm of Number (base Euler). |
| LOG10(Number) | Common logarithm of Number (base 10). |
| MIN(Value1, Value2, ...) | Returns the lowest value from a specified range of values. |
| MAX(Value1, Value2, ...) | Returns the highest value from a specified range of values. |
| MOD(Number, Divisor) | Returns the remainder after Number is divided by Divisor . The result has the same sign as divisor. |
| NCR(Number, NumberChosen) | Alias for COMBIN(). |
| NPR(Number, NumberChosen) | Alias for PERMUT(). |
| PERMUT(Number, NumberChosen) | Returns the number of permutations for a given number (NumberChosen) of items that can be selected Number of items. A permutation is any set of items where order is important. (This differs from combinations, where order is not important). |
| POW(Base, Exponent) | Raises Base to any power. For fractional exponents, Base must be greater than 0. |
| POWER(Base, Exponent) | Alias for POW(). |
| RAND() | Generates a random floating point number within the range of 0 and 1. |
| ROUND(Number, NumDigits) | Number rounded to NumDigits decimal places. If NumDigits is negative, then Number is rounded to the left of the decimal point. (NumDigits is optional and defaults to zero.) ROUND(-11.6, 0) = 12 ROUND(-11.6) = 12 ROUND(1.5, 0) = 2 ROUND(1.55, 1) = 1.6 ROUND(3.1415, 3) = 3.142 ROUND(-50.55, -2) = -100 |
| SIGN(Number) | Returns the sign of Number . Returns 1 if Number is positive, zero (0) if Number is 0, and -1 if Number is negative. |
| SIN(Number) | Sine of the angle Number in radians. |
| SINH(Number) | Hyperbolic sine of Number . |
| SQRT(Number) | Square root of Number . |
| TAN(Number) | Tangent of Number . |
| TGAMMA(Number) | Returns the gamma function of Number . |
| TRUNC(Number) | Discards the fractional part of Number . TRUNC(-3.2) = -3 TRUNC(3.2) = 3 |

Table 4.2: Statistical Functions

| Function | Description |
|------------------------------|--|
| AVGERAGE(Value1, Value2,...) | Returns the mean of a specified range of values. |
| SUM(Value1, Value2,...) | Returns the sum of a specified range of values. |

Table 4.3: Logic Functions

| Function | Description |
|--|--|
| AND(Value1, Value2, ...) | Returns true if all conditions are true. |
| IF(Condition, ValueIfTrue, ValueIfFalse) | If Condition is true (non-zero), then ValueIfTrue is returned; otherwise, ValueIfFalse is returned. |
| NOT(Value) | Returns the logical negation of Value . |
| OR(Value1, Value2, ...) | Returns true if any condition is true. |

Chapter 5

Constants

The following mathematical and logical constants are available:

Table 5.1: Math Constants

| Constant | Value |
|----------|---|
| E | Euler's number (2.71828182845904523536) |
| NAN | NaN (Not-a-Number) |
| PI | pi (3.14159265358979323846) |

Table 5.2: Logical Constants

| Constant | Value |
|----------|-------|
| TRUE | 1 |
| FALSE | 0 |

The following number formats are supported:

Table 5.3: Number Formats

| Format | Example |
|---------------------|--------------|
| Scientific notation | 1e3 for 1000 |

Chapter 6

Comments

Comments can be embedded within an expression to clarify its intent. C/C++ style comments are supported, which provide:

- multi-line comments (text within a pair of `/*` and `*/`).
- single line comments (everything after a `//` until the end of the current line).

For example, assuming that the variables `P_LEVEL` and `N_OBS` have been defined within the parser, an expression such as this could be used:

```
/* Returns the p-level of a study if:  
  p-level < 5% AND  
  number of observations was at least 30.  
Otherwise, NaN is returned. */  
  
IF(// Review the results from the analysis  
  AND(P_LEVEL < .05, N_OBS >= 30),  
  // ...and return the p-level if we should accept it  
  P_LEVEL,  
  // or NaN if not  
  NAN)
```


Part II

Developer Guide

Chapter 7

Building

TinyExpr++ is self-contained in two files: `tinyexpr.cpp` and `tinyexpr.h`. To use *TinyExpr++*, add those two files to your project.

The API documentation can be built using the following:

```
doxygen docs/Doxyfile
```

7.1 Requirements

TinyExpr++ must be compiled as C++17.

MSVC, GCC, and Clang compilers are supported.

Chapter 8

Usage

TinyExpr++'s `te_parser` class defines these functions:

```
double evaluate(const std::string_view expression);
double get_result();
bool success();
int64_t get_last_error_position();
std::string get_last_error_message();
set_variables_and_functions(const std::set<te_variable>& vars);
std::set<te_variable>& get_variables_and_functions();
add_variable_or_function(const te_variable& var);
get_decimal_separator();
set_decimal_separator();
get_list_separator();
set_list_separator();
```

`evaluate()` takes an expression and immediately returns the result. If there is a parse error, then it returns NaN (which can be verified by using `std::isnan()`). (`success()` will also return false.)

`get_result()` can be called anytime afterwards to retrieve the result from `evaluate()`.

`set_variables_and_functions()`, `get_variables_and_functions()`, and `add_variable_or_function()` are used to add custom variables and functions to the parser.

`get_decimal_separator()/set_decimal_separator()` and `get_list_separator()/set_list_separator()` can be used to parse non-US formatted formulas.

Example:

```
te_parser tep;

// Returns 10, error position is set to te_parser::npos (i.e., no error).
double result = tep.evaluate("(5+5)");
// Returns NaN, error position is set to 3.
double result2 = tep.evaluate("(5+5)");
```

You can also provide `set_variables_and_functions()` a list of constants, bound variables, and function pointers/lambda's. `evaluate()` will then evaluate expressions using these variables and functions.

8.1 Error Handling

TinyExpr++ will throw exceptions when:

- An illegal character is specified in a custom function or variable name.
- An illegal character is provided as a list or decimal separator.
- The same character is provided as both the list and decimal separator.

It is recommended to wrap the following functions in `try/catch` blocks to handle these exceptions:

- `compile()`
- `evaluate()`
- `set_variables_and_functions()`
- `add_variable_or_function()`
- `set_decimal_separator()`
- `set_list_separator()`

Syntax and calculation errors are trapped within calls to `compile()` and `evaluate()`. Error information can be retrieved afterwards by calling the following:

- `success()`: returns whether the last parse was successful or not.
- `get_last_error_position()`: returns the 0-based index of where in the expression the parse failed (useful for syntax errors). If there was no parse error, then this will return `te_parser::npos`.
- `get_last_error_message()`: returns a more detailed message for some calculation errors (e.g., division by zero).

Example:

```
#include "tinyexpr.h"
#include <iostream>

double x{ 0 }, y{ 0 };
// Store variable names and pointers.
te_parser tep;
tep.set_variables_and_functions({{"x", &x}, {"y", &y}});

// Compile the expression with variables.
auto result = tep.evaluate("sqrt(x^2+y^2)");

if (tep.success())
{
    x = 3; y = 4;
    // Will use the previously used expression, returns 5.
    const double h1 = tep.evaluate();

    x = 5; y = 12;
    // Returns 13.
    const double h2 = tep.evaluate();
}
else
{
    std::cout << "Parse error at " <<
        std::to_string(tep.get_last_error_position()) << "\n";
}
```

Chapter 9

Examples

The following are examples demonstrating how to use *TinyExpr++*.

9.1 Example 1

```
include "tinyexpr.h"
#include <iostream>

int main(int argc, char *argv[])
{
    te_parser tep;
    const char *c = "sqrt(5^2+7^2+11^2+(8-2)^2)";
    double r = tep.evaluate(c);
    std::cout << "The expression:\n\t" <<
        c << "\nevaluates to:\n\t" << r << "\n";
    return EXIT_SUCCESS;
}
```

9.2 Example 2: Binding Custom Variables

```
#include "tinyexpr.h"
#include <iostream>
#include <iomanip>

int main(int argc, char* argv[])
{
    if (argc < 2)
    {
        std::cout << "Usage: example \"expression\"\n";
        return EXIT_SUCCESS;
    }

    const char* expression = argv[1];
```

```

std::cout << "Evaluating:\n\t" << expression << "\n";

/* This shows an example where the variables
   x and y are bound at eval-time. */
double x{ 0 }, y{ 0 };
// Store variable names and pointers.
te_parser tep;
tep.set_variables_and_functions({ {"x", &x}, {"y", &y} });

/* This will compile the expression and check for errors. */
if (tep.compile(expression))
{
    /* The variables can be changed here, and eval can be called as many
       times as you like. This is fairly efficient because the parsing has
       already been done. */
    x = 3; y = 4;
    const double r = tep.evaluate();
    std::cout << "Result:\n\t" << r << "\n";
}
else
{
    /* Show the user where the error is at. */
    std::cout << "\t " << std::setfill(' ') <<
        std::setw(tep.get_last_error_position()) << '^' <<
        "\tError near here\n";
}

return EXIT_SUCCESS;
}

```

9.3 Example 3: Calling a Free Function

```

#include "tinyexpr.h"
#include <iostream>
#include <iomanip>

/* An example of calling a free function. */
double my_sum(double a, double b)
{
    std::cout << "Called C function with " <<
        a << " and " << b << ".\n";
    return a + b;
}

int main(int argc, char *argv[])
{
    const char *expression = "mysum(5, 6)";
    std::cout << "Evaluating:\n\t" << expression << "\n";

    te_parser tep;
    tep.set_variables_and_functions({{"mysum", my_sum}});
}

```

```

if (tep.compile(expression))
{
    const double r = tep.evaluate();
    std::cout << "Result:\n\t" << r << "\n";
}
else
{
    /* Show the user where the error is at. */
    std::cout << "\t " << std::setfill(' ') <<
        std::setw(tep.get_last_error_position()) << '^' <<
        "\tError near here\n";
}

return EXIT_SUCCESS;
}

```

9.4 Example 4: Non-US Formatted Formulas

```

#include "tinyexpr.h"
#include <iostream>
#include <iomanip>
#include <locale>
#include <clocale>

int main(int argc, char *argv[])
{
    /* Set locale to German.
       This string is platform dependent. The following works on Windows,
       consult your platform's documentation for more details.*/
    setlocale(LC_ALL, "de-DE");
    std::locale::global(std::locale("de-DE"));

    /* After setting your locale to German, functions like strtod() will fail
       with values like "3.14" because it expects "3,14" instead.
       To fix this, we will tell the parser to use "," as the decimal separator
       and ";" as list argument separator.*/

    const char *expression = "pow(2,2; 2)"; // Instead of "pow(2.2, 2)"
    std::cout << "Evaluating:\n\t" << expression << "\n";

    te_parser tep;
    tep.set_decimal_separator(',');
    tep.set_list_separator(';');

    if (tep.compile(expression))
    {
        const double r = tep.evaluate();
        std::cout << "Result:\n\t" << r << "\n";
    }
    else

```

```

    {
        /* Show the user where the error is at. */
        std::cout << "\t " << std::setfill(' ') <<
            std::setw(tep.get_last_error_position()) << '^' <<
            "\tError near here\n";
    }

    return EXIT_SUCCESS;
}

```

9.5 Example 5: Binding to Custom Classes

A class derived from `te_expr` can be bound to custom functions. This enables you to have full access to an object (via these functions) when parsing an expression.

The following demonstrates creating a `te_expr`-derived class which contains an array of values:

```

class te_expr_array : public te_expr
{
public:
    explicit te_expr_array(const variable_flags type) noexcept :
        te_expr(type) {}
    std::array<double, 5> m_data = { 5, 6, 7, 8, 9 };
};

```

Next, create two functions that can accept this object and perform actions on it. (Note that proper error handling is not shown for brevity.):

```

// Returns the value of a cell from the object's data.
double cell(const te_expr* context, double a)
{
    auto* c = dynamic_cast<const te_expr_array*>(context);
    return static_cast<double>(c->m_data[static_cast<size_t>(a)]);
}

// Returns the max value of the object's data.
double cell_max(const te_expr* context)
{
    auto* c = dynamic_cast<const te_expr_array*>(context);
    return static_cast<double>(
        *std::max_element(c->m_data.cbegin(), c->m_data.cend()));
}

```

Finally, create an instance of the class and connect the custom functions to it, while also adding them to the parser:

```

te_expr_array teArray{ TE_DEFAULT };

te_parser tep;
tep.set_variables_and_functions(
{

```



```
        {"cell", cell, TE_DEFAULT, &teArray},
        {"cellmax", cell_max, TE_DEFAULT, &teArray}
    });

    // Change the object's data and evaluate their summation
    // (will be 30).
    teArray.m_data = { 6, 7, 8, 5, 4 };
    auto result = tep.evaluate("SUM(CELL 0, CELL 1, CELL 2, CELL 3, CELL 4)");

    // Call the other function, getting the object's max value
    // (will be 8).
    res = tep.evaluate("CellMax()");
```


Chapter 10

Custom Extensions

10.1 Binding to Custom Functions

*TinyExpr++() can also call custom functions. Here is a short example:

```
double my_sum(double a, double b)
{
    /* Example function that adds two numbers together. */
    return a + b;
}

te_parser tep;
tep.set_variables_and_functions(
{
    { "mysum", my_sum } // function pointer
});

const double r = tep.evaluate("mysum(5, 6)");
// will be 11
```

Here is an example of using a lambda:

```
te_parser tep;
tep.set_variables_and_functions({
    { "mysum",
      [](double a, double b) noexcept
      { return a + b; } }
});

const double r = tep.evaluate("mysum(5, 6)");
// will be 11
```

10.2 Binding to Custom Classes

A class derived from `te_expr` can be bound to custom functions. This enables you to have full access to an object (via these functions) when parsing an expression.

The following demonstrates creating a `te_expr`-derived class which contains an array of values:

```
class te_expr_array : public te_expr
{
public:
    explicit te_expr_array(const variable_flags type) noexcept :
        te_expr(type) {}
    std::array<double, 5> m_data = { 5, 6, 7, 8, 9 };
};
```

Next, create two functions that can accept this object and perform actions on it. (Note that proper error handling is not included for brevity.):

```
// Returns the value of a cell from the object's data.
double cell(const te_expr* context, double a)
{
    auto* c = dynamic_cast<const te_expr_array*>(context);
    return static_cast<double>(c->m_data[static_cast<size_t>(a)]);
}

// Returns the max value of the object's data.
double cell_max(const te_expr* context)
{
    auto* c = dynamic_cast<const te_expr_array*>(context);
    return static_cast<double>(
        *std::max_element(c->m_data.cbegin(), c->m_data.cend()));
}
```

Finally, create an instance of the class and connect the custom functions to it, while also adding them to the parser:

```
te_expr_array teArray{ TE_DEFAULT };

te_parser tep;
tep.set_variables_and_functions(
{
    {"cell", cell, TE_DEFAULT, &teArray},
    {"cellmax", cell_max, TE_DEFAULT, &teArray}
});

// change the object's data and evaluate their summation
// (will be 30)
teArray.m_data = { 6, 7, 8, 5, 4 };
auto result = tep.evaluate("SUM(CELL 0, CELL 1, CELL 2, CELL 3, CELL 4)");

// call the other function, getting the object's max value
// (will be 8)
res = tep.evaluate("CellMax()");
```

Chapter 11

Non-US Formatted Formulas

TinyExpr++ supports other locales and non-US formatted formulas. Here is an example:

```
#include "tinyexpr.h"
#include <iostream>
#include <iomanip>
#include <locale>
#include <ctype>

int main(int argc, char *argv[])
{
    /* Set locale to German.
       This string is platform dependent. The following works on Windows,
       consult your platform's documentation for more details.*/
    setlocale(LC_ALL, "de-DE");
    std::locale::global(std::locale("de-DE"));

    /* After setting your locale to German, functions like strtod() will fail
       with values like "3.14" because it expects "3,14" instead.
       To fix this, we will tell the parser to use "," as the decimal separator
       and ";" as list argument separator.*/

    const char *expression = "pow(2,2; 2)"; // instead of "pow(2.2, 2)"
    std::cout << "Evaluating:\n\t" << expression << "\n";

    te_parser tep;
    tep.set_decimal_separator(',');
    tep.set_list_separator(';');

    /* This will compile the expression and check for errors. */
    auto r = tep.evaluate(expression);

    if (tep.success())
    {
        const double r = tep.evaluate(expression);
        std::cout << "Result:\n\t" << r << "\n";
    }
    else
    {

```

```
/* Show the user where the error is at. */
std::cout << "\t " << std::setfill(' ') <<
    std::setw(tep.get_last_error_position()) << '^' <<
    "\tError near here\n";
}

return EXIT_SUCCESS;
}
```


This produces the output:

```
$ Evaluating:
  pow(2,2; 2)
Result:
  4,840000
```


Chapter 12

How it Works

`te_parser::evaluate()` uses a simple recursive descent parser to compile your expression into a syntax tree. For example, the expression "`sin x + 1/4`" parses as:

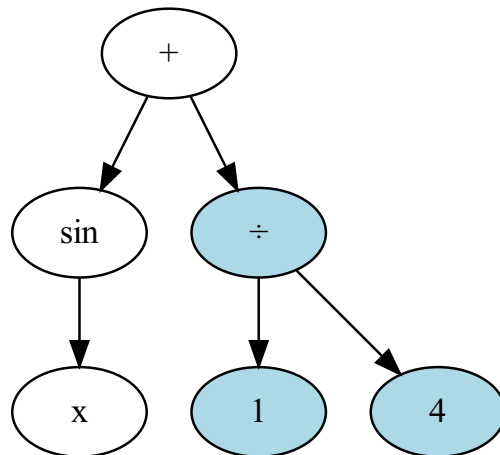

`te_parser::evaluate()` also automatically prunes constant branches. In this example, the compiled expression returned by `compile()` would become:

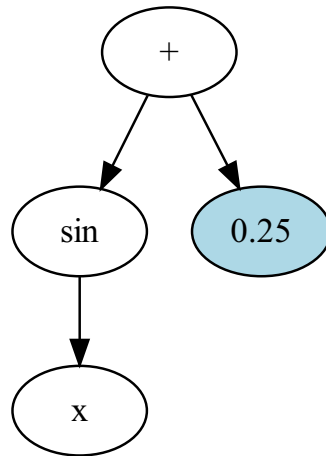

12.1 Grammar

TinyExpr++ parses the following grammar (from lowest-to-highest operator precedence):

```

<list>      =    <expr> {("," | ";" [dependent on locale]) <expr>}
<expr>      =    <term> {"&" | "|" } <term>}
<expr>      =    <term> {"<" | "!=" | "=" | "<" | "<=") | ">" | ">=") <term>}
<expr>      =    <term> {"<<" | ">>"} <term>}
<expr>      =    <term> {"+" | "-"} <term>}
<term>      =    <factor> {"*" | "/" | "%"} <factor>}
<factor>    =    <power> {"^" | "**"} <power>}
<power>     =    {"-" | "+"} <base>
<base>      =    <constant>
               | <variable>
               | <function-0> {"(" " ")}
               | <function-1> <power>
               | <function-X> "(" <expr> {"," <expr>} ")"
               | "(" <list> ")"
  
```

In addition, whitespace between tokens is ignored.

Valid variable names consist of a letter followed by any combination of: letters **a** through **z** or **A** through **Z**, the digits 0 through 9, and underscore. Constants can be integers, decimal numbers, or in scientific notation (e.g., `1e3` for 1000). A leading zero is not required (e.g., `.5` for 0.5).

Chapter 13

Compile-time Options

13.1 TE_POW_FROM_RIGHT

By default, *TinyExpr++* does exponentiation from left to right. For example:

$a^b^c == (a^b)^c$ and $-a^b == (-a)^b$

This is by design; it's the way that spreadsheets do it (e.g., *LibreOffice Calc*, *Excel*, *Google Sheets*).

If you would rather have exponentiation work from right to left, you need to define `TE_POW_FROM_RIGHT` when compiling. With `TE_POW_FROM_RIGHT` defined, the behavior is:

$a^b^c == a^{(b^c)}$ and $-a^b == -(a^b)$

That will match how many scripting languages do it (e.g., Python, Ruby).

Note that symbols can be defined by passing them to your compiler's command line (or in a Cmake configuration) as such: `-DTE_POW_FROM_RIGHT`

Chapter 14

Embedded Programming

The following section discusses topics related to using *TinyExpr++* in an embedded environment.

14.1 Performance

TinyExpr++ is fairly fast compared to compiled C when the expression is short, when the expression does hard calculations (e.g., exponentiation), and when some of the work can be simplified by `evaluate()`. *TinyExpr++* is slow compared to C when the expression is long and involves only basic arithmetic.

Here are some example benchmarks:

| Expression | <i>TinyExpr++</i> | Native C | Comparison |
|--|-------------------|----------|---------------|
| <code>sqrt(a^{1.5}+a^{2.5})</code> | 1,707 ns | 58.25 ns | 29% slower |
| <code>a+5</code> | 535 ns | 0.67 ns | 798% slower |
| <code>a+(5*2)</code> | 0.73 ns | 969 ns | 1,327% slower |
| <code>(a+5)*2</code> | 0.66 ns | 980 ns | 1,484% slower |
| <code>(1/(a+1)+2/(a+2)+3/(a+3))</code> | 3,388 ns | 3.941 ns | 859% slower |

Note that *TinyExpr++* is slower compared to *TinyExpr* because of additional type safety checks (e.g., the use of `std::variant` instead of unions).

14.2 Volatility

If needing to use a `te_parser` object as `volatile` (e.g., accessing it in a system interrupt), then you will need to do the following.

First, declare your `te_parser` as a non-volatile object outside of the interrupt function (e.g., globally):

```
te_parser tep;
```

Then, in your interrupt function, create a `volatile` reference to it:

```
void OnInterrupt()
{
    volatile te_parser& vTep = tep;
}
```

Functions in `te_parser` which have `volatile` overloads can then be called directly:

```
void OnInterrupt()
{
    volatile te_parser& vTep = tep;
    vTep.set_list_separator(',');
    vTep.set_decimal_separator('.');
}
```

The following functions in the `te_parser` class have `volatile` overloads:

- `get_result()`
- `success()`
- `get_last_error_position()`
- `get_decimal_separator()`
- `set_decimal_separator()`
- `get_list_separator()`
- `set_list_separator()`

For any other functions, use `const_cast<>` to remove the parser reference's volatility:

```
void OnInterrupt()
{
    volatile te_parser& vTep = tep;

    // Use 'const_cast<te_parser&>(vTep)' to access
    // non-volatile functions.
    const_cast<te_parser&>(vTep).set_variables_and_functions(
        { {"STRESS_L", 10.1},
          {"P_LEVEL", .5} });
    const_cast<te_parser&>(vTep).compile(("STRESS_L*P_LEVEL"));

    if (vTep.success())
    {
        auto res = vTep.get_result();
        // Do something else...
    }
}
```

Note that it is required to make the initial declaration of your `te_parser` non-volatile; otherwise, the `const_cast<>` to the `volatile` reference will cause undefined behavior.

14.3 Exception Handling

TinyExpr++ requires exception handling, although it does attempt to minimize the use of exceptions (e.g., `noexcept` is used extensively). Syntax errors will be reported without the use of exceptions; issues such as division by zero or arithmetic overflows, however, will internally use exceptions. The parser will trap these exceptions and return NaN (not a number) as the result.

Exceptions can also be thrown when defining custom functions or variables which do not follow the proper naming convention. (Function and variable names must only contain the characters `a-z`, `A-Z`, `0-9`, and `_`, and must begin with a letter.)

Finally, specifying an illegal character for a list or decimal separator will also throw.

The following functions in `te_parser` can throw and should be wrapped in `try/catch` blocks:

- `compile()`
- `evaluate()`
- `set_variables_and_functions()`
- `add_variable_or_function()`
- `set_decimal_separator()`
- `set_list_separator()`

The caught `std::runtime_error` exception will provide a description of the error in its `what()` method.

14.4 Virtual Functions

TinyExpr++ does not use virtual functions or derived classes, unless you create a custom class derived from `te_expr` yourself (refer to Example 5). (`te_expr` defines a virtual destructor that may be implicitly optimized to `final` if no derived classes are defined.)

Part III

Appendix

References

Winkle, Lewis Van. C Math Evaluation Library: TinyExpr. 2016, codeplea.com/tinyexpr.

