

Javelin

Compact systems offering broad diffusion, or precise wall grazing optics


Product Code: JAV-018-SFC-W27W5790-1400-F15-ANO

Javelin is a versatile, compact linear system that is capable of performing a variety of lighting functions due to its broad range of optical options and compatibility with most LED output types.

All Digilin linear systems are manufactured in Australia to custom project lengths and supplied with factory-fitted connectors using Digilin’s chemical anchoring process for super durability and ease of installation. The system can undergo Digilin’s shield exterior coating service to upgrade its protection to an IP65 rating for outdoor applications.



LED Colour	Tuneable White	
CCT/Wavelength	2700K	5700K
LED Lumens	1210lm/m	1340lm/m
Power	20W/m	
Input Current	830mA/m	
Input Voltage	24VDC	
Typical CRI	90+	
LED Performance	L70 (10k) >60,000hrs	
LED Configuration	Single Tuneable White 1400lm LED	
LED Module Increment	55.6mm	
LED Spacing	9.26mm	
Maximum Continuous Run	10m (Single Feed), 20mm (Dual Feed)	
Body Width	21mm	
Mounting	Surface Mount	
Beam Option	15° Frost Lens	
Finish Colour	Natural Anodised Aluminium	
Control	Mains/Phase, DALI, Smooth DALI, DMX, Bluetooth, Non-Dim	
Driver Placement	Remote	
Build Material	Extruded Aluminium	
Luminaire IP Rating	IP20	
LED Module IP Rating	IP20 (IP44 & IP65 available)	
Dimensions - Diffusers	~21mm (width), 16.5mm (height)	
Dimensions - Lenses	~21mm (width), 17.5-21mm (height)	

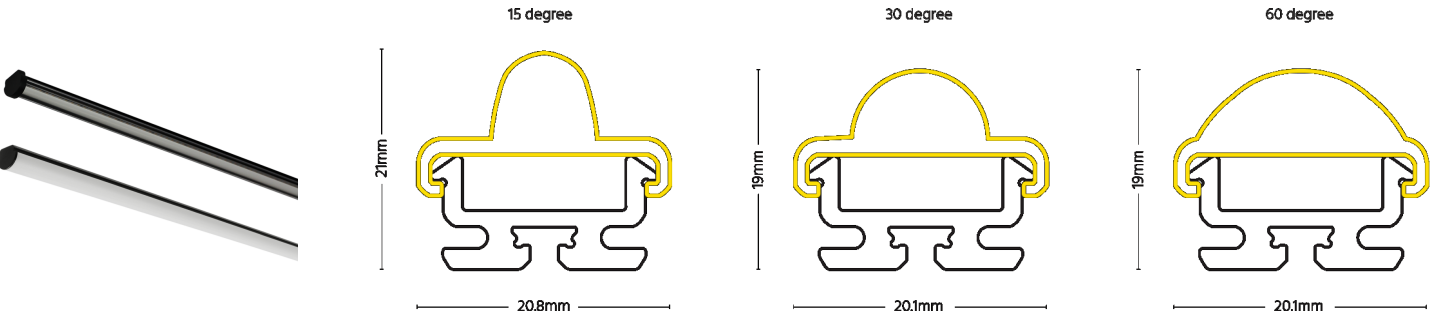

Specifications are subject to change without notice