

# PAPER TITLE TO BE DEFINED (in common.yaml)

10-DE genes across pseudotime

2022-01-11 16:46:01 +0100

## Abstract

Lung interstitium macrophages (IMs) are non-alveolar resident tissue macrophages which contribute to the lung homeostasis. These cells were reported to be heterogeneous by our group and other teams, which contains two main distinct subpopulations: CD206+ IMs and CD206- IMs. However, the exact origin of IMs and the transcriptional programs that control IM differentiation remains unclear. In recent report, we analyzed the refilled IMs in the course of time after induced IM depletion with single-cell RNA sequencing (10X Genomics Chromium) and bulk RNA sequencing.

## Contents

|   |           |
|---|-----------|
| <b>1 Description</b>  | <b>2</b>  |
| <b>2 Prepare data</b>   | <b>2</b>  |
| <b>3 DE gene expression across IM-differentiation</b>   | <b>3</b>  |
| 3.1 Annotate the cells associated to either differentiation of CD206+ IMs or CD206- IMs . . . . . | 6         |
| <b>4 TradeSeq analysis for the differentiation of monocytes to either of IM subsets</b>           | <b>6</b>  |
| 4.1 Construct sce object for TradeSeq . . . . .   | 6         |
| 4.2 Clustering using RSEC, clusterExperiment . . . . .  | 8         |
| <b>5 Show gene expression pattern calculated by TradeSeq in heatmap</b>                           | <b>10</b> |
| 5.1 Data preparation . . . . .  | 10        |
| 5.2 Draw heatmap . . . . .  | 10        |
| 5.3 Annotate DE genes as CD206+/CD206- IM differentiation specific or common genes . . . . .      | 11        |
| 5.4 Draw heatmap with expression patterns of unchanged/common genes in the order of pseudotime    | 14        |
| 5.5 Make with changed/specific genes . . . . .  | 16        |
| 5.6 GO enrichment on the changed/specific genes . . . . .   | 18        |
| <b>6 Functionality analysis of DE genes across pseudotime (common genes)</b>                      | <b>21</b> |
| 6.1 Manually classify genes by expression timing peak . . . . .                                   | 21        |
| 6.2 GO/KEGG enrichment analysis with 3 classes of common genes . . . . .                          | 21        |
| <b>7 Show gene expression pattern with TradeSeq results</b>                                       | <b>26</b> |
| 7.1 Class 1 common genes . . . . .  | 26        |
| 7.2 Class 2 common genes . . . . .  | 27        |
| 7.3 Class 3 common genes . . . . .  | 29        |
| <b>8 Session information</b>  | <b>32</b> |
| <b>9 References</b>   | <b>34</b> |


## 1 Description

## 2 Prepare data

```
suppressMessages(  
{  
library(Seurat)  
library(ComplexHeatmap)  
library(ggplot2)  
library(dplyr)  
library(RColorBrewer)  
library(circlize)  
library(monocle3)  
})  
  
mo <- readRDS(file = ".../9-Monocle_analysis_and_pseudotime_estimation/Mono_to_IM.cds")
```

Show trajectory in UMAP plot:

```
pal2 <- c(`Classical_Mono`="#A6CEE3",  
          `MHCII_IM`="#B2DF8A",  
          `CD206_IM`="#33A02C",  
          `Transit` = "#E31A1C")  
  
plot_cells(cds = mo, color_cells_by = "cell.type2",  
           cell_size = 1, label_cell_groups = FALSE,  
           label_branch_points = TRUE, label_leaves = TRUE,  
           label_roots = FALSE, alpha = 1) +  
           scale_color_manual(values = pal2)
```

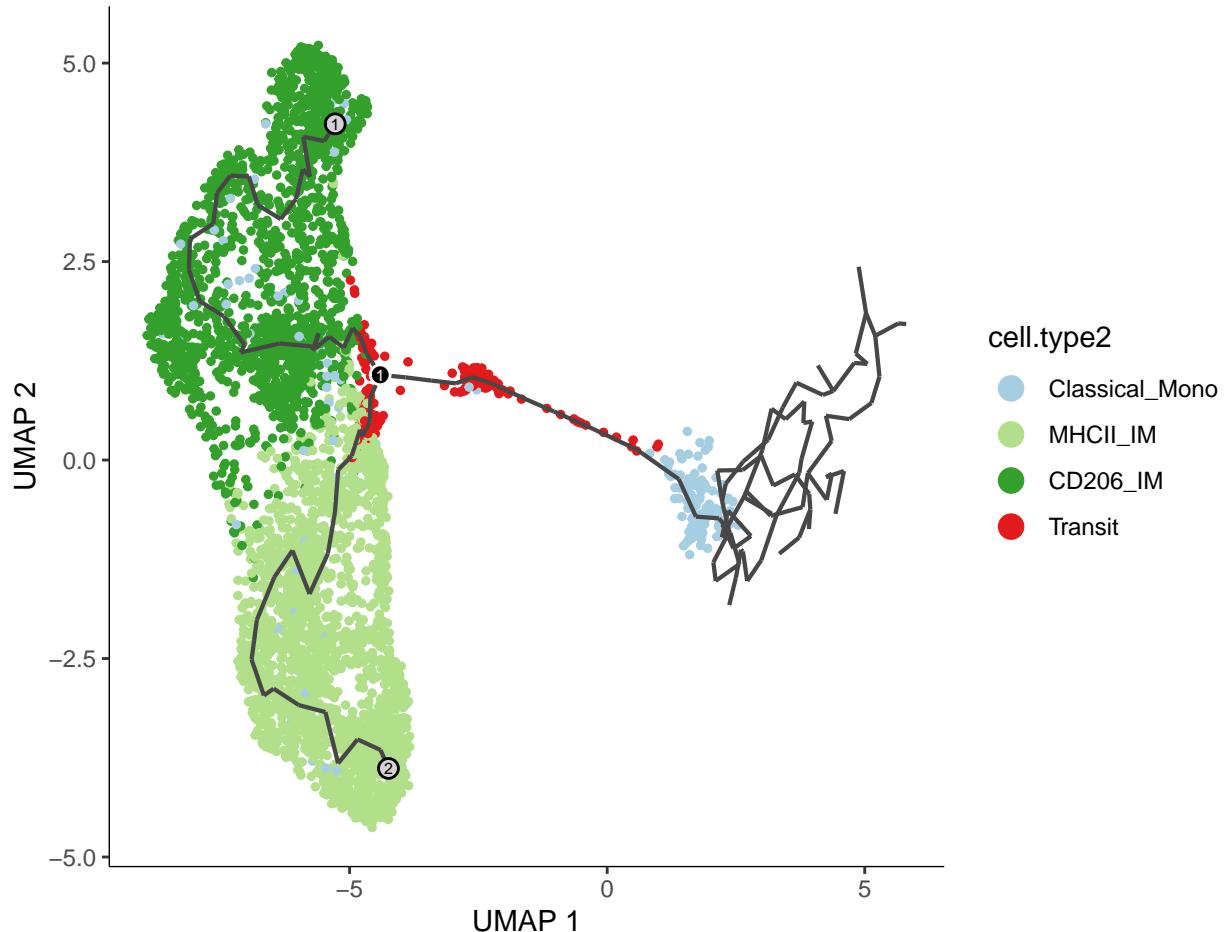

```
ggsave(filename = ".../Figures/UMAPplot_trajectory.pdf", width = 6.5, height = 5) 1
```

### 3 DE gene expression across IM-differentiation

DE genes across pseudotime of IM differentiation ## Across pseudotime of IM differentiation

Prepare matrix with z-scores, smoothed and scaled data across pseudotime for heatmap.

```
pt.matrix <- exprs(mo)[match(genes, rownames(rowData(mo))), order(pseudotime(mo))] 1
cellnames <- colnames(pt.matrix)
#Can also use "normalized_counts" instead of "exprs" to use various normalization methods, for example:
#normalized_counts(cds, norm_method = "log") 2
#3
#4
#5
#6
#7
#8
#9
```

```
pt.matrix <- t(apply(pt.matrix, 1, function(x){smooth.spline(x, df=3)$y})) 6
pt.matrix <- t(apply(pt.matrix, 1, function(x){(x-mean(x))/sd(x)})) 7
rownames(pt.matrix) <- genes 8
colnames(pt.matrix) <- cellnames 9
```


Show DE genes in unsupervised heatmap.

```
|| #K means with 6 groups 1
```

```

htkm <- Heatmap(
  pt.matrix,
  # use_raster = FALSE, # use FALSE to export to vector image.
  name                = "z-score",
  col                 = colorRamp2(seq(from=-2,to=2,length=11),
    rev(brewer.pal(11, "Spectral"))),
  show_row_names       = FALSE,
  show_column_names    = FALSE,
  row_names_gp         = gpar(fontsize = 3),
  row_km = 6,
  row_km_repeats = 31,
  row_dend_reorder = TRUE,
  row_title_rot        = 0,
  cluster_rows          = TRUE,
  cluster_row_slices    = FALSE,
  cluster_columns        = FALSE,
)
htkm <- draw(htkm)

```

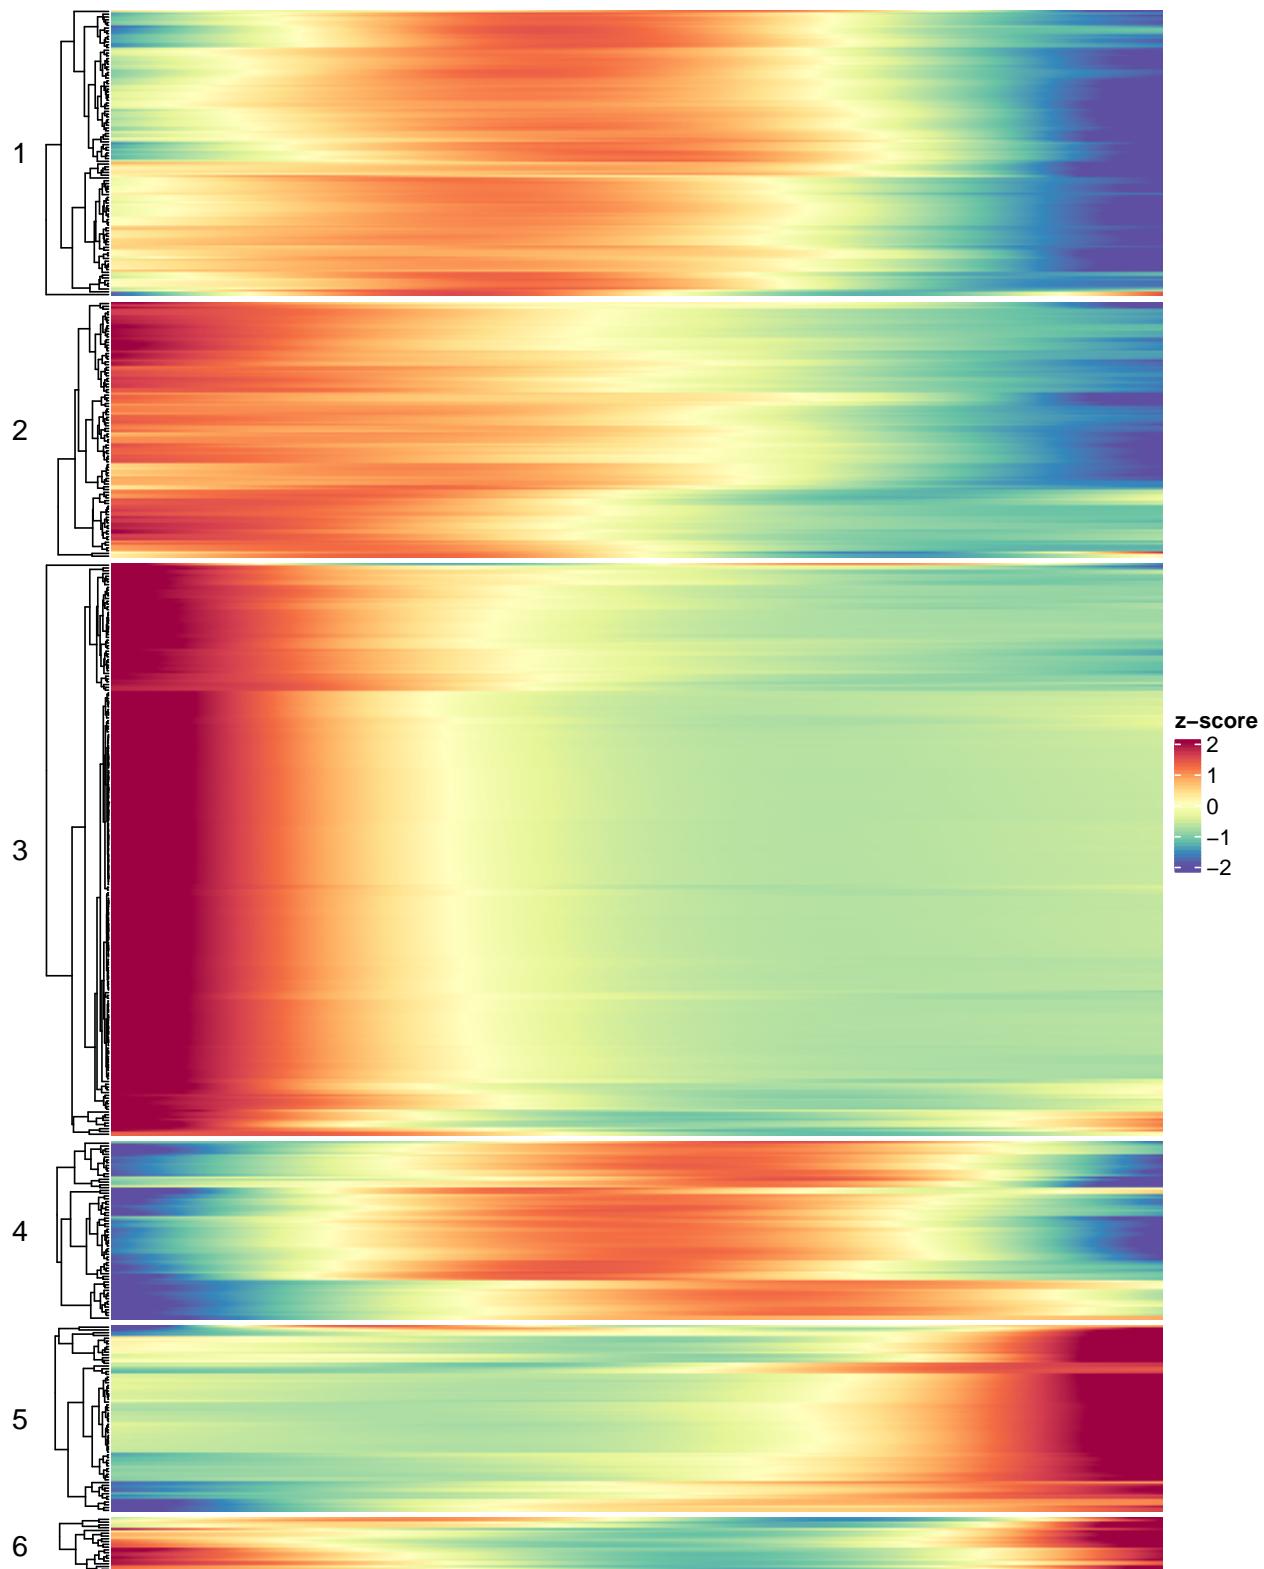

In this heatmap, the x axis is pseudotime, which represents differentiation state from monocytes (left) to IMs (right).

### 3.1 Annotate the cells associated to either differentiation of CD206+ IMs or CD206- IMs

```

library(magrittr)                                     1
# Get the closest vertice for every cell           2
y_to_cells <- mo@principal_graph_aux$UMAP$pr_graph_cell_proj_closest_ 3
  vertex%>%as.data.frame()

y_to_cells$cells <- rownames(y_to_cells)           4
y_to_cells$Y <- y_to_cells$V1                      5

# Get the root vertices                           6
# It is the same node as above                  7
root <- mo@principal_graph_aux$UMAP$root_pr_nodes 8

principalgraph <- mo@principal_graph$UMAP          9

# Get the other endpoints                         10
endpoints <- names(which(igraph::degree(principalgraph) == 1))    11
endpoints <- endpoints[!endpoints %in% root]        12

# For each endpoint                            13
cellWeights <- lapply(endpoints, function(endpoint) { 14
  # We find the path between the endpoint and the root 15
  path <- igraph::shortest_paths(principalgraph, root, endpoint)$vpath 16
  [[1]]
  path <- as.character(path)                         17
  # We find the cells that map along that path      18
  df <- y_to_cells[y_to_cells$Y %in% path, ]         19
  df <- data.frame(weights = as.numeric(colnames(mo) %in% df$cells)) 20
  colnames(df) <- endpoint                         21
  return(df)
}) %>% do.call(what = 'cbind', args = .) %>%
  as.matrix()                                       22
rownames(cellWeights) <- colnames(mo)               23
colnames(cellWeights) <- c("CD206_IM_branch", "MHCII_IM_branch") 24
pseudotime <- matrix(mo@principal_graph_aux$UMAP$pseudotime, ncol = ncol( 25
  cellWeights),                                26
  nrow = ncol(mo), byrow = FALSE)                27
rownames(pseudotime) <- colnames(mo)               28

```

## 4 TradeSeq analysis for the differentiation of monocytes to either of IM subsets

### 4.1 Construct sce object for TradeSeq

```

suppressMessages(library(tradeSeq))                 1

# this step is VERY time consuming                2
sce <- fitGAM(counts = mo@assays$data$counts,       3
  pseudotime = pseudotime,
  cellWeights = cellWeights)                     4

```

```
saveRDS(sce, file = "./sce.4339cells.newversion.Rds")
```

5  
6

Between-lineage comparisons (CD206+ IM vs CD206- IM differentiation) ## Between-lineage comparisons (CD206+ IM vs CD206- IM differentiation)

Association of gene expression with pseudotime (find significant DE genes along pseudotime).

```
assoRes <- associationTest(sce)
endRes <- diffEndTest(sce)
head(assoRes)
```


```
## # A tibble: 6 x 4
##   waldStat     df      pvalue  meanLogFC
##       <dbl>    <dbl>      <dbl>      <dbl>
## 1     210.      9     0.222
## 2     28.4      9    0.000815
## 3       NA      NA     NA     0.121
## 4     41.8      9    0.00000360
## 5     36.4      9    0.0000330
## 6     45.1      9    0.000000880
```

1  
2  
3  
4  
5  
6  
7  
8  
9

Plot the most sig gene:

```
library(ggplot2)
o <- order(endRes$waldStat, decreasing = TRUE)
sigGene <- names(sce)[o[1]]
plotSmoothers(sce, counts = counts(sce), gene = sigGene
               #, curvesCol = c("#33A02C", "#B2DF8A")
               ) + ggtitle(sigGene)
```

1  
2  
3  
4  
5  
6

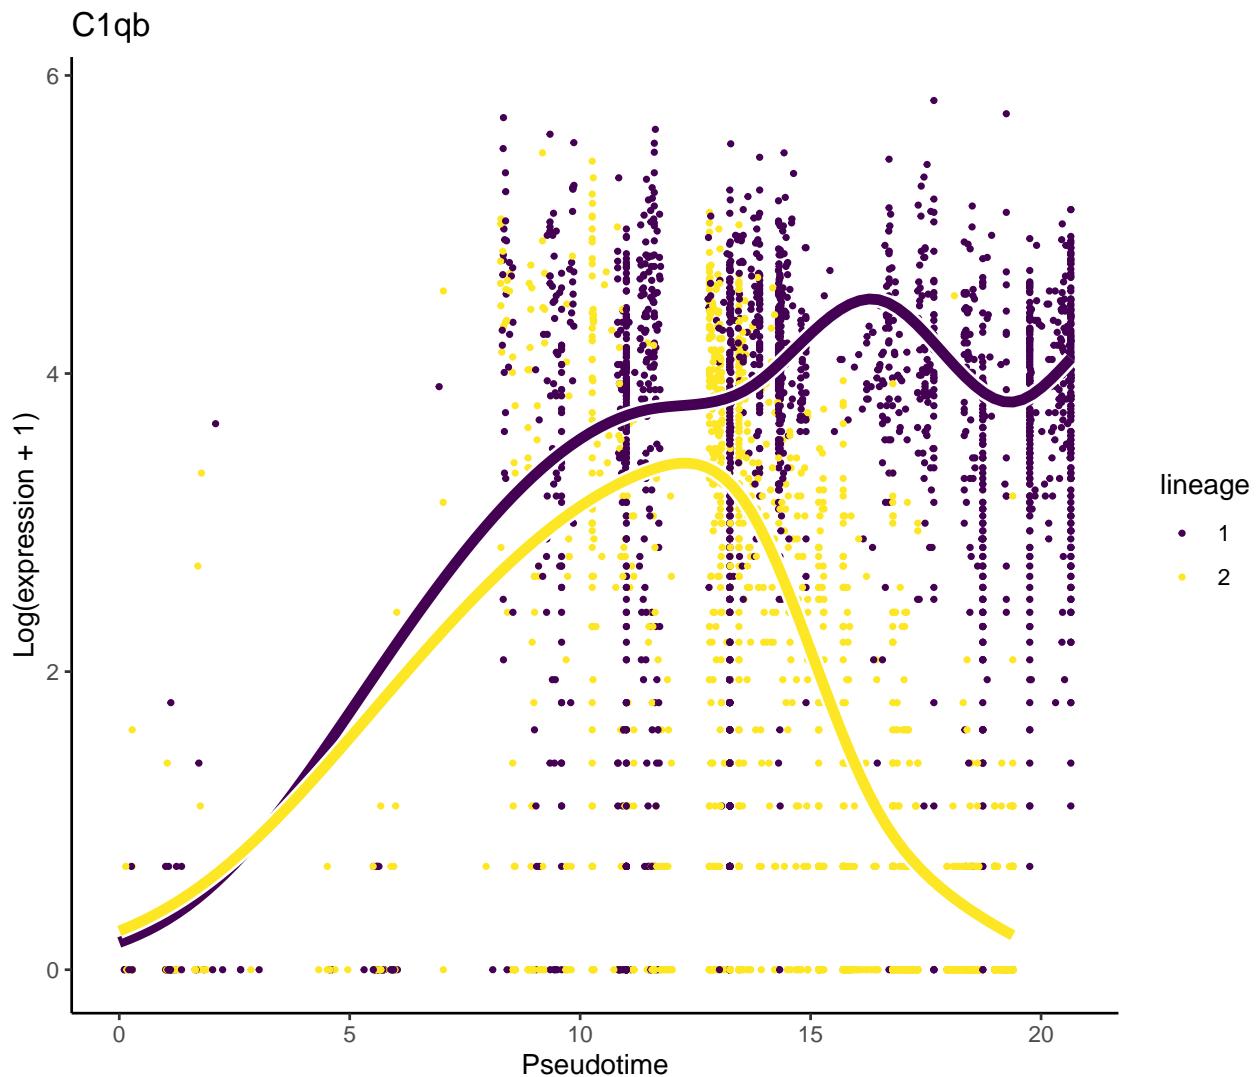

What's the top genes?

```

names(sce)[o[1:20]]  

## [1] "C1qb"      "Ctsb"       "C1qa"       "Selenop"    "Csf1r"      "Timp2"      "Pf4"        1  

## [8] "C1qc"      "Serinc3"    "Cd209a"    "Lsp1"       "Lgmn"       "Apoe"       "Blvrb"     2  

## [15] "Olfm1"     "Tnip3"      "Rpl13"      "Ninj1"      "Rpl28"      "H2-DMb1"   3

```

## 4.2 Clustering using RSEC, clusterExperiment

tradeSeq provides the functionality to cluster genes according to their expression pattern along the lineages with the clusterExpressionPatterns function. A number of equally spaced points for every lineage are selected to perform the clustering, and the number of points can be selected with the nPoints argument. (from vignette("tradeSeq"))

```

library(clusterExperiment)
nPointsClus <- 20 # The number of points to use for clustering the  

# expression patterns..
clusPat <- clusterExpressionPatterns(sce ,  


```

```

nPoints = nPointsClus,
genes = genes,
random.seed = 43,
beta = 0.2
)

## 36 parameter combinations, 36 use sequential method, 36 use subsampling
## Running Clustering on Parameter Combinations...
## done.

clusterLabels <- primaryCluster(clusPat$rsec)


cUniq <- unique(clusterLabels) #
cUniq <- cUniq[!cUniq == -1] # remove unclustered genes

# cUniq <- cUniq[cUniq == -1]
#Any samples not found as part of a homogenous set of clusters at that
# point will be classified as unclustered (given a value of -1)

# beta: value between 0 and 1 to decide how stable cluster membership
# has to be before 'finding' and removing the cluster.
if (exists("p.total")) { rm(p.total)}

for (xx in cUniq) {
  cId <- which(clusterLabels == xx)
  p <- ggplot(data = data.frame(x = 1:nPointsClus,
                                 y = rep(range(clusPat$yhatScaled[cId, ]),
                                         nPointsClus / 2)),
               aes(x = x, y = y)) +
    geom_point(alpha = 0) +
    labs(title = paste0("Cluster", xx), x = "Pseudotime", y = "
Normalized expression") +
    theme_classic() +
    theme(plot.title = element_text(hjust = 0.5))
  for (ii in 1:length(cId)) {
    geneId <- rownames(clusPat$yhatScaled)[cId[ii]]
    p <- p +
      geom_line(data = data.frame(x = rep(1:nPointsClus, 2),
                                   y = clusPat$yhatScaled[geneId, ],
                                   lineage = rep(0:1, each = nPointsClus)),
                 aes(col = as.character(lineage), group = lineage), lwd =
                   1.5)
  }
  p <- p + guides(color = "none") +
    scale_color_manual(values = c("#33A02C", "#B2DF8A"),
                       breaks = c("0", "1"))
  if (exists("p.total")) { p.total <- p.total + p} else {p.total <- p}
}
print(p.total)

```

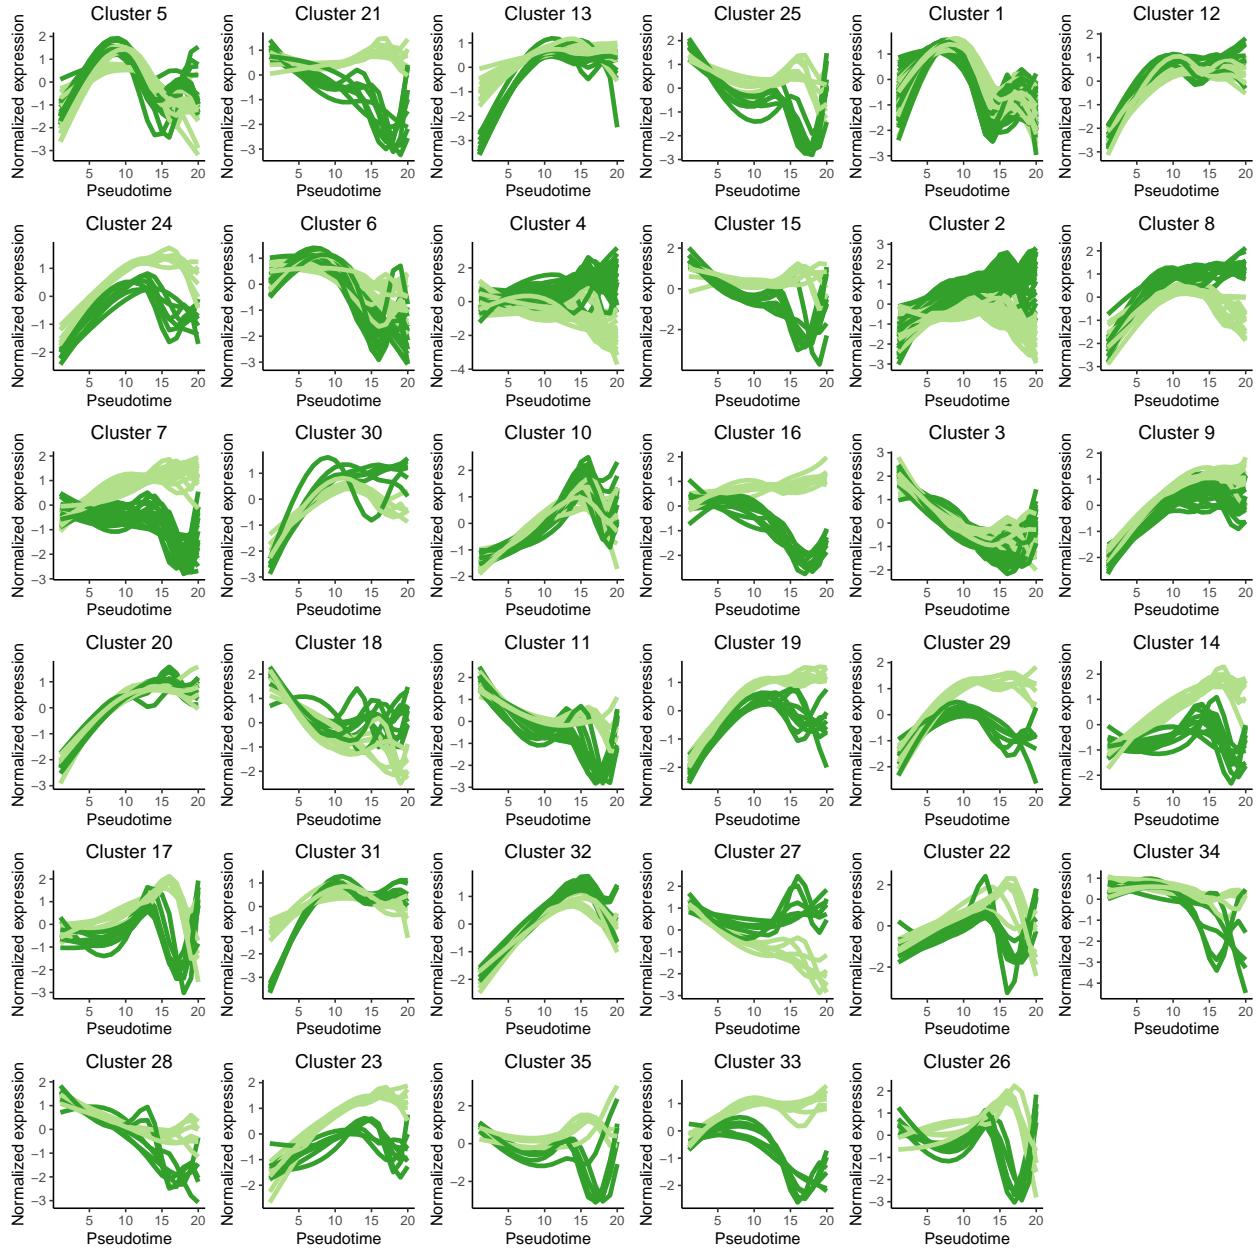

## 5 Show gene expression pattern calculated by TradeSeq in heatmap

### 5.1 Data preparation

Here we use the DE genes calculated in DE genes across pseudotime of IM differentiation.


```
yhatSmooth <- predictSmooth(sce, gene = genes, nPoints = 100, tidy = FALSE) 1
      )
yhatSmoothScaled <- t(scale(t(yhatSmooth))) 2
```

### 5.2 Draw heatmap

```

heatSmooth <- Heatmap(yhatSmoothScaled, cluster_columns = FALSE, show_row_
  names = FALSE, show_column_names = FALSE, row_km = 4)
heatSmooth <- draw(heatSmooth)

```

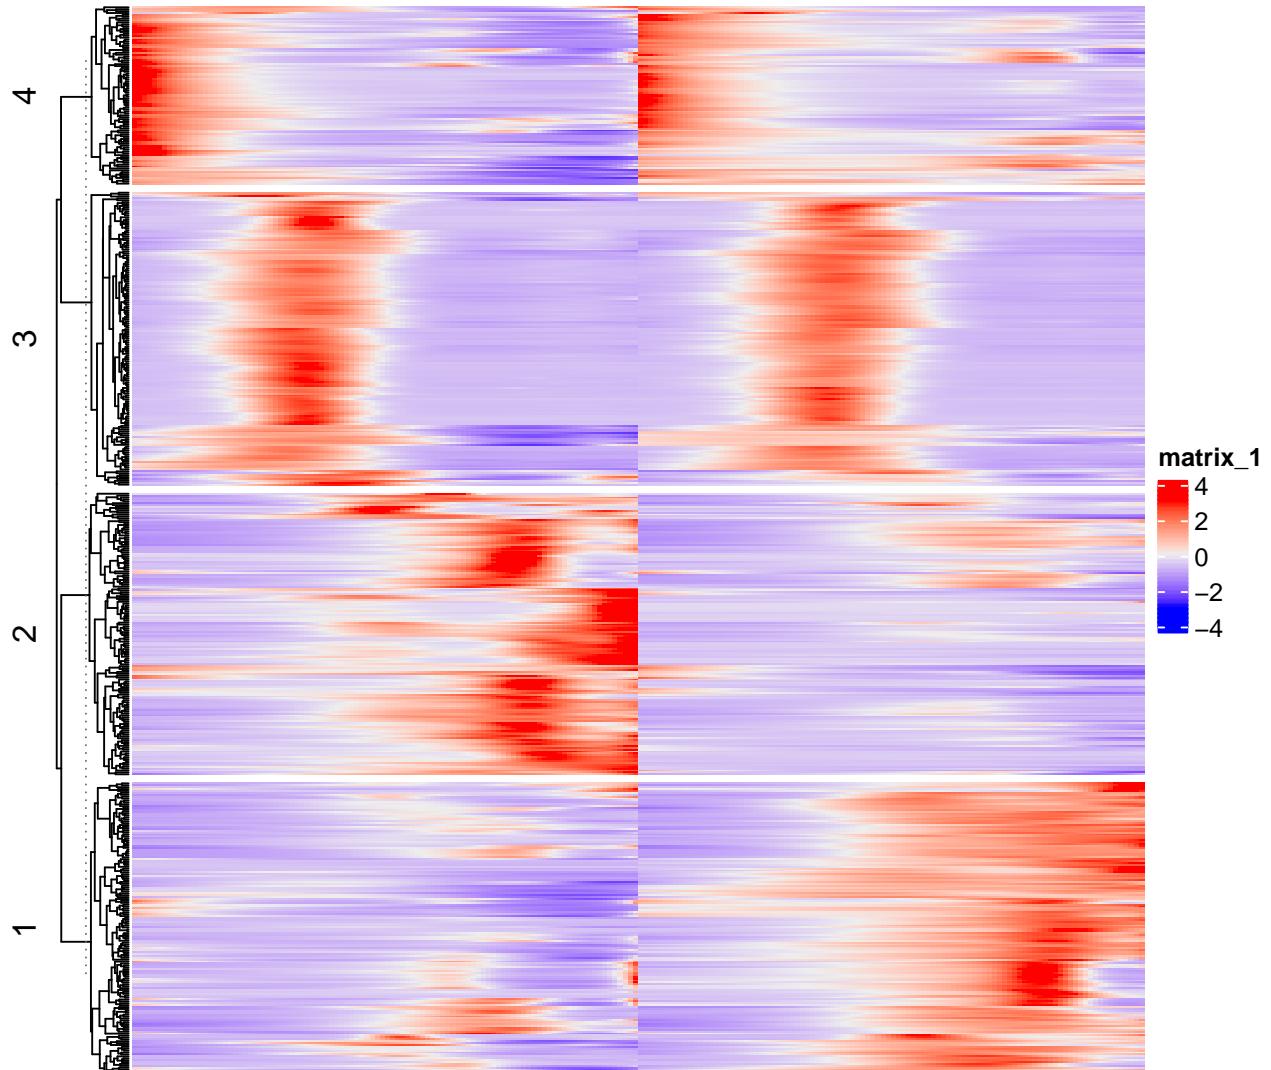

Two IM differentiation show similar patterns but some genes (especially cluster 2 and 1) are different in CD206+ and CD206-.

### 5.3 Annotate DE genes as CD206+/CD206- IM differentiation specific or common genes

According to the heatmap above, some of DE genes should remain unchanged (common) and half of them are specific to one of two IM differentiation.

We use wald statistic calculated in diffEndTest to annotate the “common” genes and “specific” genes. (in Between-lineage comparisons (CD206+ IM vs CD206- IM differentiation))

```

endRes.DE <- endRes[rownames(yhatSmooth), ]
summary(endRes.DE$waldStat)

```

|    |        |         |         |          |          |           |   |
|----|--------|---------|---------|----------|----------|-----------|---|
| ## | Min.   | 1st Qu. | Median  | Mean     | 3rd Qu.  | Max.      | 1 |
| ## | 0.0027 | 3.8599  | 41.4571 | 123.7353 | 168.7434 | 1263.9587 | 2 |

Let's use waldStat > 40 and logFC > 2 as cut threshold.

```
genes.changed <- rownames(filter(endRes.DE, waldStat > 70 & (logFC1_2 > 2
| logFC1_2 < -2) ))
genes.noChange <- setdiff(rownames(endRes.DE), genes.changed)
```

Make heatmap with unchanged/common genes.

```
heatSmooth_cd206.unchanged <- Heatmap(yhatSmoothScaled[genes.noChange,
100:1], cluster_columns = FALSE, show_row_names = FALSE, show_column_
names = FALSE, column_title = "CD206+IM")  

1  

heatSmooth_mhcii.unchanged <- Heatmap(yhatSmoothScaled[genes.noChange,
101:200], cluster_columns = FALSE, show_row_names = TRUE, row_names_gp
= gpar(fontsize = 3), show_column_names = FALSE, column_title = "MHCII
+IM")  


2  

heatSmooth_combined.unchanged <- draw (heatSmooth_cd206.unchanged +
heatSmooth_mhcii.unchanged, column_title = "Common genes", auto_adjust
= FALSE)  

3  

4  

5
```

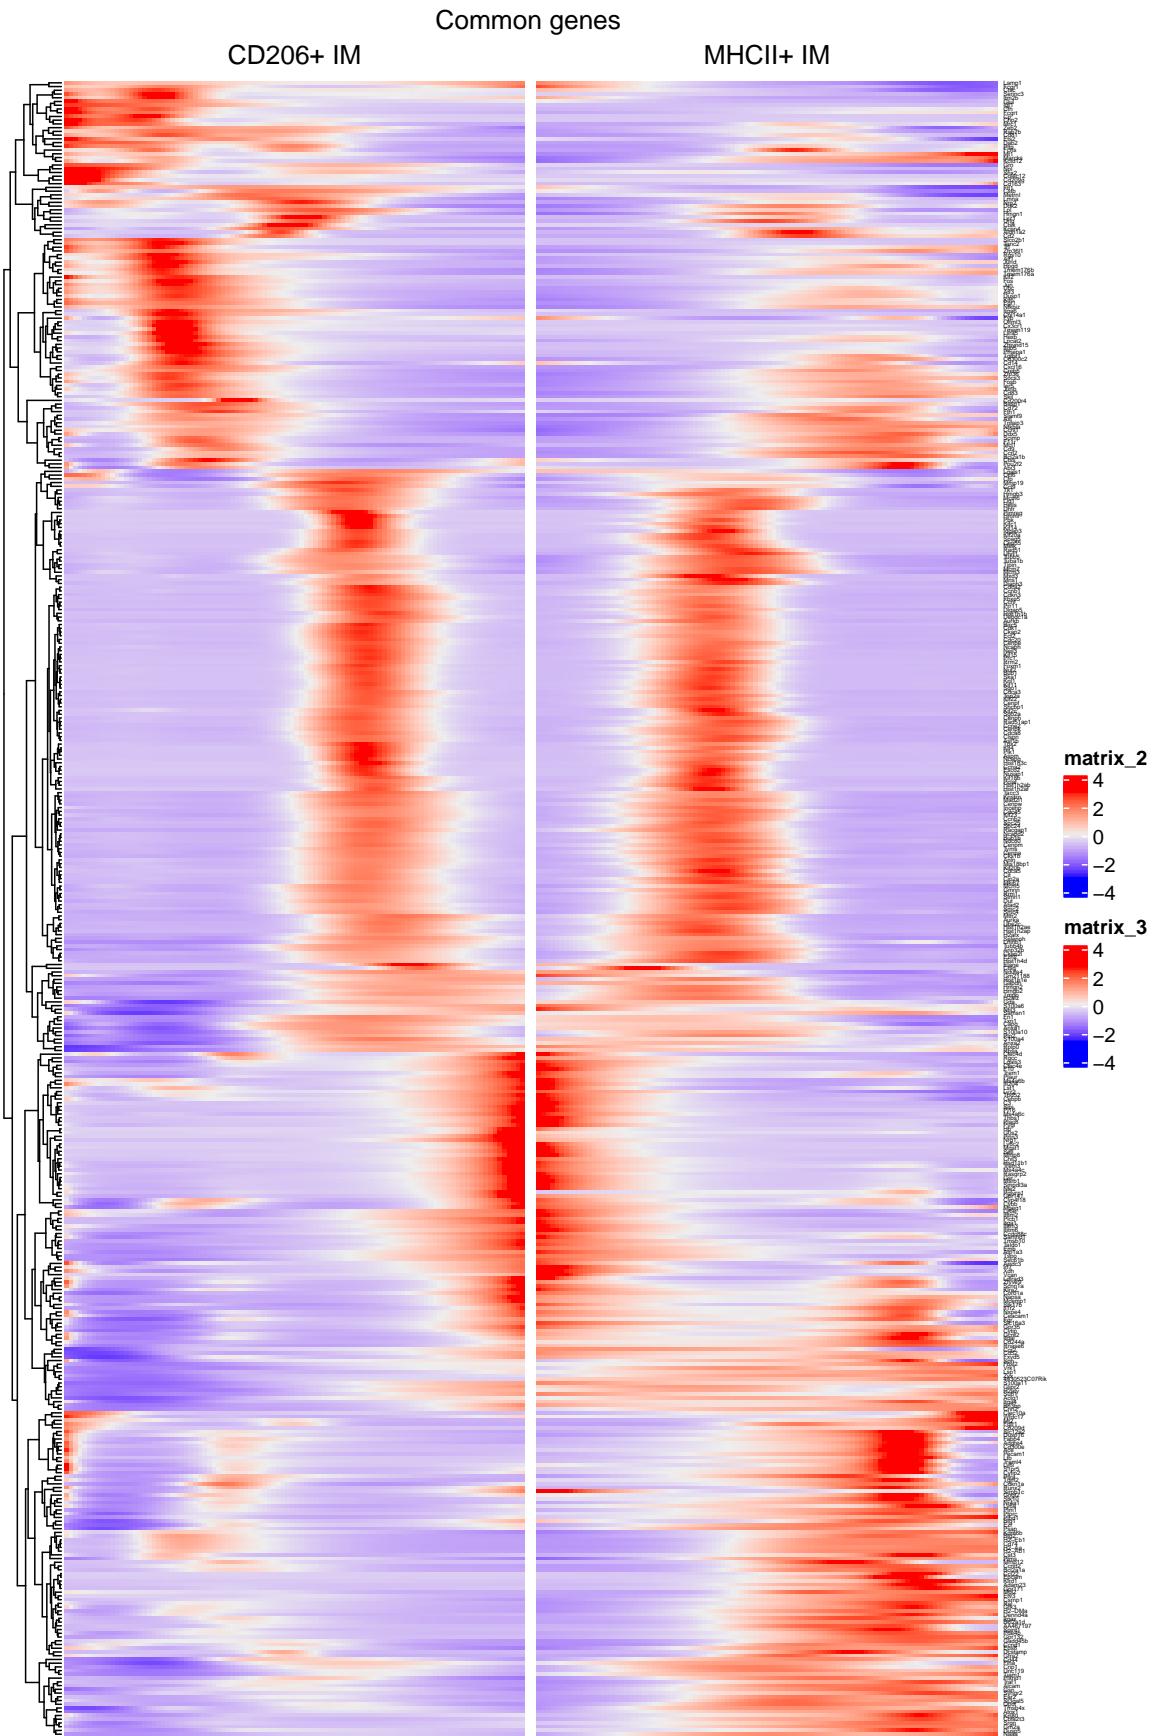

## 5.4 Draw heatmap with expression patterns of unchanged/common genes in the order of pseudotime

Let's find the expression peak of each gene:


```

1  orderbyExpressionPeak <- function(x, # matrix
2      decreasing = FALSE,
3      output.position = FALSE # if true, give
4      relative position 0 - 1, or output
5      order.
6      )
7
8  indx.peak <- apply(x, 1 , which.max)
9
10 if(output.position) {
11   po <- indx.peak/nrow(x)
12   if (! length(rownames(x)) == 0) {names(po) <- rownames(x)}
13   return(po)
14 } else {
15   o <- order(indx.peak)
16   if (! length(rownames(x)) == 0) {names(o) <- rownames(x)[o]}
17   return (o)
18 }
```

Make average peak pseudotime peak for each gene:

```

1  po.cd206 <- orderbyExpressionPeak(yhatSmoothScaled[genes.noChange , 1:100] ,
2      output.position = TRUE)
3  po.mhcii <- orderbyExpressionPeak(yhatSmoothScaled[genes.noChange ,
4      101:200] , output.position = TRUE)
5  order.mean <- order ( ( po.cd206 + po.mhcii ) /2)
6
7  heatSmooth_cd206.unchanged.ordered <- Heatmap(yhatSmoothScaled[genes.
8      noChange , 100:1] , cluster_columns = FALSE, show_row_names = FALSE,
9      show_column_names = FALSE, row_order = order.mean, column_title =
10      "CD206+IM")
11
12  heatSmooth_combined.unchanged.ordered <- draw ( heatSmooth_cd206.unchanged
13      .ordered + heatSmooth_mhcii.unchanged, column_title = "Common genes",
14      auto_adjust = FALSE)
```

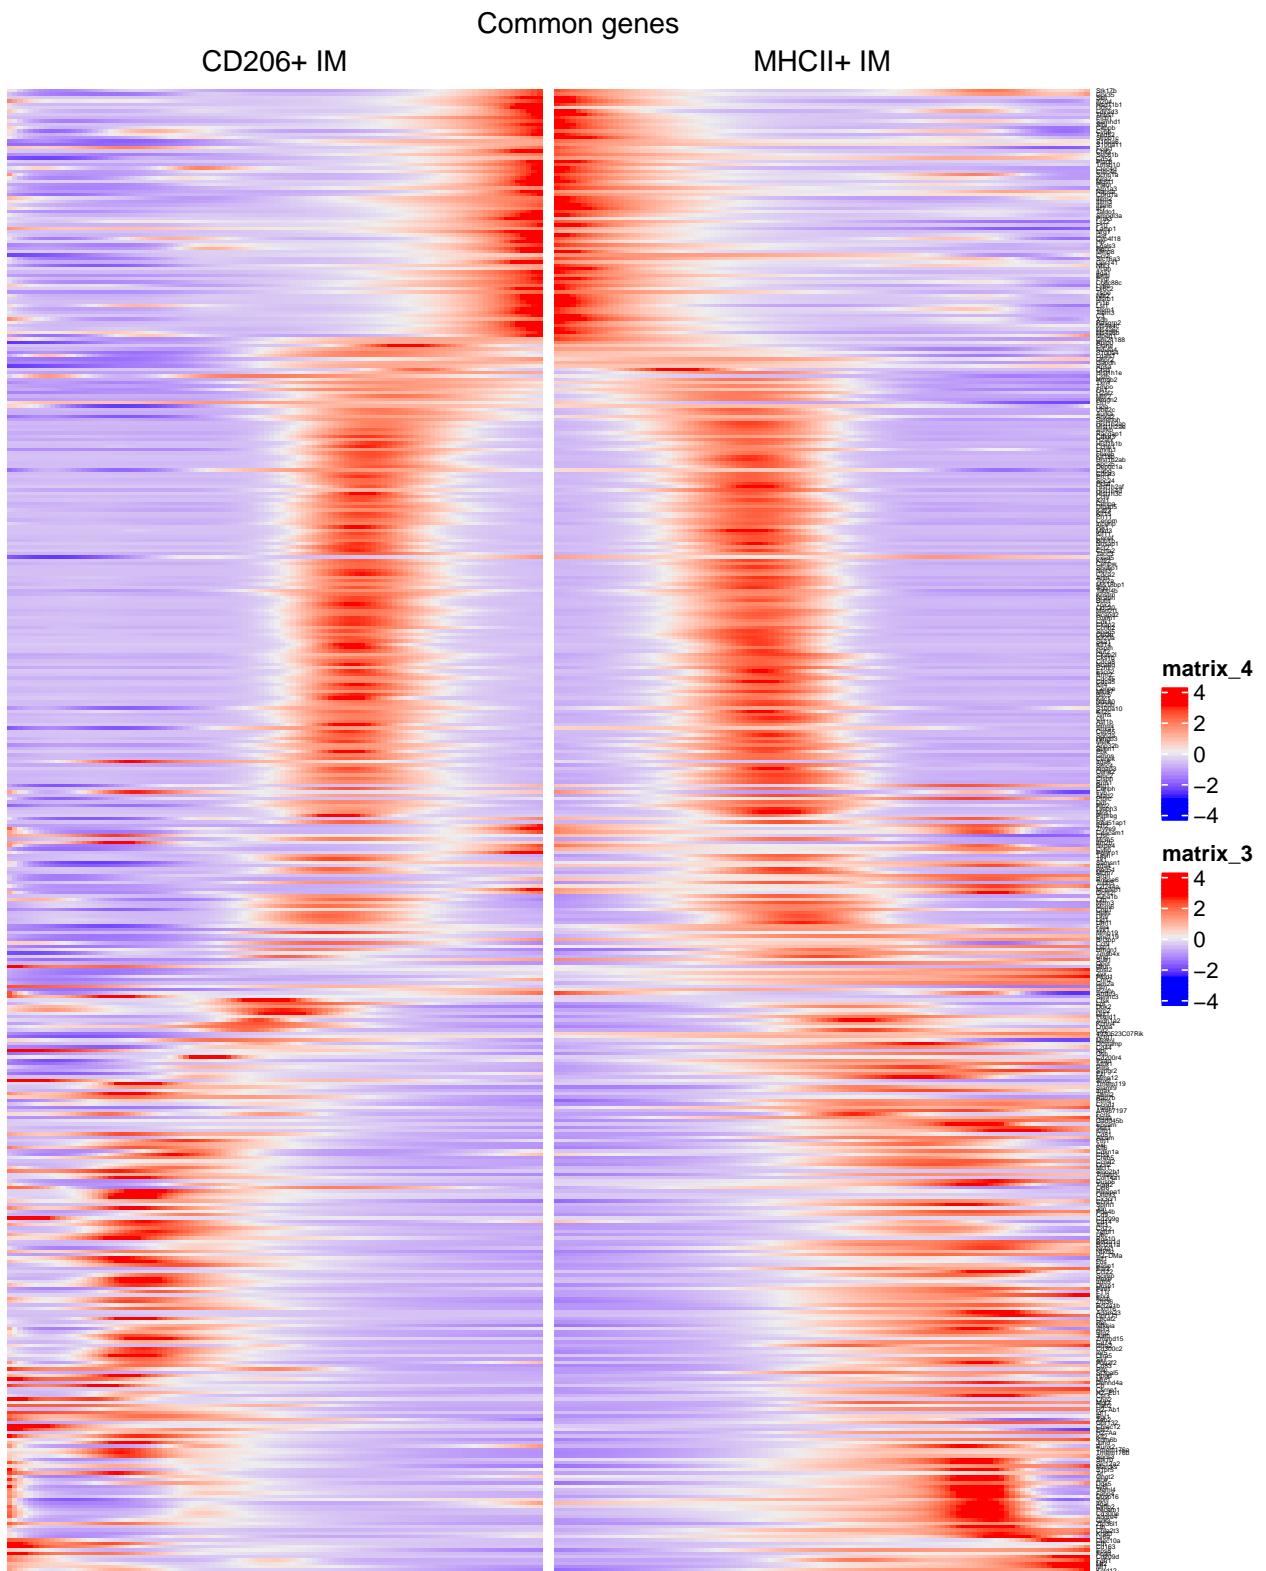

```

pdf(file = ".../Figures/Heatmap_common_genes_IMs_diff_across_pseudotime.pdf" 1
  , width = 8, height = 10)
heatSmooth_combined.unchanged.ordered
dev.off() 2
3

```


```
## pdf  
## 2
```

1  
2

## 5.5 Make with changed/specific genes

```
heatSmooth_cd206.changed <- Heatmap(yhatSmoothScaled[genes.changed,  
100:1], cluster_columns = FALSE, show_row_names = FALSE, cluster_rows  
= hclust(dist(yhatSmoothScaled[genes.changed, ])), show_column_names =  
FALSE, column_title = "CD206+IM")  
  
heatSmooth_mhcii.changed <- Heatmap(yhatSmoothScaled[genes.changed,  
101:200], cluster_columns = FALSE, show_row_names = TRUE, row_names_gp  
= gpar(fontsize = 8), show_column_names = FALSE, column_title = "MHCII+  
IM")  
  
heatSmooth_combined.changed <- draw ( heatSmooth_cd206.changed +  
heatSmooth_mhcii.changed, column_title = "Specific genes", split = 2)
```

1  
2  
3  
4  
5

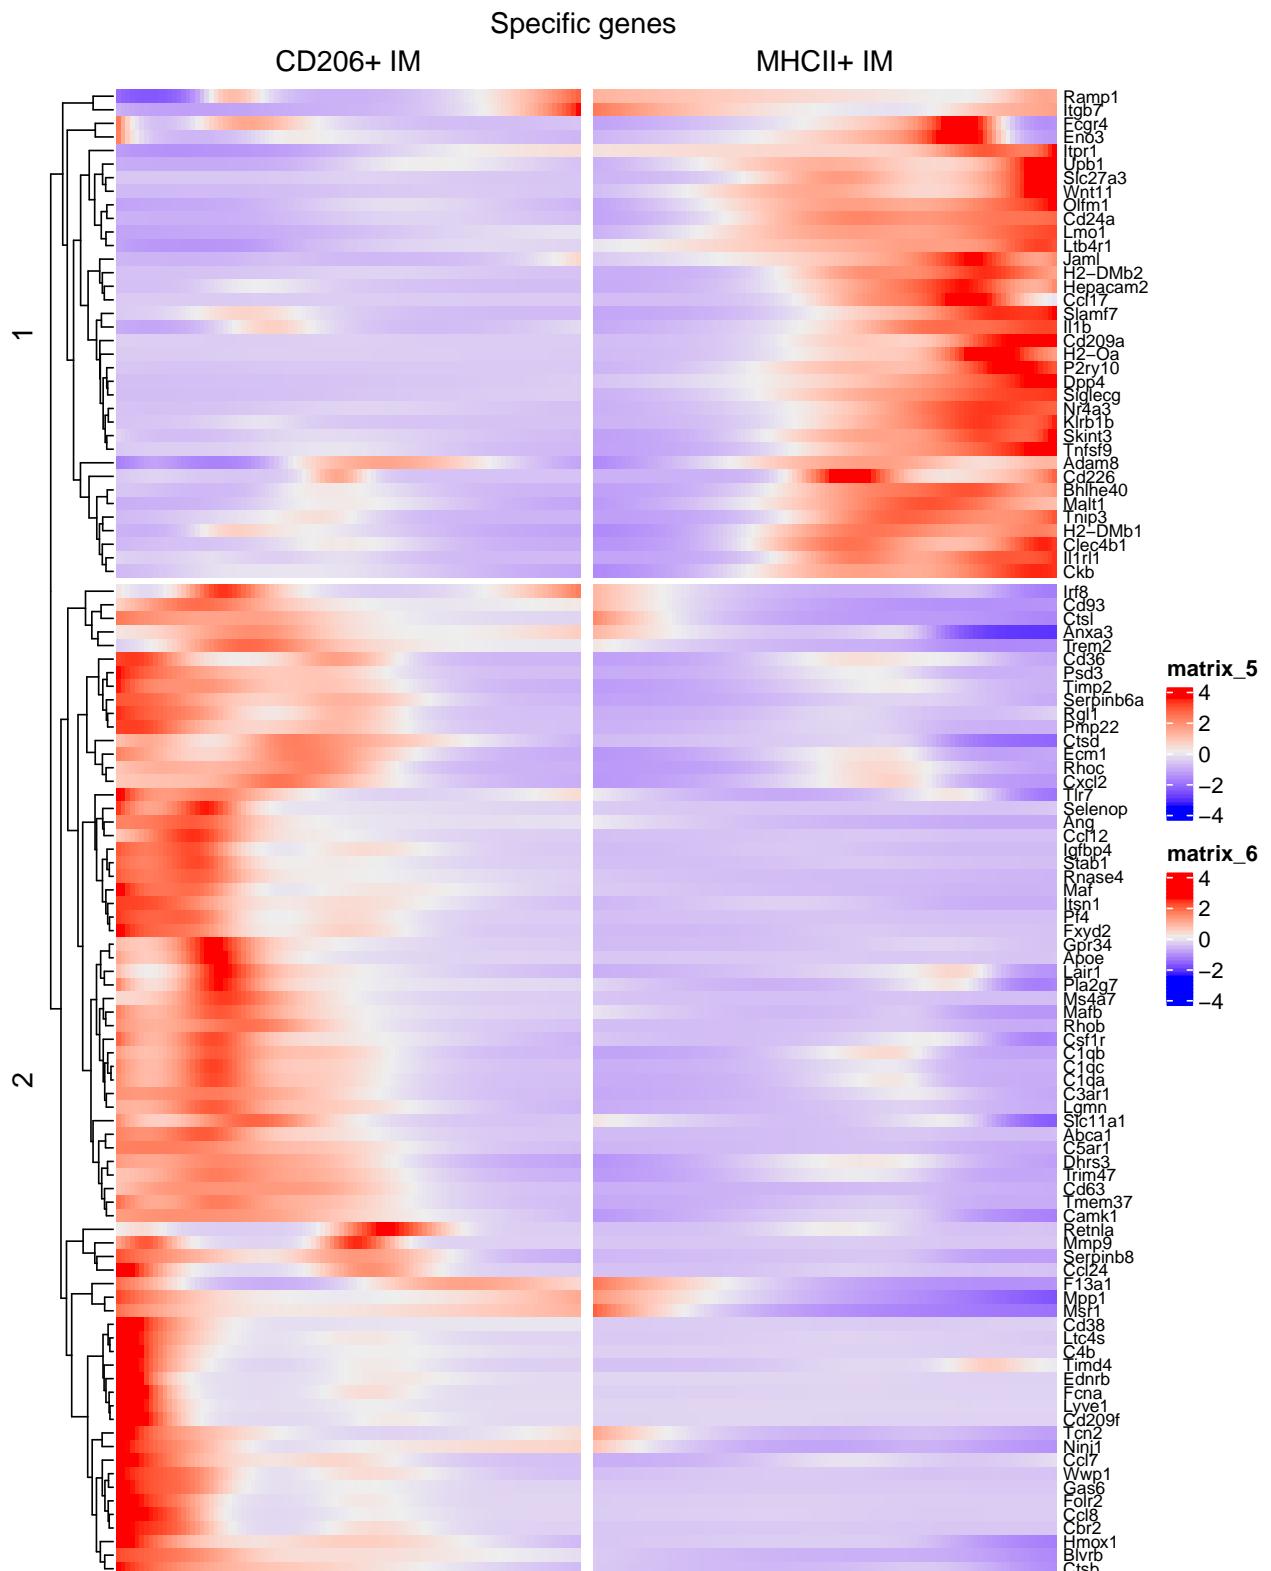

```

geneSymbol.changed.mhcii <- read.csv("./geneSymbol_changed_mhcii_IM.csv",
  col.names = FALSE)[[1]]
geneSymbol.changed.cd206 <- read.csv("./geneSymbol_changed_cd206_IM.csv",
  col.names = FALSE)[[1]]

```

MHCII IM high genes:

| geneSymbol.changed.mhcii |      |           |           |            |           |           | 1         |   |
|--------------------------|------|-----------|-----------|------------|-----------|-----------|-----------|---|
| ##                       | [1]  | "Ramp1"   | "Itgb7"   | "Fcgr4"    | "Eno3"    | "Itpr1"   | "Upb1"    | 1 |
| ##                       | [7]  | "Slc27a3" | "Wnt11"   | "Olfm1"    | "Cd24a"   | "Lmo1"    | "Ltb4r1"  | 2 |
| ##                       | [13] | "Jaml"    | "H2-DMb2" | "Hepacam2" | "Ccl17"   | "Slamf7"  | "Il1b"    | 3 |
| ##                       | [19] | "Cd209a"  | "H2-Oa"   | "P2ry10"   | "Dpp4"    | "Siglecg" | "Nr4a3"   | 4 |
| ##                       | [25] | "Klrbb1b" | "Skint3"  | "Tnfsf9"   | "Adam8"   | "Cd226"   | "Bhlhe40" | 5 |
| ##                       | [31] | "Malt1"   | "Tnip3"   | "H2-DMb1"  | "Clec4b1" | "Il1rl1"  | "Ckb"     | 6 |

| geneSymbol.changed.cd206 |      |         |             |              |           |           | 1        |    |
|--------------------------|------|---------|-------------|--------------|-----------|-----------|----------|----|
| ##                       | [1]  | "Irf8"  | "Cd93"      | "Ctsl"       | "Anxa3"   | "Trem2"   | "Cd36"   | 1  |
| ##                       | [7]  | "Psd3"  | "Timp2"     | "Serpineb6a" | "Rgl1"    | "Pmp22"   | "Ctsd"   | 2  |
| ##                       | [13] | "Ecm1"  | "Rhoc"      | "Cxcl2"      | "Tlr7"    | "Selenop" | "Ang"    | 3  |
| ##                       | [19] | "Ccl12" | "Igfbp4"    | "Stab1"      | "Rnase4"  | "Maf"     | "Itsni1" | 4  |
| ##                       | [25] | "Pf4"   | "Fxyd2"     | "Gpr34"      | "Apoe"    | "Lair1"   | "        | 5  |
| ##                       | [31] | "Ms4a7" | "Mafb"      | "Rhob"       | "Csf1r"   | "C1qb"    | "C1qc"   | 6  |
| ##                       | [37] | "C1qa"  | "C3ar1"     | "Lgmn"       | "Slc11a1" | "Abca1"   | "C5ari1" | 7  |
| ##                       | [43] | "Dhrs3" | "Trim47"    | "Cd63"       | "Tmem37"  | "Camk1"   | "        | 8  |
| ##                       | [49] | "Mmp9"  | "Serpineb8" | "Ccl24"      | "F13a1"   | "Mpp1"    | "Msri1"  | 9  |
| ##                       | [55] | "Cd38"  | "Ltc4s"     | "C4b"        | "Timd4"   | "Ednrb"   | "Fcna"   | 10 |
| ##                       | [61] | "Lyve1" | "Cd209f"    | "Tcn2"       | "Ninj1"   | "Ccl7"    | "Wwp1"   | 11 |
| ##                       | [67] | "Gas6"  | "Folr2"     | "Ccl8"       | "Cbr2"    | "Hmox1"   | "Blvrb"  | 12 |
| ##                       | [73] | "Ctsb"  |             |              |           |           |          | 13 |

|   |   |
|---|---|
| write.csv(geneSymbol.changed.cd206, file = "./geneSymbol_changed_cd206_IM.csv", quote = FALSE, row.names = FALSE) | 1 |
| write.csv(geneSymbol.changed.mhcii, file = "./geneSymbol_changed_mhcii_IM.csv", quote = FALSE, row.names = FALSE) | 2 |

## 5.6 GO enrichment on the changed/specific genes

|  |   |
|--|---|
| suppressMessages(library(clusterProfiler)) | 1 |
| source("../R/entrez2symbol.R")             | 2 |
| source("../R/replaceEntrezID.R")           | 3 |

### 5.6.1 GO enrichment on MHCII IM

|  |   |
|--|---|
| symb <- geneSymbol.changed.mhcii   | 1 |
| de_entrez <- bitr( geneID = symb, fromType = "SYMBOL", toType = "ENTREZID" | 2 |
| , OrgDb = "org.Mm.eg.db", drop = TRUE ) \$ ENTREZID                        |   |
| result.enrichKEGG <- enrichKEGG(de_entrez, organism = "mmu", keyType = "   | 3 |
| ncbi-geneid")  |   |
| result.enrichKEGG <- replaceEntrezID(result.enrichKEGG, organism = "mmu")  | 4 |

```

| write.csv(result.enrichKEGG@result, file = "./Results_enrichment/
|   enrichKEGG_MHCII_IM_specific_genes.csv")
| result.enrichKEGG@result

```

|        | ID       | Description        | GeneRatio | BgRatio | pvalue  | p.adjust | qvalue  |       |
|--------|----------|--------------------|-----------|---------|---------|----------|---------|-------|
| geneID | Count    | <chr>              | <chr>     | <chr>   | <dbl>   | <dbl>    | <dbl>   | <dbl> |
| chr    | <int>    | chr                | <int>     | chr     | <dbl>   | <dbl>    | <dbl>   | <dbl> |
| ## 1   | mmu05152 | Tuberculosis       | 7/27      | 180/89~ | 7.53e-7 | 5.44e-5  | 4.50e-5 | 5     |
| Fcgr4~ | 7        |                    |           |         |         |          |         |       |
| ## 2   | mmu04625 | C-type lect~       | 6/27      | 112/89~ | 8.06e-7 | 5.44e-5  | 4.50e-5 | 6     |
| Itpr1~ | 6        |                    |           |         |         |          |         |       |
| ## 3   | mmu05140 | Leishmanias~       | 5/27      | 70/8942 | 1.80e-6 | 8.08e-5  | 6.68e-5 | 7     |
| Fcgr4~ | 5        |                    |           |         |         |          |         |       |
| ## 4   | mmu04672 | Intestinal ~       | 4/27      | 43/8942 | 7.51e-6 | 2.09e-4  | 1.73e-4 | 8     |
| Itgb7~ | 4        |                    |           |         |         |          |         |       |
| ## 5   | mmu04640 | Hematopoiet~       | 5/27      | 94/8942 | 7.75e-6 | 2.09e-4  | 1.73e-4 | 9     |
| Cd24a~ | 5        |                    |           |         |         |          |         |       |
| ## 6   | mmu05321 | Inflammator~       | 4/27      | 62/8942 | 3.26e-5 | 6.71e-4  | 5.54e-4 | 10    |
| DM~    | 4        |                    |           |         |         |          |         |       |
| ## 7   | mmu05332 | Graft-versu~       | 4/27      | 63/8942 | 3.48e-5 | 6.71e-4  | 5.54e-4 | 11    |
| DM~    | 4        |                    |           |         |         |          |         |       |
| ## 8   | mmu04940 | Type I diab~       | 4/27      | 70/8942 | 5.28e-5 | 8.10e-4  | 6.70e-4 | 12    |
| DM~    | 4        |                    |           |         |         |          |         |       |
| ## 9   | mmu05310 | Asthma             | 3/27      | 25/8942 | 5.40e-5 | 8.10e-4  | 6.70e-4 | 13    |
| DM~    | 3        |                    |           |         |         |          |         |       |
| ## 10  | mmu05323 | Rheumatoid ~       | 4/27      | 87/8942 | 1.24e-4 | 1.67e-3  | 1.38e-3 | 14    |
| ## #   | ...      | with 125 more rows |           |         |         |          |         |       |

## 5.6.2 GO enrichment on CD206+ IM

```

symb <- geneSymbol.changed.cd206
de_entrez <- bitr( geneID = symb, fromType = "SYMBOL", toType = "ENTREZID"
  , OrgDb = "org.Mm.eg.db", drop = TRUE ) $ ENTREZID
result.enrichKEGG <- enrichKEGG(de_entrez, organism = "mmu", keyType = "
  ncbi-geneid")
result.enrichKEGG <- replaceEntrezID(result.enrichKEGG, organism = "mmu")
write.csv(result.enrichKEGG@result, file = "./Results_enrichment/
  enrichKEGG_CD206_IM_specific_genes.csv")
result.enrichKEGG@result

```

|        | ID       | Description  | GeneRatio | BgRatio | pvalue  | p.adjust | qvalue  |       |
|--------|----------|--------------|-----------|---------|---------|----------|---------|-------|
| geneID | Count    | <chr>        | <chr>     | <chr>   | <dbl>   | <dbl>    | <dbl>   | <dbl> |
| chr    | <int>    | chr          | <int>     | chr     | <dbl>   | <dbl>    | <dbl>   | <dbl> |
| ## 1   | mmu04610 | Complement ~ | 7/50      | 93/8942 | 7.27e-7 | 4.58e-5  | 3.67e-5 | 1     |
| C1qb/~ | 7        |              |           |         |         |          |         |       |
| ## 2   | mmu04061 | Viral prote~ | 7/50      | 95/8942 | 8.41e-7 | 4.58e-5  | 3.67e-5 | 2     |
| Cxcl2~ | 7        |              |           |         |         |          |         |       |

|                                  |         |         |         |         |    |
|----------------------------------|---------|---------|---------|---------|----|
| ## 3 mmu05171 Coronavirus~ 9/50  | 247/89~ | 7.54e-6 | 2.74e-4 | 2.19e-4 | 6  |
| Tlr7/~ 9                         |         |         |         |         |    |
| ## 4 mmu04936 Alcoholic l~ 7/50  | 141/89~ | 1.18e-5 | 3.23e-4 | 2.59e-4 | 7  |
| Cxcl2/~ 7                        |         |         |         |         |    |
| ## 5 mmu05150 Staphylococ~ 6/50  | 124/89~ | 6.08e-5 | 1.18e-3 | 9.47e-4 | 8  |
| C1qb/~ 6                         |         |         |         |         |    |
| ## 6 mmu05133 Pertussis 5/50     | 77/8942 | 6.50e-5 | 1.18e-3 | 9.47e-4 | 9  |
| Irf8/~ 5                         |         |         |         |         |    |
| ## 7 mmu04142 Lysosome 6/50      | 135/89~ | 9.76e-5 | 1.52e-3 | 1.22e-3 | 10 |
| Ctsl/~ 6                         |         |         |         |         |    |
| ## 8 mmu04062 Chemokine s~ 6/50  | 192/89~ | 6.56e-4 | 8.94e-3 | 7.17e-3 | 11 |
| Cxcl2/~ 6                        |         |         |         |         |    |
| ## 9 mmu04060 Cytokine-cy~ 7/50  | 292/89~ | 1.10e-3 | 1.34e-2 | 1.07e-2 | 12 |
| Cxcl2/~ 7                        |         |         |         |         |    |
| ## 10 mmu04657 IL-17 signa~ 4/50 | 91/8942 | 1.62e-3 | 1.76e-2 | 1.41e-2 | 13 |
| Cxcl2/~ 4                        |         |         |         |         |    |
| ## # ... with 99 more rows       |         |         |         |         | 14 |

### 5.6.3 GO enrichment for common genes class 1

```
result.enrichGO <- enrichGO(de_entrez, OrgDb = "org.Mm.eg.db", ont = "BP")
result.enrichGO <- replaceEntrezID(result.enrichGO, organism = "mmu")
write.csv(result.enrichGO@result, file = "./Results_enrichment/enrichGO_
common_genes_class1.csv")
result.enrichGO@result
```

|  |         |          |          |          |    |
|--|---------|----------|----------|----------|----|
| ## # A tibble: 1,842 x 9   | 1       |          |          |          |    |
| ##   ID      Description GeneRatio BgRatio     pvalue p.adjust    qvalue | 2       |          |          |          |    |
| ##   geneID  Count   | 3       |          |          |          |    |
| ##   <chr>   <chr>     <chr>     <chr>     <dbl>    <dbl>    <dbl> <chr> | 4       |          |          |          |    |
| ##   >   <int>   | 5       |          |          |          |    |
| ## 1 GO:00~ leukocyte ~ 17/70  | 360/23~ | 4.11e-16 | 7.56e-13 | 4.90e-13 | 4  |
| Trem2/~ 17   |         |          |          |          |    |
| ## 2 GO:00~ leukocyte ~ 14/70  | 219/23~ | 3.30e-15 | 2.03e-12 | 1.31e-12 | 5  |
| Cxcl2/~ 14   |         |          |          |          |    |
| ## 3 GO:00~ myeloid le~ 14/70  | 219/23~ | 3.30e-15 | 2.03e-12 | 1.31e-12 | 6  |
| Trem2/~ 14   |         |          |          |          |    |
| ## 4 GO:00~ cell chemo~ 14/70  | 303/23~ | 2.90e-13 | 1.34e-10 | 8.65e-11 | 7  |
| Cxcl2/~ 14   |         |          |          |          |    |
| ## 5 GO:00~ regulation~ 12/70  | 217/23~ | 2.05e-12 | 7.55e-10 | 4.89e-10 | 8  |
| Trem2/~ 12   |         |          |          |          |    |
| ## 6 GO:00~ granulocyt~ 10/70  | 126/23~ | 4.44e-12 | 1.36e- 9 | 8.82e-10 | 9  |
| Cxcl2/~ 10   |         |          |          |          |    |
| ## 7 GO:00~ mononuclea~ 9/70   | 89/233~ | 6.08e-12 | 1.60e- 9 | 1.04e- 9 | 10 |
| Ccl12/~ 9  |         |          |          |          |    |
| ## 8 GO:00~ neutrophil~ 9/70   | 99/233~ | 1.62e-11 | 3.72e- 9 | 2.41e- 9 | 11 |
| Cxcl2/~ 9  |         |          |          |          |    |
| ## 9 GO:00~ granulocyt~ 10/70  | 155/23~ | 3.53e-11 | 6.93e- 9 | 4.48e- 9 | 12 |
| Cxcl2/~ 10   |         |          |          |          |    |
| ## 10 GO:00~ positive r~ 10/70   | 156/23~ | 3.76e-11 | 6.93e- 9 | 4.48e- 9 | 13 |
| Trem2/~ 10   |         |          |          |          |    |
| ## # ... with 1,832 more rows  | 14      |          |          |          |    |

## 6 Functionality analysis of DE genes across pseudotime (common genes)

```
common.genes <- heatSmooth_cd206.unchanged.ordered@row_names_param$labels[  
heatSmooth_cd206.unchanged.ordered@row_order]
```

### 6.1 Manually classify genes by expression timing peak

Class-1 genes are the genes expressed in monocytes but turned off in the very early phase:

```
genes.class1 <- common.genes[1:which(common.genes == "Gm21188")]  
length(genes.class1)
```

```
## [1] 75
```

Class-2 genes are the genes up-regulated in early phase of differentiation and turned off during transit phase.

```
genes.class2 <- common.genes[(which(common.genes == "Gm21188") + 1) : which(  
common.genes == "Diaph3")]  
length(genes.class2)
```

```
## [1] 140
```

Class-3 genes are the late upregulated genes during IM differentiation.

```
genes.class3 <- common.genes[(which(common.genes == "Diaph3") + 1) : length(  
common.genes)]  
length(genes.class3)
```

```
## [1] 228
```

Save gene lists:

```
write.csv(genes.class1, file = "./common_genes_class1.csv", quote = FALSE)  
write.csv(genes.class2, file = "./common_genes_class2.csv", quote = FALSE)  
write.csv(genes.class3, file = "./common_genes_class3.csv", quote = FALSE)
```

## 6.2 GO/KEGG enrichment analysis with 3 classes of common genes

### 6.2.1 KEGG enrichment for common genes class 1

```
symb <- genes.class1  
de_entrez <- bitr( geneID = symb, fromType = "SYMBOL", toType = "ENTREZID"  
, OrgDb = "org.Mm.eg.db", drop = TRUE ) $ ENTREZID  
result.enrichKEGG <- enrichKEGG(de_entrez, organism = "mmu", keyType = "  
ncbi-geneid")  
result.enrichKEGG <- replaceEntrezID(result.enrichKEGG, organism = "mmu")  
write.csv(result.enrichKEGG@result, file = "./Results_enrichment/  
enrichKEGG_common_genes_class1.csv")  
result.enrichKEGG@result
```

```

## # A tibble: 149 x 9
##   ID      Description  GeneRatio  BgRatio    pvalue  p.adjust    qvalue
##   <chr>    <chr>        <chr>      <chr>      <dbl>      <dbl>      <dbl>
##   geneID  Count
##   <chr>  <int>
##   chr>  <int>
##   1 mmu04145 Phagosome    7/36     182/89~ 6.53e-6 0.000974 9.01e-4
##   Thbs1~    7
##   2 mmu05152 Tuberculosis 6/36     180/89~ 7.22e-5 0.00538 4.98e-3
##   Cebpb~    6
##   3 mmu05140 Leishmania~ 3/36     70/8942 2.73e-3 0.119   1.10e-1
##   Cybb/~    3
##   4 mmu04918 Thyroid hor~ 3/36     74/8942 3.19e-3 0.119   1.10e-1
##   Plcb1~    3
##   5 mmu04970 Salivary se~ 3/36     86/8942 4.88e-3 0.145   1.35e-1
##   Plcb1~    3
##   6 mmu04610 Complement ~ 3/36     93/8942 6.07e-3 0.151   1.39e-1
##   Plaur~    3
##   7 mmu04613 Neutrophil ~ 4/36     207/89~ 9.20e-3 0.167   1.55e-1
##   Plcb1~    4
##   8 mmu04621 NOD-like re~ 4/36     211/89~ 9.83e-3 0.167   1.55e-1
##   Ifi20~    4
##   9 mmu04960 Aldosterone~ 2/36     38/8942 1.01e-2 0.167   1.55e-1
##   Scnn1~    2
##   10 mmu04973 Carbohydrat~ 2/36     48/8942 1.58e-2 0.236   2.18e-1
##   Plcb1~    2
##   # ... with 139 more rows

```

### 6.2.2 GO enrichment for common genes class 1

```

result.enrichGO <- enrichGO(de_entrez, OrgDb = "org.Mm.eg.db", ont = "BP")
result.enrichGO <- replaceEntrezID(result.enrichGO, organism = "mmu")
write.csv(result.enrichGO@result, file = "./Results_enrichment/enrichGO_
common_genes_class1.csv")
result.enrichGO@result

```

```

## # A tibble: 1,740 x 9
##   ID      Description  GeneRatio  BgRatio    pvalue  p.adjust    qvalue
##   <chr>    <chr>        <chr>      <chr>      <dbl>      <dbl>      <dbl>
##   geneID  Count
##   <chr>  <int>
##   <int>
##   1 GO:00~ myeloid leu~ 10/72     219/23~ 1.40e-9 2.16e-6 1.65e-6 Gpr35
##   /S~    10
##   2 GO:00~ cellular ex~ 7/72      72/233~ 2.48e-9 2.16e-6 1.65e-6 Sell/
##   Pl~    7
##   3 GO:00~ leukocyte m~ 11/72     360/23~ 1.32e-8 7.68e-6 5.86e-6 Gpr35
##   /S~    11
##   4 GO:00~ leukocyte c~ 9/72      219/23~ 2.45e-8 1.07e-5 8.14e-6 Gpr35
##   /S~    9
##   5 GO:00~ positive re~ 11/72     418/23~ 6.08e-8 2.12e-5 1.61e-5 Sell/
##   If~    11
##   6 GO:00~ type I inte~ 5/72      40/233~ 1.47e-7 3.64e-5 2.78e-5
##   Samhd1/~ 5

```

```

## 7 GO:00~ cellular re~ 5/72      40/233~ 1.47e-7 3.64e-5 2.78e-5 10
Samhd1/~      5
## 8 GO:00~ defense res~ 11/72     464/23~ 1.74e-7 3.64e-5 2.78e-5 Slpi/ 11
Ce~      11
## 9 GO:00~ positive re~ 9/72      278/23~ 1.88e-7 3.64e-5 2.78e-5 12
Ifi204/~      9
## 10 GO:00~ response to~ 5/72     45/233~ 2.70e-7 4.70e-5 3.59e-5 13
Samhd1/~      5
## # ... with 1,730 more rows 14

```

### 6.2.3 KEGG enrichment for common genes class 2

```

symb <- genes.class2
de_entrez <- bitr( geneID = symb, fromType = "SYMBOL", toType = "ENTREZID" 1
, OrgDb = "org.Mm.eg.db", drop = TRUE ) $ ENTREZID
result.enrichKEGG <- enrichKEGG(de_entrez, organism = "mmu", keyType = " 2
ncbi-geneid")
result.enrichKEGG <- replaceEntrezID(result.enrichKEGG, organism = "mmu") 3
write.csv(result.enrichKEGG@result, file = "./Results_enrichment/
    enrichKEGG_common_genes_class2.csv")
result.enrichKEGG@result 4

```

```

## # A tibble: 88 x 9
##   ID          Description GeneRatio BgRatio    pvalue p.adjust    qvalue 1
##   <chr>        <chr>      <chr>      <chr>      <dbl>      <dbl>      <dbl> 2
##   geneID Count
##   <chr> <int>
##   chr> <int>
##   1 mmu04114 Oocyte mei~ 11/50      121/89~ 4.21e-11 2.65e-9 2.28e-9 3
##   Aurka~ 11
##   2 mmu04110 Cell cycle 11/50      125/89~ 6.01e-11 2.65e-9 2.28e-9 4
##   Ccnb1~ 11
##   3 mmu04914 Progestero~ 9/50      92/8942 1.54e- 9 4.51e-8 3.88e-8 5
##   Aurka~ 9
##   4 mmu04115 p53 signal~ 5/50      72/8942 4.70e- 5 1.03e-3 8.91e-4 6
##   Ccnb1~ 5
##   5 mmu00240 Pyrimidine~ 4/50      58/8942 2.94e- 4 5.17e-3 4.45e-3 7
##   Rrm2/~ 4
##   6 mmu04218 Cellular s~ 6/50      184/89~ 5.24e- 4 7.69e-3 6.62e-3 8
##   Ccnb1~ 6
##   7 mmu05222 Small cell~ 4/50      93/8942 1.75e- 3 2.20e-2 1.90e-2 Fn1 9
##   /C~ 4
##   8 mmu05166 Human T-ce~ 6/50      250/89~ 2.55e- 3 2.65e-2 2.28e-2 10
##   Bub1b~ 6
##   9 mmu05132 Salmonella~ 6/50      253/89~ 2.71e- 3 2.65e-2 2.28e-2 11
##   Gapdh~ 6
##   10 mmu04512 ECM-recept~ 3/50     88/8942 1.29e- 2 1.14e-1 9.81e-2 Fn1 12
##   /H~ 3
##   # ... with 78 more rows 13
##   # ... with 78 more rows 14

```

### 6.2.4 GO enrichment for common genes class 2

```

result.enrichGO <- enrichGO(de_entrez, OrgDb = "org.Mm.eg.db", ont = "BP") 1

```

```

result.enrichGO <- replaceEntrezID(result.enrichGO, organism = "mmu")
write.csv(result.enrichGO@result, file = "./Results_enrichment/enrichGO_
    common_genes_class2.csv")
result.enrichGO@result

```

```

## # A tibble: 1,780 x 9
##   ID      Description GeneRatio BgRatio     pvalue p.adjust     qvalue
##   <chr>    <chr>       <chr>       <chr>       <dbl>      <dbl>      <dbl> <chr>
##   >      <int>
## 1 GO:00~ chromosome~ 50/127    324/23~ 7.39e-60 1.32e-56 1.08e-56
##   Ube2c/~      50
## 2 GO:00~ nuclear ch~ 43/127    262/23~ 2.75e-52 1.75e-49 1.44e-49
##   Ube2c/~      43
## 3 GO:00~ sister chr~ 39/127    181/23~ 2.95e-52 1.75e-49 1.44e-49
##   Ube2c/~      39
## 4 GO:01~ mitotic nu~ 43/127    268/23~ 7.78e-52 2.91e-49 2.39e-49
##   Ube2c/~      43
## 5 GO:00~ mitotic si~ 37/127    151/23~ 8.18e-52 2.91e-49 2.39e-49
##   Ube2c/~      37
## 6 GO:00~ nuclear di~ 46/127    418/23~ 9.43e-48 2.80e-45 2.30e-45
##   Ube2c/~      46
## 7 GO:00~ organelle ~ 47/127    472/23~ 9.12e-47 2.32e-44 1.91e-44
##   Mtfr2/~      47
## 8 GO:00~ spindle or~ 27/127    179/23~ 1.59e-31 3.54e-29 2.91e-29
##   Aurka/~      27
## 9 GO:19~ microtubul~ 24/127    142/23~ 2.56e-29 5.06e-27 4.16e-27
##   Aurka/~      24
## 10 GO:00~ regulation~ 21/127    103/23~ 1.42e-27 2.53e-25 2.08e-25
##    Ube2c/~      21
## # ... with 1,770 more rows

```

### 6.2.5 KEGG enrichment for common genes class 3

```

symb <- genes.class3
de_entrez <- bitr( geneID = symb, fromType = "SYMBOL", toType = "ENTREZID"
  , OrgDb = "org.Mm.eg.db", drop = TRUE ) $ ENTREZID
result.enrichKEGG <- enrichKEGG(de_entrez, organism = "mmu", keyType = "
  ncbi-geneid")
result.enrichKEGG <- replaceEntrezID(result.enrichKEGG, organism = "mmu")
write.csv(result.enrichKEGG@result, file = "./Results_enrichment/
  enrichKEGG_common_genes_class3.csv")
result.enrichKEGG@result

```

```

## # A tibble: 228 x 9
##   ID      Description GeneRatio BgRatio     pvalue p.adjust     qvalue
##   <chr>    <chr>       <chr>       <chr>       <dbl>      <dbl>      <dbl> <chr>
##   >      <int>
## 1 mmu04210 Apoptosis    15/141    136/89~ 2.97e-9  6.78e-7 4.73e-7
##   Ctsc/~      15
## 2 mmu04145 Phagosome    15/141    182/89~ 1.56e-7  1.78e-5 1.24e-5
##   Tubb5~      15

```

|                                   |         |         |         |         |    |
|-----------------------------------|---------|---------|---------|---------|----|
| ## 3 mmu05166 Human T-cel~ 17/141 | 250/89~ | 3.62e-7 | 2.27e-5 | 1.58e-5 | 6  |
| I11r2~ 17                         |         |         |         |         |    |
| ## 4 mmu05202 Transcripti~ 16/141 | 223/89~ | 3.98e-7 | 2.27e-5 | 1.58e-5 | 7  |
| I11r2~ 16                         |         |         |         |         |    |
| ## 5 mmu04640 Hematopoiet~ 10/141 | 94/8942 | 2.02e-6 | 9.21e-5 | 6.42e-5 | 8  |
| I11r2~ 10                         |         |         |         |         |    |
| ## 6 mmu04380 Osteoclast ~ 11/141 | 128/89~ | 5.11e-6 | 1.94e-4 | 1.35e-4 | 9  |
| Fosl2~ 11                         |         |         |         |         |    |
| ## 7 mmu05323 Rheumatoid ~ 9/141  | 87/8942 | 8.43e-6 | 2.75e-4 | 1.91e-4 | 10 |
| Ctsk/~ 9                          |         |         |         |         |    |
| ## 8 mmu05140 Leishmanias~ 8/141  | 70/8942 | 1.30e-5 | 3.70e-4 | 2.58e-4 | 11 |
| Itga4~ 8                          |         |         |         |         |    |
| ## 9 mmu05152 Tuberculosis 12/141 | 180/89~ | 2.55e-5 | 6.47e-4 | 4.51e-4 | 12 |
| Lsp1/~ 12                         |         |         |         |         |    |
| ## 10 mmu04064 NF-kappa B ~ 9/141 | 105/89~ | 3.89e-5 | 8.86e-4 | 6.18e-4 | 13 |
| Gadd4~ 9                          |         |         |         |         |    |
| ## # ... with 218 more rows       |         |         |         |         | 14 |

## 6.2.6 GO enrichment for common genes class 3


```
result.enrichGO <- enrichGO(de_entrez, OrgDb = "org.Mm.eg.db", ont = "BP")
result.enrichGO <- replaceEntrezID(result.enrichGO, organism = "mmu")
write.csv(result.enrichGO@result, file = "./Results_enrichment/enrichGO_
common_genes_class3.csv")
result.enrichGO@result
```

| ## # A tibble: 3,419 x 9   | 1       |          |         |         |      |  |  |    |
|--|---------|----------|---------|---------|------|--|--|----|
| ##   ID      Description  GeneRatio BgRatio    pvalue p.adjust    qvalue       | 2       |          |         |         |      |  |  |    |
| ##   geneID  Count   | 3       |          |         |         |      |  |  |    |
| ##   <chr>   <chr>       <chr>     <chr>     <dbl>     <dbl>     <dbl>   <chr> | 4       |          |         |         |      |  |  |    |
| ## 1 GO:00~ regulation ~ 23/224  | 372/23~ | 1.72e-12 | 5.89e-9 | 4.30e-9 |      |  |  |    |
| I11r2/~ 23   |         |          |         |         |      |  |  |    |
| ## 2 GO:00~ negative re~ 22/224  | 462/23~ | 8.04e-10 | 7.67e-7 | 5.61e-7 | Fgr/ |  |  |    |
| Ce~ 22   |         |          |         |         |      |  |  |    |
| ## 3 GO:00~ positive re~ 17/224  | 265/23~ | 8.72e-10 | 7.67e-7 | 5.61e-7 |      |  |  |    |
| Ceacam~ 17   |         |          |         |         |      |  |  |    |
| ## 4 GO:19~ regulation ~ 21/224  | 424/23~ | 9.85e-10 | 7.67e-7 | 5.61e-7 |      |  |  |    |
| Ceacam~ 21   |         |          |         |         |      |  |  |    |
| ## 5 GO:00~ leukocyte c~ 19/224  | 345/23~ | 1.12e- 9 | 7.67e-7 | 5.61e-7 |      |  |  |    |
| Ceacam~ 19   |         |          |         |         |      |  |  |    |
| ## 6 GO:00~ leukocyte m~ 19/224  | 360/23~ | 2.27e- 9 | 1.29e-6 | 9.44e-7 |      |  |  |    |
| Itga4/~ 19   |         |          |         |         |      |  |  |    |
| ## 7 GO:00~ regulation ~ 19/224  | 372/23~ | 3.88e- 9 | 1.75e-6 | 1.28e-6 |      |  |  |    |
| Ceacam~ 19   |         |          |         |         |      |  |  |    |
| ## 8 GO:19~ positive re~ 15/224  | 221/23~ | 4.10e- 9 | 1.75e-6 | 1.28e-6 |      |  |  |    |
| Ceacam~ 15   |         |          |         |         |      |  |  |    |
| ## 9 GO:00~ lymphocyte ~ 11/224  | 103/23~ | 4.60e- 9 | 1.75e-6 | 1.28e-6 |      |  |  |    |
| Itga4/~ 11   |         |          |         |         |      |  |  |    |
| ## 10 GO:00~ antigen pro~ 6/224  | 16/233~ | 5.42e- 9 | 1.85e-6 | 1.35e-6 | Ctss |  |  |    |
| /H~ 6  |         |          |         |         |      |  |  |    |
| ## # ... with 3,409 more rows  |         |          |         |         |      |  |  | 14 |

## 7 Show gene expression pattern with TradeSeq results


### 7.1 Class 1 common genes

```
1 require(ggplot2)
2 sigGene <- "Ly6c2"
3 plotSmothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  + scale_color_manual(values =c("#33A02C", "#B2DF8A"))
```

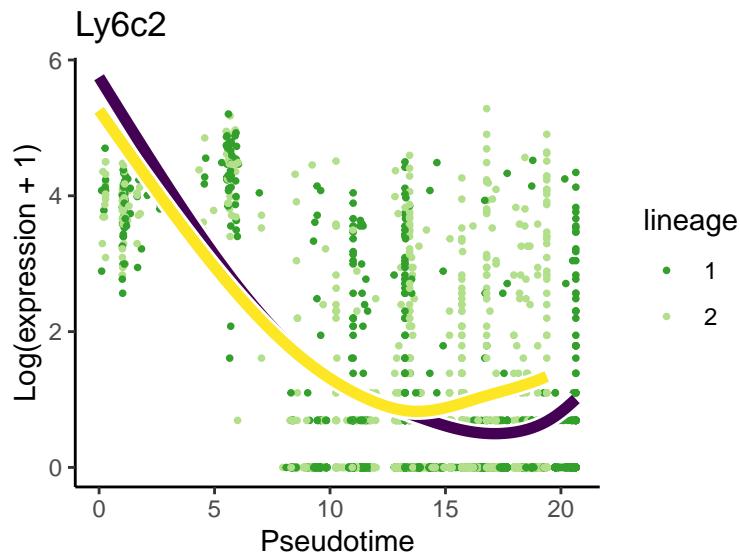

```
1 ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_", sigGene,
2   ".pdf"),
3   width = 4, height = 3)
```


```
1 sigGene <- "Sell"
2 plotSmothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  + scale_color_manual(values =c("#33A02C", "#B2DF8A"))
```

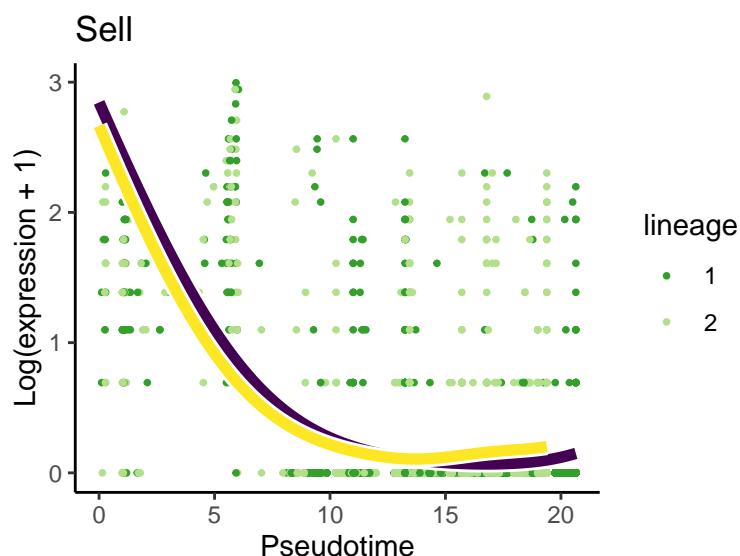

```

sigGene <- "Plac8"
plotSmoothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

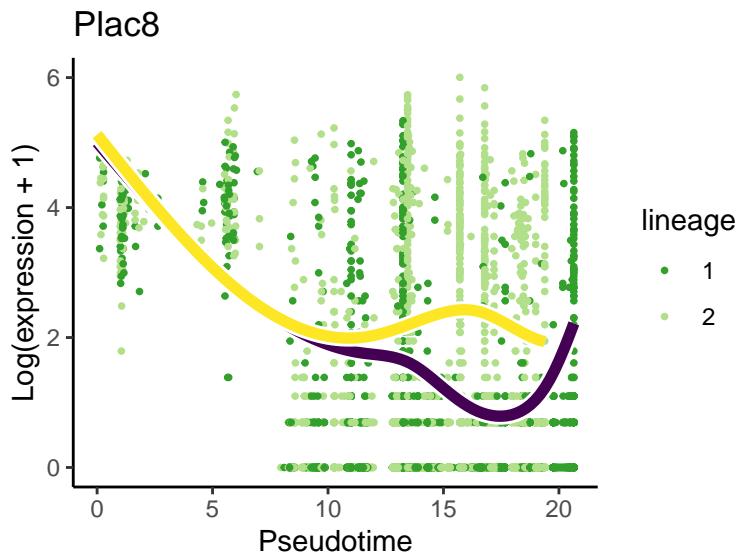

```

ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
  sigGene, ".pdf"),
  width = 4, height = 3)


```

## 7.2 Class 2 common genes

```

sigGene <- "Top2a"
plotSmoothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

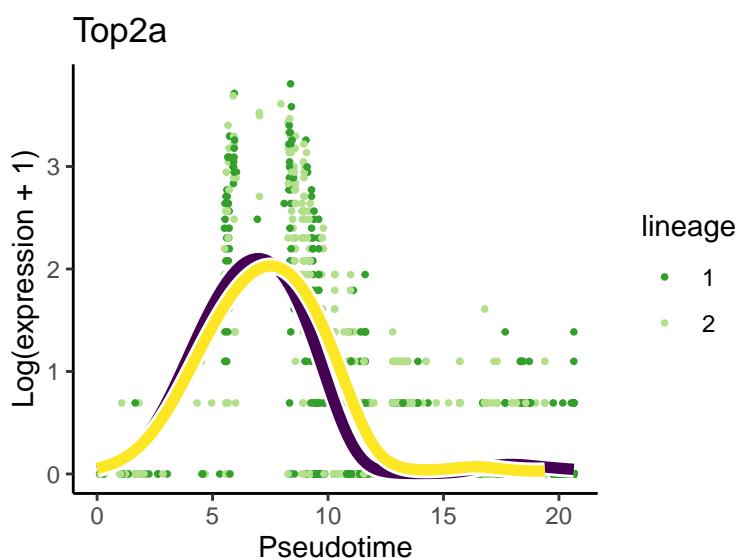


```

ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
  sigGene, ".pdf"),

```


```
width = 4, height = 3)
```

```
1 sigGene <- "Ccnb2"  
2 plotSmoothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene  
 ) + scale_color_manual(values =c("#33A02C", "#B2DF8A"))
```

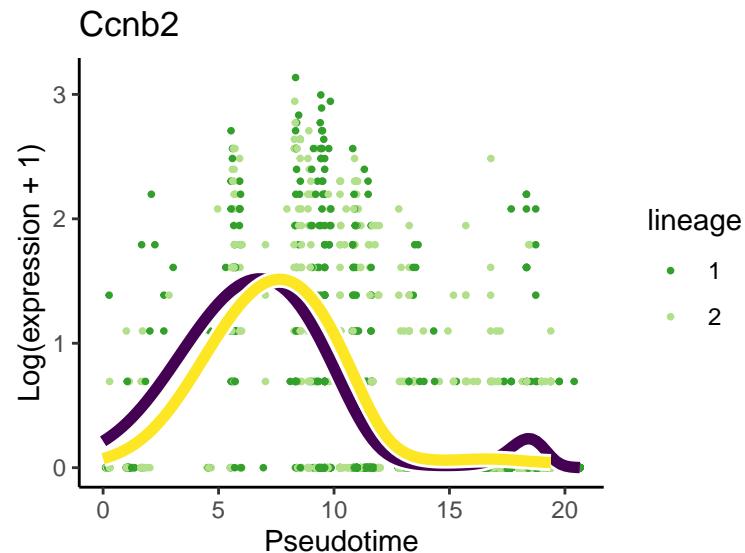

```
1 ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_", sigGene,  
2 ".pdf"),  
       width = 4, height = 3)
```

```
1 sigGene <- "Mki67"  
2 plotSmoothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene  
 ) + scale_color_manual(values =c("#33A02C", "#B2DF8A"))
```

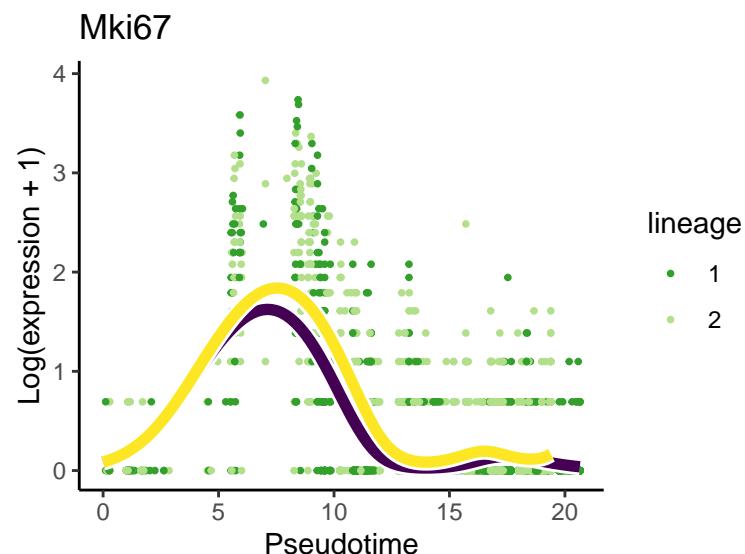


```
1 ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_", sigGene,  
2 ".pdf"),  
       width = 4, height = 3)
```

### 7.3 Class 3 common genes

```

sigGene <- "Tgfbr1"
plotSmothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene
) + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

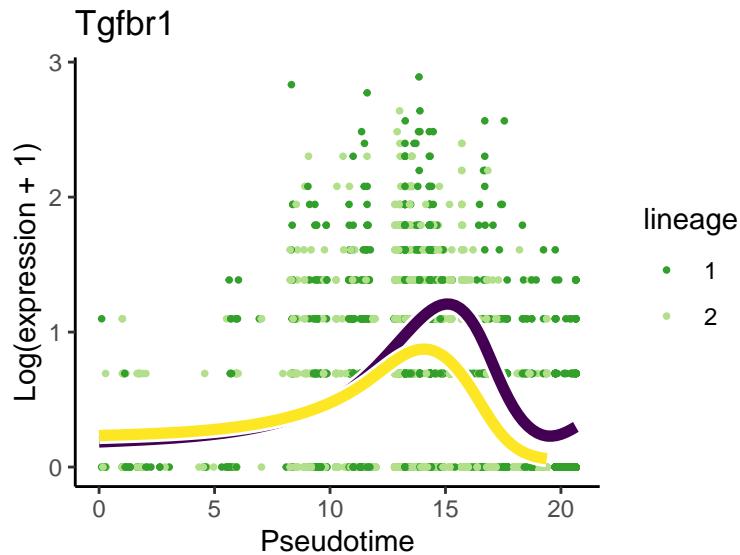

```


ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
".pdf"),
width = 4, height = 3)

```

```

sigGene <- "Cd163"
plotSmothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene
) + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

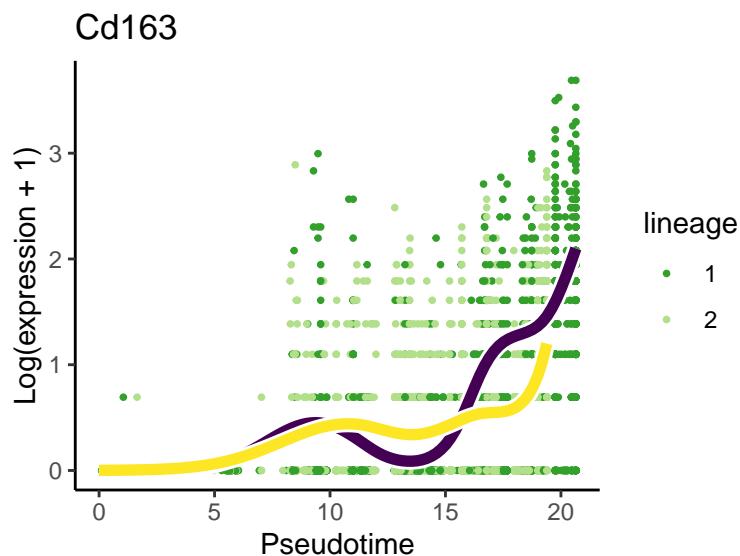

```


ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
".pdf"),
width = 4, height = 3)

```

```

sigGene <- "Creb5"
plotSmothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

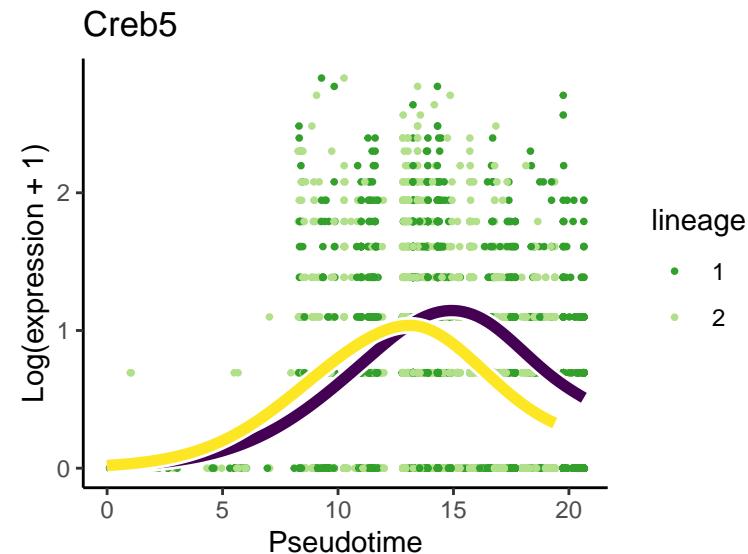

```


ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
  sigGene, ".pdf"),
  width = 4, height = 3)

```

```

sigGene <- "Ube2c"
plotSmothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

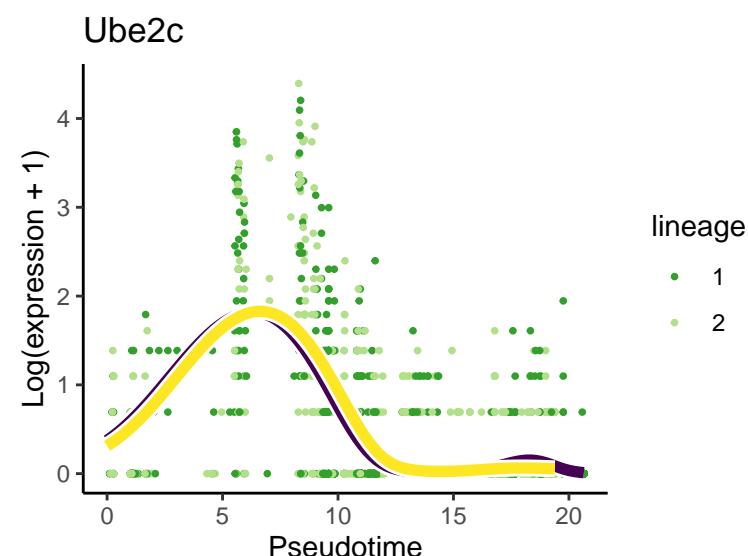

```


ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
  sigGene, ".pdf"),
  width = 4, height = 3)

```

```

sigGene <- "Aurkb"
plotSmothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

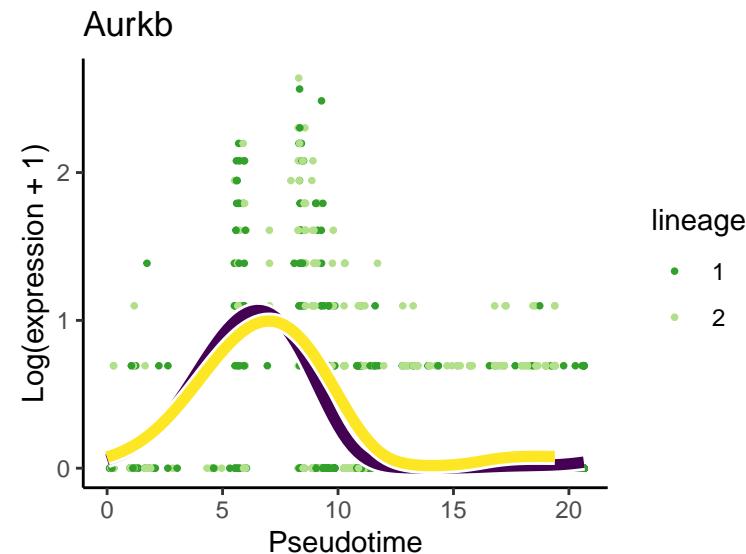

```


ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
  sigGene, ".pdf"),
  width = 4, height = 3)

```

```

sigGene <- "Racgap1"
plotSmothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

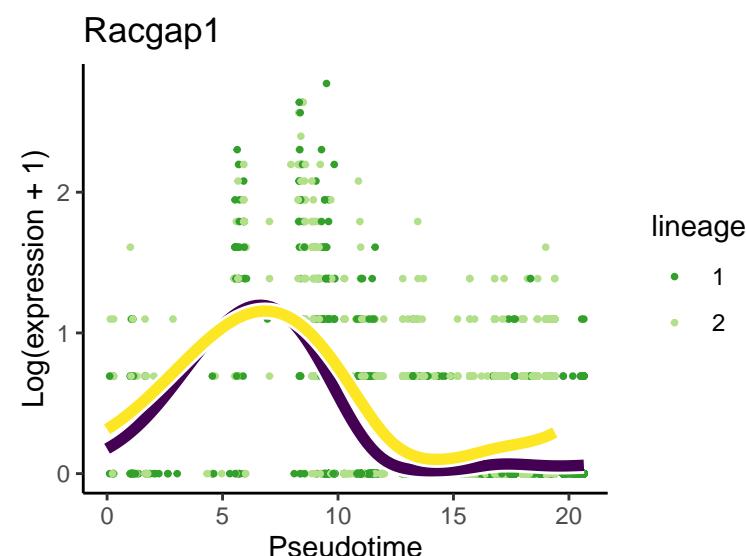

```


ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
  sigGene, ".pdf"),
  width = 4, height = 3)

```

```

sigGene <- "Ube2c"
plotSmoothers(sce, counts = counts(sce), gene = sigGene) + ggtitle(sigGene)
  ) + scale_color_manual(values =c("#33A02C", "#B2DF8A"))

```

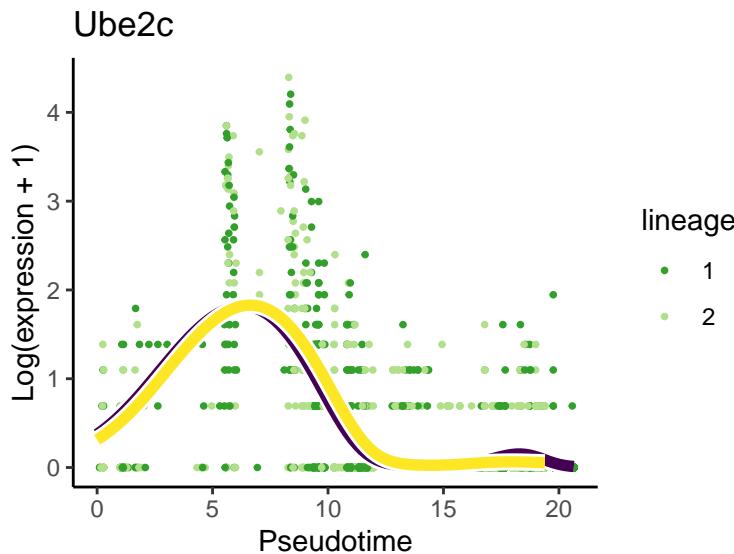

```

ggsave(filename = paste("../Figures/TradeSeq_plot_IM_lineages_",
  sigGene,
  ".pdf"),
  width = 4, height = 3)

```

## 8 Session information

R session:

```

sessionInfo()

```

```

## R version 4.0.3 (2020-10-10)
## Platform: x86_64-pc-linux-gnu (64-bit)
## Running under: Ubuntu 20.04.3 LTS
##
## Matrix products: default
## BLAS:    /usr/lib/x86_64-linux-gnu/openblas-pthread/libblas.so.3
## LAPACK: /usr/lib/x86_64-linux-gnu/openblas-pthread/liblapack.so.3
##
## locale:
## [1] LC_CTYPE=en_US.UTF-8          LC_NUMERIC=C
## [3] LC_TIME=en_GB.UTF-8          LC_COLLATE=en_US.UTF-8
## [5] LC_MONETARY=en_GB.UTF-8       LC_MESSAGES=en_US.UTF-8
## [7] LC_PAPER=en_GB.UTF-8          LC_NAME=C
## [9] LC_ADDRESS=C                  LC_TELEPHONE=C
## [11] LC_MEASUREMENT=en_GB.UTF-8    LC_IDENTIFICATION=C
##
## attached base packages:
## [1] stats4     parallel   grid       stats      graphics   grDevices utils
## [8] datasets   methods    base

```

|   |                             |    |
|---|-----------------------------|----|
| ## other attached packages:                   |                             | 21 |
| ## [1] org.Mm.eg.db_3.12.0                    | AnnotationDbi_1.52.0        | 22 |
| ## [3] clusterProfiler_3.18.1                 | clusterExperiment_2.11.2    | 23 |
| ## [5] tradeSeq_1.4.0                         | magrittr_2.0.1              | 24 |
| ## [7] monocle3_1.0.0                         | SingleCellExperiment_1.12.0 | 25 |
| ## [9] SummarizedExperiment_1.20.0            | GenomicRanges_1.42.0        | 26 |
| ## [11] GenomeInfoDb_1.26.7                   | IRanges_2.24.1              | 27 |
| ## [13] S4Vectors_0.28.1                      | MatrixGenerics_1.2.1        | 28 |
| ## [15] matrixStats_0.61.0                    | Biobase_2.50.0              | 29 |
| ## [17] BiocGenerics_0.36.1                   | circlize_0.4.13             | 30 |
| ## [19] RColorBrewer_1.1-2                    | dplyr_1.0.7                 | 31 |
| ## [21] ggplot2_3.3.5                         | ComplexHeatmap_2.6.2        | 32 |
| ## [23] SeuratObject_4.0.4                    | Seurat_4.0.5                | 33 |
| ##  |                             | 34 |
| ## loaded via a namespace (and not attached): |                             | 35 |
| ## [1] rsvd_1.0.5                             | ica_1.0-2                   | 36 |
| ## [4] class_7.3-17                           | foreach_1.5.1               | 37 |
| ## [7] crayon_1.4.2                           | spatstat.core_2.3-2         | 38 |
| ## [10] rhdf5filters_1.2.1                    | nlme_3.1-153                | 39 |
| ## [13] GOSemSim_2.16.1                       | rlang_0.4.12                | 40 |
| ## [16] ROCR_1.0-11                           | irlba_2.3.5                 | 41 |
| ## [19] phylobase_0.8.10                      | BiocParallel_1.24.1         | 42 |
| ## [22] bit64_4.0.5                           | glue_1.5.1                  | 43 |
| ## [25] rngtools_1.5.2                        | sctransform_0.3.2           | 44 |
| .0-0  |                             |    |
| ## [28] classInt_0.4-3                        | DOSE_3.16.0                 | 45 |
| ## [31] VGAM_1.1-5                            | tidyselect_1.1.1            | 46 |
| ## [34] XML_3.99-0.8                          | tidyrr_1.1.4                | 47 |
| ## [37] sf_1.0-4                              | xtable_1.8-4                | 48 |
| ## [40] evaluate_0.14                         | cli_3.1.0                   | 49 |
| ## [43] rstudioapi_0.13                       | miniUI_0.1.1.1              | 50 |
| ## [46] rpart_4.1-15                          | fastmatch_1.1-3             | 51 |
| ## [49] locfdr_1.1-8                          | shiny_1.7.1                 | 52 |
| ## [52] xfun_0.28                             | clue_0.3-60                 | 53 |
| ## [55] tidygraph_1.2.0                       | tibble_3.1.6                | 54 |
| ## [58] ggrepel_0.9.1                         | ape_5.5                     | 55 |
| ## [61] png_0.1-7                             | future_1.23.0               | 56 |
| ## [64] bitops_1.0-7                          | slam_0.1-49                 | 57 |
| ## [67] plyr_1.8.6                            | sparsesvd_0.2               | 58 |
| ## [70] coda_0.19-4                           | pillar_1.6.4                | 59 |
| ## [73] cachem_1.0.6                          | kernlab_0.9-29              | 60 |
| ## [76] GetoptLong_1.0.5                      | gmodels_2.18.1              | 61 |
| ## [79] ellipsis_0.3.2                        | generics_0.1.1              | 62 |
| ## [82] tools_4.0.3                           | rnc1_0.8.4                  | 63 |
| ## [85] tweenr_1.0.2                          | fgsea_1.16.0                | 64 |
| ## [88] DelayedArray_0.16.3                   | fastmap_1.1.0               | 65 |
| .10.0   |                             |    |
| ## [91] compiler_4.0.3                        | abind_1.4-5                 | 66 |
| ## [94] pkgmaker_0.32.2                       | plotly_4.10.0               | 67 |
| .2.4  |                             |    |
| ## [97] gridExtra_2.3                         | edgeR_3.32.1                | 68 |
| ## [100] deldir_1.0-6                         | utf8_1.2.2                  | 69 |
| ## [103] wk_0.5.0                             | jsonlite_1.7.2              | 70 |
| ## [106] princurve_2.1.6                      | docopt_0.7.1                | 71 |

|                               |                     |                   |     |
|-------------------------------|---------------------|-------------------|-----|
| ## [109] genefilter_1.72.1    | lazyeval_0.2.2      | LearnBayes_2.15.1 | 72  |
| ## [112] promises_1.2.0.1     | doParallel_1.0.16   | goftest_1.2-3     | 73  |
| ## [115] spatstat.utils_2.2-0 | reticulate_1.22     | rmarkdown_2.11    | 74  |
| ## [118] cowplot_1.1.1        | textshaping_0.3.6   | Rtsne_0.15        | 75  |
| ## [121] downloader_0.4       | softImpute_1.4-1    | uwot_0.1.11       | 76  |
| ## [124] igraph_1.2.9         | HDF5Array_1.18.1    | survival_3.2-7    | 77  |
| ## [127] yaml_2.2.1           | systemfonts_1.0.3   | DDRTree_0.1.5     | 78  |
| ## [130] htmltools_0.5.2      | memoise_2.0.1       | locfit_1.5-9.4    | 79  |
| ## [133] graphlayouts_0.7.2   | viridisLite_0.4.0   | digest_0.6.29     | 80  |
| ## [136] assertthat_0.2.1     | mime_0.12           | densityClust_0.3  | 81  |
| ## [139] registry_0.5-1       | units_0.7-2         | RSSQLite_2.2.9    | 82  |
| ## [142] yulab.utils_0.0.4    | future.apply_1.8.1  | data.table_1.14.2 | 83  |
| ## [145] blob_1.2.2           | RNeXML_2.4.5        | ragg_1.2.1        | 84  |
| ## [148] fastICA_1.2-3        | splines_4.0.3       | labeling_0.4.2    | 85  |
| ## [151] Rhdf5lib_1.12.1      | Cairo_1.5-12.2      | RCurl_1.98-1.5    | 86  |
| ## [154] monocle_2.18.0       | hms_1.1.1           | rhdf5_2.34.0      | 87  |
| ## [157] colorspace_2.0-2     | BiocManager_1.30.16 | shape_1.4.6       | 88  |
| ## [160] Rcpp_1.0.7           | RANN_2.6.1          | enrichplot_1.10.2 | 89  |
| ## [163] fansi_0.5.0          | parallelly_1.29.0   | R6_2.5.1          | 90  |
| ## [166] ggridges_0.5.3       | lifecycle_1.0.1     | gdata_2.18.0      | 91  |
| ## [169] leiden_0.3.9         | DO.db_2.9           | Matrix_1.3-4      | 92  |
| ## [172] howmany_0.3-1        | qvalue_2.22.0       | RcppAnnoy_0.0.19  | 93  |
| ## [175] iterators_1.0.13     | stringr_1.4.0       | htmlwidgets_1.5.4 | 94  |
| ## [178] beachmat_2.6.4       | polyclip_1.10-0     | purrrr_0.3.4      | 95  |
| ## [181] shadowtext_0.0.9     | terra_1.4-22        | mgcv_1.8-33       | 96  |
| ## [184] globals_0.14.0       | patchwork_1.1.1     | slingshot_1.8.0   | 97  |
| ## [187] codetools_0.2-18     | G0.db_3.12.1        | FNN_1.1.3         | 98  |
| ## [190] gtools_3.9.2         | prettyunits_1.1.1   | gridBase_0.4-7    | 99  |
| ## [193] gtable_0.3.0         | DBI_1.1.1           | ggfun_0.0.4       | 100 |
| ## [196] tensor_1.5           | httr_1.4.2          | highr_0.9         | 101 |
| ## [199] KernSmooth_2.23-20   | stringi_1.7.6       | progress_1.2.2    | 102 |
| ## [202] reshape2_1.4.4       | farver_2.1.0        | uuid_1.0-3        | 103 |
| ## [205] spdep_1.1-12         | annotate_1.68.0     | viridis_0.6.2     | 104 |
| ## [208] magick_2.7.3         | xml2_1.3.3          | combinat_0.0-8    | 105 |
| ## [211] rvcheck_0.2.1        | boot_1.3-25         | s2_1.0.7          | 106 |
| ## [214] ade4_1.7-18          | scattermore_0.7     | bit_4.0.4         | 107 |
| ## [217] scatterpie_0.1.7     | spatstat.data_2.1-0 | ggraph_2.0.5      | 108 |
| ## [220] pkgconfig_2.0.3      | knitr_1.36          |                   | 109 |

## 9 References