

Hands on with Deep Agents in LangSmith

This is just the beginning of something big.

Grab the
Code Repo



<https://bit.ly/4gWUnkg>

Agenda

What are Deep Agents


When to use them

**Build a Deep Agent in a
Notebook**


Q & A

What is a Deep Agent?

Runtimes, Frameworks and Harnesses

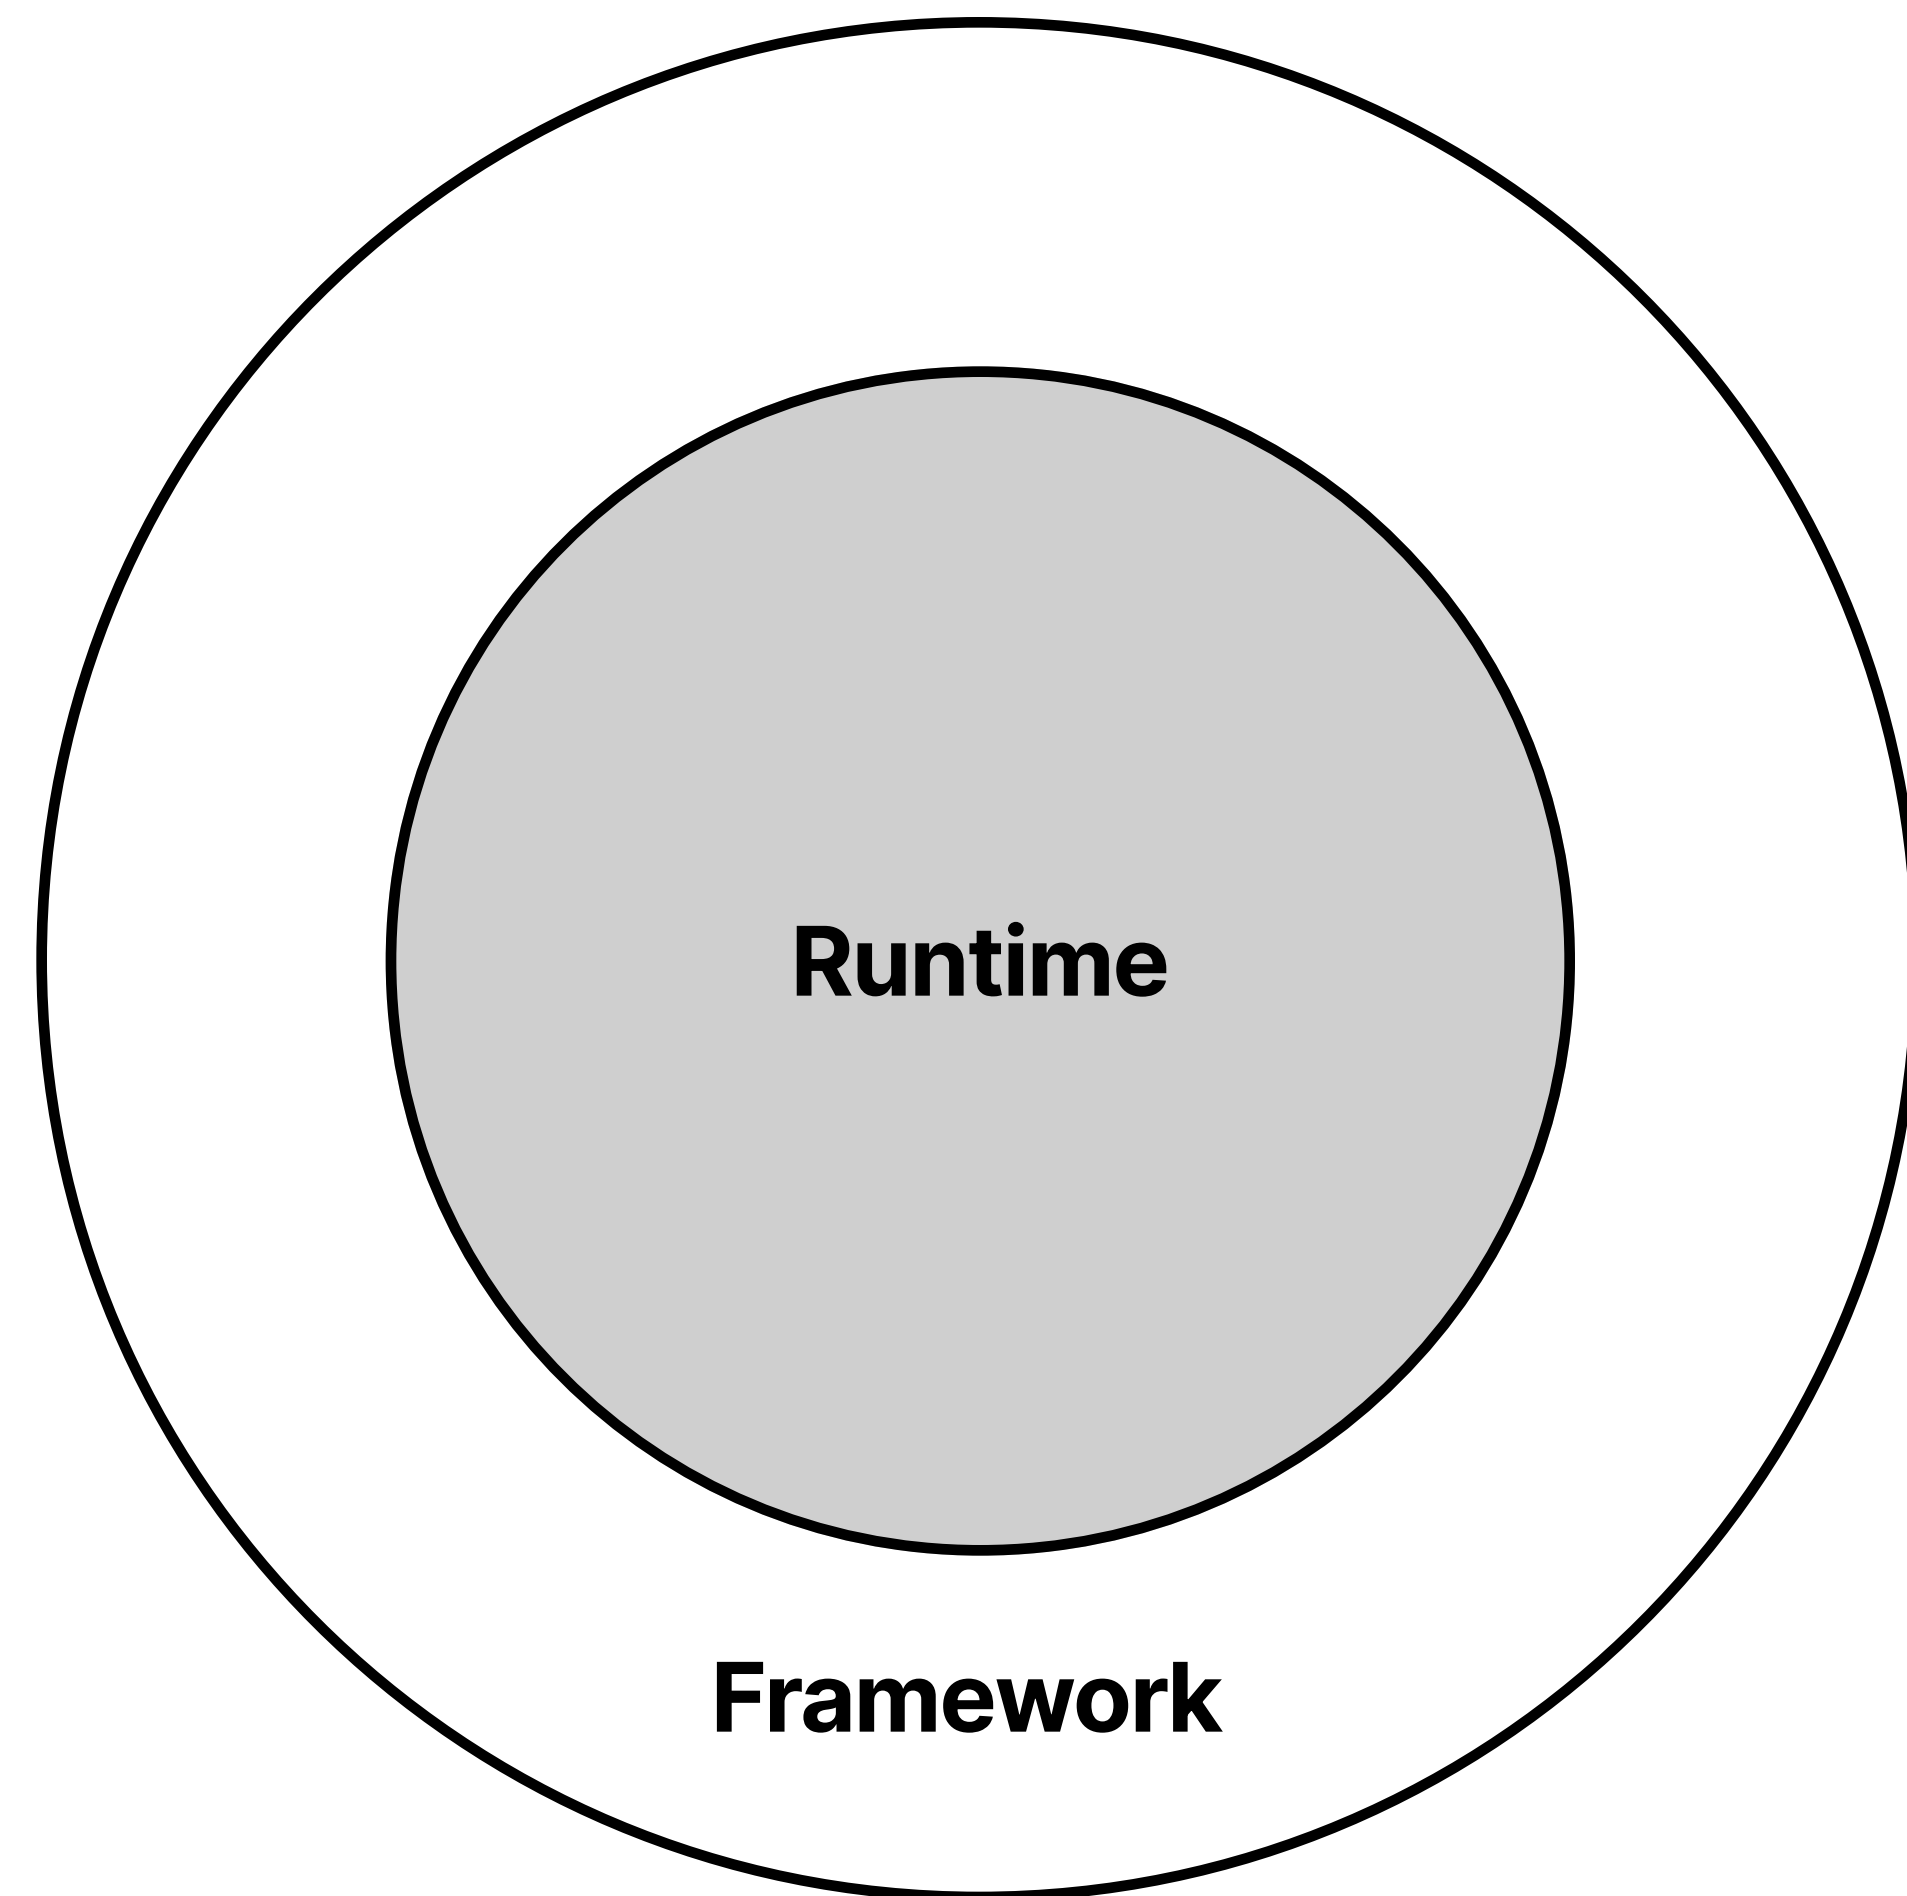

Deep Agents
are Here

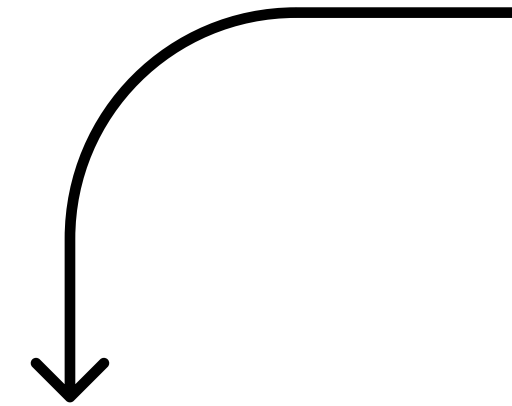

Abstraction Level

Higher



Lower

Harness

Framework

Runtime

Value Add | Runtimes, Frameworks and Harnesses

Runtime

- Durable Execution
- Streaming
- HITL
- Persistence

Framework

- Abstractions
 - LLMs
 - RAG Components
 - Storage

Harness

- Predefined:
 - Prompts
 - Tools
 - Subagents

Examples | Runtimes, Frameworks and Harnesses

Runtime

- LangGraph
- Temporal
- Inngest

Framework

- LangChain
- Vercel AI SDK
- CrewAI
- OpenAI Agents SDK
- Google ADK
- LlamaIndex

Harness

- DeepAgents SDK
- Claude Agent SDK
- Manus

**When should I use a Deep
Agent?**

Deep Agent Use Cases

Get Started Quickly (POCs)

Get an agent up and running.
Get feedback and iterate.
Lower risk endeavors.

Long Running Tasks

Tasks beyond a simple single
call and response that
require time to work through.

Undefined Multi-Step Tasks

When steps for a task are
unknown or may vary.

Pre-Defined Tools & Prompts

General use cases where
pre-defined components
work well.

Let's Build a Deep Agent!