

f (<https://www.facebook.com/AnalyticsVidhya>) | **🐦** (<https://twitter.com/analyticsvidhya>)

g+ (<https://plus.google.com/+Analyticsvidhya/posts>)

in (<https://www.linkedin.com/groups/Analytics-Vidhya-Learn-everything-about-5057165>) |

Home (<https://www.analyticsvidhya.com/>) | Blog (<https://www.analyticsvidhya.com/blog/>)

Jobs (<https://www.analyticsvidhya.com/jobs/>) | Trainings (<https://www.analyticsvidhya.com/trainings/>)

Learning Paths (<https://www.analyticsvidhya.com/learning-paths-data-science-business-analytics-business-intelligence-big-data/>)

Discuss (<https://discuss.analyticsvidhya.com>)

Datahack Summit 2017 (<https://www.analyticsvidhya.com/datahacksummit/>) |



(<https://www.analyticsvidhya.com>)



(<https://www.analyticsvidhya.com>)

[/datahacksummit/?utm_source=avblog_header&utm_medium=web&utm_campaign=banner](https://www.analyticsvidhya.com/datahacksummit/?utm_source=avblog_header&utm_medium=web&utm_campaign=banner))

HOME (<https://www.analyticsvidhya.com/>) LEARN ▾ ENGAGE ▾ COMPETE ▾ GET HIRED ▾



DATAHACK SUMMIT 2017 (<https://www.analyticsvidhya.com/datahacksummit>)

[/?utm_source=av_header_menu&utm_medium=avsite](https://www.analyticsvidhya.com/datahacksummit/?utm_source=av_header_menu&utm_medium=avsite))

CONTACT US (<https://www.analyticsvidhya.com/contact/>)

WE ARE HIRING! (<https://www.analyticsvidhya.com/about-me/career-analytics-vidhya/>)

Home (<https://www.analyticsvidhya.com/>) > Deep Learning

(<https://www.analyticsvidhya.com/blog/category/deep-learning/>) >

Understanding and coding Neural Networks From Scratch in Python and R

(<https://www.analyticsvidhya.com/blog/2017/05/neural-network-from-scratch-in-python-and-r/>)

DEEP LEARNING ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/CATEGORY/DEEP-LEARNING/](https://www.analyticsvidhya.com/blog/category/deep-learning/)) PYTHON ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/CATEGORY/PYTHON-2/](https://www.analyticsvidhya.com/blog/category/python/)) R ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/CATEGORY/R/](https://www.analyticsvidhya.com/blog/category/r/))



**GIVE YOUR CAREER THE
BIG DATA ADVANTAGE**
[REGISTER FREE](#)
22nd OCT - 28th OCT

2017/10/30 下午12:53

know how to apply it, try it around with different parameters, values, limits and develop an understanding of the algorithm.

I prefer Option 2 and take that approach to learning any new topic. I might not be able to tell you the entire math behind an algorithm, but I can tell you the intuition. I can tell you the best scenarios to apply an algorithm based on my experiments and understanding.

In my interactions with people, I find that people don't take time to develop this intuition and hence they struggle to apply things in the right manner.

In this article, I will discuss the building block of a neural network from scratch and focus more on developing this intuition to apply Neural networks. We will code in both "Python" and "R". By end of this article, you will understand how Neural networks work, how do we initialize weights and how do we update them using back-propagation.

Let's start.

Table of Contents:

1. Simple intuition behind Neural networks
2. Multi Layer Perceptron and its basics
3. Steps involved in Neural Network methodology
4. Visualizing steps for Neural Network working methodology
5. Implementing NN using Numpy (Python)
6. Implementing NN using R
7. [Optional] Mathematical Perspective of Back Propagation Algorithm

Simple intuition behind neural networks

utm_term=DS_AV_Banner&
utm_content=DS_AV_Banner)



(http://praxis.ac.in/fulltime-bigdata-analytics/?utm_source=AVBanner)

POPULAR POSTS

- Essentials of Machine Learning Algorithms (with Python and R Codes)
(<https://www.analyticsvidhya.com/blog/2017/09/common-machine-learning-algorithms/>)
- A Complete Tutorial to Learn Data Science with Python from Scratch
(<https://www.analyticsvidhya.com/blog/2016/01/complete-tutorial-learn-data-science-python-scratch-2/>)
- 7 Types of Regression Techniques you should know!
(<https://www.analyticsvidhya.com/blog/2017/05/7-types-of-regression-techniques-you-should-know/>)

If you have been a developer or seen one work – you know how it is to search for bugs in a code. You would fire various test cases by varying the inputs or circumstances and look for the output. The change in output provides you a hint on where to look for the bug – which module to check, which lines to read. Once you find it, you make the changes and the exercise continues until you have the right code / application.

Neural networks work in very similar manner. It takes several input, processes it through multiple neurons from multiple hidden layers and returns the result using an output layer. This result estimation process is technically known as “**Forward Propagation**”.

Next, we compare the result with actual output. The task is to make the output to neural network as close to actual (desired) output. Each of these neurons are contributing some error to final output. How do you reduce the error?

We try to minimize the value/ weight of neurons those are contributing more to the error and this happens while traveling back to the neurons of the neural network and finding where the error lies. This process is known as “**Backward Propagation**”.

In order to reduce these number of iterations to minimize the error, the neural networks use a common algorithm known as “Gradient Descent”, which helps to optimize the task quickly and efficiently.

That's it – this is how Neural network works! I know this is a very simple representation, but it would help you understand things in a simple manner.


Multi Layer Perceptron and its basics

Just like atoms form the basics of any material on earth – the

[/blog/2015/08/comprehensive-guide-regression/](#)
Understanding Support Vector Machine algorithm from examples (along with code)
(<https://www.analyticsvidhya.com/blog/2017/09/understaing-support-vector-machine-example-code/>)
A Complete Tutorial on Tree Based Modeling from Scratch (in R & Python)
(<https://www.analyticsvidhya.com/blog/2016/04/complete-tutorial-tree-based-modeling-scratch-in-python/>)
6 Easy Steps to Learn Naive Bayes Algorithm (with codes in Python and R)
(<https://www.analyticsvidhya.com/blog/2017/09/naive-bayes-explained/>)
17 Ultimate Data Science Projects To Boost Your Knowledge and Skills (& can be accessed freely)
(<https://www.analyticsvidhya.com/blog/2016/10/17-ultimate-data-science-projects-to-boost-your-knowledge-and-skills/>)

basic forming unit of a neural network is a perceptron. So, what is a perceptron?

A perceptron can be understood as anything that takes multiple inputs and produces one output. For example, look at the image below.

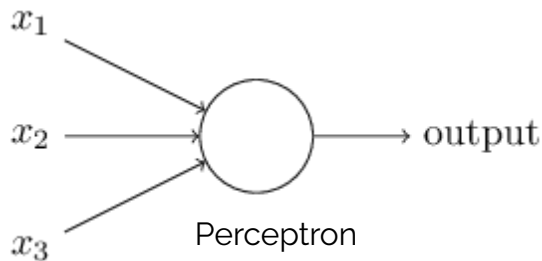

The above structure takes three inputs and produces one output. The next logical question is what is the relationship between input and output? Let us start with basic ways and build on to find more complex ways.

Below, I have discussed three ways of creating input output relationships:

1. **By directly combining the input and computing the output** based on a threshold value. for eg: Take $x_1=0$, $x_2=1$, $x_3=1$ and setting a threshold $=0$. So, if $x_1+x_2+x_3>0$, the output is 1 otherwise 0. You can see that in this case, the perceptron calculates the output as 1.
2. **Next, let us add weights to the inputs.** Weights give importance to an input. For example, you assign $w_1=2$, $w_2=3$ and $w_3=4$ to x_1 , x_2 and x_3 respectively. To compute the output, we will multiply input with respective weights and compare with threshold value as $w_1*x_1 + w_2*x_2 + w_3*x_3 > \text{threshold}$. These weights assign more importance to x_3 in comparison to x_1 and x_2 .
3. **Next, let us add bias:** Each perceptron also has a bias which can be thought of as how much flexible the perceptron is. It is somehow similar to the constant b of a linear function $y = ax + b$. *It allows us to move the line up and down to fit the prediction with the data better. Without b the line will always*

Beginner's guide to Web Scraping in Python (using BeautifulSoup) (<https://www.analyticsvidhya.com/blog/2015/10/beginner-guide-web-scraping-beautiful-soup-python/>)



(https://www.dataquest.io/?utm_source=analytics-vidhya&utm_medium=ads&utm_campaign=2017-09-analytics-vidhya&utm_content=data-scientist)

RECENT POSTS



(<https://www.analyticsvidhya.com/blog/2017/10/comprehensive-tutorial-learn-data-science-julia-from-scratch/>)

A Comprehensive Tutorial to Learn Data Science with Julia from

goes through the origin (0, 0) and you may get a poorer fit. For example, a perceptron may have two inputs, in that case, it requires three weights. One for each input and one for the bias. Now linear representation of input will look like, $w_1 \cdot x_1 + w_2 \cdot x_2 + w_3 \cdot x_3 + 1 \cdot b$.

But, all of this is still linear which is what perceptrons used to be. But that was not as much fun. So, people thought of evolving a perceptron to what is now called as artificial neuron. A neuron applies non-linear transformations (activation function) to the inputs and biases.

What is an activation function?

Activation Function takes the sum of weighted input ($w_1 \cdot x_1 + w_2 \cdot x_2 + w_3 \cdot x_3 + 1 \cdot b$) as an argument and return the output of the neuron.

$$a = f\left(\sum_{i=0}^N w_i x_i\right)$$

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28091327/eq1-neuron.png>) In above equation, we have represented 1 as x_0 and b as w_0 .

The activation function is mostly used to make a non-linear transformation which allows us to fit nonlinear hypotheses or to estimate the complex functions. There are multiple activation functions, like: "Sigmoid", "Tanh", ReLu and many other.

Forward Propagation, Back Propagation and Epochs

Till now, we have computed the output and this process is known as "**Forward Propagation**". But what if the estimated output is far away from the actual output (high error). In the neural network what we do, we update the biases and weights based on the error. This weight and bias updating process is

Scratch
(<https://www.analyticsvidhya.com/blog/2017/10/comprehensive-tutorial-learn-data-science-julia-from-scratch/>)
MOHD SANAD ZAKI ...



(<https://www.analyticsvidhya.com/blog/2017/10/essential-nlp-guide-data-scientists-top-10-nlp-tasks/>)

The Essential
NLP Guide for
data scientists
(with codes for
top 10 common
NLP tasks)
(<https://www.analyticsvidhya.com/blog/2017/10/essential-nlp-guide-data-scientists-top-10-nlp-tasks/>)
NSS , OCTOBER 26, ...



(<https://www.analyticsvidhya.com/blog/2017/10/fundamentals-deep-learning-activation->


known as **"Back Propagation"**.

Back-propagation (BP) algorithms work by determining the loss (or error) at the output and then propagating it back into the network. The weights are updated to minimize the error resulting from each neuron. The first step in minimizing the error is to determine the gradient (Derivatives) of each node w.r.t. the final output. To get a mathematical perspective of the Backward propagation, refer below section.

This one round of forward and back propagation iteration is known as one training iteration aka **"Epoch"**.

Multi-layer perceptron

Now, let's move on to next part of **Multi-Layer** Perceptron. So far, we have seen just a single layer consisting of 3 input nodes i.e x1, x2 and x3 and an output layer consisting of a single neuron. But, for practical purposes, the single-layer network can do only so much. An MLP consists of multiple layers called **Hidden Layers** stacked in between the **Input Layer** and the **Output Layer** as shown below.

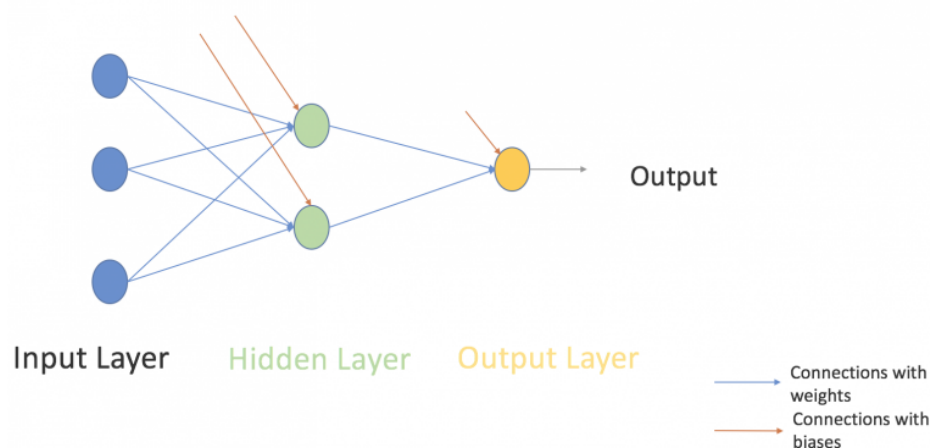

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/26094834/Screen-Shot-2017-05-26-at-9.47.51-AM.png>)

functions-when-to-use-them/)

Fundamentals of Deep Learning – Activation Functions and When to Use Them?

(<https://www.analyticsvidhya.com/blog/2017/10/fundamentals-deep-learning-activation-functions-when-to-use-them/>)

DISHASHREE GUPTA...



(<https://www.analyticsvidhya.com/blog/2017/10/art-story-telling-data-science/>)

The Art of Story Telling in Data Science and how to create data stories?

(<https://www.analyticsvidhya.com/blog/2017/10/art-story-telling-data-science/>)

SHANTANU KUMAR ,...

The image above shows just a single hidden layer in green but in practice can contain multiple hidden layers. Another point to remember in case of an MLP is that all the layers are fully connected i.e every node in a layer(except the input and the output layer) is connected to every node in the previous layer and the following layer.

Let's move on to the next topic which is training algorithm for a neural network (to minimize the error). Here, we will look at most common training algorithm known as Gradient descent (<https://www.analyticsvidhya.com/blog/2017/03/introduction-to-gradient-descent-algorithm-along-its-variants/>).

Full Batch Gradient Descent and Stochastic Gradient Descent

Both variants of Gradient Descent perform the same work of updating the weights of the MLP by using the same updating algorithm but the difference lies in the number of training samples used to update the weights and biases.

Full Batch Gradient Descent Algorithm as the name implies uses all the training data points to update each of the weights once whereas Stochastic Gradient uses 1 or more(sample) but never the entire training data to update the weights once.

Let us understand this with a simple example of a dataset of 10 data points with two weights **w1** and **w2**.

Full Batch: You use 10 data points (entire training data) and calculate the change in w1 (Δw_1) and change in w2(Δw_2) and update w1 and w2.

SGD: You use 1st data point and calculate the change in w1 (Δw_1) and change in w2(Δw_2) and update w1 and w2. Next,



(https://www.dataquest.io/?utm_source=analytics-vidhya&utm_medium=ads&utm_campaign=2017-09-analytics-vidhya&utm_content=python)



(http://www.edvancer.in/certified-data-scientist-with-python-course?utm_source=AV&utm_medium=AVads&utm_campaign=AVadsnonfc&utm_content=pythonavad)

GET CONNECTED



11,789

FOLLOWERS

(<http://www.twitter.com/analyticsvidhya>)




39,815

FOLLOWERS

when you use 2nd data point, you will work on the updated weights

For a more in-depth explanation of both the methods, you can have a look at this article (<https://www.analyticsvidhya.com/blog/2017/03/introduction-to-gradient-descent-algorithm-along-its-variants/>).

Steps involved in Neural Network methodology

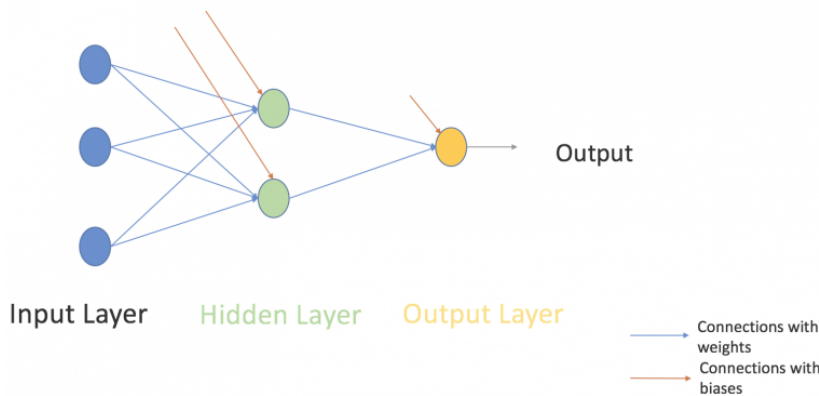

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/26094834/Screenshot-2017-05-26-at-9.47.51-AM.png>)

Let's look at the step by step building methodology of Neural Network (MLP with one hidden layer, similar to above-shown architecture). At the output layer, we have only one neuron as we are solving a binary classification problem (predict 0 or 1). We could also have two neurons for predicting each of both classes.

First look at the broad steps:

o.) We take input and output

(<http://www.facebook.com/AnalyticsVidhya>)
2,248 FOLLOWERS

(<https://plus.google.com/+AnalyticsVidhya>)
Email SUBSCRIBE

(<http://feedburner.google.com/fb/a/mailverify?uri=analyticsvidhya>)



(https://www.analyticsvidhya.com/datahacksummit/?utm_source=avblog_side&utm_medium=web&utm_campaign=banner)



(https://datahack.analyticsvidhya.com/contest/data-science-hackathon-churn-prediction/?utm_source=avblog_side2&utm_medium=web&utm_campaign=banner)

- X as an input matrix
- y as an output matrix

1.) We initialize weights and biases with random values (This is one time initiation. In the next iteration, we will use updated weights, and biases). Let us define:

- wh as weight matrix to the hidden layer
- bh as bias matrix to the hidden layer
- wout as weight matrix to the output layer
- bout as bias matrix to the output layer

2.) We take matrix dot product of input and weights assigned to edges between the input and hidden layer then add biases of the hidden layer neurons to respective inputs, this is known as linear transformation:

$$\text{hidden_layer_input} = \text{matrix_dot_product}(X, wh) + bh$$

3) Perform non-linear transformation using an activation function (Sigmoid). Sigmoid will return the output as $1/(1 + \exp(-x))$.

$$\text{hiddenlayer_activations} = \text{sigmoid}(\text{hidden_layer_input})$$

4.) Perform a linear transformation on hidden layer activation (take matrix dot product with weights and add a bias of the output layer neuron) then apply an activation function (again used sigmoid, but you can use any other activation function depending upon your task) to predict the output

$$\begin{aligned} \text{output_layer_input} &= \text{matrix_dot_product} \\ &(\text{hiddenlayer_activations} * wout) + bout \\ \text{output} &= \text{sigmoid}(\text{output_layer_input}) \end{aligned}$$

All above steps are known as “Forward Propagation”

5.) Compare prediction with actual output and calculate the gradient of error (Actual – Predicted). Error is the mean square

$$\text{loss} = ((Y-t)^2)/2$$

$$E = y - \text{output}$$

6.) Compute the slope/ gradient of hidden and output layer neurons (To compute the slope, we calculate the derivatives of non-linear activations x at each layer for each neuron). Gradient of sigmoid can be returned as $x * (1 - x)$.

$$\begin{aligned} \text{slope_output_layer} &= \text{derivatives_sigmoid}(\text{output}) \\ \text{slope_hidden_layer} &= \\ &\text{derivatives_sigmoid}(\text{hiddenlayer_activations}) \end{aligned}$$

7.) Compute change factor(delta) at output layer, dependent on the gradient of error multiplied by the slope of output layer activation

$$d_output = E * \text{slope_output_layer}$$

8.) At this step, the error will propagate back into the network which means error at hidden layer. For this, we will take the dot product of output layer delta with weight parameters of edges between the hidden and output layer ($w_{out.T}$).

$$\text{Error_at_hidden_layer} = \text{matrix_dot_product}(d_output, w_{out.T})$$

9.) Compute change factor(delta) at hidden layer, multiply the error at hidden layer with slope of hidden layer activation

$$d_hiddenlayer = \text{Error_at_hidden_layer} * \text{slope_hidden_layer}$$

10.) Update weights at the output and hidden layer: The weights in the network can be updated from the errors calculated for training example(s).

$$\begin{aligned} w_{out} &= w_{out} + \\ &\text{matrix_dot_product}(\text{hiddenlayer_activations.T}, \end{aligned}$$

```

d_output)*learning_rate
wh = wh +
matrix_dot_product(X.Transpose,d_hiddenlayer)*learning_rate

```

learning_rate: The amount that weights are updated is controlled by a configuration parameter called the learning rate)

11.) Update biases at the output and hidden layer: The biases in the network can be updated from the aggregated errors at that neuron.

- bias at output_layer = bias at output_layer + sum of delta of output_layer at row-wise * learning_rate
- bias at hidden_layer = bias at hidden_layer + sum of delta of output_layer at row-wise * learning_rate

```

bh = bh + sum(d_hiddenlayer, axis=0) * learning_rate
bout = bout + sum(d_output, axis=0)*learning_rate

```

Steps from 5 to 11 are known as “Backward Propagation”

One forward and backward propagation iteration is considered as one training cycle. As I mentioned earlier, When do we train second time then update weights and biases are used for forward propagation.

Above, we have updated the weight and biases for hidden and output layer and we have used full batch gradient descent algorithm.

Visualization of steps for Neural Network methodology

We will repeat the above steps and visualize the input, weights, biases, output, error matrix to understand working

methodology of Neural Network (MLP).

Note:

- For good visualization images, I have rounded decimal positions at 2 or 3 positions.
- Yellow filled cells represent current active cell
- Orange cell represents the input used to populate values of current cell

Step 0: Read input and output

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0																1	
1	0	1	1																1	
0	1	0	1																0	

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/26185640/0.0NN.jpg>)

Step 1: Initialize weights and biases with random values (There are methods to initialize weights and biases but for now initialize with random values)

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08							0.30	0.69		1	
1	0	1	1	0.10	0.73	0.68										0.25			1	
0	1	0	1	0.60	0.18	0.47										0.23			0	
				0.92	0.11	0.52														

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28120922/Screen-Shot-2017-05-28-at-12.06.49-PM.png>)

Step 2: Calculate hidden layer input:

$\text{hidden_layer_input} = \text{matrix_dot_product}(X, wh) + bh$

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10				0.30	0.69		1	
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61				0.25			1	
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27				0.23			0	
				0.92	0.11	0.52														

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28120936/Screen-Shot-2017-05-28-at-12.07.23-PM.png>) **Step 3:** Perform non-linear transformation on hidden linear input

$hiddenlayer_activations = sigmoid(hidden_layer_input)$

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.86	0.75	0.30	0.69		1	
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25			1	
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23			0	
				0.92	0.11	0.52														

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28120948/Screen-Shot-2017-05-28-at-12.07.32-PM.png>) **Step 4:** Perform linear and non-linear transformation of hidden layer activation at output layer

$output_layer_input = matrix_dot_product$

$(hiddenlayer_activations * wout) + bout$

$output = sigmoid(output_layer_input)$

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.86	0.75	0.30	0.69	0.79	1	
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25		0.80	1	
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23		0.79	0	
				0.92	0.11	0.52														

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28121001/Screen-Shot-2017-05-28-at-12.07.41-PM.png>) **Step 5:** Calculate gradient of Error(E) at output layer

$E = y - output$

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.86	0.75	0.30	0.69	0.79	1	0.21
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25		0.80	1	0.20
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23		0.79	0	-0.79
				0.92	0.11	0.52														

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28121014/Screen-Shot-2017-05-28-at-12.07.48-PM.png>) **Step 6:** Compute slope at output and hidden layer

$Slope_output_layer = derivatives_sigmoid(output)$

$Slope_hidden_layer =$

$derivatives_sigmoid(hiddenlayer_activations)$

X				wh			bh			hidden_layer input			hidden_layer activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.86	0.75	0.30	0.69	0.79	1	0.21
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25		0.80	1	0.20
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23		0.79	0	-0.79
				0.92	0.11	0.52														

Slope hidden layer		
0.15	0.12	0.19
0.08	0.11	0.14
0.15	0.14	0.17

Slope Output	
0.17	
0.16	
0.17	

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28121030/Screen-Shot-2017-05-28-at-12.07.57-PM.png>) **Step 7:** Compute delta at output layer

$$d_output = E * slope_output_layer * lr$$

X				wh			bh			hidden_layer input			hidden_layer activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.86	0.75	0.30	0.69	0.79	1	0.21
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25		0.80	1	0.20
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23		0.79	0	-0.79
				0.92	0.11	0.52														

Slope hidden layer		
0.15	0.12	0.19
0.08	0.11	0.14
0.15	0.14	0.17

Slope Output	
0.17	
0.16	
0.17	

E	
0.21	
0.20	
-0.79	

delta output	
0.04	
0.03	
-0.13	

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28121043/Screen-Shot-2017-05-28-at-12.08.06-PM.png>)

Step 8: Calculate Error at hidden layer

$$\text{Error_at_hidden_layer} = \text{matrix_dot_product}(d_output, \text{wout.Transpose})$$

X				wh			bh			hidden_layer input			hidden_layer activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.86	0.75	0.30	0.69	0.79	1	0.21
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25		0.80	1	0.20
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23		0.79	0	-0.79
				0.92	0.11	0.52														

Slope hidden layer			error at hidden layer		
0.15	0.12	0.19	0.010	0.009	0.008
0.08	0.11	0.14	0.010	0.008	0.008
0.15	0.14	0.17	-0.039	-0.033	-0.031

Slope Output	
0.17	
0.16	
0.17	

E	
0.21	
0.20	
-0.79	

delta output	
0.04	
0.03	
-0.13	

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28121057/Screen-Shot-2017-05-28-at-12.08.14-PM.png>) **Step 9:** Compute delta at hidden layer

$$d_hiddenlayer = Error_at_hidden_layer * slope_hidden_layer$$

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.86	0.75	0.30	0.69	0.79	1	0.21
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25		0.80	1	0.20
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23		0.79	0	-0.79
				0.92	0.11	0.52														

Slope hidden layer			error at hidden layer		
0.15	0.12	0.19	0.010	0.009	0.008
0.08	0.11	0.14	0.010	0.008	0.008
0.15	0.14	0.17	-0.039	-0.033	-0.031

Slope Output	E
0.17	0.21
0.16	0.20
0.17	-0.79

delta hidden layer		
0.002	0.001	0.002
0.001	0.001	0.001
-0.006	-0.005	-0.005

delta output
0.04
0.03
-0.13

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28121113/Screen-Shot-2017-05-28-at-12.08.20-PM.png>)

Step 10: Update weight at both output and hidden layer

wout = wout +

matrix_dot_product(hiddenlayer_activations.Transpose,
d_output)*learning_rate

wh = wh +

matrix_dot_product(X.Transpose,d_hiddenlayer)*learning_rate

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.86	0.75	0.29	0.69	0.79	1	0.21
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25		0.80	1	0.20
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23		0.79	0	-0.79
				0.92	0.11	0.51														

Slope hidden layer			error at hidden layer		
0.15	0.12	0.19	0.010	0.009	0.008
0.08	0.11	0.14	0.010	0.008	0.008
0.15	0.14	0.17	-0.039	-0.033	-0.031

Slope Output	E
0.17	0.21
0.16	0.20
0.17	-0.79

Learning Rate	0.1
---------------	-----

delta hidden layer		
0.002	0.001	0.002
0.001	0.001	0.001
-0.006	-0.005	-0.005

delta output
0.035
0.033
-0.131

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28121126/Screen-Shot-2017-05-28-at-12.08.30-PM.png>)

Step 11: Update biases at both output and hidden layer

bh = bh + sum(d_hiddenlayer, axis=0) * learning_rate

bout = bout + sum(d_output, axis=0)*learning_rate

X				wh			bh			hidden_layer_input			hidden_layer_activations			wout	bout	output	y	E
1	0	1	0	0.42	0.88	0.55	0.46	0.72	0.08	1.48	1.78	1.10	0.81	0.85	0.75	0.29	0.68	0.79	1	0.21
1	0	1	1	0.10	0.73	0.68				2.40	1.89	1.61	0.92	0.87	0.83	0.25		0.80	1	0.20
0	1	0	1	0.60	0.18	0.47				1.48	1.56	1.27	0.81	0.83	0.78	0.23		0.79	0	-0.79
				0.92	0.11	0.51														

Slope hidden layer			error at hidden layer		
0.15	0.12	0.19	0.010	0.009	0.008
0.08	0.11	0.14	0.010	0.008	0.008
0.15	0.14	0.17	-0.039	-0.033	-0.031

Slope Output	E
0.17	0.21
0.16	0.20
0.17	-0.79

Learning Rate	0.1
---------------	-----

delta hidden layer		
0.002	0.001	0.002
0.001	0.001	0.001
-0.006	-0.005	-0.005

delta output
0.035
0.033
-0.131

(<https://s3-ap-south-1.amazonaws.com/av-blog-media/wp-content/uploads/2017/05/28121142/Screen-Shot-2017-05-28-at-12.08.39-PM.png>)

Above, you can see that there is still a good error not close to actual target value because we have completed only one training iteration. If we will train model multiple times then it will be a very close actual outcome. I have completed thousands iteration and my result is close to actual target values ([0.98032096] [0.96845624] [0.04532167]).

Implementing NN using Numpy (Python)

```
import numpy as np
```

```
#Input array
```

```
X=np.array([[1,0,1,0],[1,0,1,1],[0,1,0,1]])
```

```
#Output
```

```
y=np.array([[1],[1],[0]])
```

```
#Sigmoid Function
```

```
def sigmoid (x):
```

```
    return 1/(1 + np.exp(-x))
```

```
#Derivative of Sigmoid Function
```

```
def derivatives_sigmoid(x):
```

```
return x * (1 - x)

#Variable initialization
epoch=5000 #Setting training iterations
lr=0.1 #Setting learning rate
inputlayer_neurons = X.shape[1] #number of features
in data set
hiddenlayer_neurons = 3 #number of hidden layers
neurons
output_neurons = 1 #number of neurons at output layer

#weight and bias initialization
wh=np.random.uniform(size=
(inputlayer_neurons,hiddenlayer_neurons))
bh=np.random.uniform(size=(1,hiddenlayer_neurons))
wout=np.random.uniform(size=
(hiddenlayer_neurons,output_neurons))
bout=np.random.uniform(size=(1,output_neurons))

for i in range(epoch):

    #Forward Propagation
    hidden_layer_input1=np.dot(X,wh)
    hidden_layer_input=hidden_layer_input1 + bh
    hiddenlayer_activations =
    sigmoid(hidden_layer_input)
    output_layer_input1=np.dot(hiddenlayer_activations,wout)
    output_layer_input= output_layer_input1+ bout
    output = sigmoid(output_layer_input)

    #Backpropagation
    E = y-output
    slope_output_layer = derivatives_sigmoid(output)
    slope_hidden_layer =
```

```
derivatives_sigmoid(hiddenlayer_activations)
d_output = E * slope_output_layer
Error_at_hidden_layer = d_output.dot(wout.T)
d_hiddenlayer = Error_at_hidden_layer *
slope_hidden_layer
wout += hiddenlayer_activations.T.dot(d_output)
*lr
bout += np.sum(d_output, axis=0, keepdims=True) *lr
wh += X.T.dot(d_hiddenlayer) *lr
bh += np.sum(d_hiddenlayer, axis=0, keepdims=True)
*lr

print output
```

Implementing NN in R

```
# input matrix
X=matrix(c(1,0,1,0,1,0,1,1,0,1,0,1),nrow = 3,
ncol=4,byrow = TRUE)

# output matrix
Y=matrix(c(1,1,0),byrow=FALSE)

#sigmoid function
sigmoid<-function(x){
1/(1+exp(-x))
}

# derivative of sigmoid function
derivatives_sigmoid<-function(x){
x*(1-x)
}
```

```
# variable initialization
epoch=5000
lr=0.1
inputlayer_neurons=ncol(X)
hiddenlayer_neurons=3
output_neurons=1

#weight and bias initialization
wh=matrix(
rnorm(inputlayer_neurons*hiddenlayer_neurons,mean=0,sd=1),
inputlayer_neurons, hiddenlayer_neurons)
bias_in=runif(hiddenlayer_neurons)
bias_in_temp=rep(bias_in, nrow(X))
bh=matrix(bias_in_temp, nrow = nrow(X), byrow =
FALSE)
wout=matrix(
rnorm(hiddenlayer_neurons*output_neurons,mean=0,sd=1),
hiddenlayer_neurons, output_neurons)

bias_out=runif(output_neurons)
bias_out_temp=rep(bias_out,nrow(X))
bout=matrix(bias_out_temp,nrow = nrow(X),byrow =
FALSE)
# forward propagation
for(i in 1:epoch){

hidden_layer_input1= X%%wh
hidden_layer_input=hidden_layer_input1+bh
hidden_layer_activations=sigmoid(hidden_layer_input)
output_layer_input1=hidden_layer_activations%%wout
output_layer_input=output_layer_input1+bout
output= sigmoid(output_layer_input)
```



```

# Back Propagation

E=Y-output
slope_output_layer=derivatives_sigmoid(output)
slope_hidden_layer=derivatives_sigmoid(hidden_layer_activations)
d_output=E*slope_output_layer
Error_at_hidden_layer=d_output**t(wout)
d_hiddenlayer=Error_at_hidden_layer*slope_hidden_layer
wout= wout +
(t(hidden_layer_activations)**d_output)*lr
bout= bout+rowSums(d_output)*lr
wh = wh +(t(X)**d_hiddenlayer)*lr
bh = bh + rowSums(d_hiddenlayer)*lr

}
output

```

[Optional] Mathematical Perspective of Back Propagation Algorithm

Let W_i be the weights between the input layer and the hidden layer. W_h be the weights between the hidden layer and the output layer.

Now, $\mathbf{h} = \sigma(\mathbf{u}) = \sigma(\mathbf{W}_i \mathbf{X})$, i.e h is a function of u and u is a function of W_i and X . here we represent our function as σ

$\mathbf{Y} = \sigma(\mathbf{u}') = \sigma(\mathbf{W}_h \mathbf{h})$, i.e Y is a function of u' and u' is a function of W_h and h .

We will be constantly referencing the above equations to calculate partial derivatives.

We are primarily interested in finding two terms, $\partial E / \partial W_i$ and $\partial E / \partial W_h$ i.e change in Error on changing the weights between the input and the hidden layer and change in error on changing the weights between the hidden layer and the output layer.

But to calculate both these partial derivatives, we will need to use the chain rule of partial differentiation since E is a function of Y and Y is a function of u' and u' is a function of W_i .

Let's put this property to good use and calculate the gradients.

$$\partial E / \partial W_h = (\partial E / \partial Y) \cdot (\partial Y / \partial u') \cdot (\partial u' / \partial W_h), \dots (1)$$

We know E is of the form $E = (Y - t)^2 / 2$.

$$\text{So, } (\partial E / \partial Y) = (Y - t)$$

Now, σ is a sigmoid function and has an interesting differentiation of the form $\sigma(1 - \sigma)$. I urge the readers to work this out on their side for verification.

$$\text{So, } (\partial Y / \partial u') = \partial(\sigma(u')) / \partial u' = \sigma(u')(1 - \sigma(u')).$$

But, $\sigma(u') = Y$, So,

$$(\partial Y / \partial u') = Y(1 - Y)$$

$$\text{Now, } (\partial u' / \partial W_h) = \partial(W_h h) / \partial W_h = h$$

Replacing the values in equation (1) we get,

$$\partial E / \partial W_h = (Y - t) \cdot Y(1 - Y) \cdot h$$

So, now we have computed the gradient between the hidden layer and the output layer. It is time we calculate the gradient between the input layer and the hidden layer.

$$\partial E / \partial W_i = (\partial E / \partial h) \cdot (\partial h / \partial u) \cdot (\partial u / \partial W_i)$$

But, $(\partial E / \partial h) = (\partial E / \partial Y) \cdot (\partial Y / \partial u') \cdot (\partial u' / \partial h)$. Replacing this value in the above equation we get,

$$\partial E / \partial W_i = [(\partial E / \partial Y) \cdot (\partial Y / \partial u') \cdot (\partial u' / \partial h)] \cdot (\partial h / \partial u) \cdot (\partial u / \partial W_i) \dots \dots \dots (2)$$

So, What was the benefit of first calculating the gradient between the hidden layer and the output layer?

As you can see in equation (2) we have already computed $\partial E / \partial Y$ and $\partial Y / \partial u'$ saving us space and computation time. We will come to know in a while why is this algorithm called the back propagation algorithm.

Let us compute the unknown derivatives in equation (2).

$$\partial u' / \partial h = \partial (W_h h) / \partial h = W_h$$

$$\partial h / \partial u = \partial (\sigma(u)) / \partial u = \sigma(u)(1 - \sigma(u))$$

But, $\sigma(u) = h$, So,

$$(\partial Y / \partial u) = h(1 - h)$$

$$\text{Now, } \partial u / \partial W_i = \partial (W_i X) / \partial W_i = X$$

Replacing all these values in equation (2) we get,

$$\partial E / \partial W_i = [(Y - t) \cdot Y(1 - Y) \cdot W_h] \cdot h(1 - h) \cdot X$$

So, now since we have calculated both the gradients, the weights can be updated as

$$W_h = W_h + \eta \cdot \partial E / \partial W_h$$

$$W_i = W_i + \eta \cdot \partial E / \partial W_i$$

Where η is the learning rate.

So coming back to the question: Why is this algorithm called Back Propagation Algorithm?

The reason is: If you notice the final form of $\partial E / \partial W_h$ and $\partial E / \partial W_i$, you will see the term $(Y-t)$ i.e the output error, which is what we started with and then propagated this back to the input layer for weight updation.

So, where does this mathematics fit into the code?

```
hiddenlayer_activations=h
```

```
E= Y-t
```

```
Slope_output_layer = Y(1-Y)
```

```
lr =  $\eta$ 
```

```
slope_hidden_layer = h(1-h)
```

```
wout =  $W_h$ 
```

Now, you can easily relate the code to the mathematics.

End Notes:

This article is focused on the building a Neural Network from scratch and understanding its basic concepts. I hope now you understand the working of a neural network like how does forward and backward propagation work, optimization algorithms (Full Batch and Stochastic gradient descent), how to update weights and biases, visualization of each step in Excel and on top of that code in python and R.

Therefore, in my upcoming article, I'll explain the applications of using Neural Network in Python and solving real-life challenges

related to:

1. Computer Vision
2. Speech
3. Natural Language Processing

I enjoyed writing this article and would love to learn from your feedback. Did you find this article useful? I would appreciate your suggestions/feedback. Please feel free to ask your questions through comments below.

**Learn (<https://www.analyticsvidhya.com/blog>),
compete, hack
(<https://datahack.analyticsvidhya.com/>) and get hired
(<https://www.analyticsvidhya.com/jobs/#/user/>)!**

Share this:

 (<https://www.analyticsvidhya.com/blog/2017/05/neural-network-from-scratch-in-python-and-r/?share=linkedin>)

 (<https://www.analyticsvidhya.com/blog/2017/05/neural-network-from-scratch-in-python-and-r/?share=facebook>)


 (<https://www.analyticsvidhya.com/blog/2017/05/neural-network-from-scratch-in-python-and-r/?share=google-plus-1>)

 (<https://www.analyticsvidhya.com/blog/2017/05/neural-network-from-scratch-in-python-and-r/?share=twitter>)

 (<https://www.analyticsvidhya.com/blog/2017/05/neural-network-from-scratch-in-python-and-r/?share=pocket>)

 (<https://www.analyticsvidhya.com/blog/2017/05/neural-network-from-scratch-in-python-and-r/?share=reddit>)

RELATED



(<https://www.analyticsvidhya.com/blog/2016/02/free-read-books-statistics-mathematics-data-science/>)

Free Must Read Books on Statistics & Mathematics for Data Science

(<https://www.analyticsvidhya.com/blog/2016/02/free-read-books-statistics-mathematics-data-science/>)

February 17, 2016

In "Machine Learning"



(<https://www.analyticsvidhya.com/blog/2017/01/the-most-comprehensive-data-science-learning-plan-for-2017/>)

The most comprehensive Data Science learning plan for 2017

(<https://www.analyticsvidhya.com/blog/2017/01/the-most-comprehensive-data-science-learning-plan-for-2017/>)

January 16, 2017

In "Business Analytics"



(<https://www.analyticsvidhya.com/blog/2017/07/introduction-to-genetic-algorithm/>)

Introduction to Genetic Algorithm & their application in data science

(<https://www.analyticsvidhya.com/blog/2017/07/introduction-to-genetic-algorithm/>)

July 31, 2017

In "Machine Learning"

TAGS: BACK PROPAGATION ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/TAG/BACK-PROPAGATION/](https://www.analyticsvidhya.com/blog/tag/back-propagation/)), FORWARD PROPAGATION ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/TAG/FORWARD-PROPAGATION/](https://www.analyticsvidhya.com/blog/tag/forward-propagation/)), GRADIENT DESCENT ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/TAG/GRADIENT-DESCENT/](https://www.analyticsvidhya.com/blog/tag/gradient-descent/)), MULTI LAYER PERCEPTRON ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/TAG/MULTI-LAYER-PERCEPTRON/](https://www.analyticsvidhya.com/blog/tag/multi-layer-perceptron/)), NEURAL NETWORK ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/TAG/NEURAL-NETWORK/](https://www.analyticsvidhya.com/blog/tag/neural-network/)), PERCEPTRON ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/TAG/PERCEPTRON/](https://www.analyticsvidhya.com/blog/tag/perceptron/)), PYTHON ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/TAG/PYTHON/](https://www.analyticsvidhya.com/blog/tag/python/)), R ([HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/TAG/R/](https://www.analyticsvidhya.com/blog/tag/r/))

Previous Article



**Artificial Intelligence
Developer- Ahmedabad
(1-3 Years Of
Experience)**

([https://www.analyticsvidhya.com
/blog/2017/05/artificial-
intelligence-developer-
ahmedabad-1-3-years-of-
experience/](https://www.analyticsvidhya.com/blog/2017/05/artificial-intelligence-developer-ahmedabad-1-3-years-of-experience/))

Next Article



**Director – Analytics –
CPG/Retail Domain-
Bangalore- (12-15 Years
Of Experience)**

([https://www.analyticsvidhya.com
/blog/2017/05/director-
analytics-cpgretail-
domain-bangalore-12-15-
years-of-experience/](https://www.analyticsvidhya.com/blog/2017/05/director-analytics-cpgretail-domain-bangalore-12-15-years-of-experience/))



([https://www.analyticsvidhya.com
/blog/author
/sunil-
ray/](https://www.analyticsvidhya.com/blog/author/sunil-ray/))

Author

Sunil Ray
([https://www.analyticsvidhya.com
/blog/author/sunil-ray/](https://www.analyticsvidhya.com/blog/author/sunil-ray/))

I am a Business Analytics and Intelligence professional with deep experience in the Indian Insurance industry. I have worked for various multi-national Insurance companies in last 7 years.

32 COMMENTS

**Sunny says**

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOM=129396#RESPOND)
MAY 29, 2017 AT 11:01 AM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129395)

Thank you very much.

**Deep Chatterjee says**

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOM=129396#RESPOND)
MAY 29, 2017 AT 11:06 AM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129396)

Amazing article..

Very well written and easy to understand the basic concepts..

Thank you for the hard work.

**Ankur sharma says**

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOM=129397#RESPOND)
MAY 29, 2017 AT 11:11 AM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129397)

Thanks, for sharing this. Very nice article.

**Srinivas says**

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOM=129398#RESPOND)
MAY 29, 2017 AT 12:16 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129398)

Nice article Sunil! Appreciate your continued research on the same.

One correction though...

Now...

hiddenlayer_neurons = 3 #number of hidden layers

Should be...


hiddenlayer_neurons = 3 #number of neurons at hidden layers

**Sunil Ray says**

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOM=129414#RESPOND)
MAY 29, 2017 AT 12:09 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-

AND-R/#COMMENT-129414)

Thanks Srinivas! Have updated the comment.

 **ramesh says:**
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-137338#RESPOND)
MAY 17, 2017 AT 12:06 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-137338)

i didn't understand what is the need to calculate delta during back propagation.can you give any explanation to it.

 **Sami Mustafa says:**
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129400#RESPOND)
MAY 28, 2017 AT 12:39 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129400)

Very interesting!

 **ajit abalakrishnan (http://blogs.rediff.com/ajitb) says:**
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129404#RESPOND)
MAY 28, 2017 AT 12:00 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129404)

Very well written... I completely agree with you about learning by working on a problem

 **Andrei says:**
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129411#RESPOND)
MAY 28, 2017 AT 2:05 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129411)

Thanks for great article! Probably, it should be "Update bias at both output and hidden layer" in the Step 11 of the Visualization of steps for Neural Network methodology



Sumil Ray says:
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-



REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129415) MAY 29, 2017 AT 4:33 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129415)

Thanks Andrei,

I'm updating only biases at step 11.

Regards,
Sunil

Sasikanth says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129413) MAY 29, 2017 AT 4:23 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129413)

Wonderful explanation. This is an excellent article. I did not come across such a lucid explanation of NN so far.



Sunil Ray says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129416) MAY 29, 2017 AT 4:31 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129416)

Thanks Sasikanth!

Regards,
Sunil

Robert says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129426) MAY 29, 2017 AT 6:12 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129426)

Great article! There is a small typo: In the section where you describe the three ways of creating input output relationships you define "x2" twice – one of them should be "x3" instead 😊

Keep up the great work!

**Sumil Raj says:**

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#REPLYTOQN=129434#RESPOND)
MAY 30, 2017 AT 12:06 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129434)

Thanks Robert for highlighting the typo!

Minati says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#REPLYTOQN=129428#RESPOND)
MAY 29, 2017 AT 3:13 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129428)

Explained in very lucid manner. Thanks for this wonderful article.

Lakshmi pathi says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#REPLYTOQN=129437#RESPOND)
MAY 29, 2017 AT 9:16 AM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129437)

Very Interesting! Nice Explanation

Ravi theja says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#REPLYTOQN=129450#RESPOND)
MAY 30, 2017 AT 7:16 AM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129450)

Awesome Sunil. Its a great job.

Thanks a lot for making such a neat and clear page for NN, very much useful for beginners.

PraveenKumar Manivannan says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#REPLYTOQN=129454#RESPOND)
MAY 30, 2017 AT 8:04 AM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129454)

Well written article. With step by step explanation , it was easier to understand forward and backward propogations.. is there any functions in scikit learn for neural networks?

**Sunil Praveen says:**

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-
SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOMMENT=129460#RESPOND)WWW.ANALYTICSVIDHYA.COM
/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/#COMMENT-129460)

Thanks Praveen! You can look at this
([http://scikit-learn.org/stable/modules
/classes.html#module-sklearn.neural_network](http://scikit-learn.org/stable/modules/classes.html#module-sklearn.neural_network)
([http://scikit-learn.org/stable/modules
/classes.html#module-](http://scikit-learn.org/stable/modules/classes.html#module-sklearn.neural_network)
sklearn.neural_network)).

Regards,
Sunil

Sanjay says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/?REPLYTOCOMMENT=129467#RESPOND)WWW.ANALYTICSVIDHYA.COM/BLOG/2017
/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129467)

Hello Sunil,

Please refer below,

"To get a mathematical perspective of the Backward
propagation, refer below section.

This one round of forward and back propagation iteration
is known as one training iteration aka "Epoch". "

I'm kind of lost there, did you already explain something?(
about back prop) , Is there any missing information?

Thanks

Rajendra says:

REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/?REPLYTOCOMMENT=129475#RESPOND)WWW.ANALYTICSVIDHYA.COM/BLOG/2017
/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129475)

Great article Sunil! I have one doubt. Why you applied
linear to nonlinear transformation in the middle of the
process? Is it necessary!!

Sahar says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOMMENT=129483#RESPOND)
MAY 13, 2017 AT 7:11 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129483)

Thanks a lot, Sunil, for such a well-written article.
Particularly, I liked the visualization section, in which each step is well explained by an example.

I just have a suggestion: if you add the architecture of MLP in the beginning of the visualization section it would help a lot. Because in the beginning I thought you are addressing the same architecture plotted earlier, in which there were 2 hidden units, not 3 hidden units.
Thanks a lot once more!

Vishwa says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOMMENT=129518#RESPOND)
MAY 14, 2017 AT 12:19 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129518)

Nice Article 😊

Asad Hanif says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOMMENT=129531#RESPOND)
MAY 14, 2017 AT 3:07 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129531)

Very well written article. Thanks for your efforts.

Amil says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOMMENT=129548#RESPOND)
MAY 14, 2017 AT 12:02 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129548)

Great article. For a beginner like me, it was fully understandable. Keep up the good work.

Preeti Agarwal says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOMMENT=129587#RESPOND)
JUNE 12, 2017 AT 12:09 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129587)

Great Explanation....on Forward and Backward

Propagation



Sunil Ray says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-
SCRATCH-IN-PYTHON-AND-R/?REPLYTOCOM=129666#RESPOND)
JUNE 2, 2017 AT 12:08 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM
/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/#COMMENT-129666)

Thanks Preeti

Regards,
Sunil



Gino (http://www.gino.com) says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/?REPLYTOCOM=129638#RESPOND)
JUNE 2, 2017 AT 11 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017
/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129638)

I really like how you explain this. Very well written. Thank
you



Sunil Ray says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/?REPLYTOCOM=129665#RESPOND)
JUNE 2, 2017 AT 12:01 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM
/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/#COMMENT-129665)

Thanks Gino



Prabhakar Krishnamoorthy says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/?REPLYTOCOM=129659#RESPOND)
JUNE 2, 2017 AT 11 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017
/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-129659)

I am 63 years old and retired professor of management.
Thanks for your lucid explanations. I am able to learn. My
blessings are to you.



Sunil Ray says
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-
AND-R/?REPLYTOCOM=129664#RESPOND)
JUNE 2, 2017 AT 12:01 PM (HTTPS://WWW.ANALYTICSVIDHYA.COM
/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-

AND-R/#COMMENT-129664)

Thanks Professor

Regards,
Sunil

Burhan Mohamed says:
REPLY (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-132052#RESPOND)
OCT 29 AM (HTTPS://WWW.ANALYTICSVIDHYA.COM/BLOG/2017/05/NEURAL-NETWORK-FROM-SCRATCH-IN-PYTHON-AND-R/#COMMENT-132052)

I want to hug you. I still have to read this again but machine learning algorithms have been shrouded in mystery before seeing this article. Thank you for unveiling it good friend.

LEAVE A REPLY

Your email address will not be published.

Comment

Name (required)

Email (required)

Website

SUBMIT COM



ANALYTICS VIDHYA

About Us
(http://www.analyticsvidhya.com/about-me/)

Our Team
(https://www.analyticsvidhya.com/about-me/team/)

Career
(https://www.analyticsvidhya.com/career-analytics-vidhya/)

Contact Us
(https://www.analyticsvidhya.com/contact/)

Write for us
(https://www.analyticsvidhya.com/about-me/write/)

DATA SCIENTISTS COMPANIES

Blog
(https://www.analyticsvidhya.com/blog/)

Hackathon
(https://datahack.analyticsvidhya.com/)

Discussions
(https://discuss.analyticsvidhya.com/)

Apply Jobs
(https://www.analyticsvidhya.com/jobs/)

Leaderboard
(https://datahack.analyticsvidhya.com/users/)

Post Jobs
(https://www.analyticsvidhya.com/corporate/)

Trainings
(https://datahack.analyticsvidhya.com/trainings/)

Hiring Vidhyathons
(https://datahack.analyticsvidhya.com/hiring-vidhyathons/)

Webinars
(https://www.analyticsvidhya.com/webinars/)

Analytics Vidhya
(https://www.analyticsvidhya.com/contact/)

JOIN OUR COMMUNITY :

f

(https://www.facebook.com/AnalyticsVidhya/)

10821

Followers

(https://www.facebook.com/AnalyticsVidhya/)

🐦

(https://twitter.com/AnalyticsVidhya)

2521

Followers

(https://twitter.com/AnalyticsVidhya)

+

(https://plus.google.com/+AnalyticsVidhya/)

2110

Followers

(https://plus.google.com/+AnalyticsVidhya/)

in

(https://www.linkedin.com/company/AnalyticsVidhya/)

2521

Followers

(https://www.linkedin.com/company/AnalyticsVidhya/)

Subscribe to emailer

>