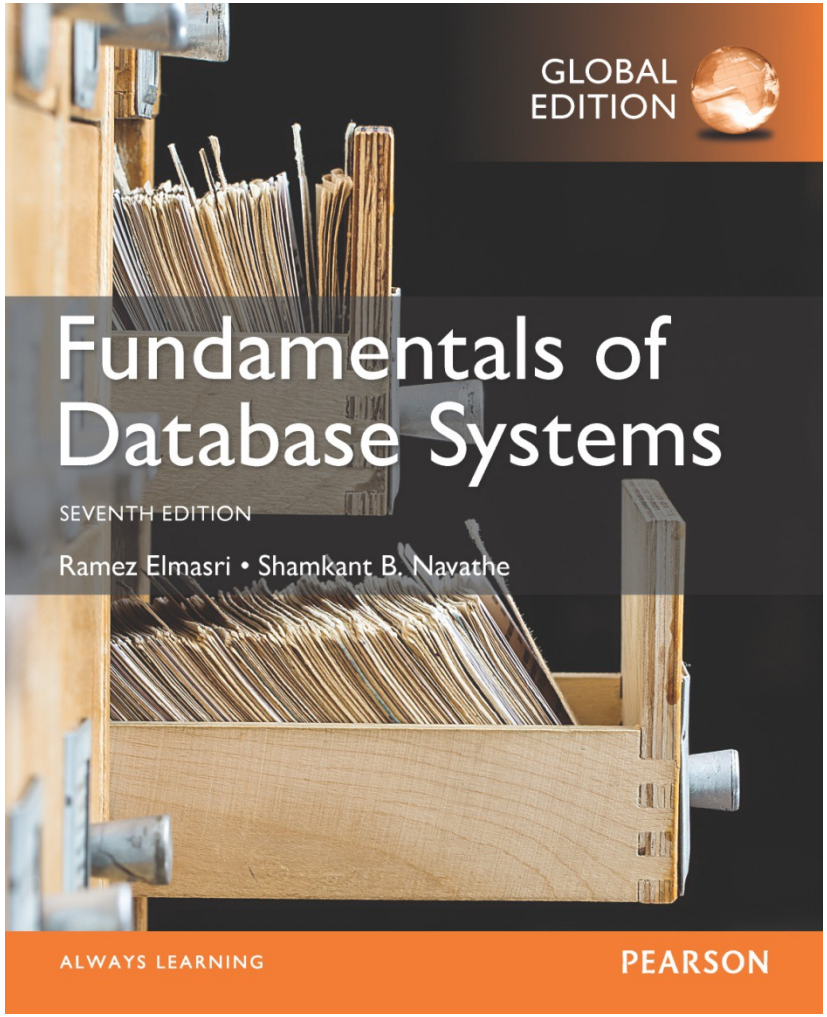

ANEXO LESSON 1

Database System Concepts and Architecture

Outline

- Data Models and Their Categories
- Schemas, Instances, and States
- Three-Schema Architecture
- Data Independence

Data Models

- **Data Model:**
  - A set of concepts to describe the ***structure*** of a database. By structure of a database we mean the data types, relationships, and constraints that apply to the data.
  - Most data models also include a set of basic operations for specifying retrievals and updates on the database.

Categories of Data Models

- **Conceptual (high-level, semantic) data models:**
  - Provide concepts that are close to the way many users perceive data.
    (Also called ***entity-based*** or ***object-based*** data models.)
- **Physical (low-level, internal) data models:**
  - Provide concepts that describe details of how data is stored in the computer.
- **Implementation (representational) data models:**
  - Provide concepts that fall between the above two, used by many commercial DBMS implementations (e.g. relational data models used in many commercial systems).

Schemas versus Instances

- Database Schema:
  - The ***description*** of a database.
  - Includes descriptions of the database structure, data types, and the constraints on the database.
- Schema Diagram:
  - An ***illustrative*** display of (most aspects of) a database schema.
- Schema Construct:
  - A ***component*** of the schema or an object within the schema, e.g., STUDENT, COURSE.

Example of a Database Schema

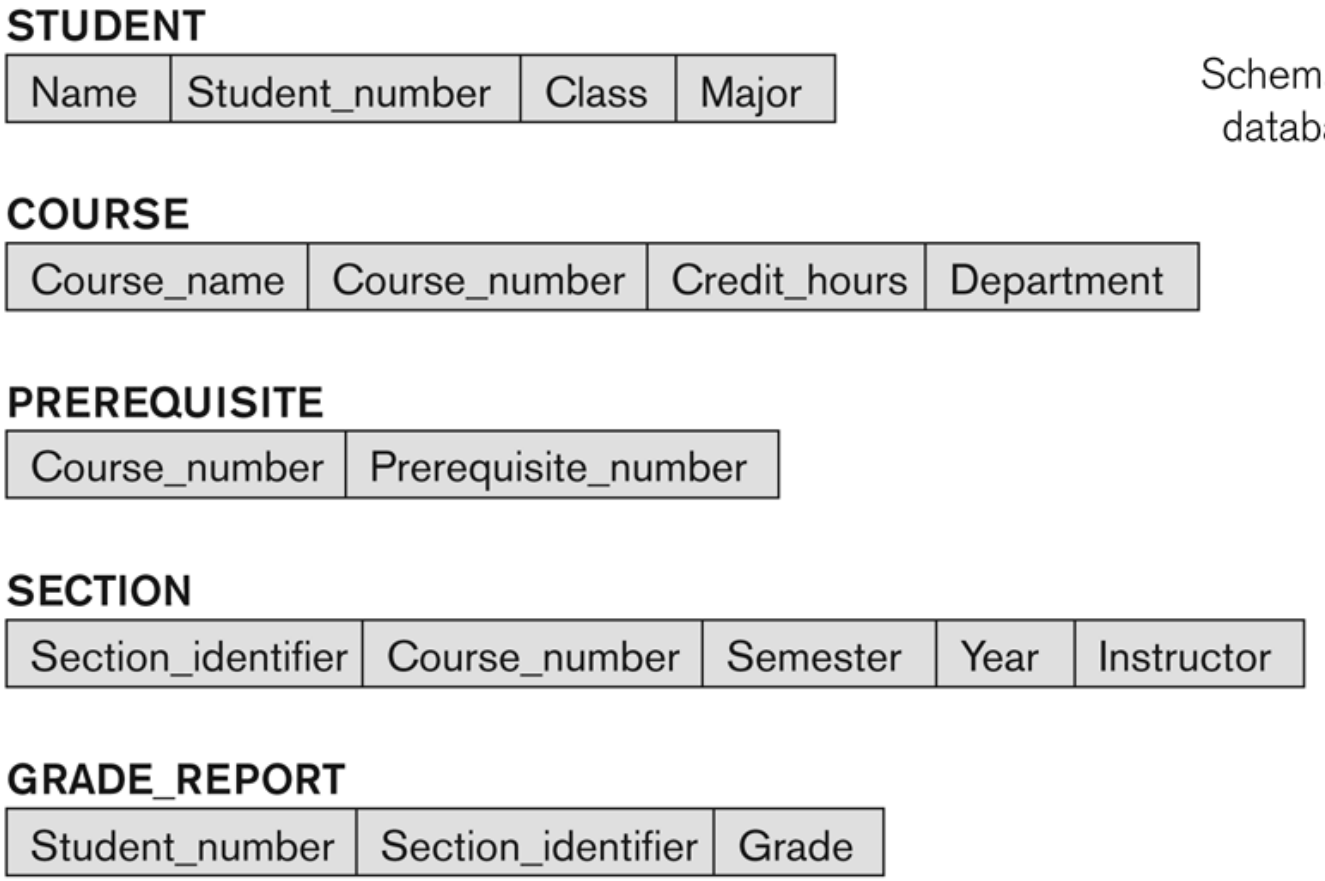

Figure 2.1
Schema diagram for the database in Figure 1.2.

Schemas versus Instances

- Database State:
  - The actual data stored in a database at a ***particular moment in time***. This includes the collection of all the data in the database.
  - Also called database instance (or occurrence or snapshot).
    - The term *instance* is also applied to individual database components, e.g. *record instance, table instance, entity instance*

Database Schema vs. Database State

- Database State:
  - Refers to the ***content*** of a database at a moment in time.
- Initial Database State:
  - Refers to the database state when it is initially loaded into the system.
- Valid State:
  - A state that satisfies the structure and constraints of the database.

Database Schema vs. Database State (continued)

- Distinction
  - The ***database schema*** changes very infrequently.
  - The ***database state*** changes every time the database is updated.

- **Schema** is also called **intension**.
- **State** is also called **extension**.

Example of a database state

COURSE

Course_name	Course_number	Credit_hours	Department
Intro to Computer Science	CS1310	4	CS
Data Structures	CS3320	4	CS
Discrete Mathematics	MATH2410	3	MATH
Database	CS3380	3	CS

SECTION

Section_identifier	Course_number	Semester	Year	Instructor
85	MATH2410	Fall	04	King
92	CS1310	Fall	04	Anderson
102	CS3320	Spring	05	Knuth
112	MATH2410	Fall	05	Chang
119	CS1310	Fall	05	Anderson
135	CS3380	Fall	05	Stone

GRADE_REPORT

Student_number	Section_identifier	Grade
17	112	B
17	119	C
8	85	A
8	92	A
8	102	B
8	135	A

PREREQUISITE

Course_number	Prerequisite_number
CS3380	CS3320
CS3380	MATH2410
CS3320	CS1310

Figure 1.2
A database that stores student and course information.

Three-Schema Architecture

- Defines DBMS schemas at ***three*** levels:
  - **Internal schema** at the internal level to describe physical storage structures and access paths (e.g indexes).
    - Typically uses a **physical** data model.
  - **Conceptual schema** at the conceptual level to describe the structure and constraints for the whole database for a community of users.
    - Uses a **conceptual** or an **implementation** data model.
  - **External schemas** at the external level to describe the various user views.
    - Usually uses the same data model as the conceptual schema.

The three-schema architecture

Figure 2.2
The three-schema architecture.

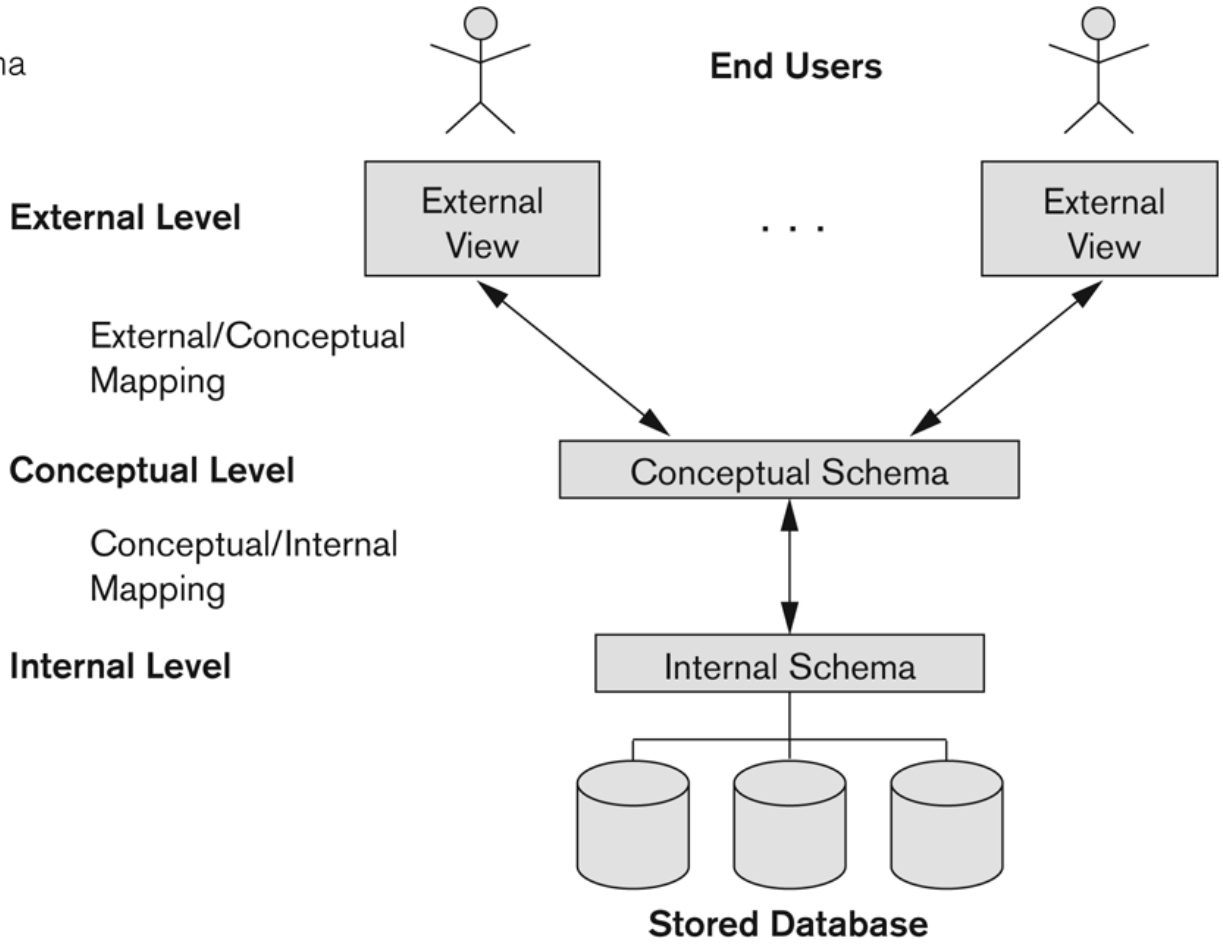

Data Independence

- **Logical Data Independence:**
  - The capacity to change the conceptual schema without having to change the external schemas and their associated application programs.
- **Physical Data Independence:**
  - The capacity to change the internal schema without having to change the conceptual schema.
  - For example, the internal schema may be changed when certain file structures are reorganized or new indexes are created to improve database performance