# Lab – File System Commands

## Introduction

In this lab, you will use CLI commands to manage files and folders in Windows.

## Recommended Equipment

- A computer running Windows

## Instructions

### Step 1: Access the Windows command prompt.

a. Log on to a Windows computer. The account **ITEUser** is used as the example user account throughout this lab.

b. To access the Windows command prompt, click **Start** and enter **cmd**. Select **Command Prompt** or **cmd.exe** to continue.

### Step 2: Create and change directories.

In this step, you will use the change directory (**cd**), make directory (**md**), and directory (**dir**) commands.

**Note**: A directory is another word for folder. Directory and folder are used interchangeably throughout this lab.

a. Type **cd** at the command prompt.

Question:

What is the current directory?

```
C:\Users\TIPQC>cd
C:\Users\TIPQC
```

b. Type **dir** at the command prompt to list the files and folders that are in the current folder.

```
C:\Users\ITEUser> dir
 Volume in drive C has no label.
 Volume Serial Number is 9055-35E9

 Directory of C:\Users\ITEUser

04/27/2019  09:21 AM    <DIR>          .
04/27/2019  09:21 AM    <DIR>          ..
04/25/2019  11:39 AM    <DIR>          3D Objects
04/25/2019  11:39 AM    <DIR>          Contacts
04/26/2019  10:29 AM    <DIR>          Desktop
04/25/2019  11:39 AM    <DIR>          Documents
04/25/2019  11:39 AM    <DIR>          Downloads
<some output omitted>
               0 File(s)              0 bytes
              15 Dir(s)  32,671,969,280 bytes free
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
Microsoft Windows [Version 10.0.26200.9550]
(c) Microsoft Corporation. All rights reserved.

C:\Users\TIPQC>dir
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC

10/07/2026  01:48 PM    <DIR>          .
03/09/2026  11:01 AM    <DIR>          ..
04/02/2025  02:44 PM    <DIR>          .anaconda
10/01/2025  10:45 AM    <DIR>          .cache
04/02/2025  02:22 PM    <DIR>          .conda
02/07/2025  01:50 PM               146 .condarc
02/07/2025  01:48 PM    <DIR>          .continuum
07/18/2026  03:43 PM    <DIR>          .copilot
10/22/2025  02:23 PM                54 .gitconfig
04/25/2025  02:48 PM    <DIR>          .ipynb_checkpoints
02/05/2025  03:22 PM    <DIR>          .ipython
02/07/2025  01:55 PM    <DIR>          .jupyter
02/05/2025  03:22 PM    <DIR>          .matplotlib
09/03/2026  12:31 PM               176 .packettracer
07/18/2026  02:05 PM    <DIR>          .spyder-py3
10/08/2026  11:21 AM    <DIR>          .VirtualBox
04/02/2025  02:35 PM    <DIR>          .vscode
07/18/2026  03:26 PM    <DIR>          .vscode-shared
02/07/2025  01:55 PM    <DIR>          anaconda_projects
09/03/2026  01:32 PM    <DIR>          Cisco Packet Tracer 8.2.2
10/09/2025  12:05 PM    <DIR>          CLionProjects
10/18/2024  05:21 AM    <DIR>          Contacts
09/16/2026  03:54 PM    <DIR>          Desktop
10/03/2026  02:04 PM    <DIR>          Documents
10/08/2026  11:07 AM    <DIR>          Downloads
03/21/2025  08:25 AM    <DIR>          Favorites
10/22/2025  02:32 PM    <DIR>          github
02/07/2025  02:06 PM    <DIR>          Jedi
10/18/2024  05:21 AM    <DIR>          Links
10/18/2024  05:21 AM    <DIR>          Music
10/22/2025  02:25 PM    <DIR>          my-first-repo
10/22/2025  02:51 PM    <DIR>          my-first-repo-cloned
10/18/2024  05:23 AM    <DIR>          OneDrive
07/18/2026  03:40 PM    <DIR>          OOPFA1_NACION
04/28/2026  09:20 AM    <DIR>          Pictures
10/18/2024  05:21 AM    <DIR>          Saved Games
10/17/2024  03:58 PM    <DIR>          Searches
07/18/2026  08:17 AM                72 Untitled.ipynb
12/17/2025  12:13 PM    <DIR>          VHDPlus
10/08/2025  12:24 PM    <DIR>          Videos
10/08/2026  11:20 AM    <DIR>          VirtualBox VMs
               4 File(s)            448 bytes
              37 Dir(s)  545,573,273,600 bytes free
```

c. In the current directory, use the **md** command to create three new folders: **ITEfolder1**, **ITEfolder2**, and **ITEfolder3**. Type **md ITEfolder1** and press **Enter**. Create **ITEfolder2** and **ITEfolder3**. (**Note**: The command **mkdir** performs the same function as the command **md**.)

```
C:\Users\ITEUser> md ITEfolder1
C:\Users\ITEUser> md ITEfolder2 ITEfolder3
```

```
10/08/2026  11:24 AM    <DIR>          .AKaraB
10/08/2026  11:41 AM    <DIR>          .AKaraB2
10/08/2026  11:41 AM    <DIR>          .AKaraB3
```

d. Type **dir** to verify that the folders have been created.

e. Type **cd ITEfolder3** at the command prompt and press **Enter**.

Question:

Which folder are you in now?

```
C:\Users\TIPQC>cd .AKaraB3

C:\Users\TIPQC\.AKaraB3>
```

f. Create **ITEfolder4** in the current directory. Within the **ITEfolder4** folder, create a folder named **ITEfolder5**. Use the **dir** command to verify the folder creation.

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

Question:

What command or commands did you use to create the nested folders?

```
C:\Users\TIPQC\.AKaraB3\.AKaraB4>dir
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB3\.AKaraB4

10/08/2026  11:52 AM    <DIR>          .
10/08/2026  11:51 AM    <DIR>          ..
10/08/2026  11:52 AM    <DIR>          .AKaraB5
               0 File(s)              0 bytes
               3 Dir(s)  531,806,830,592 bytes free
```

g. Change directory as necessary until you are in ITEfolder5.

```
C:\Users\TIPQC\.AKaraB3\.AKaraB4\.AKaraB5>
```

h. Type **cd ..** to change the current directory. Each **..** is a shortcut to move up one level in the directory tree.

Question:

After issuing the **cd ..** command, what is your directory now?

```
C:\Users\TIPQC\.AKaraB3\.AKaraB4\.AKaraB5>cd ..
```

What would be the current directory if you issue this command at C:\Users\ITEUser\ITEfolder3\ITEFolder4?

```
C:\Users\TIPQC\.AKaraB3\.AKaraB4>
```

## Step 3: Create text files.


a. Navigate to the **C:\Users\ITEUser\ITEfolder1** directory. Type **cd ..\ITEfolder1** at the prompt.

```
C:\Users\TIPQC\.AKaraB>
```

b. Type **echo This is doc1.txt > doc1.txt** at the command prompt. The **echo** command is used to display a message at the command prompt. The **>** is used to redirect the message from the screen to a file. For example, in the first line, the message **This is doc1.txt** is redirected into a new file named **doc1.txt**. Use the **echo** command and **>** redirect to create these files: **doc2.txt**, **file1.txt**, and **file2.txt**.

```
C:\Users\ITEUser\ITEfolder1> echo This is doc1.txt > doc1.txt
C:\Users\ITEUser\ITEfolder1> echo This is doc2.txt > doc2.txt
C:\Users\ITEUser\ITEfolder1> echo This is file1.txt > file1.txt
C:\Users\ITEUser\ITEfolder1> echo This is file2.txt > file2.txt
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

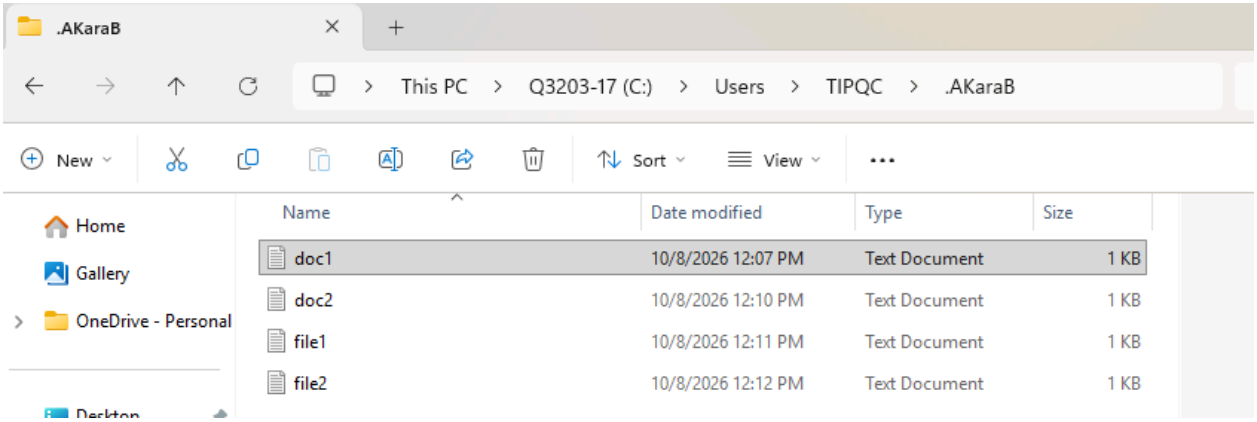


c. Use the **dir** command to verify the files are in the **ITEfolder1** folder.

```
C:\Users\ITEUser\ITEFolder1> dir
<some output omitted>
04/29/2019  08:05 AM                19 doc1.txt
04/29/2019  08:06 AM                19 doc2.txt
04/29/2019  08:08 AM                20 file1.txt
04/29/2019  08:08 AM                20 file2.txt
               4 File(s)             78 bytes
               2 Dir(s)  32,625,397,760 bytes free
```

```
C:\Users\TIPQC\.AKaraB>dir
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB

10/08/2026  12:12 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  12:07 PM                19 doc1.txt
10/08/2026  12:10 PM                19 doc2.txt
10/08/2026  12:11 PM                20 file1.txt
10/08/2026  12:12 PM                20 file2.txt
               4 File(s)             78 bytes
               2 Dir(s)  523,438,129,152 bytes free
```

d. Use the **more** or **type** command to view the content of the newly created text files.

```
C:\Users\ITEUser\ITEfolder1> more doc1.txt
This is doc1.txt

C:\Users\ITEUser\ITEfolder1> type doc2.txt
This is doc2.txt
```

```
C:\Users\TIPQC\.AKaraB>more doc1.txt
This is doc1.txt

C:\Users\TIPQC\.AKaraB>type doc2.txt
This is doc2.txt
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

### Step 4: Copy, delete, and move files.

a. At the command prompt, type **move doc2.txt C:\Users\ITEUser\ITEfolder2** to move the file **doc2.txt** to the **C:\Users\ITEUser\ITEfolder2** directory.

```
C:\Users\ITEUser\ITEfolder1> move doc2.txt C:\Users\ITEUser\ITEfolder2
        1 file(s) moved.
```

```
C:\Users\TIPQC\.AKaraB>move doc2.txt C:\Users\TIPQC\.AKaraB2
        1 file(s) moved.
```

b. Type **dir** at the prompt to verify that **doc2.txt** is no longer in the current directory.

```
C:\Users\TIPQC\.AKaraB>dir
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB

10/08/2026  12:22 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  12:07 PM                19 doc1.txt
10/08/2026  12:11 PM                20 file1.txt
10/08/2026  12:12 PM                20 file2.txt
               3 File(s)             59 bytes
               2 Dir(s)  523,436,830,720 bytes free
```

c. Navigate to **C:\Users\ITEUser\ITEfolder2** to change the directory to **ITEfolder2**. Type **dir** at the prompt to verify **doc2.txt** has been moved.

```
C:\Users\TIPQC\.AKaraB2>dir
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB2

10/08/2026  12:22 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  12:10 PM                19 doc2.txt
               1 File(s)             19 bytes
               2 Dir(s)  523,436,183,552 bytes free
```

d. Type **copy doc2.txt doc2_copy.txt** to create a copy of **doc2.txt**. Type **dir** at the prompt to verify a copy of the file has been created.

```
C:\Users\ITEUser\ITEfolder2> dir
<some output omitted>
Directory of C:\Users\ITEUser\ITEfolder2

04/30/2019  09:07 AM                19 doc2.txt
04/30/2019  09:07 AM                19 doc2_copy.txt
               2 File(s)             38 bytes
               2 Dir(s)  31,753,068,544 bytes free
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
C:\Users\TIPQC\.AKaraB2>copy doc2.txt doc2_copy.txt
        1 file(s) copied.

C:\Users\TIPQC\.AKaraB2>dir
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB2

10/08/2026  12:28 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  12:10 PM                19 doc2.txt
10/08/2026  12:10 PM                19 doc2_copy.txt
               2 File(s)             38 bytes
               2 Dir(s)  523,434,725,376 bytes free
```

e. Use the **move** command to move **doc2_copy.txt** to **ITEfolder1**. Type **move doc2_copy.txt ..\ITEfolder1**.

```
C:\Users\ITEUser\ITEfolder2> move doc2_copy.txt ..\ITEfolder1
        1 file(s) moved.
```

```
C:\Users\TIPQC\.AKaraB2>move doc2_copy.txt ..\.AKaraB
        1 file(s) moved.
```

f. A copy of the file **doc2.txt** can be created in a new location using the **copy** command. At the prompt, enter the **copy doc2.txt ..\ITEfolder1\doc2_new.txt**.

```
C:\Users\ITEUser\ITEfolder2> copy doc2.txt ..\ITEfolder1\doc2_new.txt
        1 file(s) copied.
```

```
C:\Users\TIPQC\.AKaraB2>copy doc2.txt ..\.AKaraB\doc2_new.txt
        1 file(s) copied.
```

g. The file **doc2.txt** can also be moved to a new location with a new filename using the **move** command. Type **move doc2.txt ..\ITEfolder1\doc2_new.txt** at the prompt.

```
C:\Users\ITEUser\ITEfolder2> move doc2.txt ..\ITEfolder1\doc2_move.txt
        1 file(s) moved.
```

```
C:\Users\TIPQC\.AKaraB2>move doc2.txt ..\.AKaraB\doc2_move.txt
        1 file(s) moved.
```

h. Type **dir ..\ITEfolder1** to view the content in **ITEfolder1** without leaving the current directory.

```
C:\Users\ITEUser\ITEfolder2> dir ..\ITEfolder1
<some output omitted>
 Directory of C:\Users\ITEUser\ITEfolder1

04/29/2019  12:08 PM    <DIR>          .
04/29/2019  12:08 PM    <DIR>          ..
04/29/2019  08:05 AM                19 doc1.txt
04/29/2019  08:06 AM                19 doc2_copy.txt
04/29/2019  08:06 AM                19 doc2_move.txt
04/29/2019  08:06 AM                19 doc2_new.txt
04/29/2019  08:08 AM                20 file1.txt
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
04/29/2019  08:08 AM                20 file2.txt
               6 File(s)            116 bytes
               2 Dir(s)  31,467,700,224 bytes free
```

```
C:\Users\TIPQC\.AKaraB2>dir ..\.AKaraB
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB

10/08/2026  12:34 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  12:07 PM                19 doc1.txt
10/08/2026  12:10 PM                19 doc2_copy.txt
10/08/2026  12:10 PM                19 doc2_move.txt
10/08/2026  12:10 PM                19 doc2_new.txt
10/08/2026  12:11 PM                20 file1.txt
10/08/2026  12:12 PM                20 file2.txt
               6 File(s)            116 bytes
               2 Dir(s)  523,432,210,432 bytes free
```

i. Change the current directory to **ITEfolder1**. Type **cd ..\ITEfolder1** at the prompt.

```
C:\Users\TIPQC\.AKaraB>
```

j. Move **file1.txt** and **file2.txt** into **ITEfolder3**. To move all the files that contain the word **file** into **ITEfolder3** with one command, use a **wildcard** (*) character to represent one or more characters. Type **move file* ..\ITEfolder3**.

```
C:\Users\ITEUser\ITEfolder1> move file* ..\ITEfolder3
C:\Users\ITEUser\ITEfolder1\file1.txt
C:\Users\ITEUser\ITEfolder1\file2.txt
        2 file(s) moved.
```

```
C:\Users\TIPQC\.AKaraB>move file* ..\.AKaraB3
C:\Users\TIPQC\.AKaraB\file1.txt
C:\Users\TIPQC\.AKaraB\file2.txt
        2 file(s) moved.
```

k. To view the content of the file doc2_new.txt, use the **type** or **more** command at the prompt.

```
C:\Users\ITEUser\ITEfolder1> type doc2_new.txt
This is doc2.txt
```

```
C:\Users\TIPQC\.AKaraB>type doc2_new.txt
This is doc2.txt
```

l. Use the **ren** command to rename doc2_new.txt to doc3.txt. Use the **dir** command to display the content in the directory.

```
c:\Users\ITEUser\ITEfolder1> ren doc2_new.txt file.log
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB

10/08/2026  12:40 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  12:07 PM                19 doc1.txt
10/08/2026  12:10 PM                19 doc2_copy.txt
10/08/2026  12:10 PM                19 doc2_move.txt
10/08/2026  12:10 PM                19 file.log
               4 File(s)             76 bytes
               2 Dir(s)  523,429,900,288 bytes free
```

m. Use the **type** or **more** command to view the content of the newly rename file **file.log.**

```
C:\Users\ITEUser\ITEfolder1> more file.log
This is doc2.txt
```

```
C:\Users\TIPQC\.AKaraB>more file.log
This is doc2.txt
```

n. To delete a file or multiple files, use the **del** command with the file names at the prompt.

Question:

What single command would you use to delete all the files with doc2 in the filename? Use the command to remove the files with doc2 in the filename.

***del *doc2****

What command would you use to delete all the files in the directory? Use the command to remove the files.

***del *.****

## Step 5: Use the xcopy and robocopy commands.

In this step, the **xcopy** and **robocopy** commands are used to copy the content in a directory.

a. View the content of ITEfolder3.

```
C:\Users\ITEUser\ITEfolder1> dir ..\ITEfolder3
<some output omitted>
 Directory of c:\Users\ITEUser\ITEfolder3

04/29/2019  03:11 PM    <DIR>          .
04/29/2019  03:11 PM    <DIR>          ..
04/29/2019  03:05 PM                20 file1.txt
04/29/2019  03:05 PM                20 file2.txt
04/29/2019  03:01 PM    <DIR>          ITEfolder4
               2 File(s)             40 bytes
               3 Dir(s)  31,492,157,440 bytes free
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
C:\Users\TIPQC\.AKaraB3>dir
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB3

10/08/2026  12:39 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  11:52 AM    <DIR>          .AKaraB4
10/08/2026  12:11 PM                20 file1.txt
10/08/2026  12:12 PM                20 file2.txt
               2 File(s)             40 bytes
               3 Dir(s)  523,425,153,024 bytes free
```

b. Type **xcopy ..\ITEfolder3 .** at the prompt to copy the content of **ITEfolder3** to **ITEfolder1**. Note the **.** at the end of the command. It is a shortcut for the current directory.

```
C:\Users\ITEUser\ITEfolder1> xcopy ..\ITEfolder3 .
..\ITEfolder3\file1.txt
..\ITEfolder3\file2.txt
2 File(s) copied
```

```
C:\Users\TIPQC\.AKaraB>xcopy ..\.AKaraB3 .
..\.AKaraB3\file1.txt
..\.AKaraB3\file2.txt
2 File(s) copied
```

c. At the prompt, type **dir** to display the content of **ITEfolder1**. Only the files in the **ITEfolder3** were copied into **ITEfolder1**. The directory **ITEfolder4** was not copied into **ITEfolder3**.

```
C:\Users\ITEUser\ITEfolder1> dir
<some output omitted>
 Directory of C:\Users\ITEUser\ITEfolder1
04/29/2019  03:16 PM    <DIR>          .
04/29/2019  03:16 PM    <DIR>          ..
04/29/2019  03:05 PM                20 file1.txt
04/29/2019  03:05 PM                20 file2.txt
               2 File(s)             40 bytes
               2 Dir(s)  31,491,321,856 bytes free
```

```
 Directory of C:\Users\TIPQC\.AKaraB

10/08/2026  01:01 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  12:07 PM                19 doc1.txt
10/08/2026  12:10 PM                19 doc2_copy.txt
10/08/2026  12:10 PM                19 doc2_move.txt
10/08/2026  12:10 PM                19 file.log
10/08/2026  12:11 PM                20 file1.txt
10/08/2026  12:12 PM                20 file2.txt
               6 File(s)            116 bytes
               2 Dir(s)  523,422,584,832 bytes free
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

d. Use **help xcopy** or **xcopy /?** to determine which switch would allow the **xcopy** command to copy **all** the files and directories.

Question:

What option allows you to copy all the files and directories, including the empty directories?




e. Because **ITEfolder4** is a subfolder and **ITEfolder5** is both a subfolder and an empty folder, **/E** is needed to copy all the contents of **ITEfolder3** and the empty subfolder.

Type **xcopy /E ..\ITEfolder3 .** at the prompt to copy the files. When prompted, type **a** to allow overwriting the existing files.

```
c:\Users\ITEUser\ITEfolder1> xcopy /E ..\ITEfolder3
Overwrite C:\Users\ITEUser\ITEfolder1\file1.txt (Yes/No/All)? a
..\ITEfolder3\file1.txt
..\ITEfolder3\file2.txt
2 File(s) copied
```

```
C:\Users\TIPQC\.AKaraB>xcopy /E ..\.AKaraB3
Overwrite C:\Users\TIPQC\.AKaraB\file1.txt (Yes/No/All)? A
..\.AKaraB3\file1.txt
..\.AKaraB3\file2.txt
2 File(s) copied
```

f. Verify that the **ITEfolder4** and **ITEfolder5** were also copied in **ITEfolder1**.

```
c:\Users\ITEUser\ITEfolder1> dir
<some output omitted>
 Directory of c:\Users\ITEUser\ITEfolder1

04/29/2019  04:41 PM    <DIR>          .
04/29/2019  04:41 PM    <DIR>          ..
04/29/2019  03:05 PM                20 file1.txt
04/29/2019  03:05 PM                20 file2.txt
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
04/29/2019  04:41 PM    <DIR>          ITEfolder4
               2 File(s)             40 bytes
               3 Dir(s)  31,493,193,728 bytes free
```

```
C:\Users\TIPQC\.AKaraB>dir
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB

10/08/2026  01:06 PM    <DIR>          .
10/08/2026  11:41 AM    <DIR>          ..
10/08/2026  01:06 PM    <DIR>          .AKaraB4
10/08/2026  12:07 PM                19 doc1.txt
10/08/2026  12:10 PM                19 doc2_copy.txt
10/08/2026  12:10 PM                19 doc2_move.txt
10/08/2026  12:10 PM                19 file.log
10/08/2026  12:11 PM                20 file1.txt
10/08/2026  12:12 PM                20 file2.txt
               6 File(s)            116 bytes
               3 Dir(s)  523,185,074,176 bytes free
```

```
c:\Users\ITEUser\ITEfolder1> dir ITEfolder4
<some output omitted>
 Directory of c:\Users\ITEUser\ITEfolder1\ITEfolder4

04/29/2019  04:41 PM    <DIR>          .
04/29/2019  04:41 PM    <DIR>          ..
04/29/2019  03:00 PM    <DIR>          ITEfolder5
               0 File(s)              0 bytes
               3 Dir(s)  31,493,193,728 bytes free
```

```
C:\Users\TIPQC\.AKaraB>dir .AKaraB4
 Volume in drive C is Q3203-17
 Volume Serial Number is A9E1-531C

 Directory of C:\Users\TIPQC\.AKaraB\.AKaraB4

10/08/2026  01:06 PM    <DIR>          .
10/08/2026  01:06 PM    <DIR>          ..
10/08/2026  11:52 AM    <DIR>          .AKaraB5
               0 File(s)              0 bytes
               3 Dir(s)  523,183,874,048 bytes free
```

g. The robocopy command can also be used to copy the content of a directory to a new destination. The robocopy command has more capabilities than the built-in Windows copy and xcopy command, such as resume copying after a network interruption, skip files that appear to be identical to the files in the destination folders, and mirror a directory by keeping the destination directory in sync with the source directory.

   Copy the ITEfolder4 content to ITEUser folder using the robocopy command.

   ```
   C:\Users\ITEUser\ITEfolder1> robocopy /E
   C:\Users\ITEUser\ITEfolder3\ITEfolder4\ C:\Users\ITEUser
   ```

   Note the information provided by the command during the copying process.

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
C:\Users\TIPQC\.AKaraB>robocopy /E

------------------------------------------------------------------------------
   ROBOCOPY     ::     Robust File Copy for Windows
------------------------------------------------------------------------------

  Started : Thursday, October 8, 2026 1:09:46 PM
   Source -
     Dest -

    Files : *.*

  Options : *.* /S /E /DCOPY:DA /COPY:DAT /R:1000000 /W:30

------------------------------------------------------------------------------

ERROR : No Source Directory Specified.


       Simple Usage :: ROBOCOPY source destination /MIR

            source :: Source Directory (drive:\path or \\server\share\path).
         destination :: Destination Dir  (drive:\path or \\server\share\path).
               /MIR :: Mirror a complete directory tree.

    For more usage information run ROBOCOPY /?


****  /MIR can DELETE files as well as copy them !
```

h. Navigate to **C:\Users\ITEUser** to verify that the folder ITEfolder5 is copied.

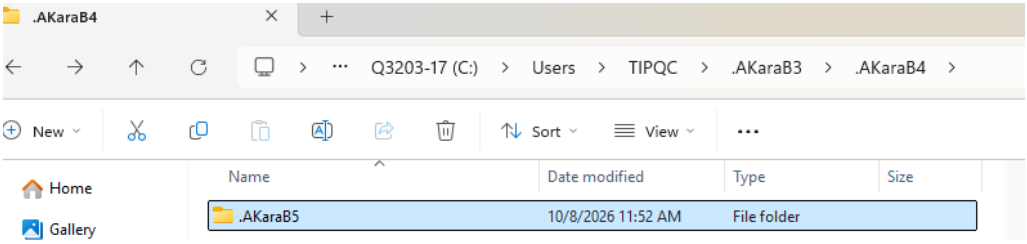


## Step 6: Delete directories.

In this step, you will delete an empty and a non-empty directory using the **rd** command.

a. Use the **rd ITEfolder2** to delete the empty directory and verify that the directory was deleted.

```
C:\Users\ITEUser> rd ITEfolder2
```

```
C:\Users\TIPQC>rd .AKaraB2
```

b. Navigate to the **C:\Users\ITEUser\ITEfolder3** directory.

```
C:\Users\TIPQC\.AKaraB3>
```

c. Use the **rd ITEfolder1** to delete the directory. Verify the directory removal using the **dir** command.

Were you able to delete the directory? Explain.

***No, I was not able to delete the directory using the rd command because the directory was not empty. It still contained files and subfolders, so Windows would not allow it to be removed normally. To delete a non-empty directory, I needed to use the rd /S command, which removes the directory along with all of its contents.***


d. Use **rd /?** command to determine the switch that allows the deletion of a non-empty directory.

```
c:\Users\ITEUser\ITEfolder3> rd /S ITEfolder1
ITEfolder4, Are you sure (Y/N)? y
```

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
C:\Users\TIPQC\.AKaraB3>rd /S .AKaraB
.AKaraB, Are you sure (Y/N)? y
```

e. Use the appropriate commands to delete all the text files and folders that you have created in this lab. Type **exit** to close the command prompt window.

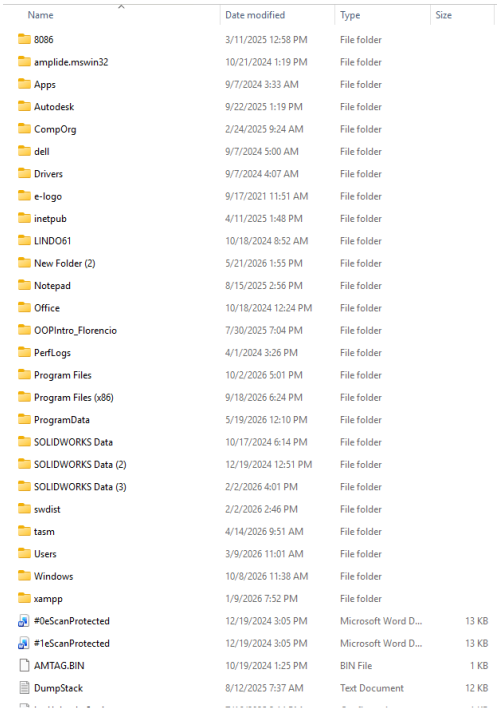

| Name | Date modified | Type | Size |
|---|---|---|---|
| 8086 | 3/11/2025 12:58 PM | File folder | |
| amplide.mswin32 | 10/21/2024 1:19 PM | File folder | |
| Apps | 9/7/2024 3:33 AM | File folder | |
| Autodesk | 9/22/2025 1:19 PM | File folder | |
| CompOrg | 2/24/2025 9:24 AM | File folder | |
| dell | 9/7/2024 5:00 AM | File folder | |
| Drivers | 9/7/2024 4:07 AM | File folder | |
| e-logo | 9/17/2021 11:51 AM | File folder | |
| inetpub | 4/11/2025 1:48 PM | File folder | |
| LINDO61 | 10/18/2024 8:52 AM | File folder | |
| New Folder (2) | 5/21/2026 1:55 PM | File folder | |
| Notepad | 8/15/2025 2:56 PM | File folder | |
| Office | 10/18/2024 12:24 PM | File folder | |
| OOPIntro_Florencio | 7/30/2025 7:04 PM | File folder | |
| PerfLogs | 4/1/2024 3:26 PM | File folder | |
| Program Files | 10/2/2026 5:01 PM | File folder | |
| Program Files (x86) | 9/18/2026 6:24 PM | File folder | |
| ProgramData | 5/19/2026 12:10 PM | File folder | |
| SOLIDWORKS Data | 10/17/2024 6:14 PM | File folder | |
| SOLIDWORKS Data (2) | 12/19/2024 12:51 PM | File folder | |
| SOLIDWORKS Data (3) | 2/2/2026 4:01 PM | File folder | |
| swdist | 2/2/2026 2:46 PM | File folder | |
| tasm | 4/14/2026 9:51 AM | File folder | |
| Users | 3/9/2026 11:01 AM | File folder | |
| Windows | 10/8/2026 11:38 AM | File folder | |
| xampp | 1/9/2026 7:52 PM | File folder | |
| #0eScanProtected | 12/19/2024 3:05 PM | Microsoft Word D... | 13 KB |
| #1eScanProtected | 12/19/2024 3:05 PM | Microsoft Word D... | 13 KB |
| AMTAG.BIN | 10/19/2024 1:25 PM | BIN File | 1 KB |
| DumpStack | 8/12/2025 7:37 AM | Text Document | 12 KB |

## Reflection Question

What are the advantages of using CLI vs. GUI?

***I think using CLI has the advantage of being faster and more direct when managing files and folders, especially when I already know the commands I need to use. It also allows me to perform multiple file operations quickly without having to click through different menus and windows. On the other hand, GUI is easier for beginners because it is more visual and user-friendly. To conclude, CLI is useful for speed and efficiency, while GUI is more convenient and easier to understand for everyday tasks.***

© 2015 - 2020 Cisco and/or its affiliates. All rights reserved. Cisco Public