

EXP NO: 2a

DATE:

RSA ALGORITHM

AIM:

To write a C program to implement and perform RSA algorithm

ALGORITHM:

Step 1 : Start.

Step 2 : Include necessary header files.

Step 3 : Create a function for calculating GCD(Greatest Common Divisor).

Step 4 : Define GCD function.

Step 5 : Create a function for encryption and decryption process.

Step 6 : Define encryption and decryption function.

Step 7 : Call both encryption and decryption function inside main function.

Step 8 : End.

PROGRAM:

```
from math import gcd

# defining a function to perform RSA approach
def RSA(p: int, q: int, message: int):
    # calculating n
    n = p * q

    # calculating totient, t
    t = (p - 1) * (q - 1)

    # selecting public key, e
    for i in range(2, t):
        if gcd(i, t) == 1:
            e = i
            break


    # selecting private key, d
    j = 0
    while True:
        if (j * e) % t == 1:
            d = j
            break
        j += 1

    # performing encryption
    ct = (message ** e) % n
    print(f"Encrypted message is {ct}")
```

```
# performing decryption
mes = (ct ** d) % n
print(f"Decrypted message is {mes}")

p=int(input("Enter the value of p: "))
q=int(input("Enter the value of q: "))
msg=int(input("Enter the message: "))
RSA(p,q,msg)
```

OUTPUT:

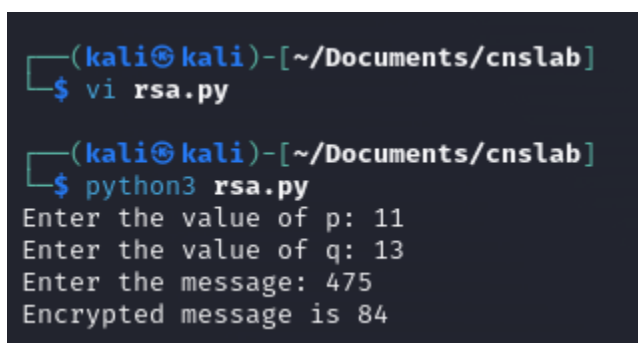A terminal window with a dark background and light blue text. The prompt is (kali@kali) - [~/Documents/cnslab]. The user enters 'vi rsa.py'. The prompt is (kali@kali) - [~/Documents/cnslab]. The user enters 'python3 rsa.py'. The program prompts for 'Enter the value of p: 11', 'Enter the value of q: 13', and 'Enter the message: 475'. The final output is 'Encrypted message is 84'.

```
(kali@kali) - [~/Documents/cnslab]
$ vi rsa.py

(kali@kali) - [~/Documents/cnslab]
$ python3 rsa.py
Enter the value of p: 11
Enter the value of q: 13
Enter the message: 475
Encrypted message is 84
```

RESULT:

Thus, a python program is implemented to demonstrate RSA Algorithm.

EXP NO: 2b

DATE:

DIFFIE HELMAN KEY EXCHANGE

AIM:

To write a C program to implement and perform Diffie Helman Key Exchange process.

ALGORITHM:

Step 1 : Start.

Step 2 : Include necessary header files.

Step 3 : Create a function for calculating primitive root of a number.

Step 4 : Define primitive_root function.

Step 5 : Create a function for calculating public key.

Step 6 : Define calc_public_key function.

Step 7 : Call calc_public_key function inside main function.

Step 8 : End.

PROGRAM:

```
def prime_checker(p):
    # Checks If the number entered is a Prime Number or not
    if p < 1:
        return -1
    elif p > 1:
        if p == 2:
            return 1
        for i in range(2, p):
            if p % i == 0:
                return -1
        return 1

def primitive_check(g, p, L):
    # Checks If The Entered Number Is A Primitive Root Or Not
    for i in range(1, p):
        L.append(pow(g, i) % p)
    for i in range(1, p):
        if L.count(i) > 1:
            L.clear()
            return -1
    return 1

l = []
while 1:
    P = int(input("Enter P : "))
    if prime_checker(P) == -1:
        print("Number Is Not Prime, Please Enter Again!")
        continue
    break

while 1:
    G = int(input(f"Enter The Primitive Root Of {P} : "))
    if primitive_check(G, P, l) == -1:
        print(f"Number Is Not A Primitive Root Of {P}, Please Try Again!")
        continue
    break


# Private Keys
x1, x2 = int(input("Enter The Private Key Of User 1 : ")), int(
    input("Enter The Private Key Of User 2 : "))
```

```

while 1:
    if x1 >= P or x2 >= P:
        print(f"Private Key Of Both The Users Should Be Less Than {P}!")
        continue
    break
# Calculate Public Keys
y1, y2 = pow(G, x1) % P, pow(G, x2) % P
# Generate Secret Keys
k1, k2 = pow(y2, x1) % P, pow(y1, x2) % P
print(f"\nSecret Key For User 1 Is {k1}\nSecret Key For User 2 Is {k2}\n")
if k1 == k2:
    print("Keys Have Been Exchanged Successfully")
else:
    print("Keys Have Not Been Exchanged Successfully")

```

OUTPUT:

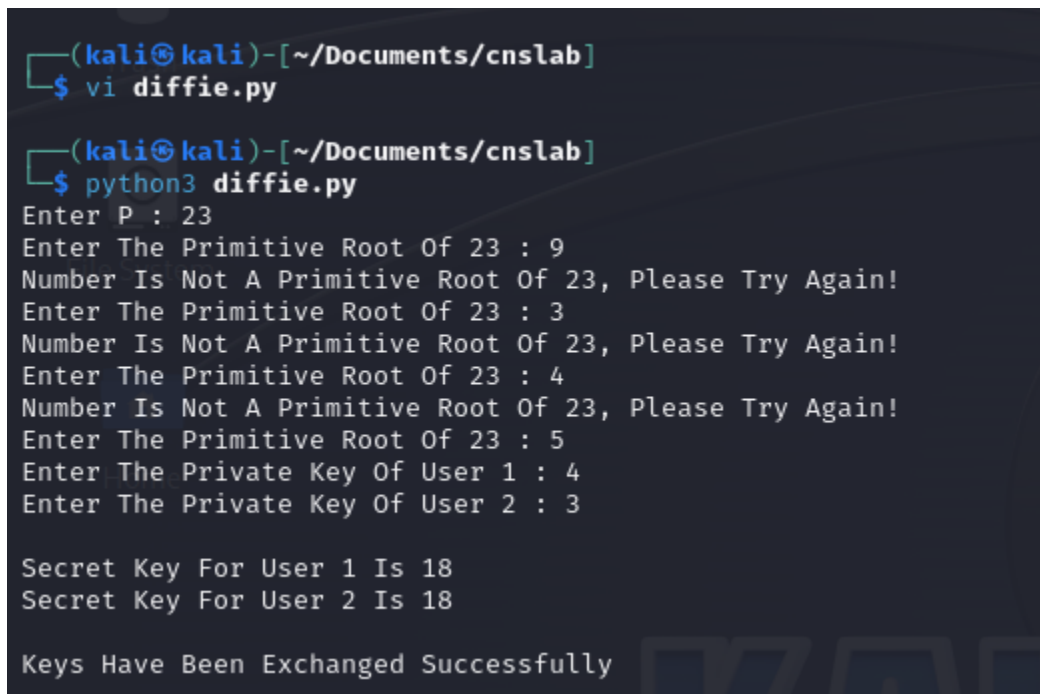

```

(kali@kali)-[~/Documents/cnslab]
$ vi diffie.py

(kali@kali)-[~/Documents/cnslab]
$ python3 diffie.py
Enter P : 23
Enter The Primitive Root Of 23 : 9
Number Is Not A Primitive Root Of 23, Please Try Again!
Enter The Primitive Root Of 23 : 3
Number Is Not A Primitive Root Of 23, Please Try Again!
Enter The Primitive Root Of 23 : 4
Number Is Not A Primitive Root Of 23, Please Try Again!
Enter The Primitive Root Of 23 : 5
Enter The Private Key Of User 1 : 4
Enter The Private Key Of User 2 : 3

Secret Key For User 1 Is 18
Secret Key For User 2 Is 18

Keys Have Been Exchanged Successfully

```

RESULT:

Thus, a python program has been implemented to demonstrate Diffie Hellman Key Exchange Algorithm.