

Name: Blessing Oyeniran
Student ID: CS-C26-09-NA-004
Date: October 7, 2026

Final Checklist

Topology

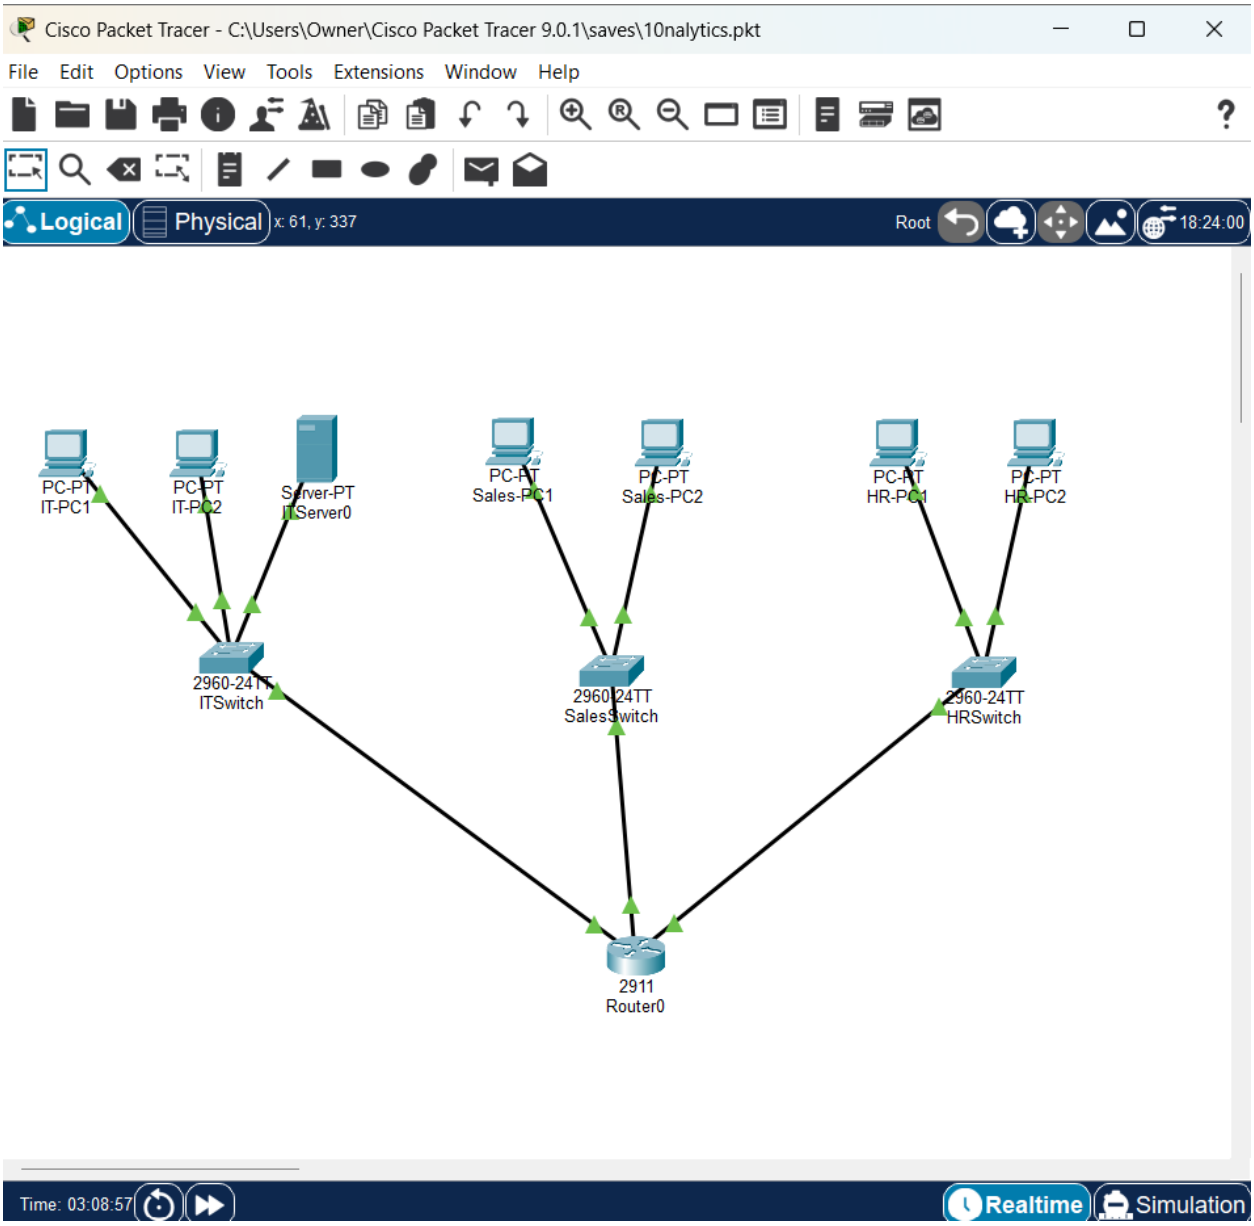


IP Address Configuration

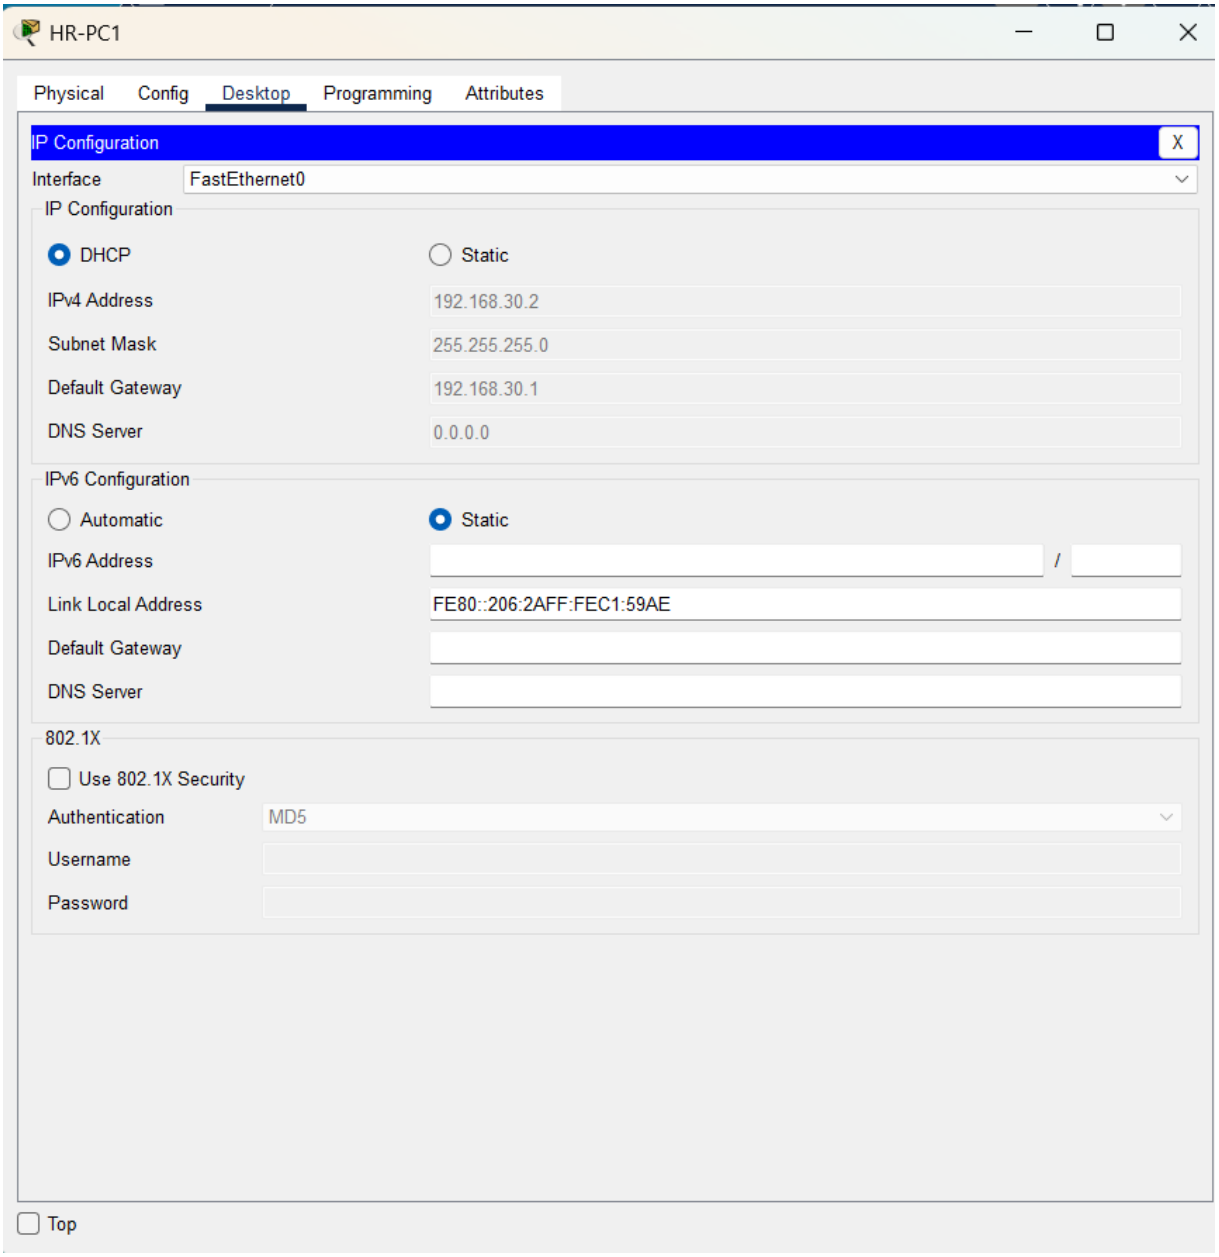


Sales → HR ping Success

Sales → IT ping Blocked

Sales → IT FTP Allowed

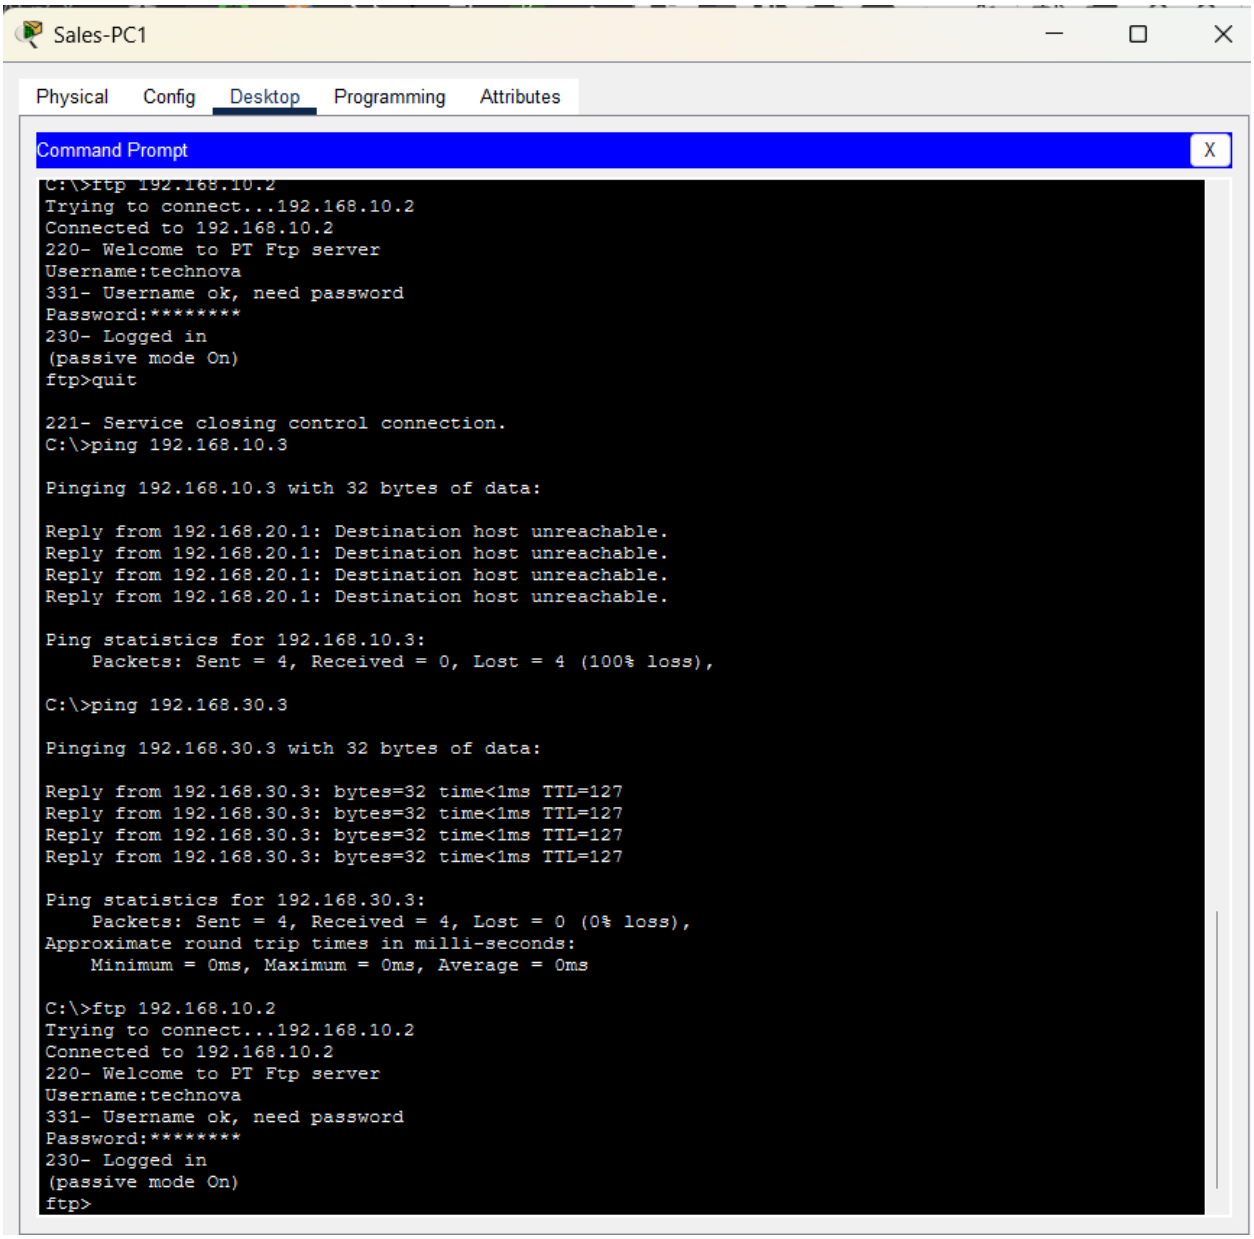


Sales → IT HTTP Allowed

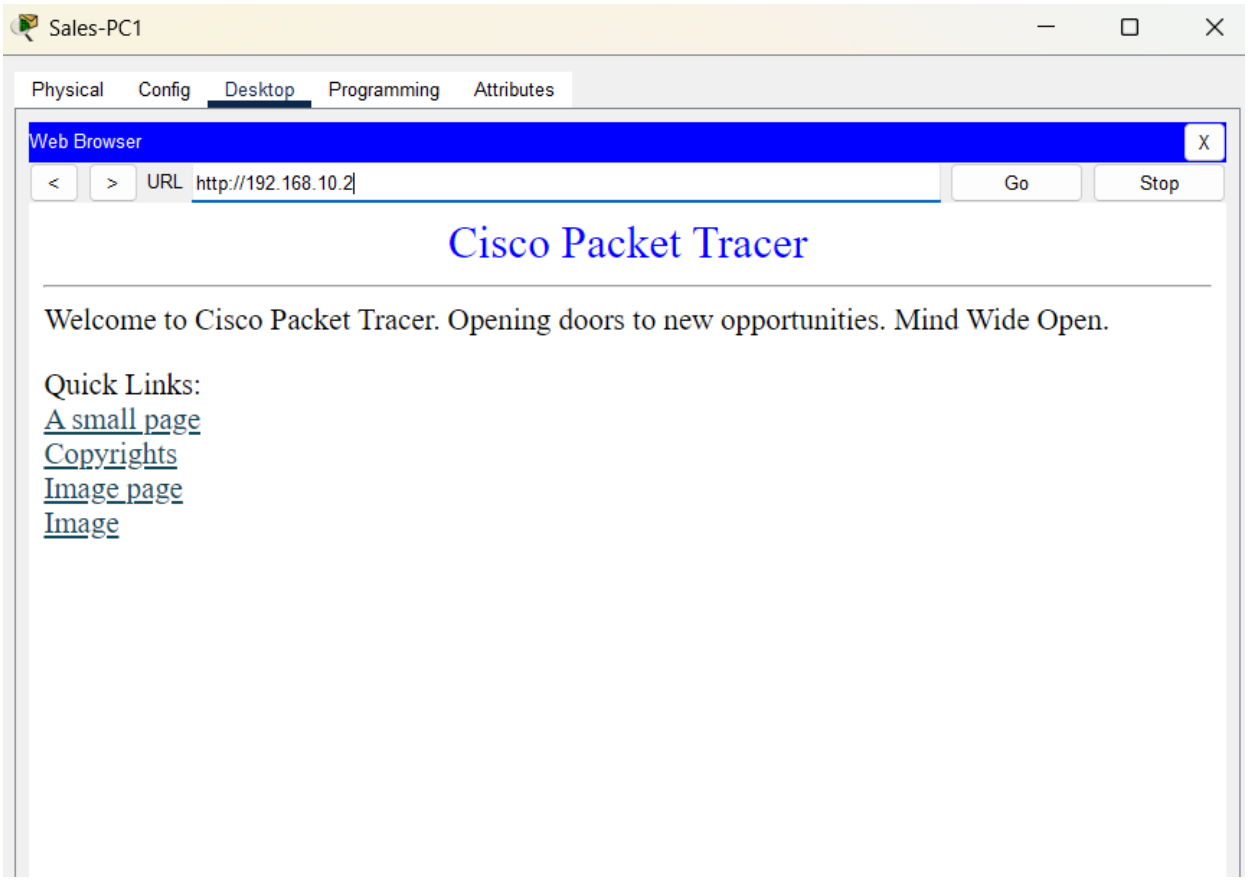


HR → IT ping Success

HR → Sales ping Success


HR → IT FTP Allowed

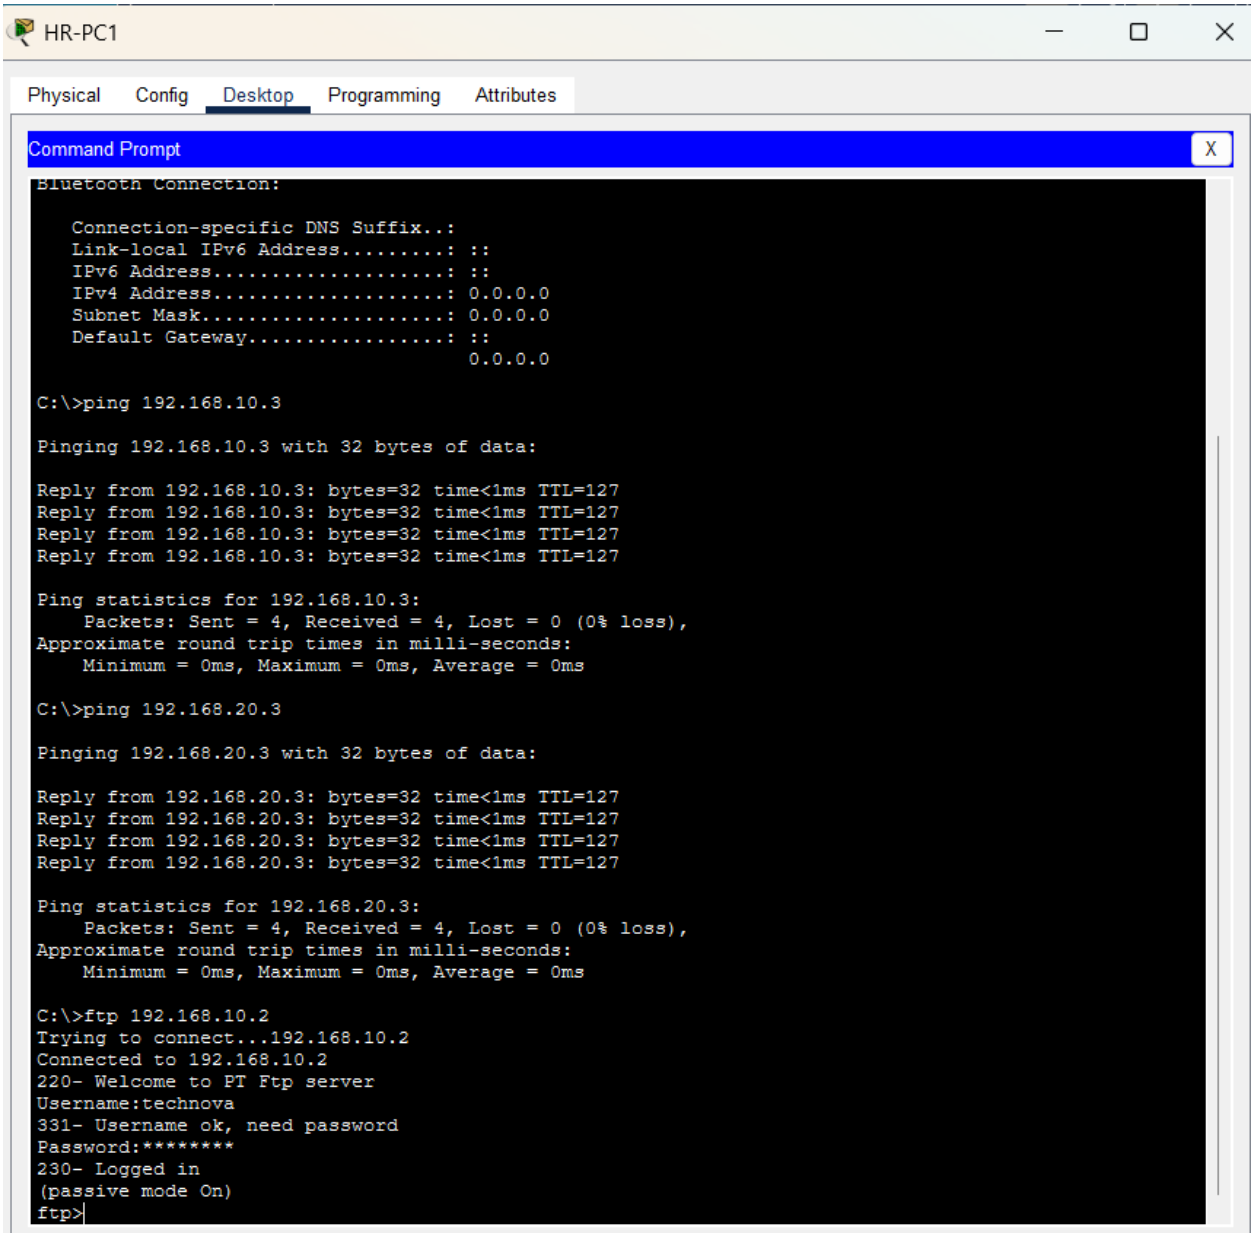

IT → HR ping Success

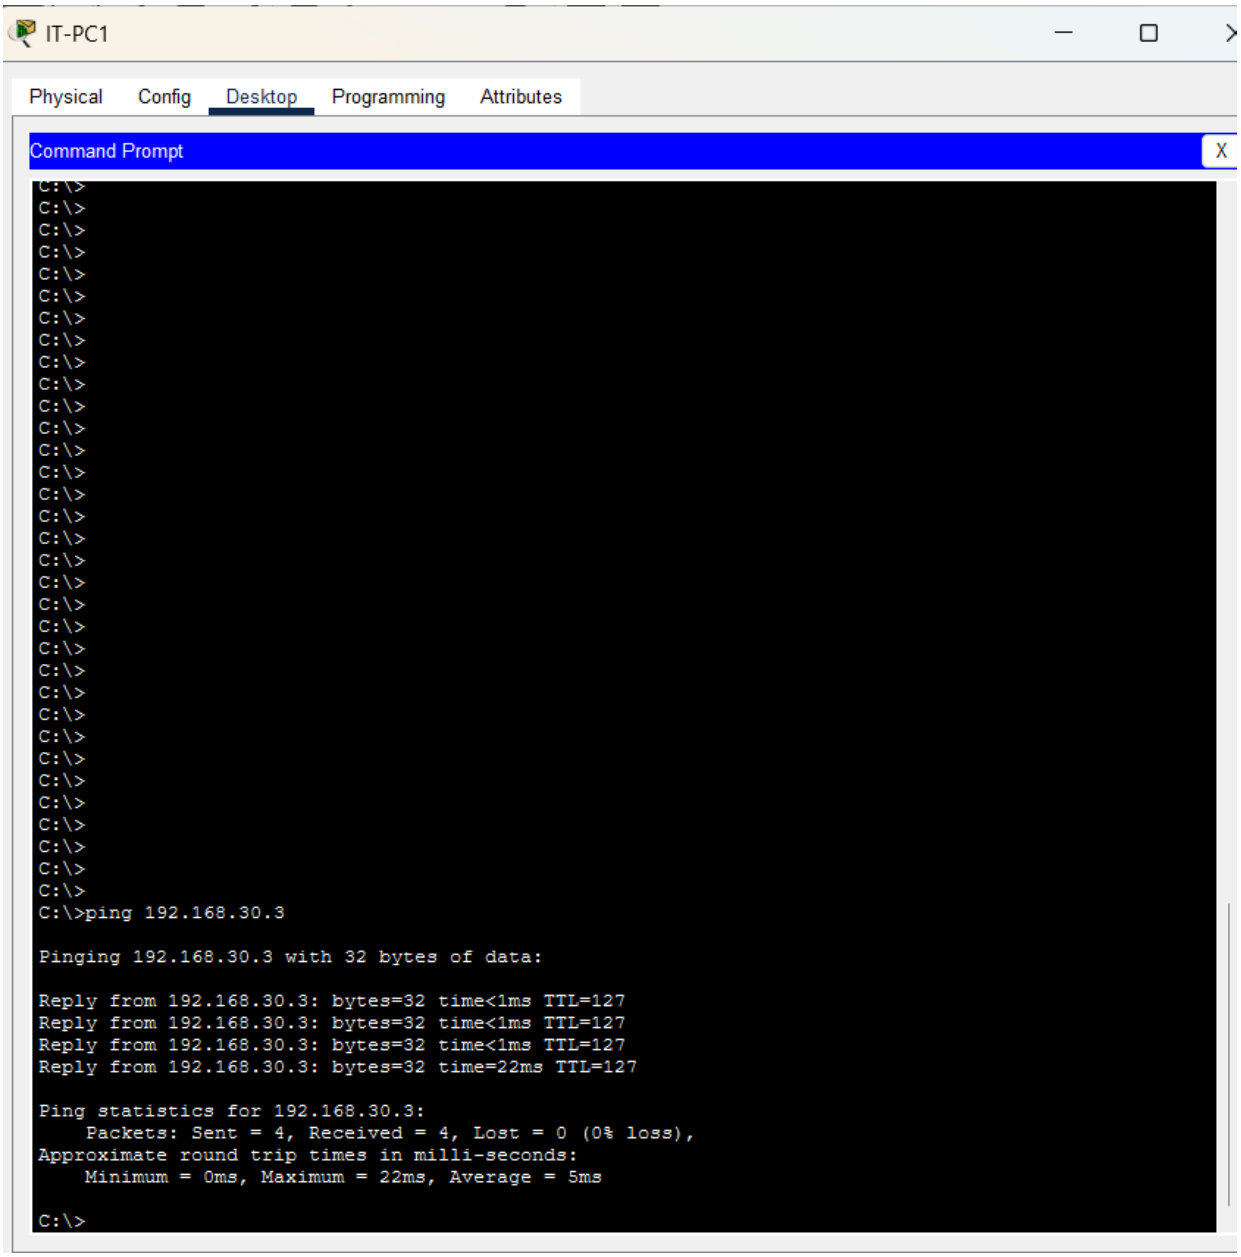

ACL command in router

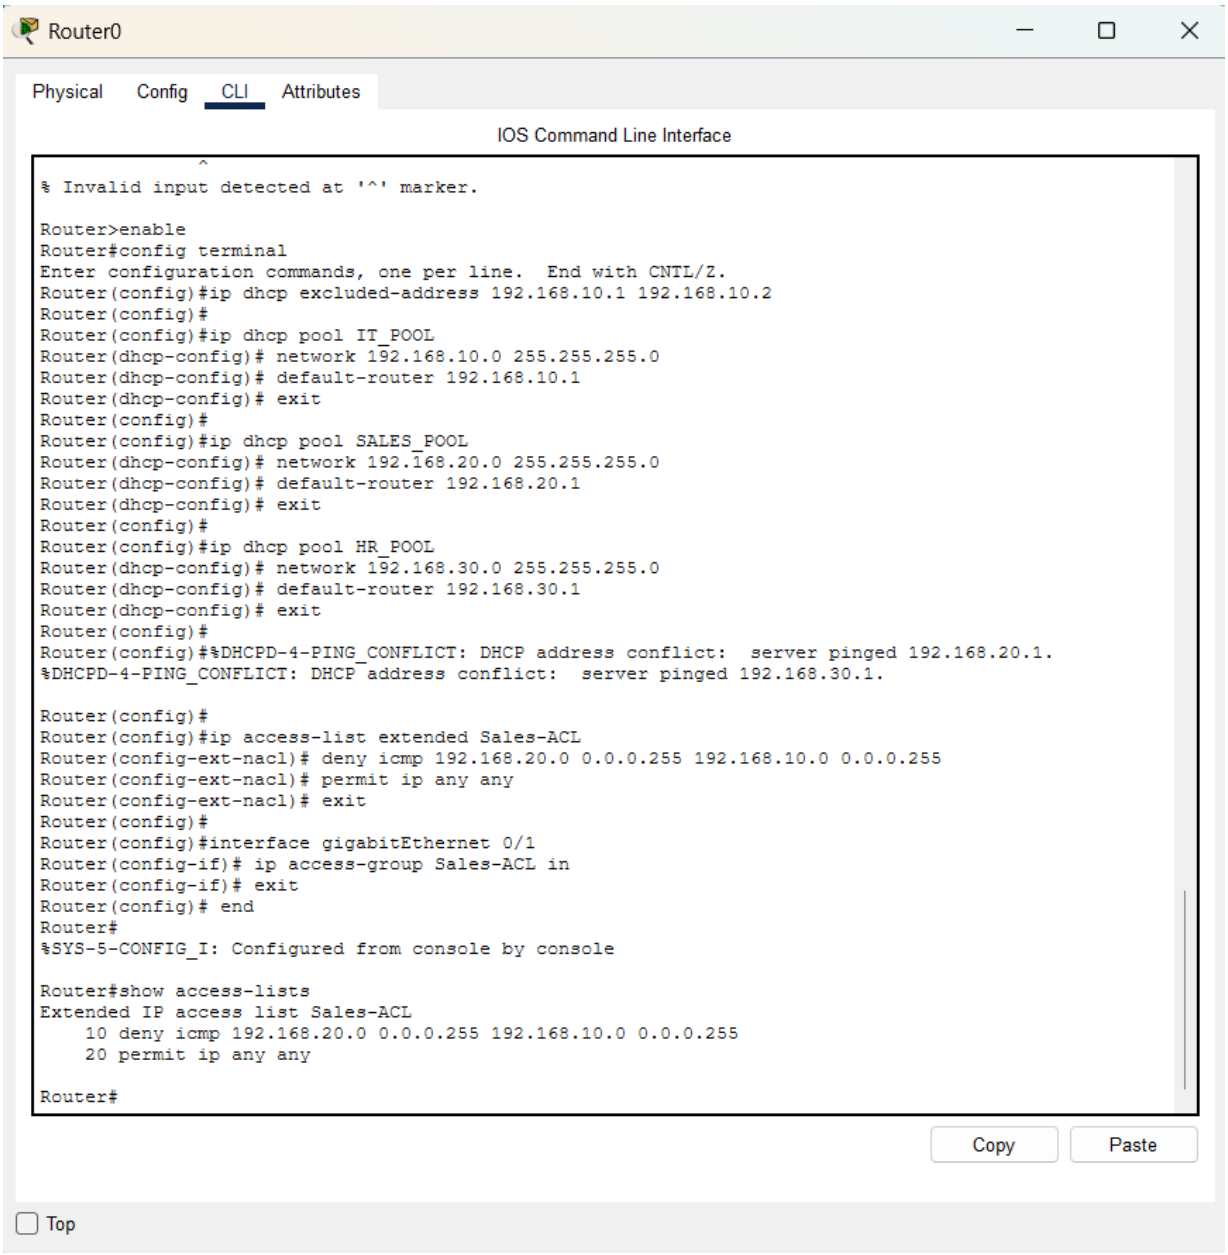
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
% Invalid input detected at '^' marker.
Router>enable
Router#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip dhcp excluded-address 192.168.10.1 192.168.10.2
Router(config)#
Router(config)#ip dhcp pool IT_POOL
Router(dhcp-config)# network 192.168.10.0 255.255.255.0
Router(dhcp-config)# default-router 192.168.10.1
Router(dhcp-config)# exit
Router(config)#
Router(config)#ip dhcp pool SALES_POOL
Router(dhcp-config)# network 192.168.20.0 255.255.255.0
Router(dhcp-config)# default-router 192.168.20.1
Router(dhcp-config)# exit
Router(config)#
Router(config)#ip dhcp pool HR_POOL
Router(dhcp-config)# network 192.168.30.0 255.255.255.0
Router(dhcp-config)# default-router 192.168.30.1
Router(dhcp-config)# exit
Router(config)#
Router(config)#%DHCPD-4-PING_CONFLICT: DHCP address conflict: server pinged 192.168.20.1.
%DHCPD-4-PING_CONFLICT: DHCP address conflict: server pinged 192.168.30.1.
Router(config)#
Router(config)#ip access-list extended Sales-ACL
Router(config-ext-nacl)# deny icmp 192.168.20.0 0.0.0.255 192.168.10.0 0.0.0.255
Router(config-ext-nacl)# permit ip any any
Router(config-ext-nacl)# exit
Router(config)#
Router(config)#interface gigabitEthernet 0/1
Router(config-if)# ip access-group Sales-ACL in
Router(config-if)# exit
Router(config)# end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#show access-lists
Extended IP access list Sales-ACL
10 deny icmp 192.168.20.0 0.0.0.255 192.168.10.0 0.0.0.255
20 permit ip any any
Router#
Copy
Paste
Top