Improving Debugging For Optimized Rust Code

Master Thesis

Niklas Lundberg

Department of Computer Science, Electrical and Space Engineering Luleå University of Technology

September 15, 2021

Overview

- 1. Introduction
- 2. DWARF
- 3. Implementation
- 4. Result and Discussion
- 5. Conclusion

What is debugging?

- Debugging is the process of finding an resolving errors, flaws, or faults.
- There are many different debugging techniques
- A debugger is a tool for debugging.
 - Used for controlling debugged target.
 - Start
 - Stop
 - Reset
 - Step
 - Breakpoints
 - Used to retrieve and visualize debug information.
 - Evaluate variable
 - Stack trace
 - And more

Unoptimized Vs Optimized Rust Code

- Rust is a programming language.
- Unoptimized Rust Code
 - Slow to run compared to other languages and optimized Rust code.
 - The machine code is very similar to the source code.
 - Values of variables are stored in memory on the stack.
 - Easy to debug.
- Optimized Rust Code
 - Fast compared to unoptimized code.
 - The machine code is very different form source code.
 - Values of variables have short life spans because they are stored in registers.
 - Hard to debug.

Problems

- Hard to debug because of short life spans of values.
- Existing debuggers like GDB often say that variables are optimized out.
- Existing debuggers also gives wrong result, this is especially true for LLDB.
- Both LLDB and GDB are hard to use for beginners.

Solution and motivation

- Research if better and more debug information can be generated.
- Why? Because debuggers are restricted by the amount of debug information generated.
- Create a debugger for embedded systems that solve the mentioned problems.
 - Why? Because debuggers are very useful for embedded systems.
 - Small enough that the system can fully be understood.
 - They often have high requirements to meet.
 - Important that the optimized code work correctly.
 - Unoptimized code is to slow.
 - Written is Rust to use the benefits of Rust.

DWARF




DWARF



How to get the debug information?

- Rust generates a Executable and Linkable Format(ELF) file.
- ELF contains the Debugging with Attributed Record Formats(DWARF).
- DWARF is used to understand how the source and machine code relates to each other.
- Rust uses DWARF version 4.
- Dwarf is divided into 12 sections.

DWARF Sections

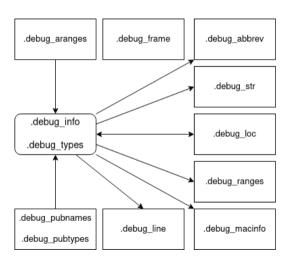

Compilation unit

- Sections .debug_info and .debug_types contain a number of compilation units.
- A compilation unit can be one program or library for example.
- Each compilation unit contains all the related debug information for that unit.
- Each compilation unit contains a tree of DIEs.
- DIE stand fore Debug Information Entry.
- A DIE contains information about a piece of the source code, like a variable for example.

Debug Information Entry(DIE)

- Debug Information Entry(DIE).
 - All DIEs have a DWARF TAG.
 - DIEs also contain a number of DWARF attributesa.
- DWARF DIE example from the .debug_info section.

An example on how to use DWARF

- How can DWARF be used to evaluate the value of a variable?
 - Two things are needed from DWARF.
 - Location of the value in the debug target.
 - The type of the variable.

Evaluating a variable

- Read the current code location from the debug target.
- Find the current compilation unit using the current code location.
- Find the current subprogram DIE using the current code location.
- Find the searched variable DIE in the sub tree of the subprogram DIE.


Evaluating the location of a variable

```
<2><4321>: Abbrev Number: 16 (DW TAG subprogram)
  <4322> DW AT low pc : 0x8000fca
  <4326> DW_AT_high pc : 0x2c
  <432c> DW AT linkage name: (indirect string, offset: 0x473b8): ZN24nucleo r
  <4330> DW AT name : (indirect string, offset: 0x64a52): my function
  <4334> DW AT decl file : 1
  <4335> DW AT decl line : 194
  <4336> DW AT type : <0x6233>
<3><433a>: Abbrev Number: 17 (DW TAG_formal_parameter)
  <433b> DW AT location : 2 byte block: 91 7e (DW OP fbreg: -2)
  <433e> DW AT name : (indirect string. offset: 0x11d94): val
  <4342> DW AT decl file : 1
  <4343> DW AT decl line : 194
         DW AT type
  <4344>
                        : <0x6233>
```

Parsing the type of a variable

```
<1><6233>: Abbrev Number: 34 (DW_TAG_base_type)
  <6234> DW_AT_name : (indirect string, offset: 0x2a125): i16
  <6238> DW_AT_encoding : 5 (signed)
  <6239> DW_AT_byte_size : 2
```

Debugging library rust-debug

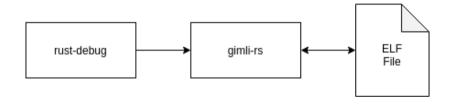


Debugging library rust-debug

Features

- Virtually Unwinding Stack and Stack trace
- Evaluating Variables
- Finding breakpoint location
- Retrieving source location information from a DIE
- And more

Embedded Rust Debugger(ERD)

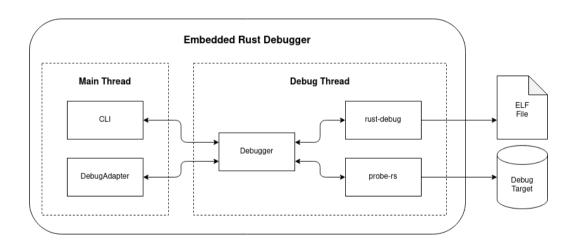

Result

- Evaluated the result be comparing ERD to GDB and LLDB.
- Compiled an example blink program with different optimization.
- The blink program has a inline assembly breakpoint set.
- To ensure that the program stops a the same location each time.
- Added some different types of variables to test the debugger.

Rust Source Code

 $let \ mut \ test_enum3 = TestEnum::Struct(TestStruct \ \{ \ flag: \ true, \ num: \ 123 \ \});$

ERD

test_enum3 = TestEnum { < OptimizedOut >}

GDB Version 11.0.90

(gdb) p test_enum3

 $1 = \text{nucleo_rtic_blinking_led}::TestEnum::ITest(< \text{optimized out})$

Rust Source Code

let mut test_enum3 = TestEnum::Struct(TestStruct { flag: true, num: 123 });

LLDB Version 13.0.0

```
 \begin{array}{l} (\mathsf{nucleo\_rtic\_blinking\_led} :: \mathsf{TestEnum}) \ \mathsf{test\_enum3} = \{ \\ \mathsf{ITest} = (0 = 0) \\ \mathsf{UTest} = (0 = 0) \\ \mathsf{Struct} = \{ \\ 0 = (\mathsf{flag} = \mathsf{false}, \ \mathsf{num} = 0) \\ \} \\ \mathsf{Non} = \{ \} \\ \\ \end{array}
```

Rust Source Code

 $let \ mut \ test_struct = TestStruct \ \{ \ flag: \ true, \ num: \ 123 \ \};$

ERD

 $test_struct = TestStruct \; \{ \; num::123, \; flag::< OptimizedOut > \}$

GDB Version 11.0.90

(gdb) p test_struct

 $1 = \text{nucleo_rtic_blinking_led}$: TestStruct {flag: <sybthetic pointer>, num: 123}

LLDB Version 13.0.0

 $(\mathsf{nucleo_rtic_blinking_led}::\mathsf{TestEnum})\ \mathsf{test_struct} = (\mathsf{flag} = \mathsf{false},\ \mathsf{num} = 123)$

Rust Source Code

let mut test_u16: u16 = 500;

ERD

 $test_u16 = <OutOfRange>$

GDB Version 11.0.90

(gdb) p test_u16 1 =optimized out>

LLDB Version 13.0.0

(unsigned short) test_u16 = $\langle variable not available \rangle$

Conclusion

- Was not able to generate better or more debug information.
- Able to do some small improvements.
- ERD lacks some of the features that LLDB and GDB has.
- Contributed with a Debugging library for Rust.
- ERD is written in Rust.
- Improved somewhat on the user experience.
- Still a lot that needs to be done.

Future Work

- Display last known value.
- Evaluating expressions.
- Improving user experience.

Questions?