
1.Feature-radiks 流程截图

登陆应用后:

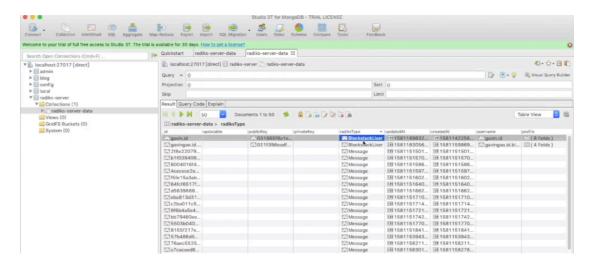

出现了 BlockstackUser 类型的条目, _id 为 gavin.id

Save 后:


```
Line 10:16: 'getConfig' is defined but never used no-
unused-vars
Line 70:26: Expected '!==' and instead saw '!=' eqeqeq

[DEBUG] uploadToGaiaHub: uploading lagger.js:41

Message/49d98a5ab0fc-4e5b-82b6-366ele3d0d09 to https://hub.blocks
tack.org

Compute What's New X Search
```

存储到 Gaiahub 的 Id 为 49d98...

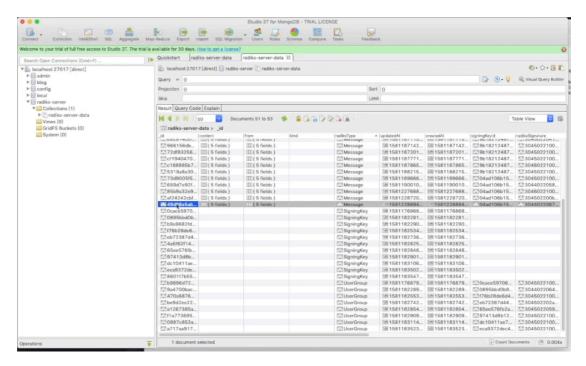

MongoDB 后台也多了 49d98...的数据

2.Model 设计

```
import { Model } from 'radiks';

export default class Message extends Model {
  static className = 'Message';

  static schema = {
    from: String,
    content: String,
    flag: {
      type: Boolean,
      decrypted: true
    }
  }

  static defaults = {
    content: "welcome to message board"
  }
}
```

留言板的 Model 设计分为几个字段,一个是 from 表示留言的创建者,一个是 content 表示留言的内容, from 与 content 是需要加密的。Flag 是不加密的,为

了方便后台数据的索引,默认为 true,当留言过期或者失效的时候为 false。