




Christian Giovanni Arredondo Rangel
1222100691
Coneccion por putty por medio del puerto 830

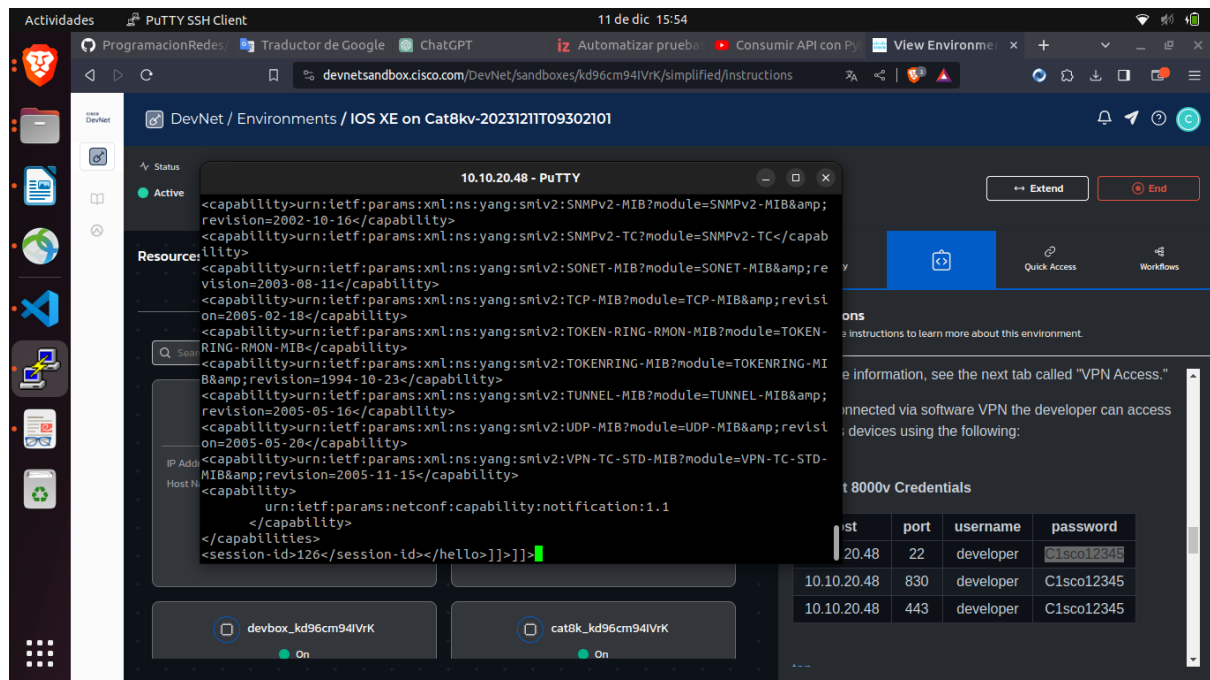

To start a NETCONF session, the client needs to send its own hello message in a response:

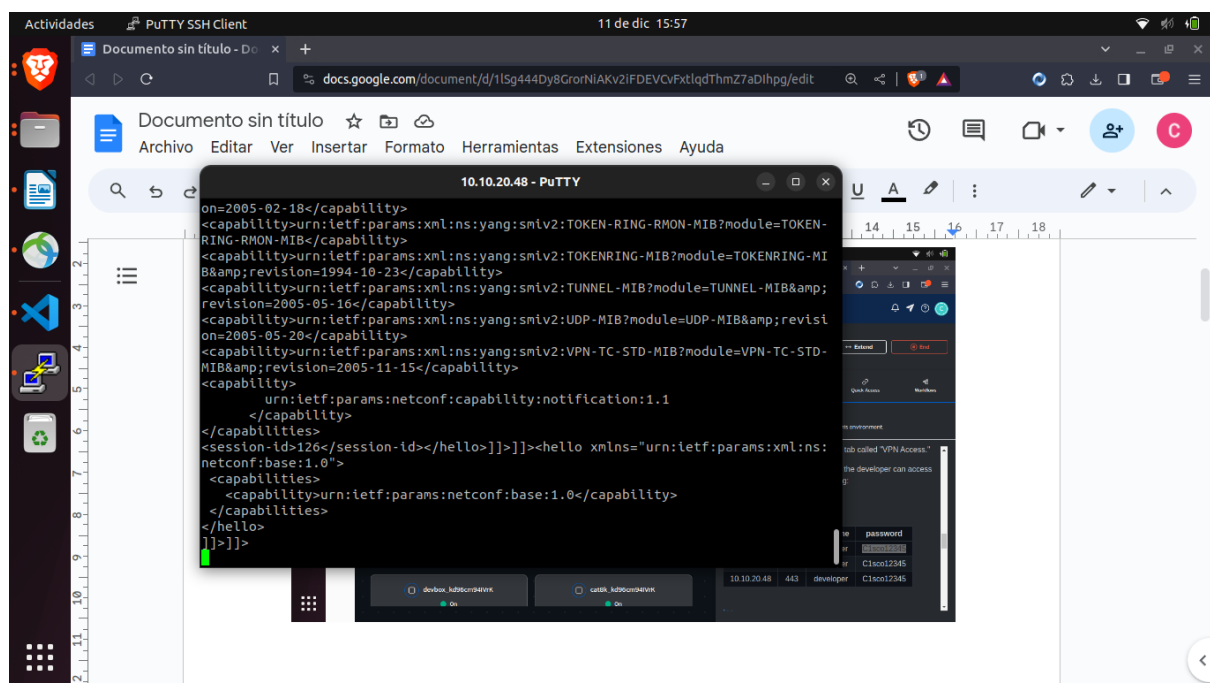

After the client hello message has been sent, the NETCONF session is ready to process RPC messages.

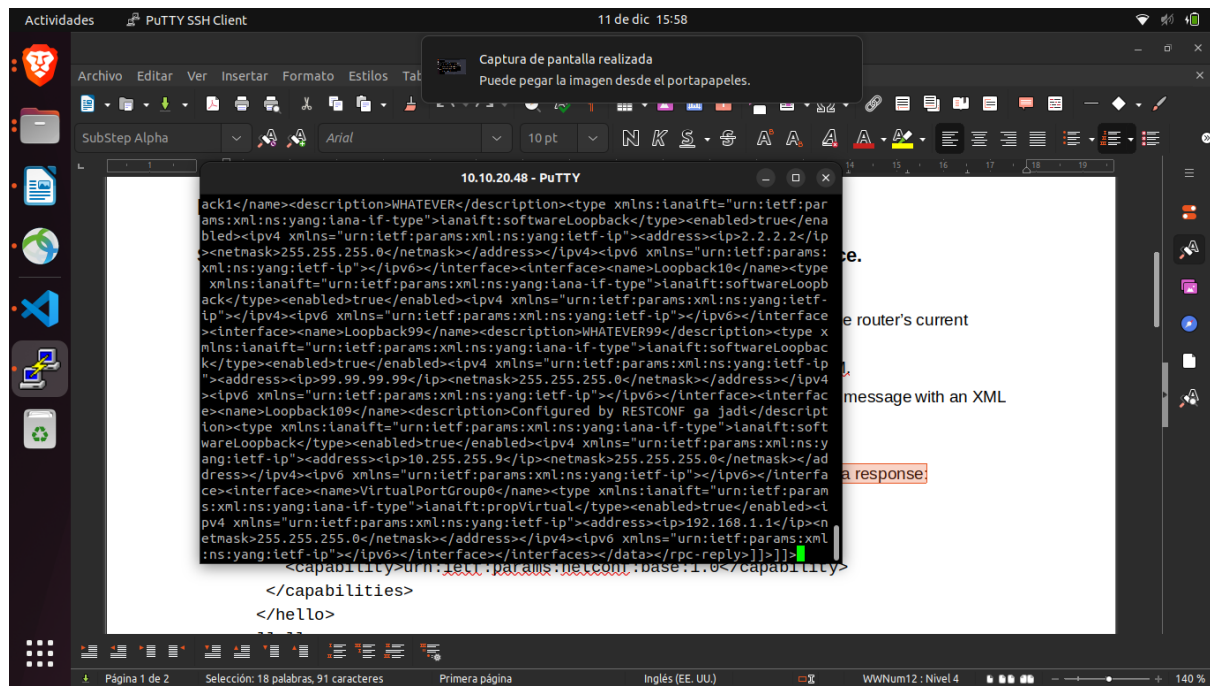

To close the NETCONF session, the client needs to send the following message:

```

<rpc message-id="99999999" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <close-session />
</rpc>
]]>]]>

```