

# Core Java

**Rajeev Gupta**  
Java Trainer & Consultant (MTech CS)  
[rgupta.mtech@gmail.com](mailto:rgupta.mtech@gmail.com)

# Core Java

**Rajeev Gupta**  
Java Trainer & Consultant (MTech CS)  
[rgupta.mtech@gmail.com](mailto:rgupta.mtech@gmail.com)

# What is Java? 10 min break

java =oops+ lib + jvm

## C/C++ vs java

gcc



**bind with the platform info**

**portability:**

**exe cant not run of window :(**


**fast: native language**

**pointer: u can refer any add in memory**

**memory leak**

**diff memory mgt**

o

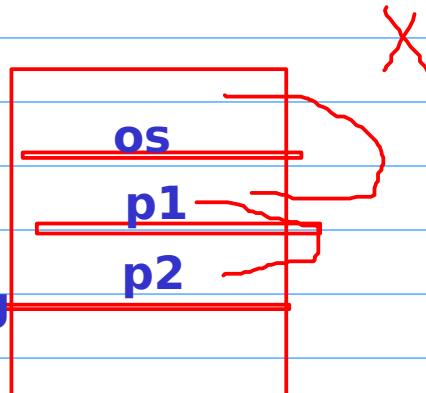


**Java**



**=> network programming**


**java vs c**

## how java runs?

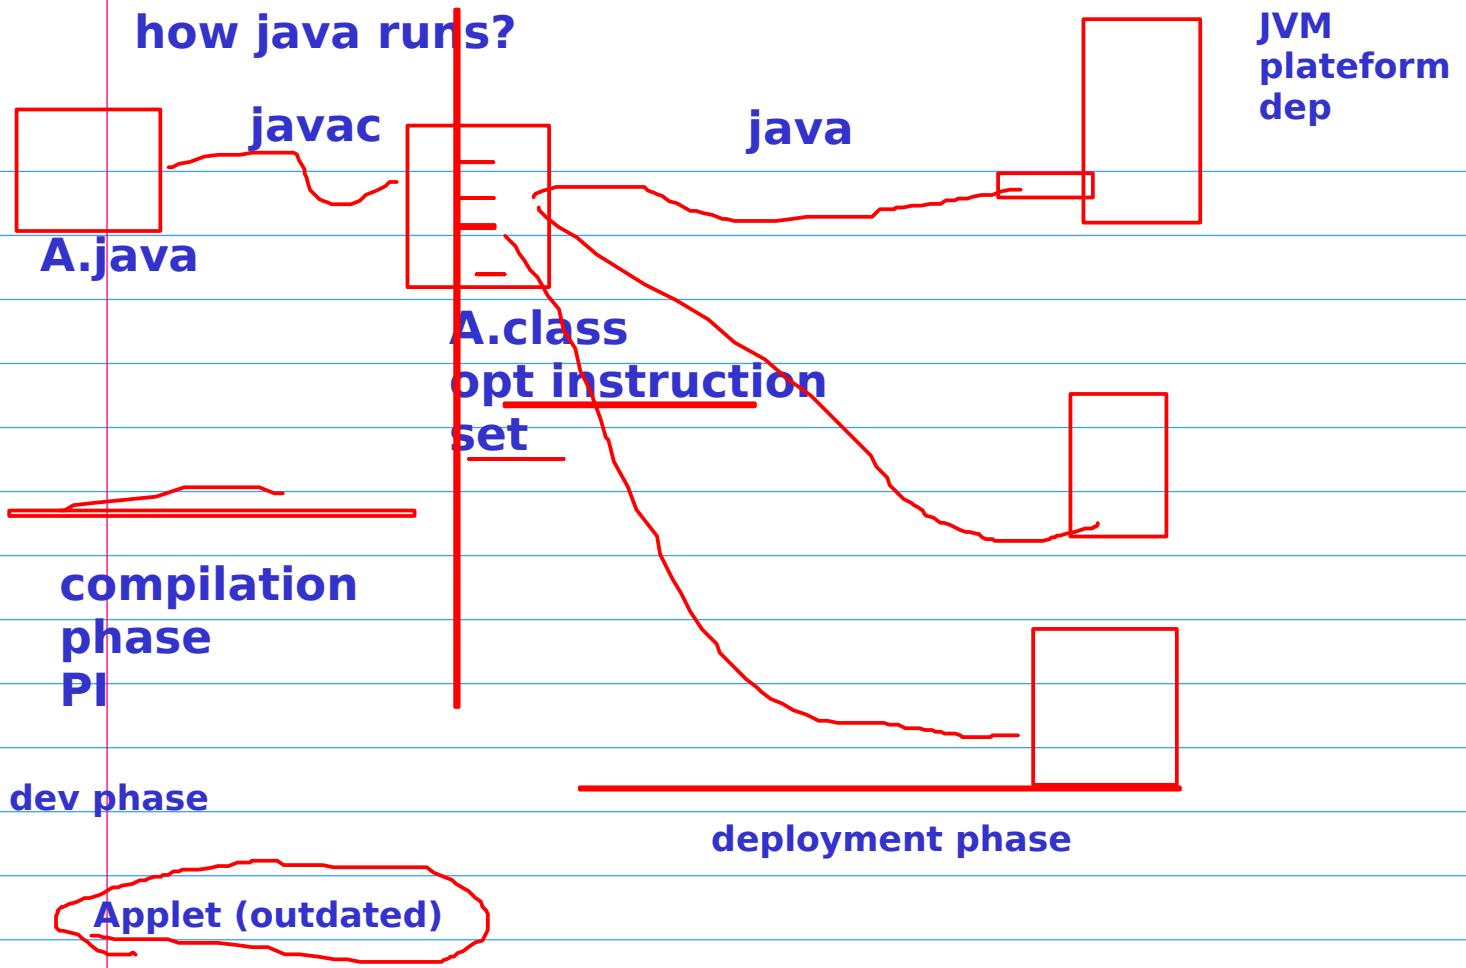

jvm

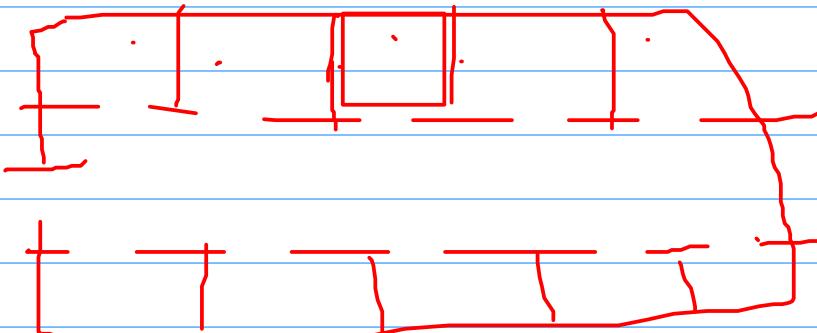

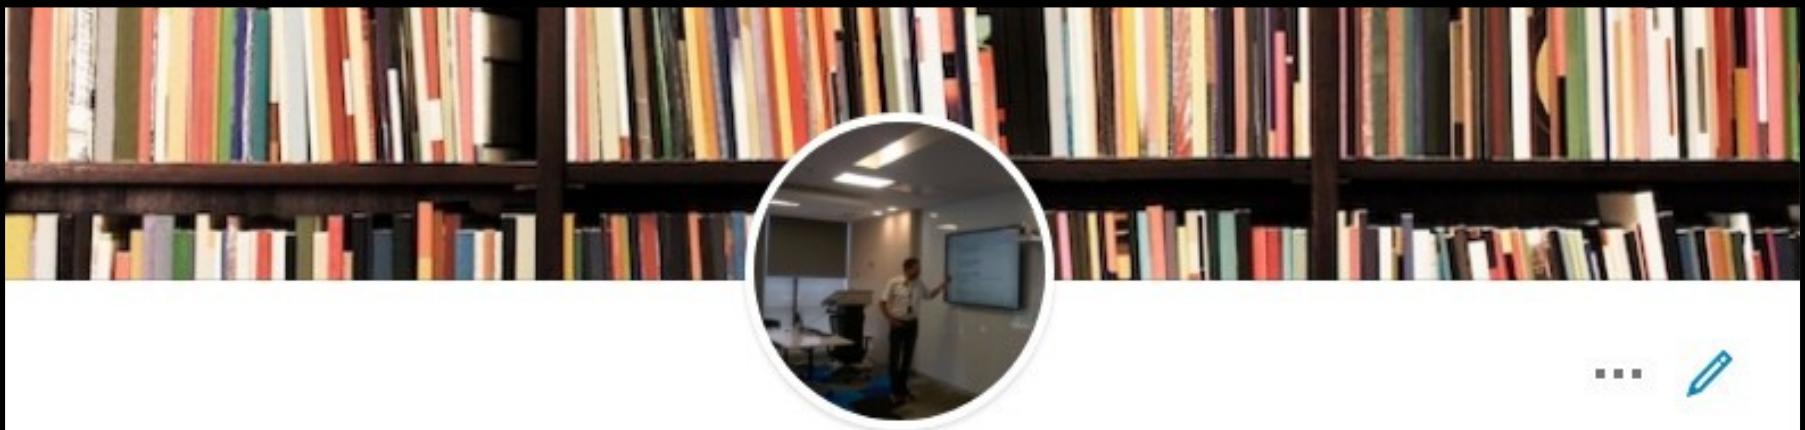

...



## Rajeev Gupta

FreeLancer Corporate Java JEE/ Spring Trainer

freelance • Institution of Electronics and Telecommunication Engineers IETE

New Delhi Area, India • 500+ 

- 
1. Expert trainer for Java 8, GOF Design patterns, OOAD, JEE 7, Spring 5, Hibernate 5, Spring boot, microservice, netflix oss, Spring cloud, angularjs, Spring MVC, Spring Data, Spring Security, EJB 3, JPA 2, JMS 2, Struts 1/2, Web service
  2. Helping technology organizations by training their fresh and senior engineers in key technologies and processes.
  3. Taught graduate and post graduate academic courses to students of professional degrees.

I am open for advance java training /consultancy/ content development/ guest lectures/online training for corporate / institutions on freelance basis

## **Day-1: Introduction to Java, JVM, procedural programming, Arrays**

- Introduction to OO Concepts
- Introduction to UML
- Pillars of OO: Inheritance - Polymorphism - Abstraction - Encapsulation
- JVM basics: JDK,JRE and JVM
- Procedural programming: if else, looping, switch etc
- Array, defining usages 1D/2D arrays
- Lab Assignments

## **Day 2: Object Orientation & JVM introduction**

- Creating Class, Object, constructor, init parameters
- Static variable and method
- Concepts of packages, Access specifier
- Inheritance, Types of inheritance in Java, Inheriting Data Member and Methods
- Role of Constructors in inheritance, Overriding super Class methods, super
- Hands On & Lab

### **Day 3: Advanced Class Features**

- Loose coupling and high cohesion
- composition, aggrigation, inheritance, basic of uml
  - Abstract classes and methods
  - Relationship between classes- IS-A, HAS-A, USE-A
  - Interface Vs Abstract, when to use what?
  - Final classes and methods
  - Interfaces, loose coupling and high cohesion
  - SOLID principles, Square – rectangle problem
  - Hands On & Lab

### **Day-4: Strings,Wrapper classes, Immutability, Inner classes,Lambda expression, Java 5 features , IO, Exception Handling**

- String class: Immutability and usages, stringbuilder and stringbuffer
- Wrapper classes and usages, Java 5 Language Features
- AutoBoxing and Unboxing, Enhanced For loop, Varargs, Static Import, Enums
- Inner classes: Regular inner class, method local inner class, anonymous inner class
- Char and byte oriented streams
- BufferedReader and BufferedWriter
- File handling
- Object Serialization and IO [ObjectInputStream / ObjectOutputStream]
- Exception Handling, Types of Exception, Exception Hierarchy, Exception wrapping and re throwing
- Hands On & Lab

## **Day 5: Introduction to Java threads, thread life cycle, synchronization, dead lock**

- Program vs process
- Thread as LWP
- Creating and running thread
- Thread life cycle
- Need of synchronization
- Producer consumer problem
- dead lock
- Hands on & Lab

## **Day 6:Java Collection, Generics**

- Collections Framework introduction
- List, Set, Map
- Iterator, ListIterator and Enumeration
- Collections and Array classes
- Sorting and searching, Comparator vs Comparable
- Generics, wildcards, using extends and super, bounded type
- Hands on & Lab

## **Day-7: Annotation, Java Reflection**

- Introduction to java reflection
- Java Annotation, JDK annotation, creating custom annotation, Annotation and reflection
- Introduction to Design pattern
- Hands on & Lab

## **Day 8: GOF design patterns**

- Pattern categories: Creational, Structural, Behavioral
- Creational Patterns: Singleton, Factory, Builder, Prototype
- Structural Patterns: Decorator, Facade Pattern, Proxy
- Behavioral Patterns: Iterator, Observer, Strategy,Template Method
- Hands on & Lab

# **DAY -1**

## **Day-1: Introduction to Java, JVM, procedural programming, Arrays**

- Introduction to OO Concepts
- Introduction to UML
- Pillars of OO: Inheritance - Polymorphism - Abstraction - Encapsulation
- JVM basics: JDK,JRE and JVM
- Procedural programming: if else, looping, switch etc
- Array, defining usages 1D/2D arrays
- Lab Assignments

# What is Java?


Java=OOPL+JVM+lib

How Java is different then C++?

Java Language									
JDK	Tools & Tool APIs								
	java	javac	javadoc	apt	jar	javap	JPDA	JConsole	Java VisualVM
JRE	Security	Int'l	RMI	IDL	Deploy	Monitoring	Troubleshoot	Scripting	JVM TI
	Deployment			Java Web Start			Java Plug-in		
	AWT			Swing			Java 2D		
	Accessibility		Drag n Drop		Input Methods		Image I/O	Print Service	Sound
	IDL	JDBC™		JNDI™		RMI	RMI-IIOP		Scripting
	Beans		Intl Support		I/O	JMX		JNI	Math
	Networking		Override Mechanism		Security	Serialization		Extension Mechanism	XML JAXP
	lang and util Base Libraries		Concurrency Utilities		JAR		Logging	Management	
	Preferences API		Ref Objects		Reflection		Regular Expressions	Versioning	Zip
	Java Hotspot™ Client VM					Java Hotspot™ Server VM			
Platforms		Solaris™		Linux		Windows		Other	



# How Sun define Java?

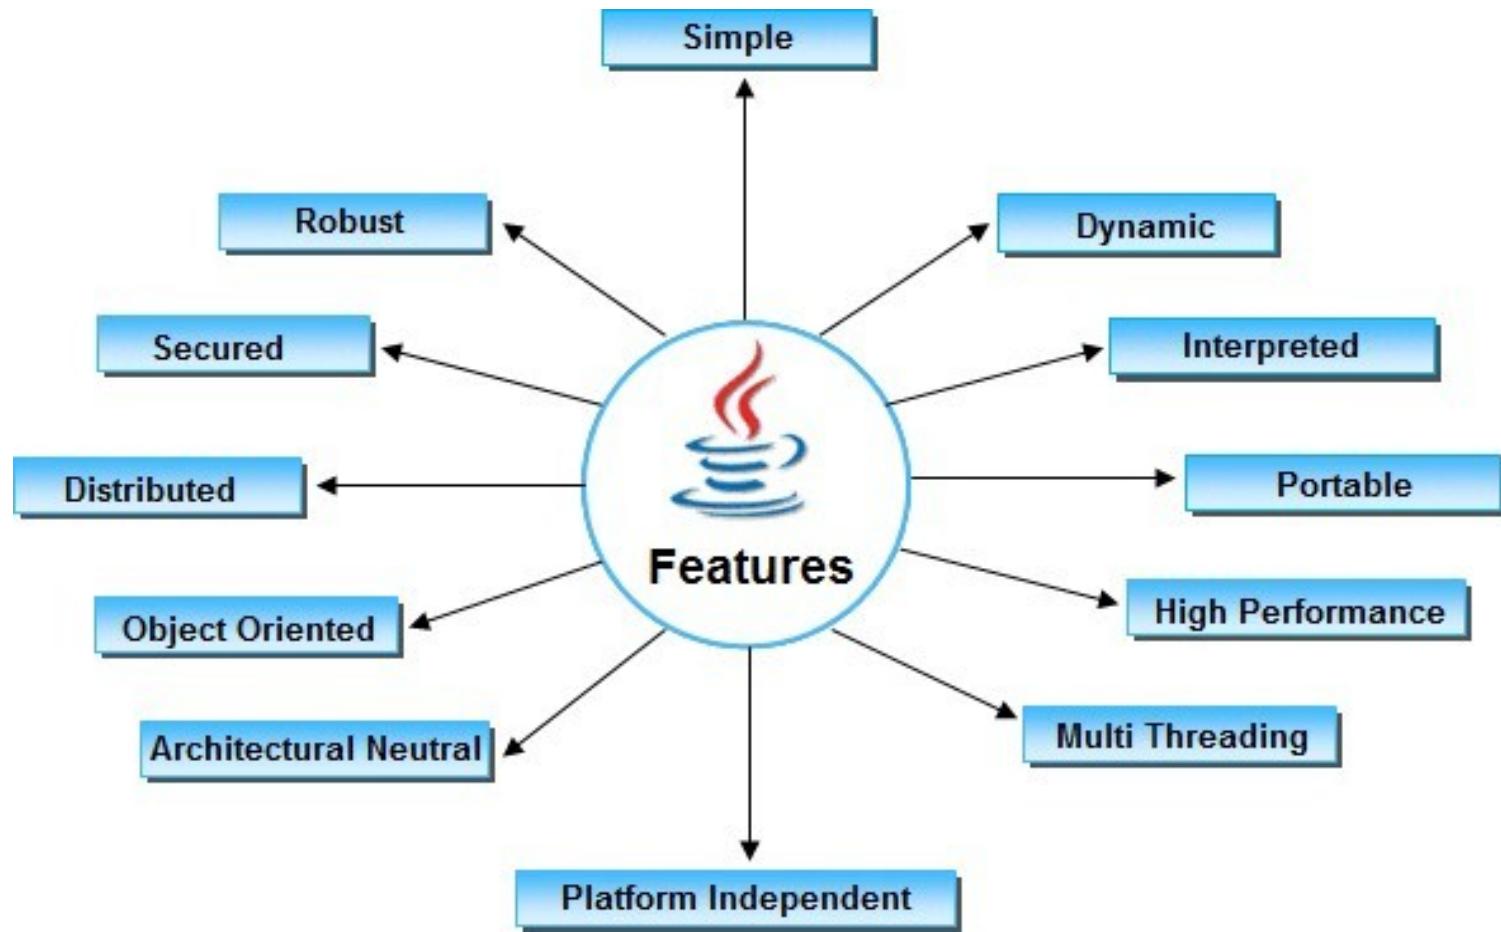

# Versions of Java

Java Version/Code Name	Release Date	Important Features/Code Name
JDK Alpha and Beta	1995	Initial release
JDK1.0(OAK)	23 <sup>rd</sup> Jab 1996	Initial release
JDK1.1	19 <sup>th</sup> Feb 1997	Reflection ,JDBC, Inner Classes, MI
J2SE1.2(Playground)	8 <sup>th</sup> Dec 1998	Collection,JIT, String memory map
J2SE 1.3(Kestrel)	8 <sup>th</sup> May 2000	Java Sound,Java Indexing,JNDI
J2SE 1.4(Merlin)	6 <sup>th</sup> Feb 2002	Assert,regex,exception chaining
J2SE 5.0(Tiger)	30 <sup>th</sup> Sept 2004	Generic,autoboxing,enums,varargs,for each,static import
Java SE 6.0(Mustang)	11 <sup>th</sup> Dec 2006	JDBC4.0,Java compiler API Annotations
Java SE7.0(Dolphin)	28 <sup>th</sup> July 2011	String in switch case, resource management in exception, catching multiple exception
Java SE8.0	18 <sup>th</sup> March 2014	Lambad expression,Annotation on Java type, Data and Time API


# Versions of Java

Version	Release date	End of Public Updates <sup>[5]</sup>	Extended Support Until
JDK Beta	1995	?	?
JDK 1.0	January 1996	?	?
JDK 1.1	February 1997	?	?
J2SE 1.2	December 1998	?	?
J2SE 1.3	May 2000	?	?
J2SE 1.4	February 2002	October 2008	February 2013
J2SE 5.0	September 2004	November 2009	April 2015
Java SE 6	December 2006	April 2013	December 2018
Java SE 7	July 2011	April 2015	July 2022
Java SE 8 (LTS)	March 2014	January 2019 (commercial) December 2020 (non-commercial)	March 2025
Java SE 9	September 2017	March 2018	N/A
Java SE 10 (18.3)	March 2018	September 2018	N/A
Java SE 11 (18.9 LTS)	September 2018	March 2019 from Oracle Later from OpenJDK	Vendor specific
Java SE 12 (19.3)	March 2019	September 2019	N/A

Legend:  Old version  Older version, still supported  Latest version  Future release

# Memory management issues in C/C++

## Memory Leak

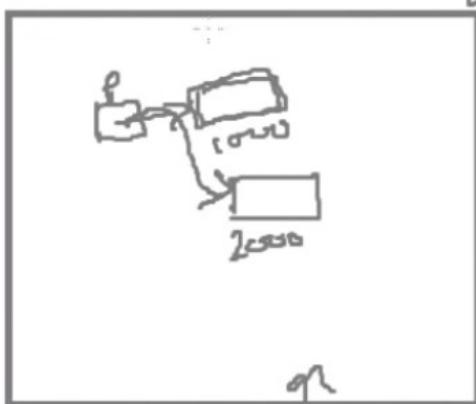

- ① Instruction ✓  
② Data ✓  
③ Stack ✓  
④ Heap ✓

```
f1() { int x; }
```

DMA

```
f2() { int *p;
```

```
p = (int *) malloc(4);  
*p = 7;  
= free(p); }
```

```
f3()  
{ int *p;  
p = (int *) malloc(4);  
free(p); }
```




# Some common buzzwords

## JDK

- ❖ Java development kit, developer need it
- ❖ Byte Code
- ❖ Highly optimize instruction set, designed to run on JVM Platform independent
- ❖ Java Runtime environment, Create an instance JVM, must be there on deployment machine.
- ❖ Platform dependent


## JVM

- ❖ Java Virtual Machine JVM
- ❖ Pick byte code and execute on client machine Platform dependent...

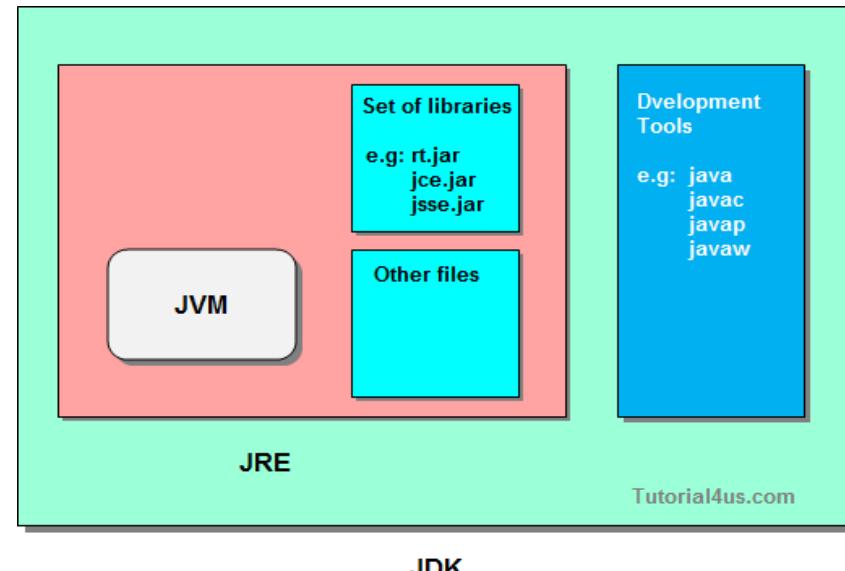

# Understanding JVM

## Key HotSpot JVM Components

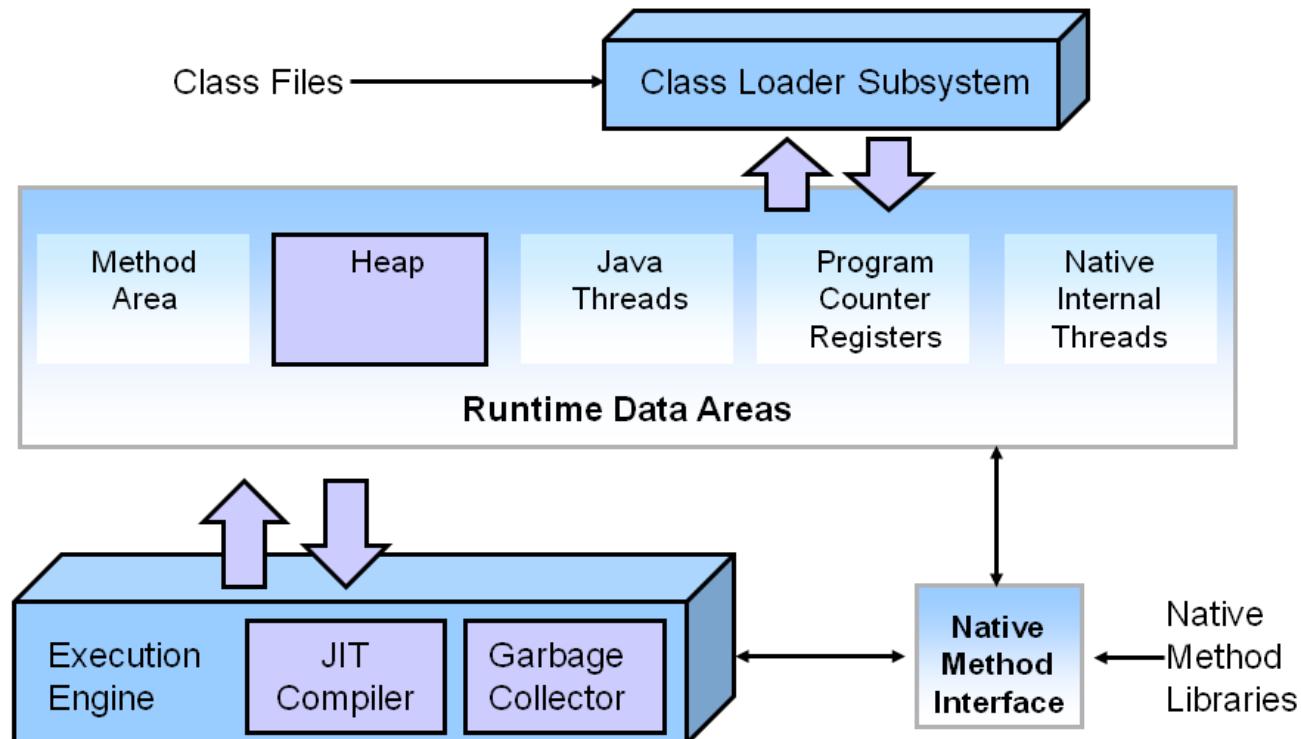

# Hello World

## Lab set-up

- ❖ Java 1.8
- ❖ Eclipse Luna

nodepad  
ide: eclipse

sts 4.2: a spring ide which is build on top of eclipse ide

```
public class HelloWorld {  
  
    public static void main(String args[])  
    {  
        System.out.println("welcome to the world of Java !!!");  
    }  
}
```

jdk 1.8  
mysql 5.6  
maven 3.4  
gradle 5.5  
sts 4.2  
mongodb

\*  
\*\*  
\*\*\*  
\*\*\*\*  
\*\*\*\*\*

\*  
\*\*  
\*\*\*  
\*\*\*\*  
\*\*\*\*\*

pascal Tra

1  
11  
121  
1331  
14641


2 D array

**Q1**




**array are objects in java**

**int x[] = new int[5];**

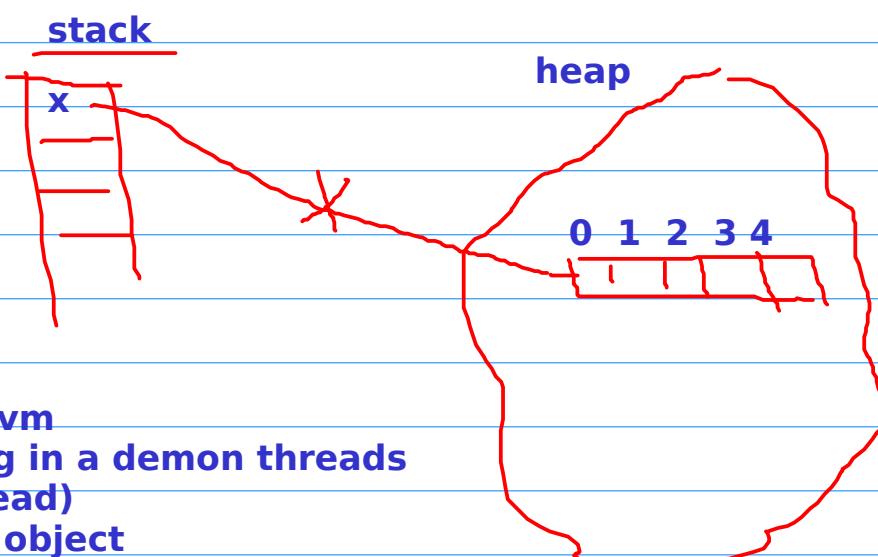

**in c/c++ memory mgt is the job of the programming :(**

**in java is is automatic thanks to GC**

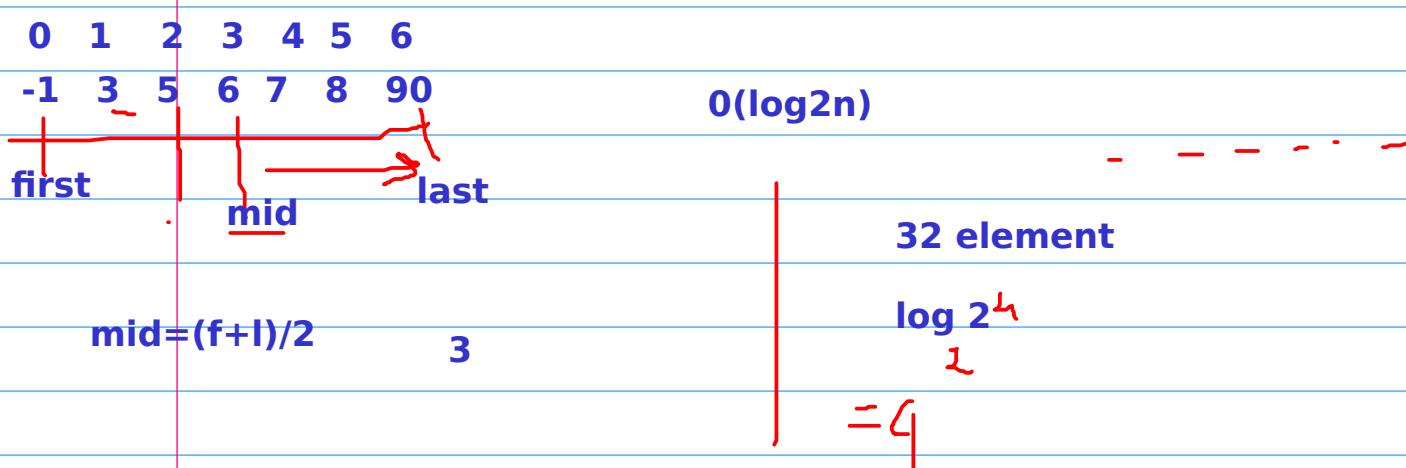


array are objects in java!

int x[][]=new int [5][6];

nt x[][]=new int [5][];

x[0]=new int[5];

x[1]=new int [10];

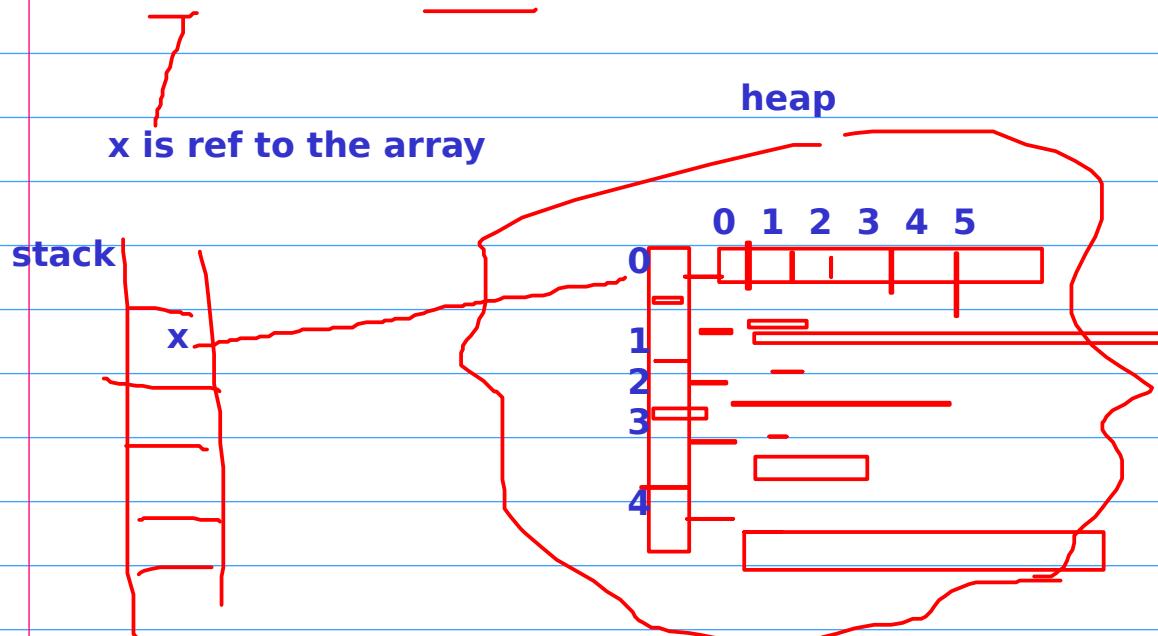

proof by contradiction

1 0 0  
0 1 0  
0 0 1

1. let assume it is identityMatix

2. for(...){

    for(...){

        if(i==j){  
            if(x[i][j]!=1){  
                identityMatix=false;  
                break;  
            }  
        }

        if(i!=j){  
            if(x[i][j]!=0){  
                identityMatix=false;  
                break;  
            }  
        }

    }


array are objects in java!

int x[][]=new int [5][6];

nt x[][]=new int [5][];

x[0]=new int[5];

x[1]=new int [10];

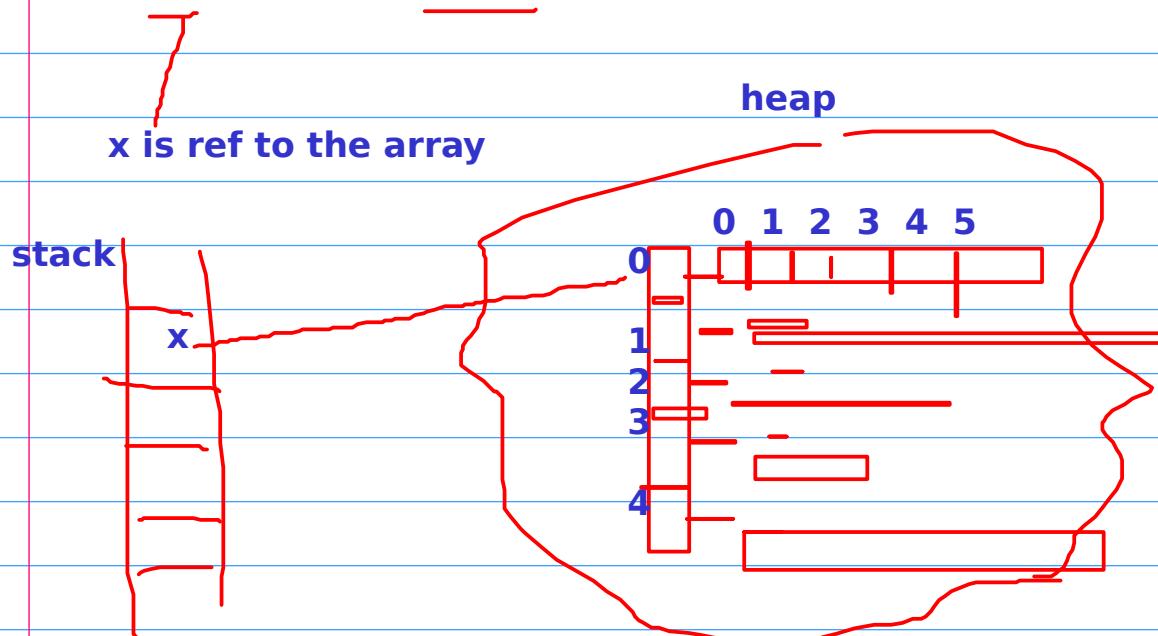

proof by contradiction

1 0 0  
0 1 0  
0 0 1

1. let assume it is identityMatix

2. for(...){

    for(...){

        if(i==j){  
            if(x[i][j]!=1){  
                identityMatix=false;  
                break;  
            }  
        }

        if(i!=j){  
            if(x[i][j]!=0){  
                identityMatix=false;  
                break;  
            }  
        }

    }  
}

```
for(i=0;i<n;i++){\n    for(j=0;j<=i;j++)\n        if(j==0 || j==i)\n            a[i][j]=1;\n        else\n            a[i][j]=a[i-1][j-1]+a[i-1][j];\n}
```

- 1  
- 11  
- 121  
- 1331

a[2][1]=a[1][0]+a[1][1];

a[i][j]=a[i-1][j-1]+a[i-1][j-1];

31.12.2021

1

1.1.2021

28.2.2020

1


29


1. check for leap year
2. find no of days in a month
3. calculate next date


```
int a[] = {4,6,-1,-2,6,9};  
// 4, 6, 6, 9, -1, -2
```

```
int b[] = new int[5]; // hold the +ve no  
int c[] = new int[5]; // -ve no
```

```
int j,k;  
j=0;  
k=0;  
for(int i=0;i<a.length;) {  
    if(a[i]>=0) {  
        b[j++]=a[i++];  
    }  
    else  
        c[k++]=a[i++];
```

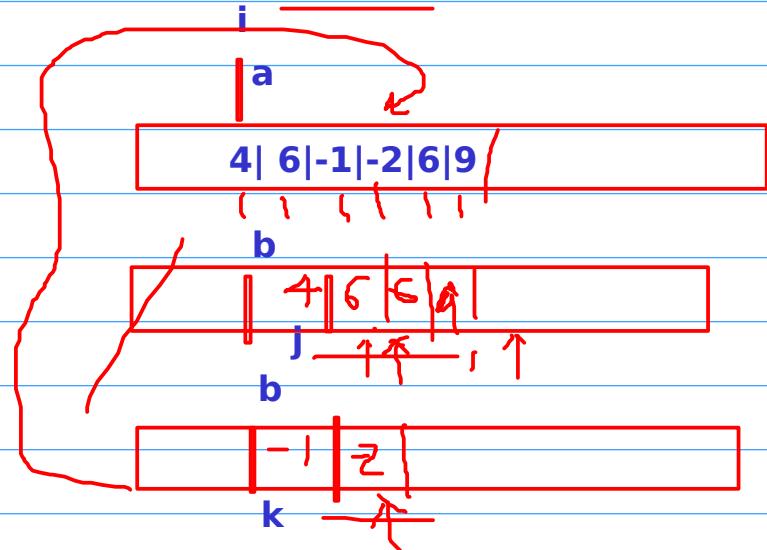

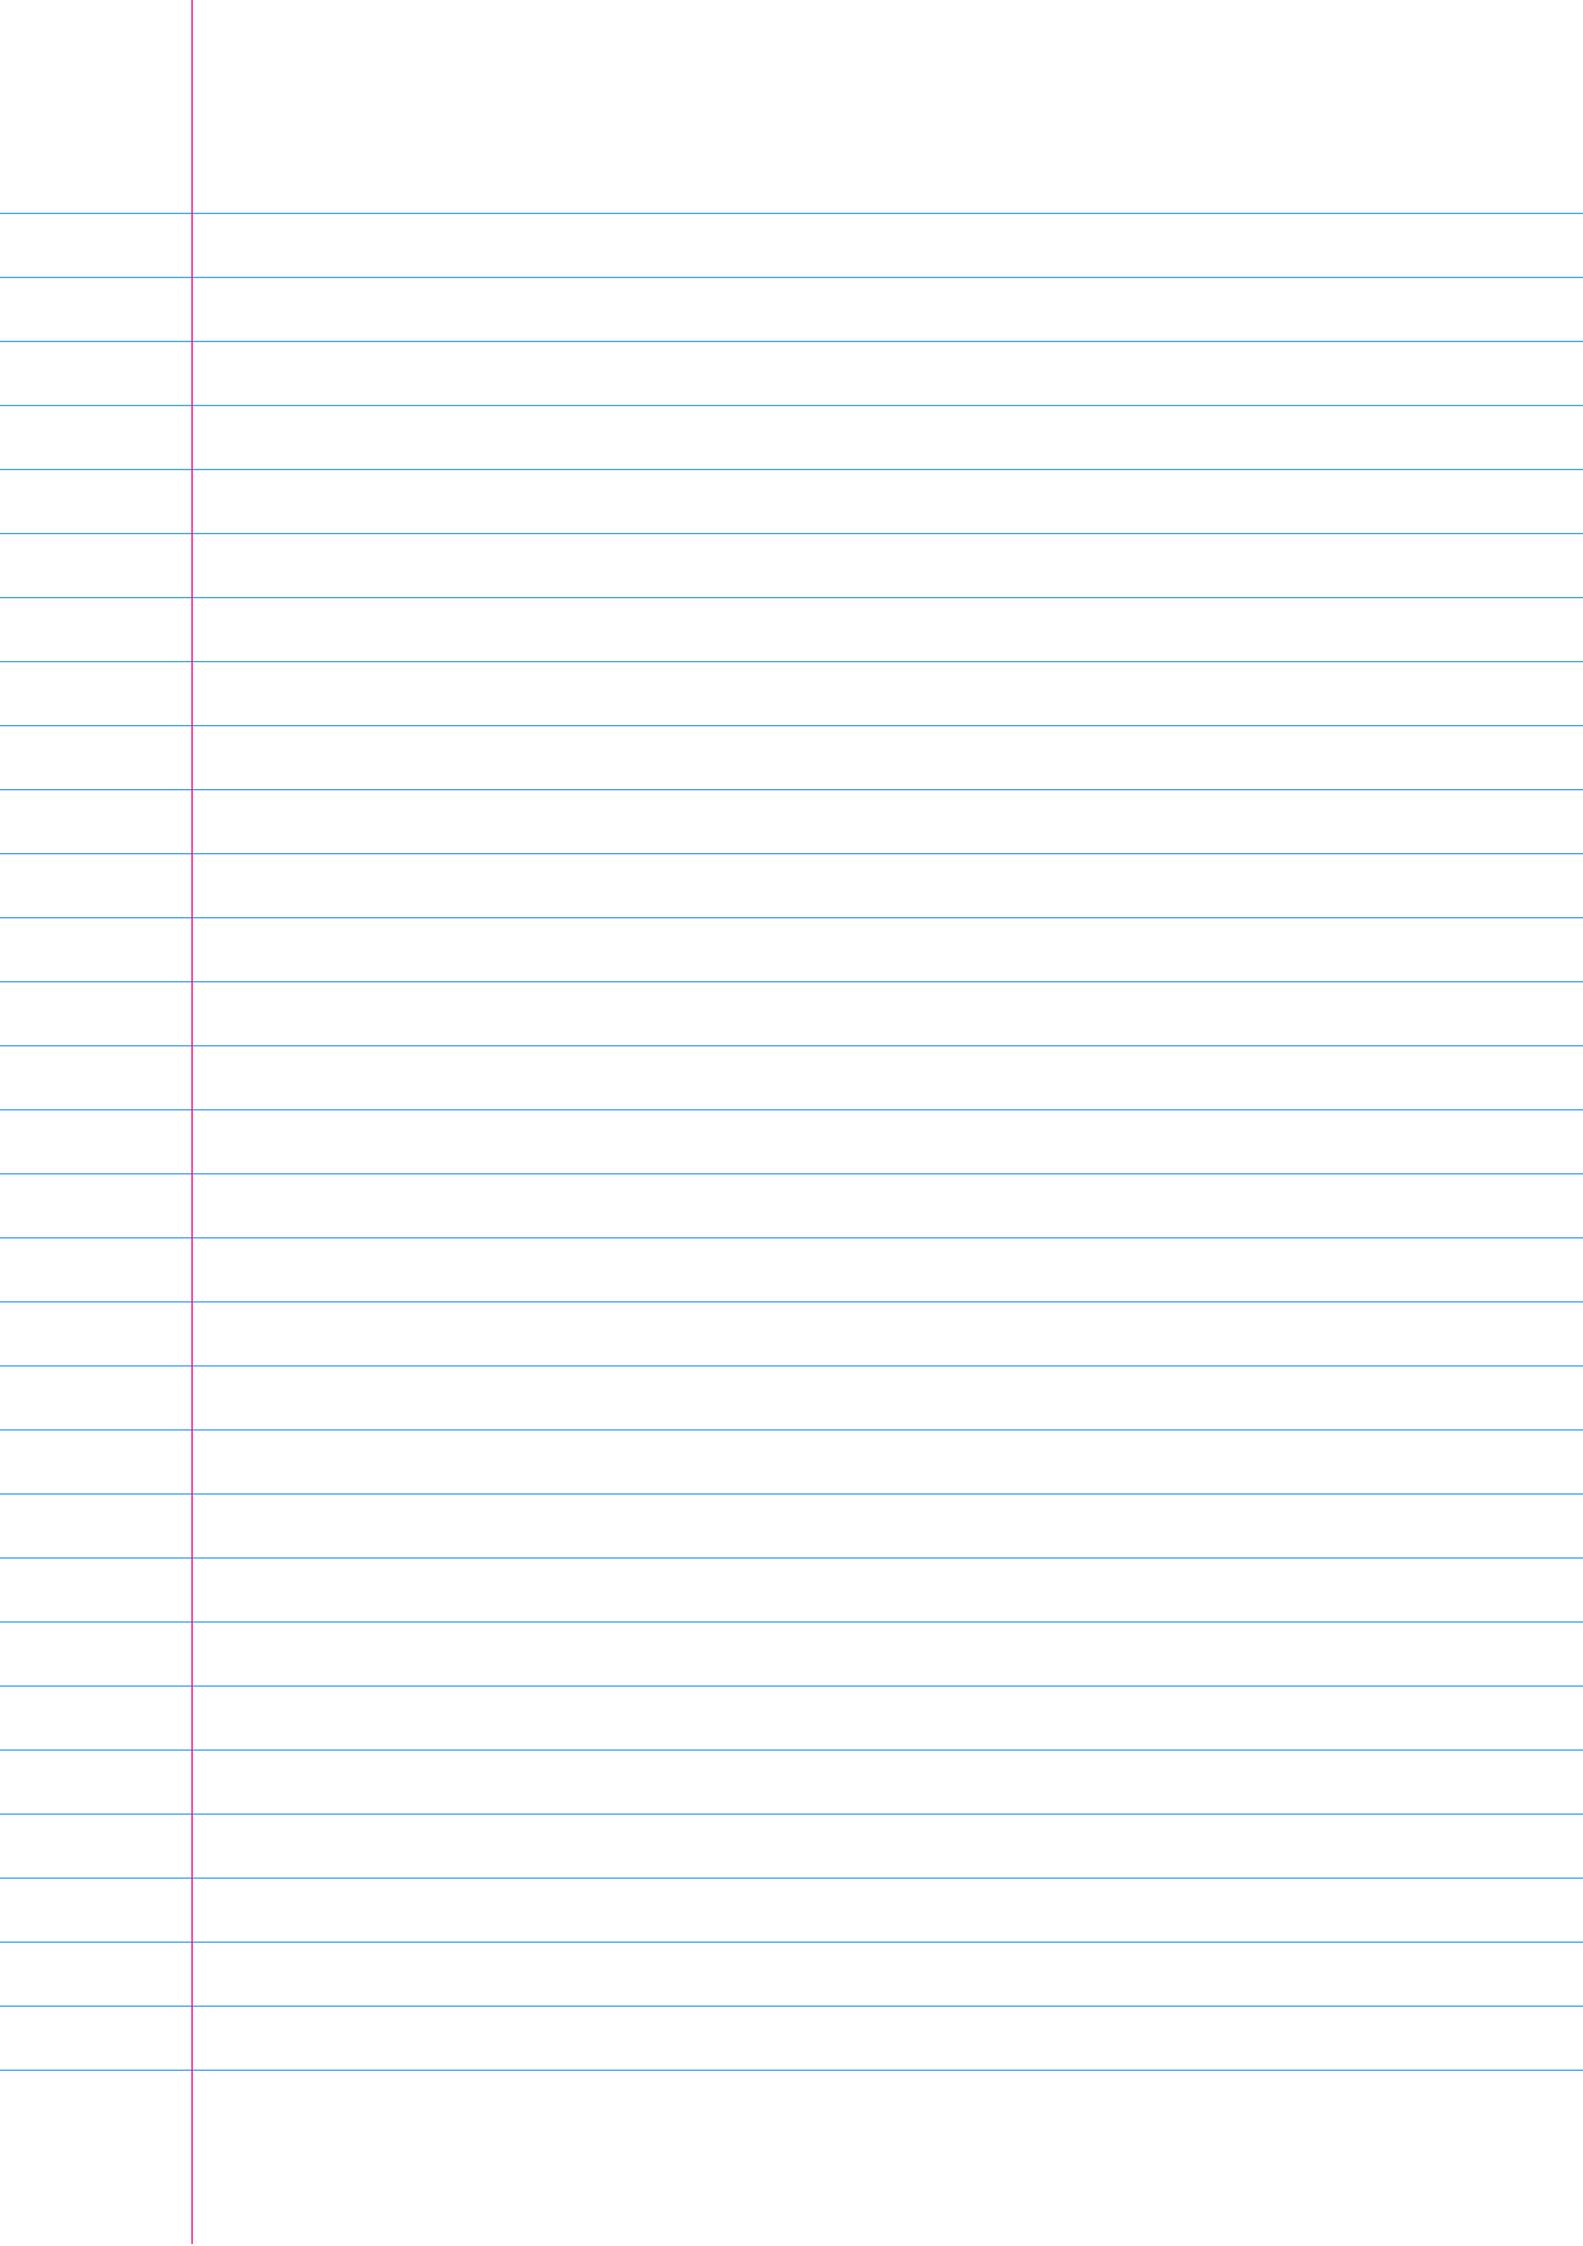

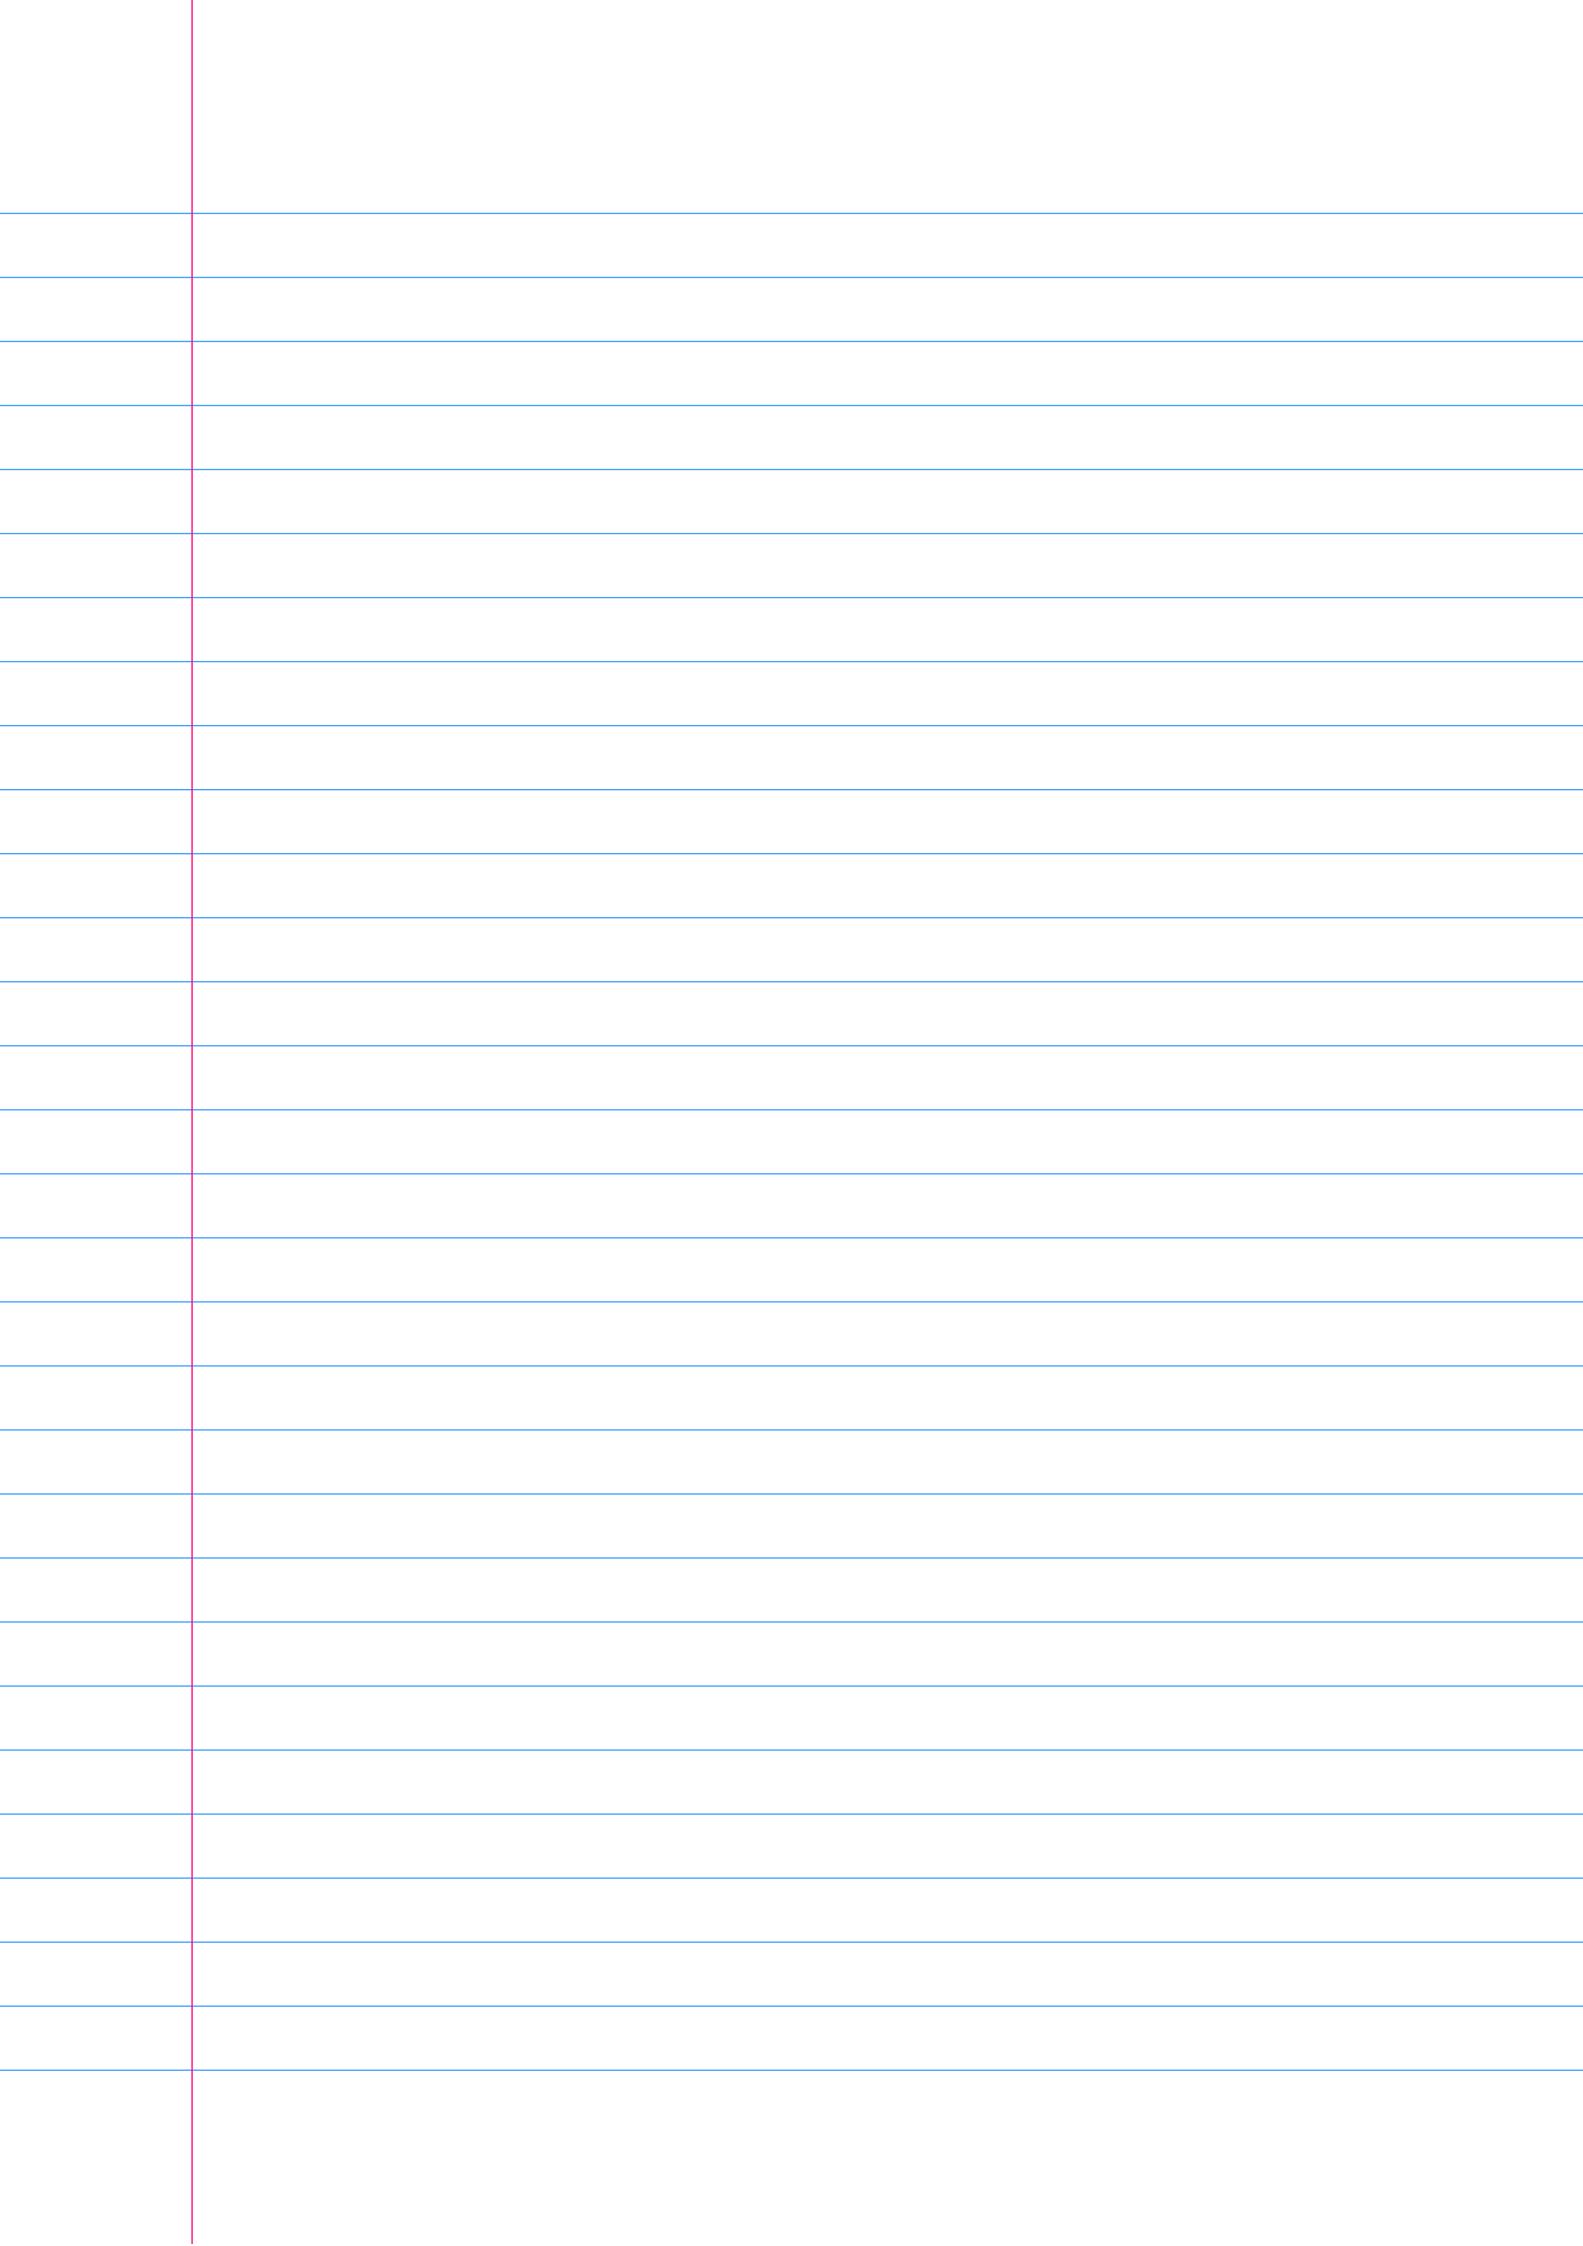

# Analysis of Hello World !!!

```
public class HelloWorld {
    public static void main(String args[])
    {
        System.out.println("welcome to the world of Java !!!");
    }
}
```

keyword

visibility modifier

need to be static

important class in java

Name of the program

declare by compiler, define by user



command line arguments

predefine object of PrintWriter

function define inside this class..

# Some basics rules about java classes


- 1) Java Source file structure
- 2) Order of placing package and import statement
- 3) Order of placing interface, class, enum, annotation, doc comment
- 4) How many package and import statements are allowed in a single java file?
- 5) Why only one package statement is allowed in and why multiple import statements are allowed?

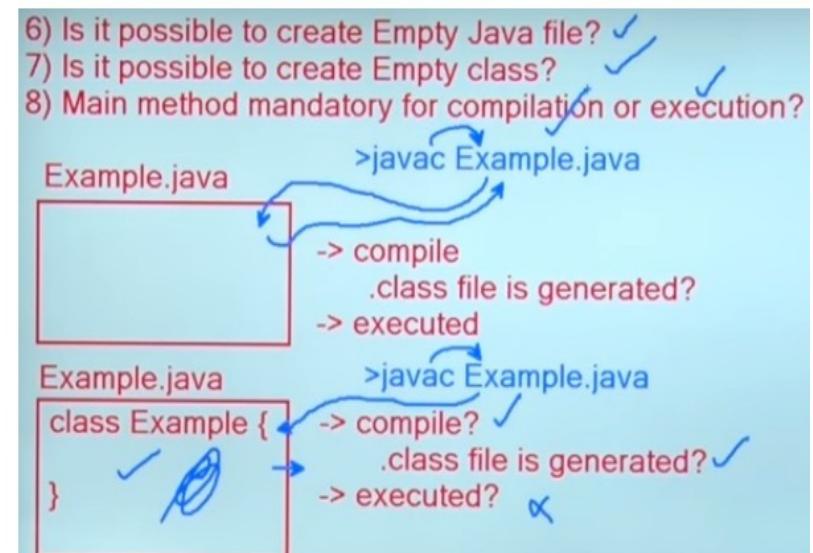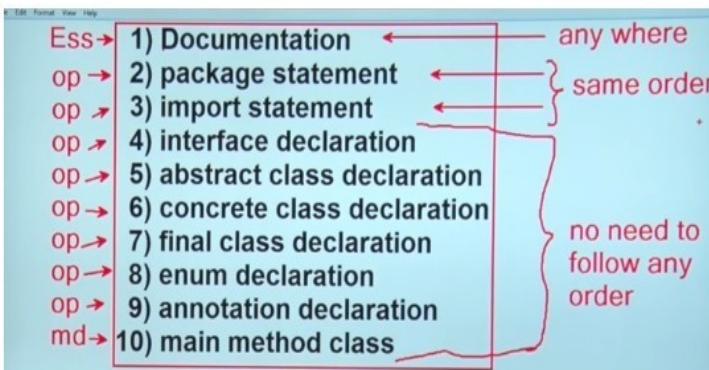

# Java Data Type

## 2 type

- Primitive data type
- Reference data type

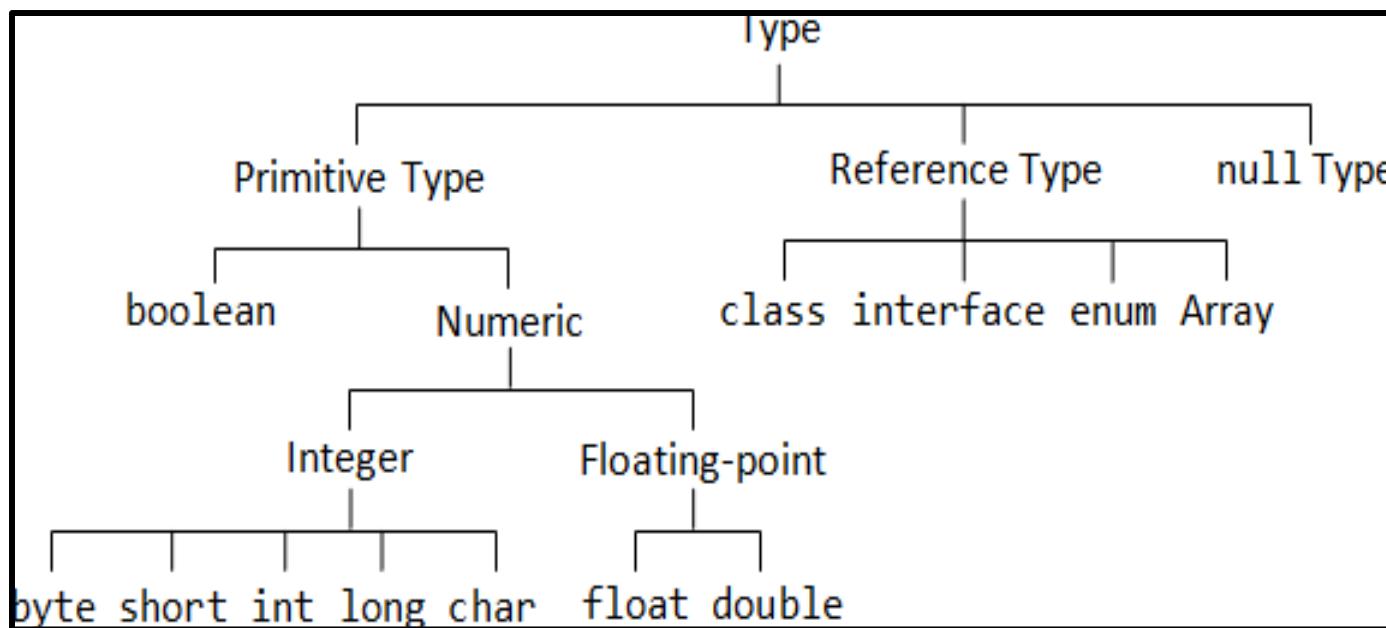


# Primitive data type

boolean	either true or false
char	16 bit Unicode 1.1
byte	8-bit integer (signed)
short	16-bit integer (signed)
int	32-bit integer (signed)
Long	64-bit integer (singed)
float	32-bit floating point (IEEE 754-1985)
double	64-bit floating point (IEEE 754-1985)

**Java uses Unicode to represent characters internally**

# Procedural Programming

- ❖ if..else
- ❖ switch
- ❖ Looping; for, while, do..while as usual in Java as in C/C++  
+
- ❖ Don't mug the program/logic
- ❖ Follow dry run approach
  - ❖ Try some programs:
    - ❖ Create
    - ❖ Factorial program
    - ❖ Prime No check
    - ❖ Date calculation

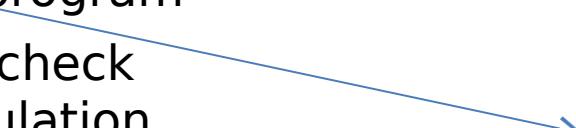

```
*
**
***
****
*****
```

**programming basics:**

**procedural programming : C**

**logic**

**Object oriented programming : C++/ Java**

**looping , if else, switch , while . do.. while**

**array: 1D, 2D array, basics question**

**funcation :how to call the function**

**basics idea of OO: class, object,method**

□ **logic, dry run: we want to run prog inside our brain**

**even/odd:**

**1. take no from the use**

**2. if( $\text{no} \% 2 == 0$ ){**

**no is even**

**}else**

**no is odd**

**to check for a prime no?**

**take a no from the user**

**let assume no is a prime no**

**13**

```
boolean isPrime=true;
for(int i=2; i<no; i++){
    if( $\text{no} \% \text{i} == 0$ ){
        isPrime=false;
        break;
    }
}
if(isPrime)
.... prime
else
--- not a prime no
```

**2 < 13 T**

**13 % 12**

n1 and n2  
i need to count prime no bw two given no

12

213

```
int counter=0;
```

```
for(int i=n1;i<=n2; i++){
```

```
    if(isPrime(i)){
```

```
        counter++;
```

```
}
```

1 1 2 3 5... 20 terms

{ }

a=2

b=3

c=5

```
int a, b , c;
```

```
a=1;
```

```
b=1;
```

```
c=a+b;
```

```
print a, b and c
```

```
for(...20 time){
```

a b c  
1 1 2 3 5.....

```
//c=a+b;
```

```
a=b;
```

```
b=c;
```

```
c=a+b;
```

```
print c
```

```
}
```

some basics question on pattern printing

```
*****  
*****  
*****  
*****  
*****
```

```
for(-----){
```

```
for(.....){
```

```
}
```

dry run


```
for(int i=0;i<5; i++) {  
    for(int j=0;j<=i; j++) {  
        System.out.print("*");  
    }  
    System.out.println();
```

i 0  
j 0

\*  
\*\*

0<=0

2<=1

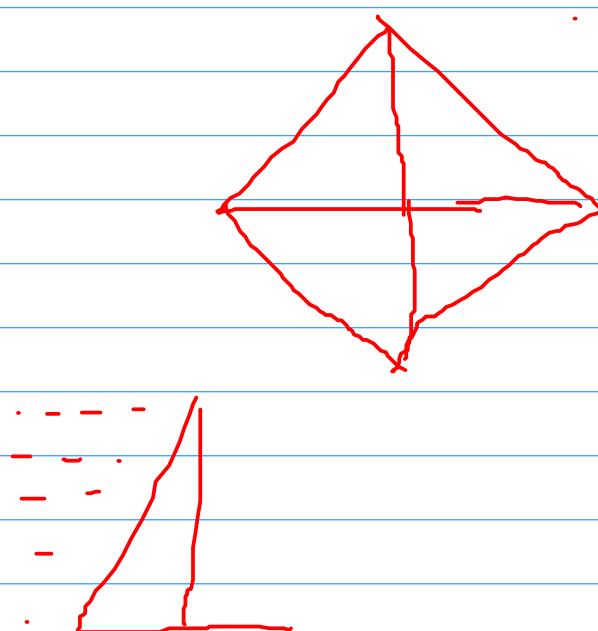

what next?


array: continuus memory location  
need?

i want to find out sum of marks of 10 students

int a, int b,.....

int a[] = new int[5];

int x[] = {4, 5, 6, 7, 8};

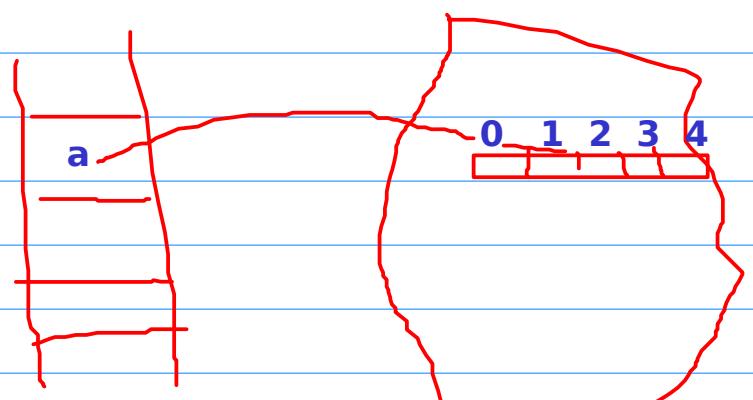

**we have marks of 5 student wap to find sum of there marks**

```
int x[]={8,9,10,5,9};
```


```
int sum=sumMarks(x);
```

```
public int sumMarks(int arr[]){
    int sum=0;
    for(int i=0;i<arr.length; i++){
        sum+=arr[i];
    }
    return sum;
}
```

**u need to write a prg to remove an el from arr**

```
int x[]={8,9,10,5,9,0};
```

$x[j]=0$

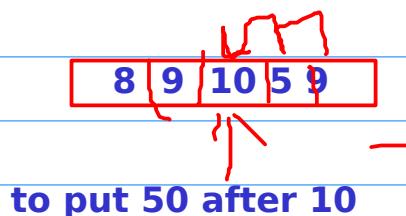


8,9,10,5,9,0

**Date problem:**

**have to try**


**y have today date and proved next date ( do ur self)**

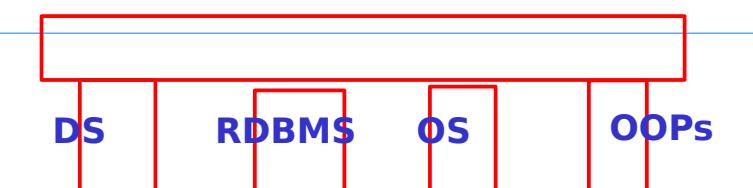

## 2 D array:

-----

`int x[][]=new int4[5];`

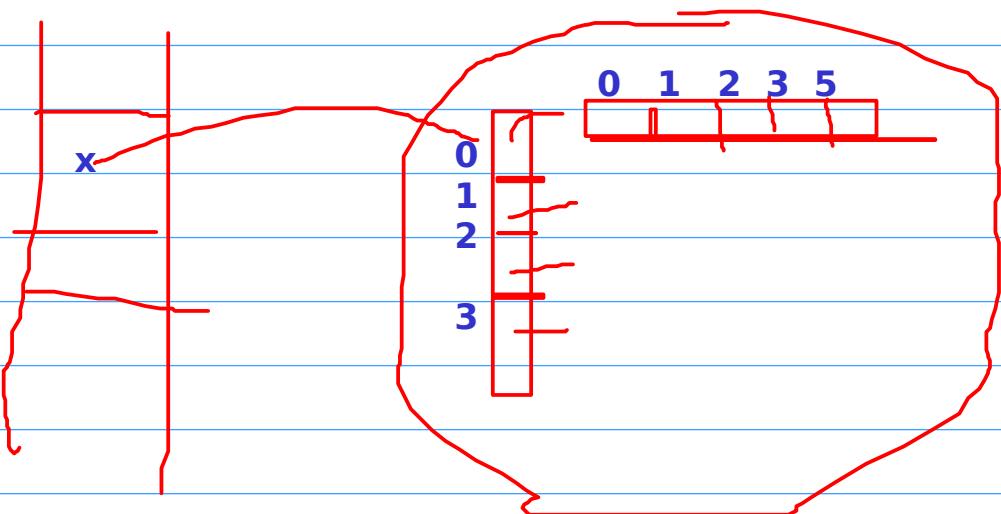

**what is `x` : `x` is a ref to an 1 D arry of Size 4, each index of this array is capable of holding the address of 1D array of size 5**


```
int x[][]= {  
    {1,4,7,7,0},  
    {3,5,7,4,77},  
    {12,23,45,0,12},  
    {1,0,2,6,7}};
```

# Array are object in java

- How Java array different from C/C++ array?


## One Dimensional array

Initialization `int a[] = new int [12];`

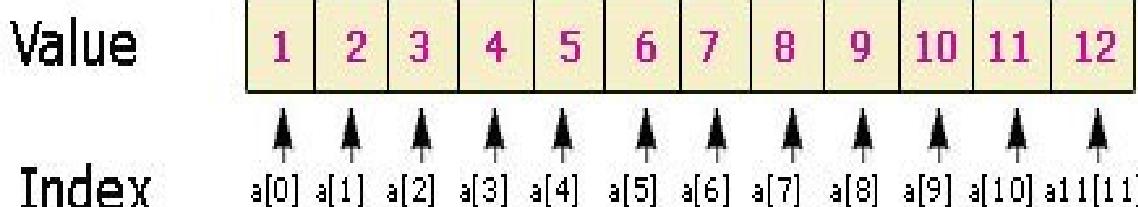

`System.out.print(a[5]);`

Output: 6

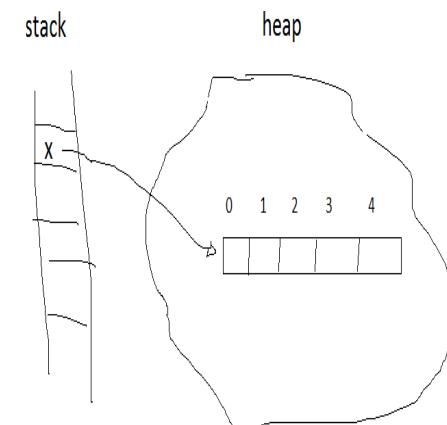

Java Array: its different then C/C++

# Object technologies

- OO is a way of looking at a software system as a collection of **interactive objects**

Reality



Tom's House



Tom



Tom's Car

Model



## Object orientation ?

we are object

me (rajiv)

amit

class and object

cookies cutter --- cookies


class is just a template to create the objects

oo: is actually study the system where one object  
intact with other objects

A passing is moving in a car

a trainer is writing on whiteboard with marker

ram is a programmer



a pond have 2 duckes one black one white


3 ways a object can interact with others:

1. USE A

2. HAS A

3. IS A

inheritance

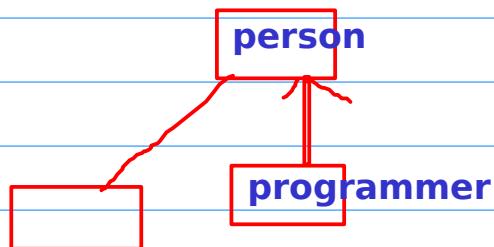

class Programmer extends Person{

}

A passing is moving in a car

~~class Passanger extends Car{  
}~~

class Car{  
}



class Passanger{  
private Car car=new Car(); //Has a  
}  
}

Composition

Aggregation

class Passanger{  
public void travel(Car car){  
}  
}

usa -a relationship

}

UML diagarams: 12 kind

Class diagrams:



```
class Marker{  
    private String color;  
    .....  
    write(){  
    }  
}
```

```
class Trainer extends Marker{
```

```
}
```



```
class Trainer {  
    private Marker marker=new Marker();
```

```
}
```



```
class Trainer {
```

```
    public void teach(Marker marker){  
        marker.write("taching phyiscs");
```

```
}
```

```
    public void eat(Food food){
```

```
}
```

```
}
```


A trainer while teaching use a marker

a trainer while eating use food provide by wife/ outside

Has-A: association

Composition and aggregation:

Building and Flat

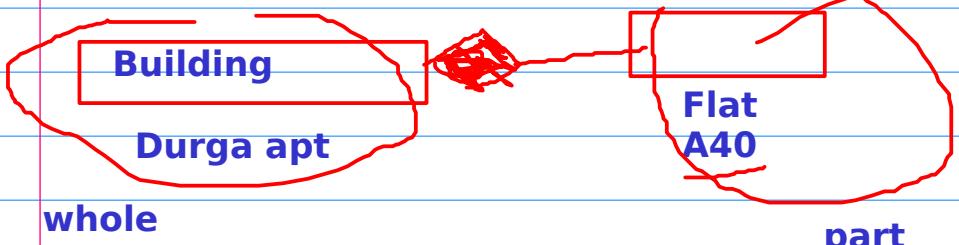


1. in the case of composition if whole is destroyed part should also be dest....

## 2. part can not be part of more than one whole

Association: agglagation

MusicGroup and Musician

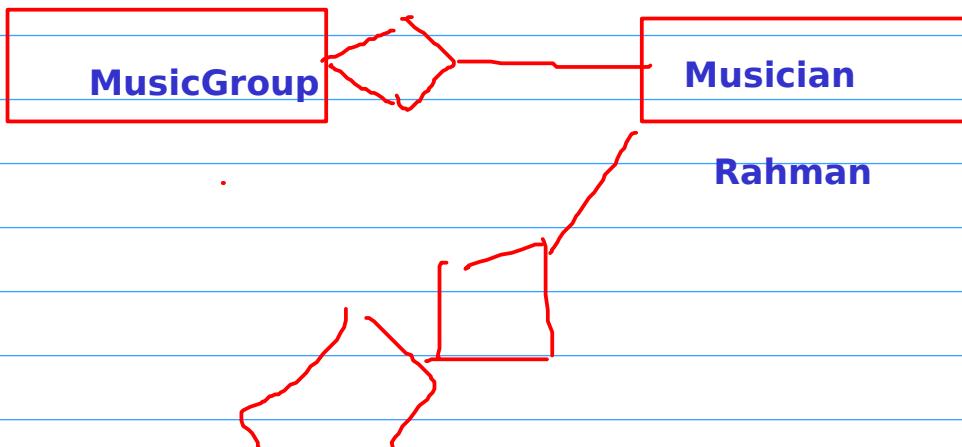

if whole is destroyed part can be alive  
the part can be shared bw two/more wholes

# What is an Object?

- Informally, an object represents an entity, either physical, conceptual, or software.

- Physical entity



Tom's Car


- Conceptual entity



US\$100,000,000,000

Bill Gate's bank account

- Software entity



# Class

- A class is the blueprint from which individual objects are created.
- An object is an instance of a class.



Object factory



Cookie Cutter

```
public class StudentTest {  
    public static void main(String[] args) {  
        Student s1 = new Student();  
        Student s2 = new Student();  
    }  
}
```

- class -

```
public class Student {  
    private String name;  
    // ...  
}
```

# Classes and Object

- All the objects share the same attribute names and methods with other objects of the same class
- Each object has its own value for each of the attribute

Person
- name
- dateOfBirth
+ getAge()




harry:Person	
name	Harry
dateOfBirth	8/12/1975
+ getAge()	



mary:Person	
name	Mary
dateOfBirth	8/12/1980
+ getAge()	


# Basic principles of OO

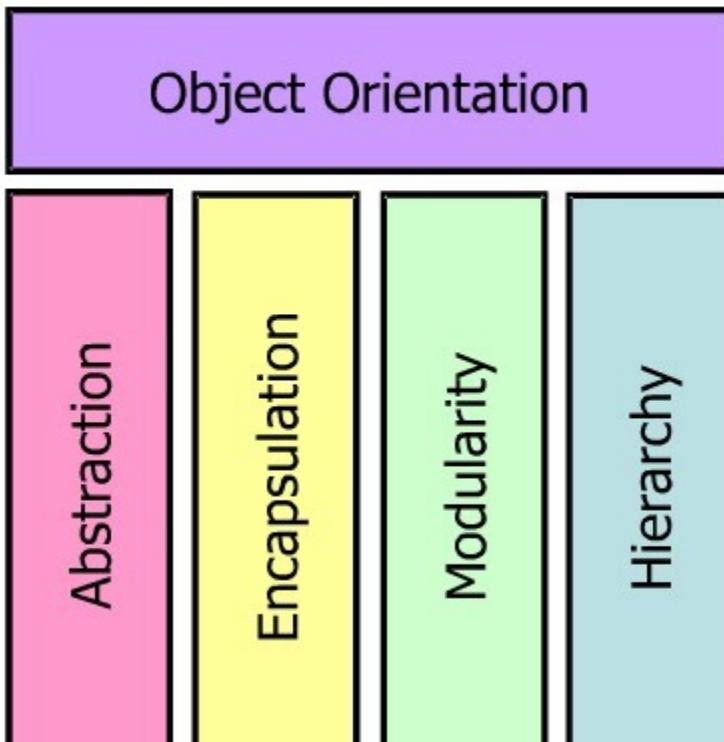

```
class Account {  
    int id;  
    String name;  
    double balance;  
    //camel casing  
    public void printAccountDetails() {  
    }  
}
```

DemoClass

# Dealing with Software complexity:Abstraction

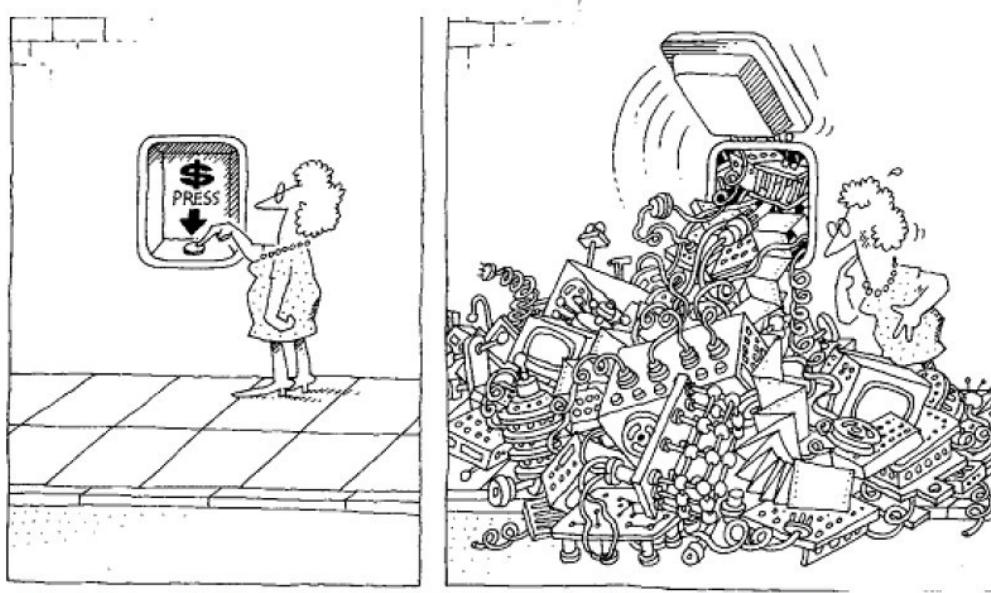

The task of the software development team is to engineer the illusion of simplicity.

# Abstraction

- ❖ Fundamental ways that we use to cope with complexity  
"abstraction arises from a recognition of similarities between certain
- ❖ objects, situations, or processes in the real world, and the decision to
- ❖ concentrate upon these similarities and to ignore for the time being the differences" -Hoare
- ❖ An abstraction denotes the **essential characteristics of an object that distinguish it from all other kinds of objects** and thus provide crisply defined conceptual boundaries, relative to the perspective of the viewer.


# Abstraction

- Determine the **relevant properties** and features while ignoring non-essential details

Cat
- bloodType - numberOfBones - lastVisitDate

abstraction

Cat
- dateOfBirth - favouriteFood - favouriteToy



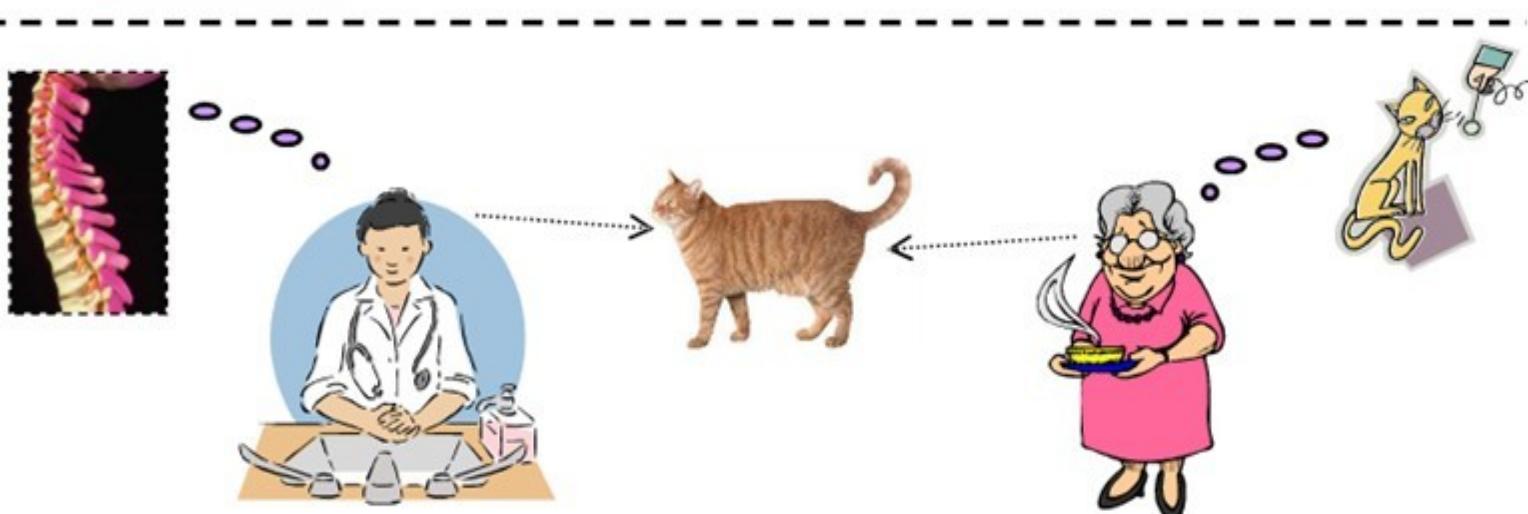


# Encapsulation

- ❖ Abstraction and encapsulation are *complementary concepts*: abstraction focuses upon the observable behavior of an object, whereas encapsulation focuses upon the implementation that gives rise to this behavior.
- ❖ Encapsulation is most often achieved through information hiding which is the process of hiding all the secrets of an object that do not contribute to its essential characteristics; typically, the structure of an object is hidden, as well as the implementation of its methods.
- ❖ Information hiding is tool to achieve encapsulation

# Understanding encapsulation

```
class Hacker{  
Account a= new Account();  
a.account_balance= -100;  
}
```

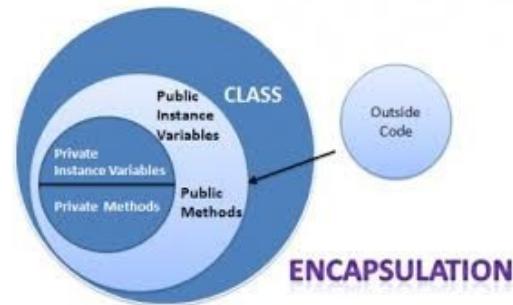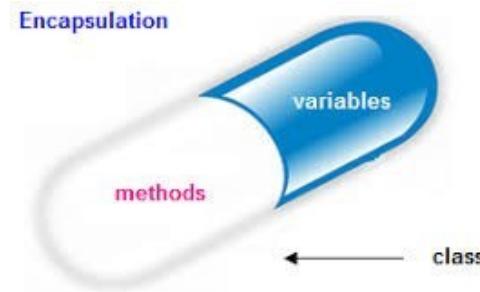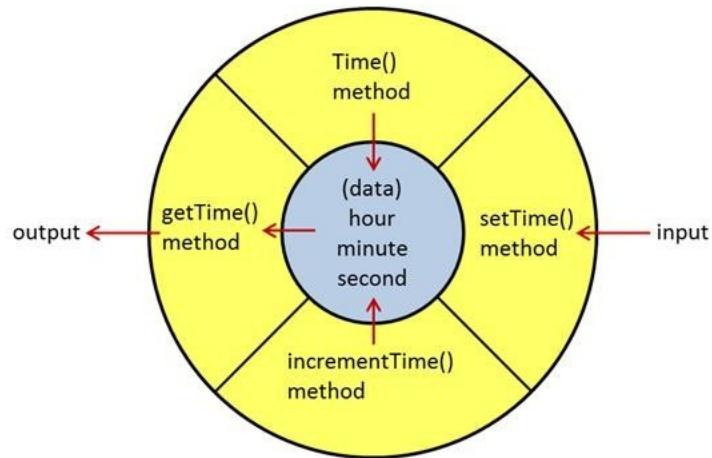


# Encapsulation

- Changing data in organized way, by using data hiding and applying business constraints
- Encapsulation= data hiding + constraints





# Encapsulation

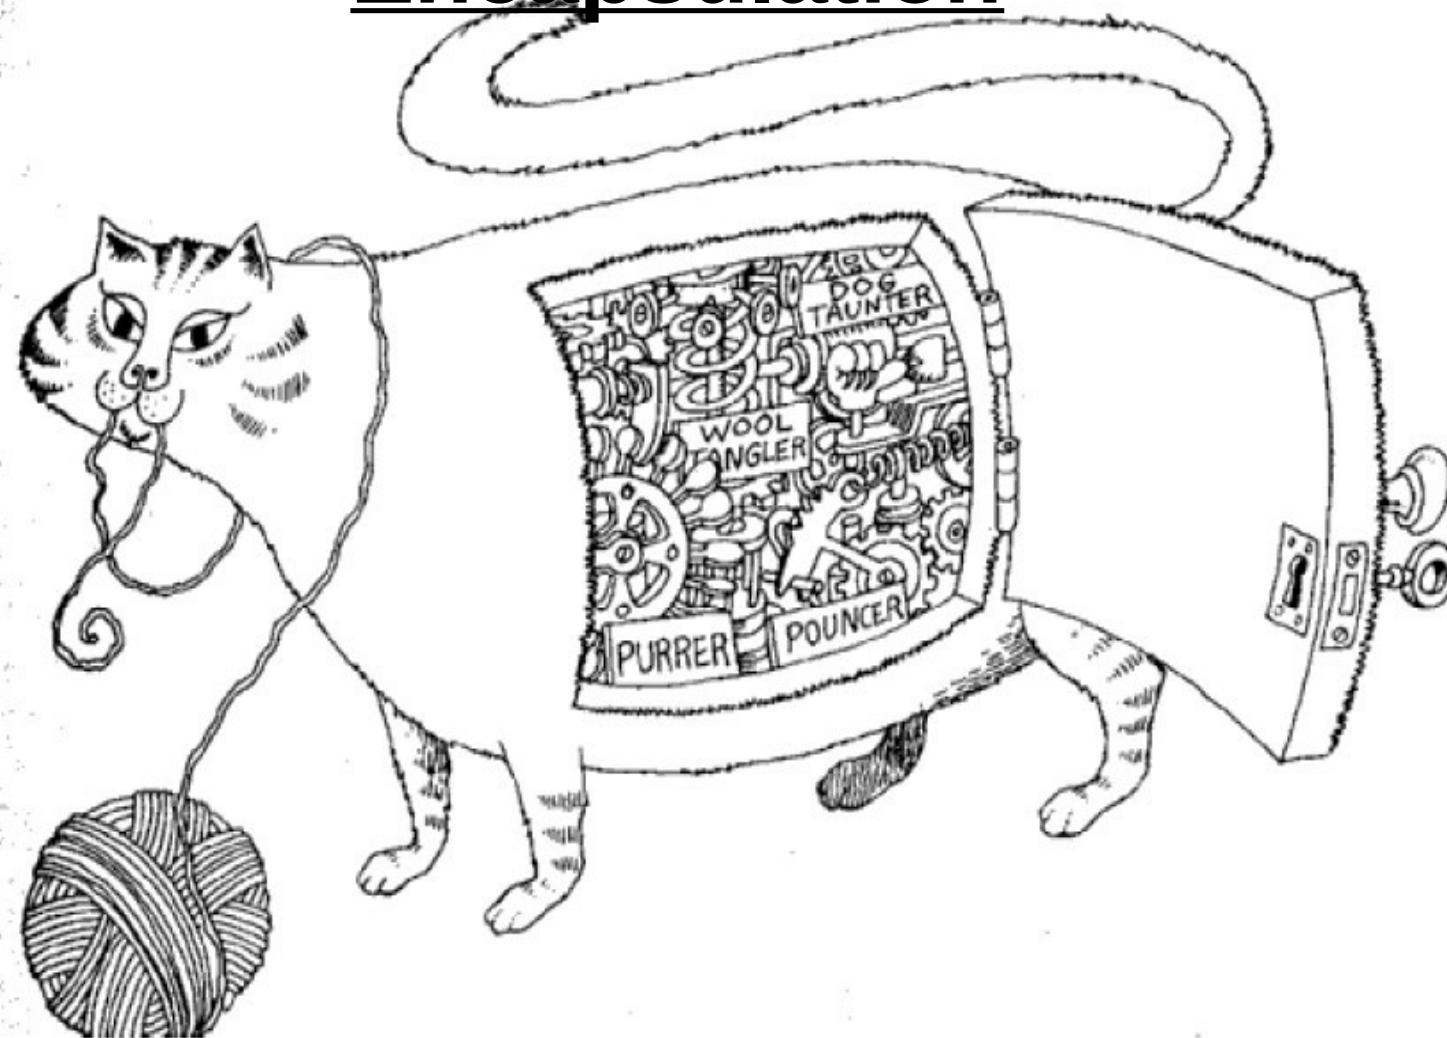


Encapsulation hides the details of the implementation of an object.

# Modularity

- Break something complex into manageable pieces
  - Functional **Decomposition**
  - Object Decomposition

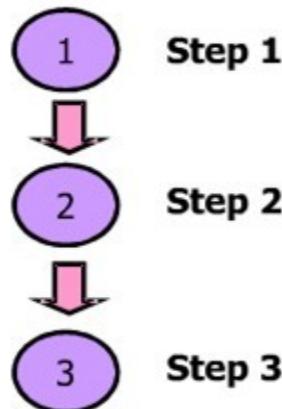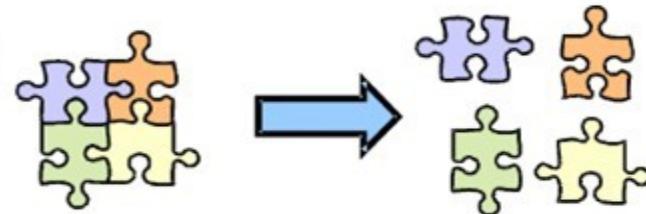


Functional Decomposition

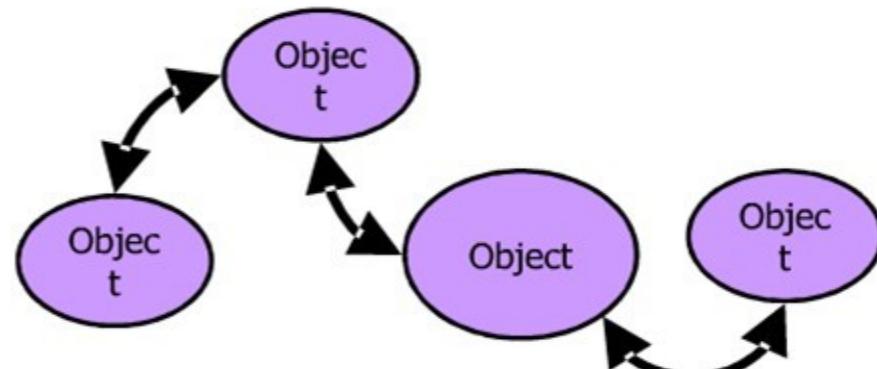

Object Decomposition

# Hierarchy

- Ranking or ordering of objects

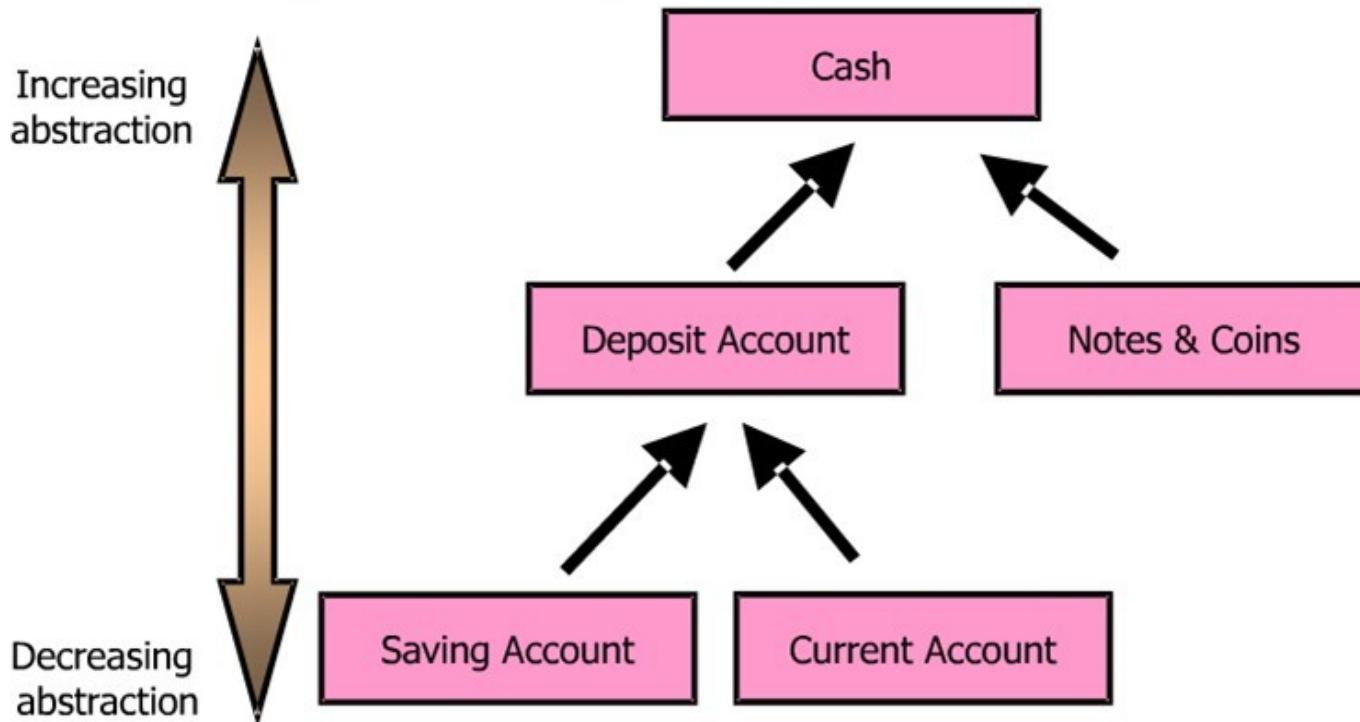

# **DAY -2**

## **Day 2: Object Orientation & JVM introduction**

- Creating Class, Object, constructor, init paramaters
- Static variable and method
- Concepts of packages, Access specifier
- Inheritance, Types of inheritance in Java, Inheriting Data Member and Methods
- Role of Constructors in inheritance, Overriding super Class methods, super
- Hands On & Lab

# What can goes inside an class?

```
public class A {  
  
    int i;          // instance variable  
  
    static int j;   // static variable  
  
    //method in class  
    public void foo(){  
        int i;      //local variable  
    }  
  
    public A(){}      //default constructor  
  
    public A(int j)    //parameterized ctr  
    {  
        //.....  
    }  
  
    //getter and setter  
    public int getI(){return i;}  
    public void setI(int i){this.i=i;}  
}
```

# Creating Classes and object

```
class Account{  
  
    public int id;  
    public double balance; → killing encapsulation  
  
    //.....  
    //.....  
  
}  
  
public class AccountDemo{  
    public static void main(String[] args) {  
        Account ac=new Account();  
        ac.id=22;  
    }  
}
```

# Correct way?

```
class Account{
    private int id;
    private double balance;
    public int getId() {
        return id;
    }
    public void setId(int id) {
        this.id = id;
    }
    public double getBalance() {
        return balance;
    }
    public void setBalance(double balance) {
        this.balance = balance;
    }
}

public class AccountDemo{
    public static void main(String[] args) {
        Account ac=new Account();
        //ac.id=22; will not work
        ac.setBalance(2000);//correct way
    }
}
```

# Constructors: default, parameterized and copy

- Initialize state of the object
- Special method have same name as that of class
- Can't return anything
- Can only be called once for a object
- **Can be private**      **singleton design pattern**
- **Can't be static\***
- **Can overloaded but can't overridden\***
- Three type of constructors
  - ❖ Default, Parameterized and Copy constructor

```
class Account{  
    private int id;  
    private double balance;  
  
    //default ctr  
    public Account() {  
        //.....  
    }  
  
    //parameterized ctr  
    public Account(int i, double b) {  
        this.id=i;  
        this.balance=b;  
    }  
  
    //copy ctr  
    public Account(Account ac) {  
        //.....  
    }  
}
```

# Need of “this” ?

```
class Account{  
    private int id;  
    private double balance;  
  
    //default ctr  
    public Account() {  
        //.....  
    }  
  
    //parameterized ctr  
    public Account(int id, double balance) {  
        id=id;   
        balance=balance;   
    }  
  
    //copy ctr  
    public Account(Account ac) {  
        //.....  
    }  
}
```

- ❖ Which id assigned to which id?
- ❖ “this” is an reference to the current object required to differentiate local variables with instance variables

**Refer next slide...**

# “this” used to resolve confusion...

```
class Account{  
  
    private int id;  
    private double balance;  
  
    //default ctr  
    public Account() {  
        //.....  
    }  
  
    //parameterized ctr  
    public Account(int id, double balance) {  
        this.id=id;  
        this.balance=balance;  
    }  
  
    //copy ctr  
    public Account(Account ac) {
```

refer to instance  
variable

# this : Constructor chaining?

- Calling one constructor from another ?


```
class Account{  
  
    private int id;  
    private double balance;  
  
    //default ctr  
    public Account() {  
        this(22,555.0);  
    }  
  
    //parameterized ctr  
    public Account(int id, double balance) {  
        this.id=id;  
        this.balance=balance;  
    }  
  
    //copy ctr  
    public Account(Account ac) {  
        //  
    }  
}
```

# Static method/variable

- ❖ Instance variable -per object while static variable are per class
- ❖ Initialize and define before any objects
- ❖ Most suitable for counter for object
- ❖ Static method can only access static data of the class
- ❖ For calling static method we don't need an object of that class

Now guess why main was static?

How to count number of account object in the memory?

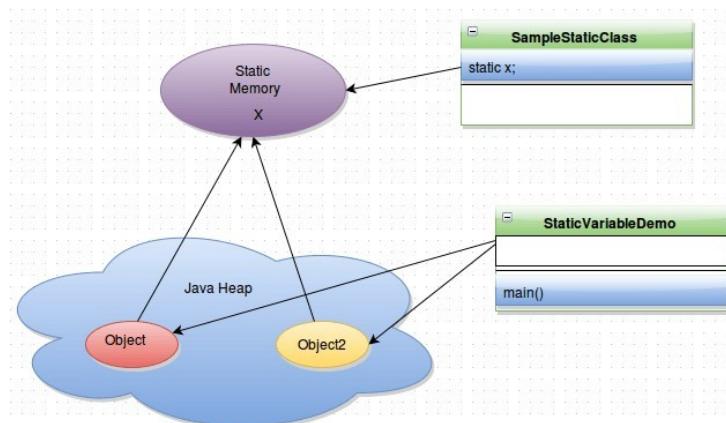

how static data works?  
static method?


how it is diff from instance variable

```
class Demo{  
    int i=6;  
    static int j=4;  
}  
  
Demo d1=new Demo();  
Demo d2=new Demo();
```

"class is a cookie cutting"

JVM: 5 memory area  
arch\*

stack : i per thread  
method area: 1 per jvm  
heap: 1 per jvm

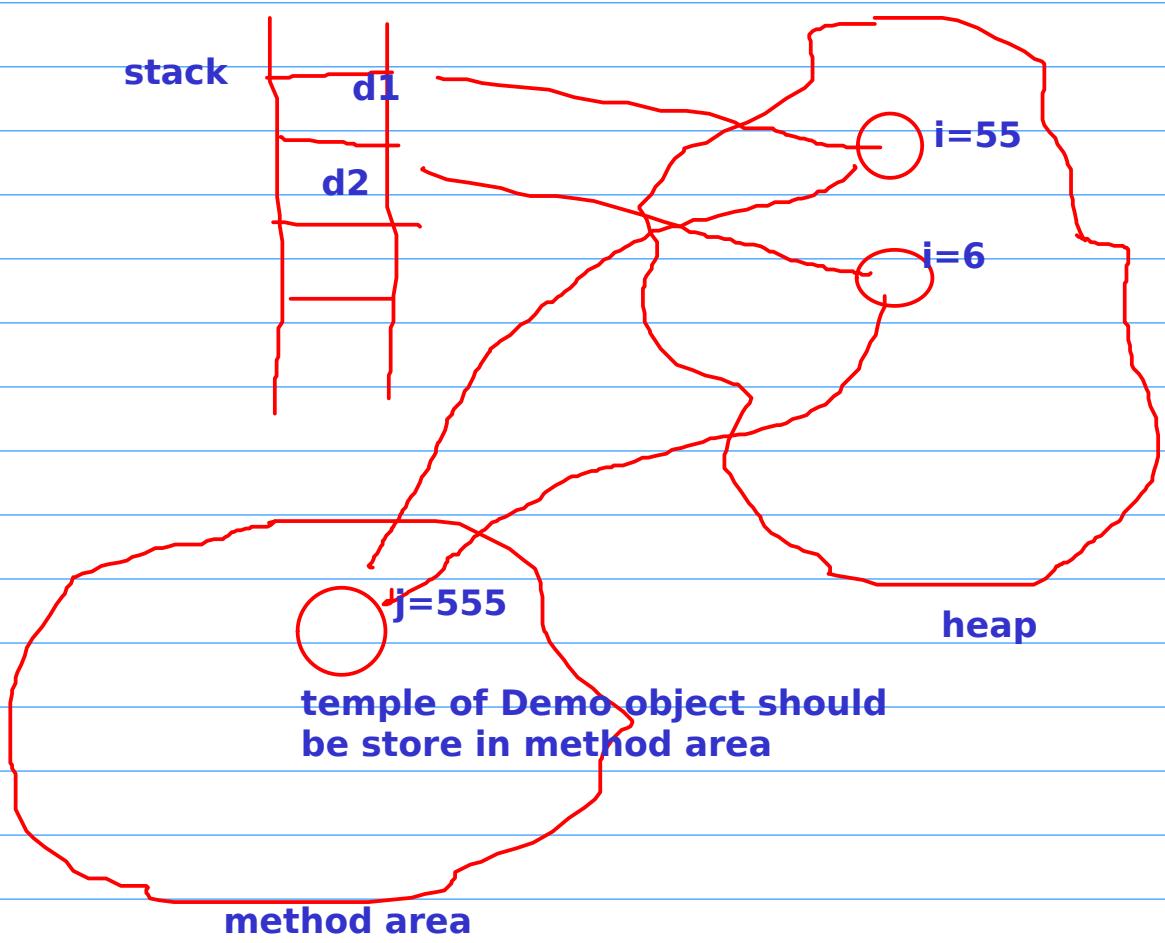

# Using static data..

```
class Account{  
  
    private int id;  
    private double balance;  
  
    // will count no of account in application  
    private static int totalAccountCounter=0;  
  
    public Account(){  
        totalAccountCounter++;  
    }  
  
    public static int getTotalAccountCounter(){  
        return totalAccountCounter;  
    }  
}
```

static variable

static method

```
Account ac1=new Account();  
Account ac2=new Account();  
  
//How many account are there in application ?
```

```
System.out.println(Account.getTotalAccountCounter());
```

```
System.out.println(ac1.getTotalAccountCounter());
```

We can not access instance variable in static method but can access static variable in instance method

# Initialization block

- We can put repeated constructor code in an Initialization block...
- Static Initialization block runs before any constructor and runs only once...

```
class Account{  
  
    private int id;  
    private double balance;  
  
    public Account(){  
        //this is common code  
    }  
    public Account(int id , double balance){  
        //this is common code  
        this.id=id;  
        this.balance=balance;  
    }  
}
```

code repetition.

# Initialization block

```
class Account{
    private int id;
    private double balance;
    private int accountCounter=0;


    static{
        System.out.println("static block: runs only once ...");
    }

    {
        System.out.println("Init block 1: this runs before any constructor ...");
    }

    {
        System.out.println("Init block 2: this runs after init block 1 , before any const execute ...");
    }
}
```

# Packages

- Packages are Java's way of grouping a number of related classes and/or interfaces together into a single unit.
- Packages act as “containers” for classes.

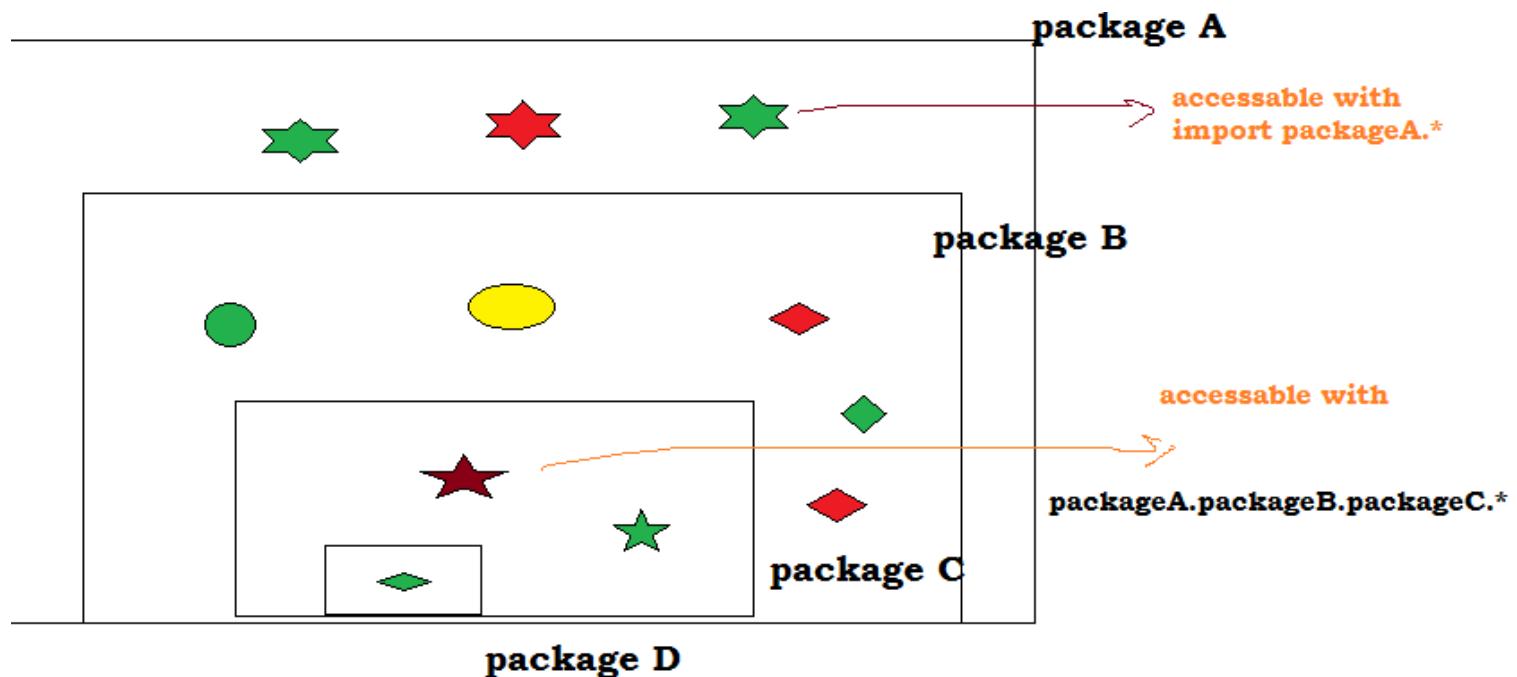

# Java Foundation Packages

- Java provides a large number of classes grouped into different packages based on their functionality.
- The six foundation Java packages are:

## **java.lang**

- Contains classes for primitive types, strings, math functions, threads, and exception

## **java.util**

- Contains classes such as vectors, hash tables, date etc.

## **java.io**

- Stream classes for I/O

## **java.awt**

- Classes for implementing GUI - windows, buttons, menus etc.

## **java.net**


- Classes for networking

## **java.applet**

- Classes for creating and implementing applets

# Visibility Modifiers


- ❖ **For instance variable and methods**
  - ❖ Public Protected
  - ❖ Default (package level) Private
- ❖ **For classes**
  - ❖ Public and default

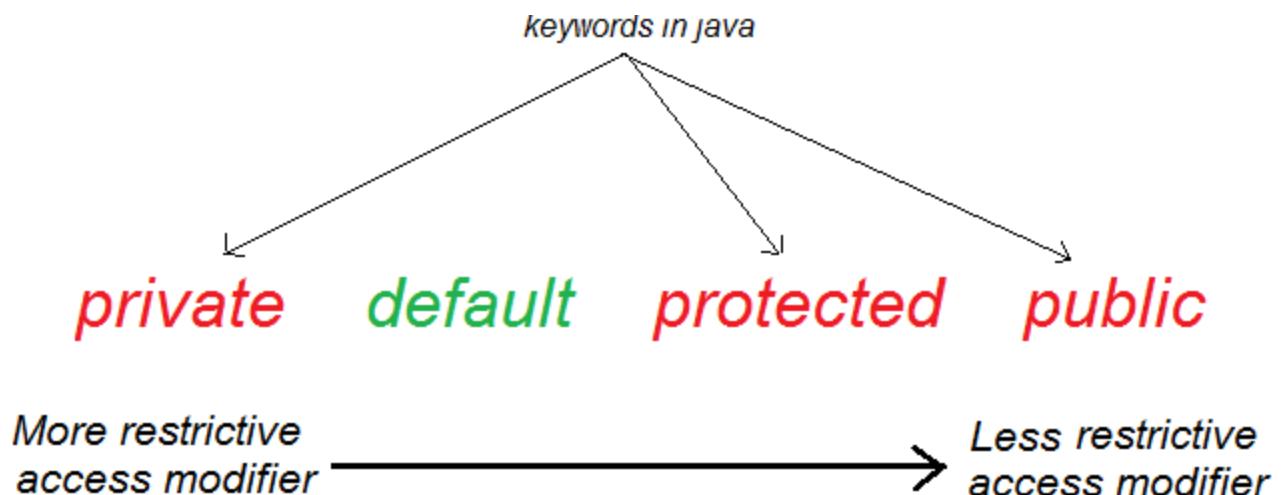

## visibility modifier and concept of package:


package is collection of class, interfaces, enums etc

package is very similar to .net /c++ namespace concepts

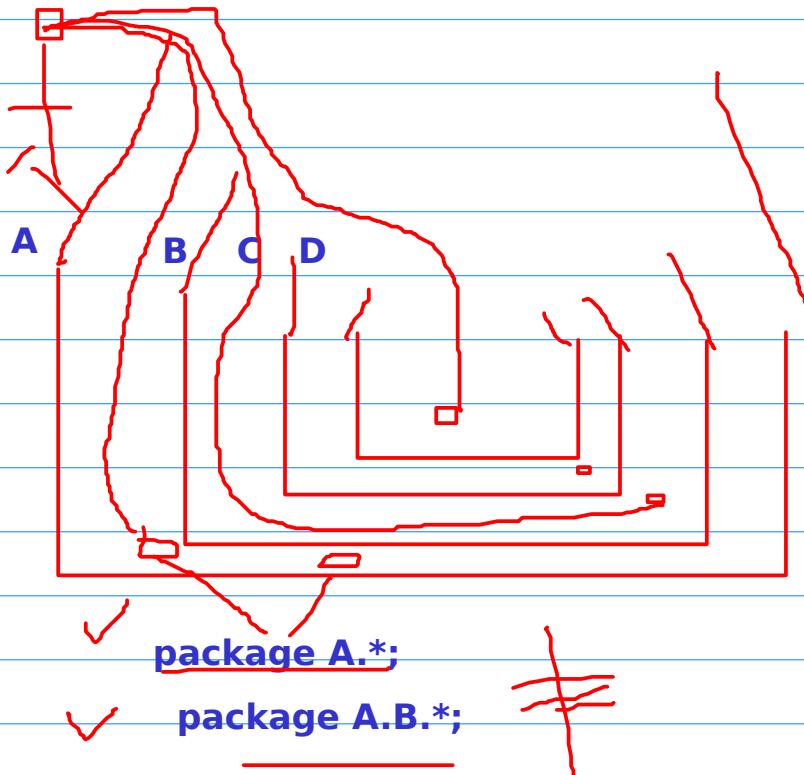

used to organize the code

Face



ui

Face



db team

face rec system  
cgi  
iaf

com.iaf.facerecsystem.ui  
.....db

**OO:**

**class, objects**

**class vs object**

**ctr: type of ctr, def, para, copy ctr**

**data: instance data, class data, local data**

**method : ctr, getters, settern , business method**

**withdraw transfer...**

## **object and its relationship**

**use a**

**has a**

**is a**

**"this"**

**implicit vs explicit**

## **Null pointer ex**


**class A{**

**public static void foo(){  
    sysout("hello");**

**}**

**}**

**A a=null;  
a.foo();**

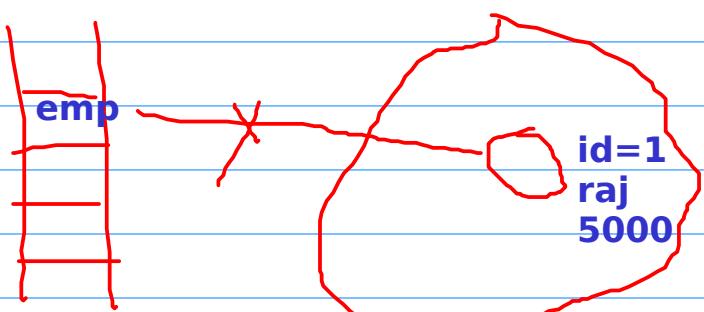

## relationship bw the object

use a

has a

is a

extendability

reusability

substitutability

overriding

IS-A

inheritance

: code reusability


code reusability can be achieve without inheritance\*

```
class A{  
    f(){  
    }  
}
```

```
class B extends A{  
  
    f2(){  
    }  
  
}
```

## diff type of inheritance

multilevel

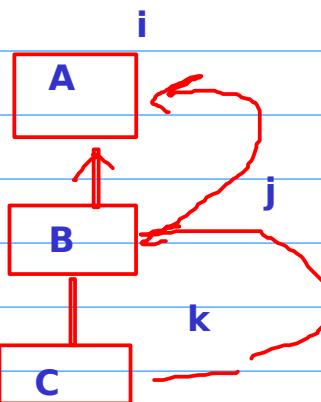

C c=new C();

why java dont support mutitle inheritance  
directly

only via interface

```
class A{  
    private int i;  
  
    public A(int i) {  
        this.i=i;  
    }  
  
    public void printA() {  
        System.out.println("i: "+ i);  
    }  
}
```

```
class B extends A{  
    private int j;  
    public B(int i, int j) {  
        super(i);  
        this.j=j;  
    }  
  
    public void printB() {  
        printA();  
        System.out.println("j: "+ j);  
    }  
}
```

```
class C extends B{  
    private int k;  
  
    public C(int i, int j, int k) {  
        super(i, j);  
        this.k=k;  
    }  
  
    public void printC() {  
        printB();  
        System.out.println("k: "+ k);  
    }  
}
```

```
public class DemoInheritance {  
  
    public static void main(String[] args) {  
  
    }
```

```
    C c=new C(1, 2, 3);  
    c.printC();  
}
```

try:

box2D

box3D

box3DWithColor

l, b

l, b , h

l, b , h, color

Object

```
class X{  
    int i=99;  
    public void foo() {  
        System.out.println("foof of X");  
    }  
}
```

i=99  
foo(){}

i=999  
foo(){}

```
class Y{  
    int i=999;  
    public void foo() {  
        System.out.println("foof of Y");  
    }  
}
```

X

Y

```
class Z extends X, Y{  
}
```

Z

### Overloading and overriding:

polymorphism

Compiler know about it  
fast  
not that  
flexible

only jvm decide

compile time

run time

Overriding

function  
overloading

Template  
classes  
(Generic Class)

loose coupling in sw dev

operator overloading

explicit

implicit

## overloading:

```
class Cal{
    public int add(int a, int b){
    }
    public int add(int a, int b, int c){
    }
}
```

```
class Cal{
```

```
}
```


```
class Cal{
    public long add(int a, long b) {
        System.out.println("public long add(int a, long b) ");
        return a+b;
    }
    public long add(long a, int b) {
        System.out.println("public long add(long a, int b) ");
        return a+b;
    }
    // public int add(int a, int b, int c) {
    //     return a+b+c;
    // }
}
public class OverloadingEx {

    public static void main(String[] args) {
        Cal cal=new Cal();
        System.out.println(cal.add(3, 2));
    }
}
```



## Upcasting and downcasting?

### TypePromotion

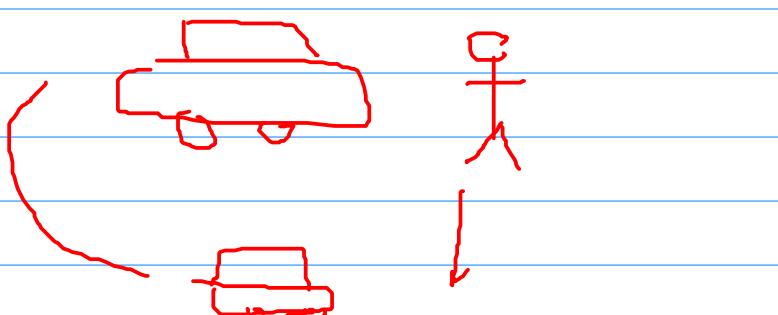



upcassting: also happy  
`int i=55;  
double j=i;`

### downcating?

### painful

`double i=55.7;  
int j=(int)i;`

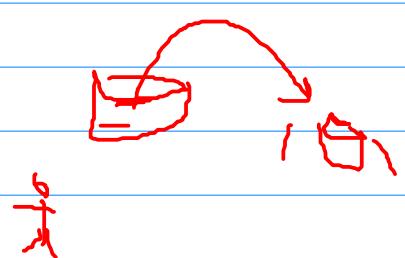

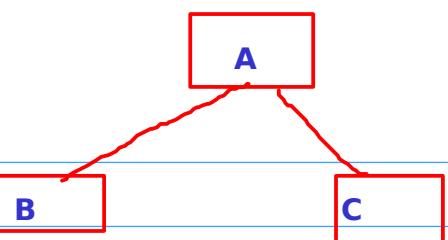

```

class A{
    void foo() {
        System.out.println("foo method of A class");
    }
}


class B extends A{
    //Overriding?
    void foo() {
        System.out.println("foo method of B class");
    }
}

```

KD



KD




Shape



Square

Circle



Triangle

abstract class

it can hv ctr


can hv instance variable

interface

cant have

cant hv instance variable ( p s final )  
static variable

abstract method:

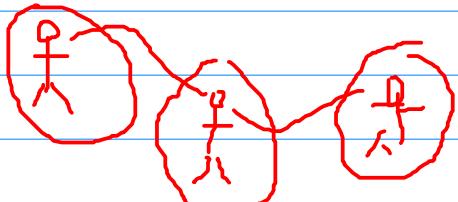

```
ab class A{  
    ab void foo();  
}
```

```
ab class B extend A{  
}  
}
```

```
class C extends B{  
  
    void foo(){  
    }  
}
```

abstract class Foo{

}

Even if no abstract method is there inside the class even then a class can be declared as abstract class?

1. if I want to stop somebody to create the object of a class => abs class

Foo f=null;


2. u want to force other dev to override one/more method

3. can ab class have a ctr?  
YES

### interface keyword:


#### what is interface ?

interface acts as contract between two software layers / parties

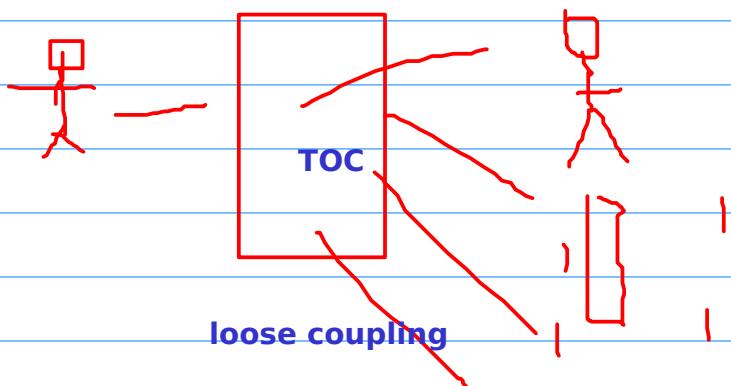

**interface A{**

```
int i=100; // public static and final
void foo();// public and abstract
}
```

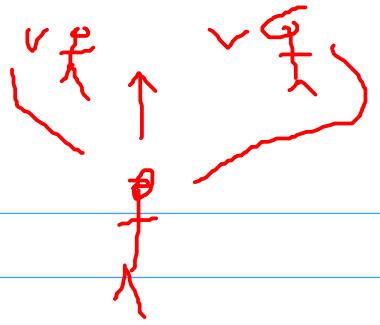

**class Almp implements A{**

```
void foo(){
}
}
```

**what is the real use of interface?**

**is to act as a contract bw two parties**

**A passanger is traveling from BTM to LalBagh**

**using metro**

**stack**

```
void push(int x){}
int pop(){}
isEmpty()
isFully()
```




**void push(int x){}
int pop(){}
isEmpty()
isFully()**

**StackInterface**



**bus**



# Visibility Modifiers

- ❖ class A has default visibility
- ❖ hence can access in the same package only.
- ❖ Make class A public, then access it.
- ❖ Protected data can access in the same package and all the subclasses in other packages provide class itself is public

```
pack packA;
```

```
class A{  
    public void foo(){  
    }  
}
```

```
pack packB;  
import packA.*;
```

```
class B{  
    public void boo(){  
A a=new A();  
}
```

```
pack packA;
```

```
public  
class A{  
protected void foo(){  
}  
}
```

```
pack packB;  
import packA.*;
```

```
class B{  
    public void boo(){  
A a=new A();  
}
```

```
pack packB;  
import packA.*;  
class C extends A{
```

```
    public void foo2(){  
        foo();  
    }  
}
```

# Want to accept parameter from user?

java.util.Scanner (Java 1.5)

```
Scanner stdin = Scanner.create(System.in);
```

```
int n = stdin.nextInt();
String s = stdin.next();
```

```
boolean b = stdin.hasNextInt()
```

# Call by value

- Java support call by value
- The value changes in function is not going to reflected in the main.

```
public class CallByValue {  
    public static void main(String[] args) {  
        int i=22;  
        int j=33;  
        System.out.println("value of i before swapping:"+i);  
        System.out.println("value of j before swapping:"+j);  
        swap(i,j);  
    }  
  
    static void swap(int i, int j) {  
        int temp;  
        temp=i;  |————→ not going to change value in  
        i=j;    |————→ main...  
        j=temp;  
    }  
}
```

# Call by reference

- ❖ Java don't support call by reference.
- ❖ When you pass an object in an method copy of reference is passed so that we can mutate the state of the object but can't delete original object itself

```
class Foo{  
    private int i;  
    public Foo(int i){  
        this.i=i;  
    }  
    public int getI(){return i;}  
    public void setI(int t){i=t;}  
}  
public class CallByref {  
  
    public static void main(String[] args) {  
        Foo f1=new Foo(22);  
        Foo f2=new Foo(33);  
        swap(f1,f2);  
    }  
  
    static void swap(Foo f1, Foo f2) {  
        Foo temp;  
        temp=f1;  
        f1=f2;  
        f2=temp;  
        // f1.setI(55);  
    }  
}
```

do not effect f1 , f2 in main

can change state of f1

**DAY -3**

### **Day 3: Advanced Class Features**

- Loose coupling and high cohesion
- composition, aggrigation, inheritance, basic of uml
  - Abstract classes and methods
  - Relationship between classes- IS-A, HAS-A, USE-A
  - Interface Vs Abstract, when to use what?
  - Final classes and methods
  - Interfaces, loose coupling and high cohesion
  - SOLID principles, Square – rectangle problem
- Hands On & Lab



# A bit about UML diagram...

- UML 2.0 aka modeling language has 12 type of diagrams
- Most important once are class diagram, use case diagram and sequence diagram.
- You should know how to read it correctly
- This is not UML session... ☺

UML	Implementation
<p>Person</p> <p>- name : String - age : int</p> <p>+ Person(name : String) + calculateBMI() : double + isOlderThan(another : Person) : boolean</p>	<pre>public class Person {     private String name;     private int age;      public Person(String name) { ... }      public double calculateBMI() { ... }      public boolean isOlderThan(Person another) { ... } }</pre>


# Relationship between Objects

- USE-A
  - Passanger using metro to reach from office from home
- HAS-A (Association)
  - Compostion
    - Flat is part of Durga apartment
  - Aggregation
    - Ram is musician with RockStart musics group
- IS-A
  - Empoloyee is a person

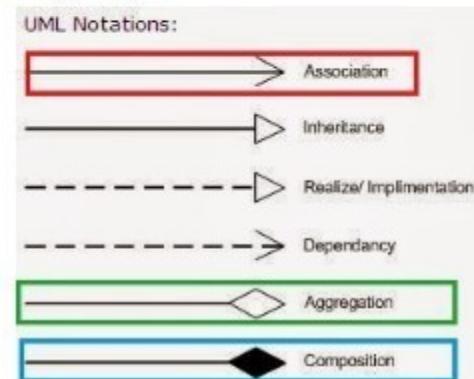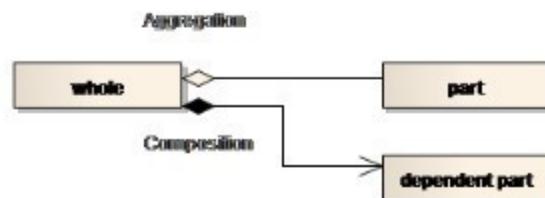

# Inheritance


- Inheritance is the inclusion of behaviour (i.e. methods) and state (i.e. variables) of a base class in a derived class so that they are accessible in that derived class.
- code reusability.
- Subclass and Super class concept

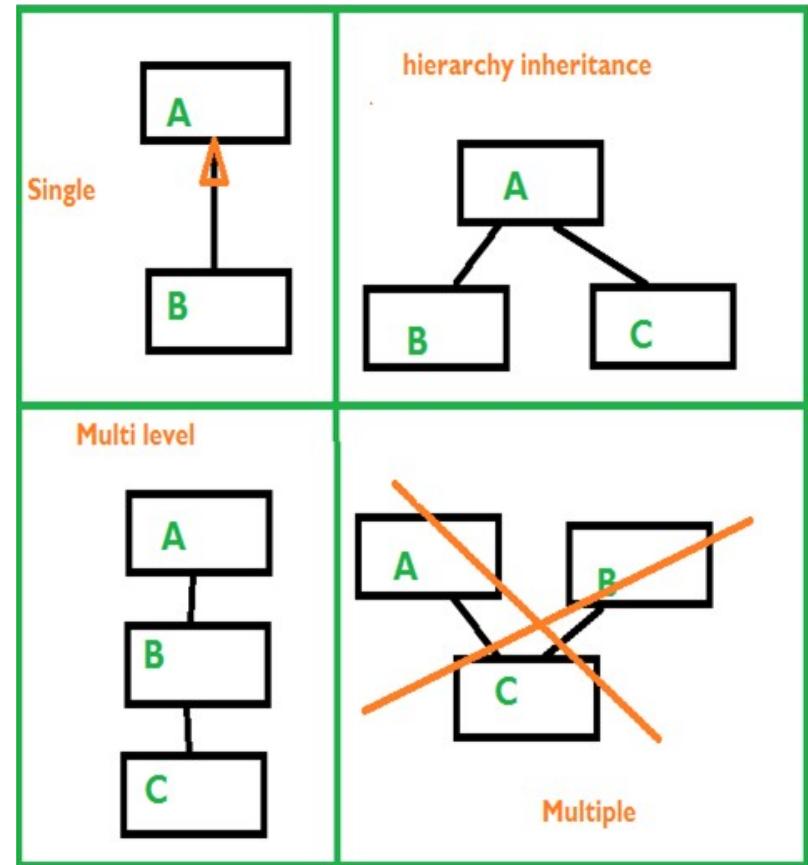

# Diamond Problem?



- Hierarchy inheritance can leads to poor design..
- Java don't support it directly...( Possible using interface)

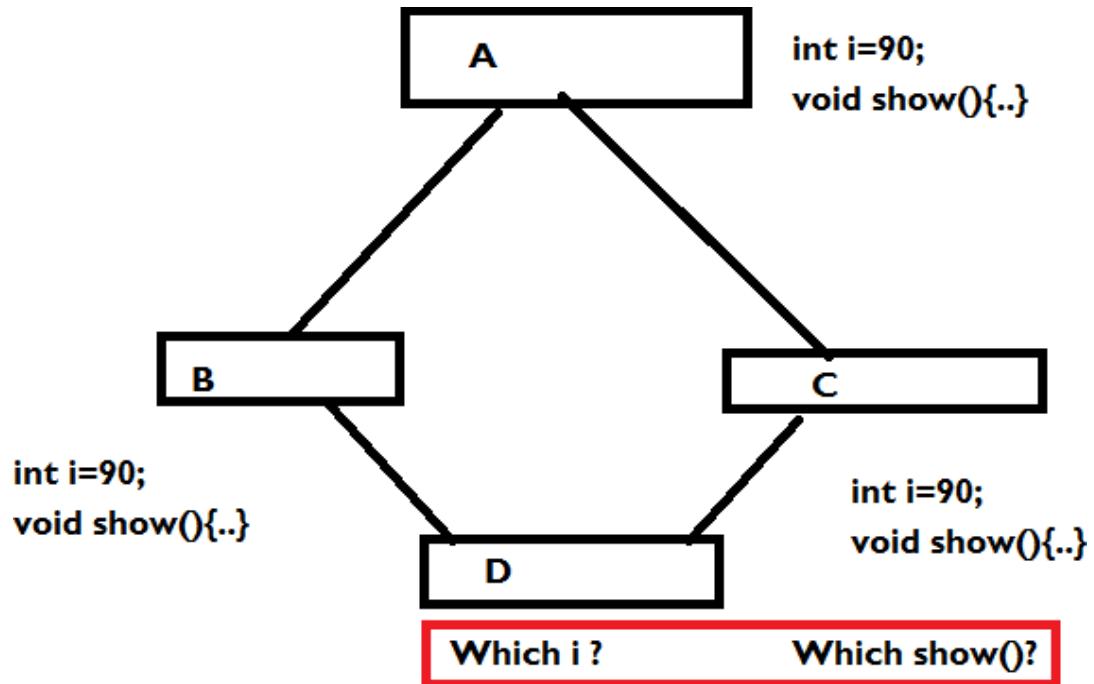

# Inheritance example

- Use extends keyword
- Use **super** to pass values to base class constructor.

```
class A{  
    int i;  
    A() {System.out.println("Default ctr of A");}  
    A(int i) {System.out.println("Parameterized ctr of A");}  
}  
  
class B extends A{  
  
    int j;  
    B() {System.out.println("Default ctr of B");}  
    B(int i,int j)  
    {  
        super(i);  
        System.out.println("Parameterized ctr of B");  
    }  
}
```

# Overloading

- ❖ Overloading deals with multiple methods in the same class with the same name but different method signatures.

```
class MyClass {  
    public void getInvestAmount(int rate) {...}  
  
    public void getInvestAmount(int rate, long principal)  
    { ... }  
}
```

- Both the above methods have the same method names but different method signatures, which mean the methods are overloaded.
- Overloading lets you define the same operation in different ways for different data.
- Constructor can be overloaded ambiguity
- \*Overloading in case of var-arg and Wrapper objects...

# Overriding...

- Overriding deals with two methods, one in the parent class and the other one in the child class and has the same name and signatures.
- Both the above methods have the same method names and the signatures but the method in the subclass *MyClass* overrides the method in the superclass *BaseClass*
- Overriding lets you define the **same operation in different ways for different object types.**


```
class BaseClass{  
    public void getInvestAmount(int rate) {...}  
}  
  
class MyClass extends BaseClass {  
    public void getInvestAmount(int rate) { ...}  
}
```

# Polymorphism


- ❖ Polymorphism=many forms of one things
- ❖ **Substitutability**
- ❖ **Overriding**
- ❖ **Polymorphism means the ability of a single variable of a given type to be used to reference objects of different types, and automatically call the method that is specific to the type of object the**
- ❖ variable references.

# Polymorphism

- Every animal sound but differently...
- We want to have Pointer of Animal class assigned by object of derived class

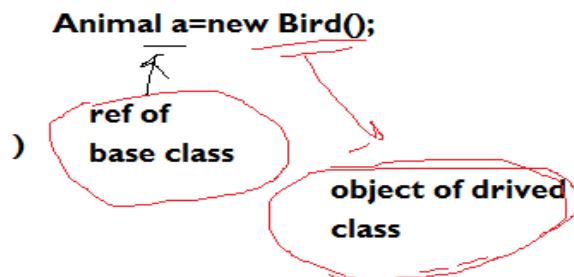

Which method is going to be called is not decided by the type of pointer rather object assigned will decide at run time

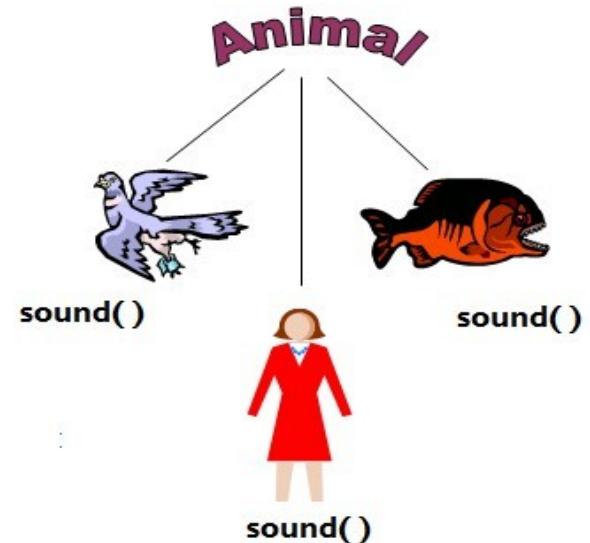

# Example...

```
class Animal
{
    public void sound()
    {
        System.out.println("Don't know how generic animal sound.....");
    }
}
class Bird extends Animal
{@Override
    public void sound()
    {
        System.out.println("Bird sound.....");
    }
}
class Person extends Animal
{@Override
    public void sound()
    {
        System.out.println("Person sound.....");
    }
}
```

# Need of abstract class?

- Sound( ) method of Animal class don't make any sense ...i.e. it don't have semantically valid definition
- Method sound( ) in Animal class should be **abstract** means incomplete
- Using abstract method Derivatives of Animal class forced to provide meaningful sound() method

```
class Animal
{
    public void sound()
    {
        System.out.println("Don't know how generic animal sound.....");
    }
}
class Bird extends Animal
{@Override
    public void sound()
    {
        System.out.println("Bird sound.....");
    }
}
class Person extends Animal
{@Override
    public void sound()
    {
        System.out.println("Person sound.....");
    }
}
```

# Abstract class

- If a class have at least one abstract method it should be declare abstract class.
- Some time if we want to stop a programmer to create object of some class...
- Class has some default functionality that can be used as it is.
- Can extends only one abstract class ☐



```
class Foo{  
    public abstract void foo();  
}
```



```
abstract class Foo{  
    public abstract void foo();  
}
```



```
abstract class Foo{  
}
```

# Abstract class use cases...

- ❖ Want to have some default functionality from base class and class have some abstract functionality that can't be define at that moment.

```
abstract class Animal
{
    public abstract void sound();
    public void eat()
    {
        System.out.println("animal eat...");
    }
}
```

- Don't want to allow a programmer to create object of an class as it is too generic

## **Interface vs abstract class**

# More example...

```
public abstract class Account {  
    public void deposit (double amount) {  
        System.out.println("depositing " + amount);  
    }  
  
    public void withdraw (double amount) {  
        System.out.println ("withdrawing " + amount);  
    }  
  
    public abstract double calculateInterest(double amount);  
}
```

```
public class SavingsAccount extends Account {  
  
    public double calculateInterest (double amount) {  
        // calculate interest for SavingsAccount  
        return amount * 0.03;  
    }  
  
    public void deposit (double amount) {  
        super.deposit (amount); // get code reuse  
        // do something else  
    }  
  
    public void withdraw (double amount) {  
        super.withdraw (amount); // get code reuse  
        // do something else  
    }  
}
```

```
public class TermDepositAccount extends Account {  
  
    public double calculateInterest (double amount) {  
        // calculate interest for SavingsAccount  
        return amount * 0.05;  
    }  
  
    public void deposit(double amount) {  
        super.deposit (amount); // get code reuse  
        // do something else  
    }  
  
    public void withdraw(double amount) {  
        super.withdraw (amount); // get code reuse  
        // do something else  
    }  
}
```

# Final

- ❖ What is the meaning of final
  - ❖ Something that can not be change!!!
- ❖ final
  - ❖ Final method arguments
    - ❖ Cant be change inside the method
  - ❖ Final variable
    - ❖ Become constant, once assigned then cant be changed
  - ❖ Final method
    - ❖ Cant overridden
  - ❖ Final class
    - ❖ Can not inherited (Killing extendibility )
    - ❖ **Can be reuse**

Some examples....

# Final class

- Final class can't be subclass i.e. Can't be extended
- No method of this class can be overridden
- Ex: String class in Java...

Real question is in what situation somebody should declare a class final

```
package cart;

public final class Beverage{

    public void importantMethod() {
        sysout("hi");
    }
}
```

---

~~```
package examStuff;
import cart.*;

class Tea extends beverage{
```~~

# Final Method


- ❖ Final Method Can't overridden
- ❖ Class containing final method can be extended
- ❖ Killing substitutability

```
class Foo{  
  
    public final void foo(){  
        Sysout("i am the best");  
        Sysout("You can use me but can't override me");  
    }  
};  
  
class Bar extends Foo{  
    @Override  
    public final void foo(){  
    }  
}
```



# Interface?

- Interface : Contract bw two parties
- Interface method
  - Only declaration
  - No method definition
- Interface variable
  - Public static and final constant
  - Its how java support global constant Break the hierarchy
- Solve diamond problem
- Callback in Java\* Some Example ....

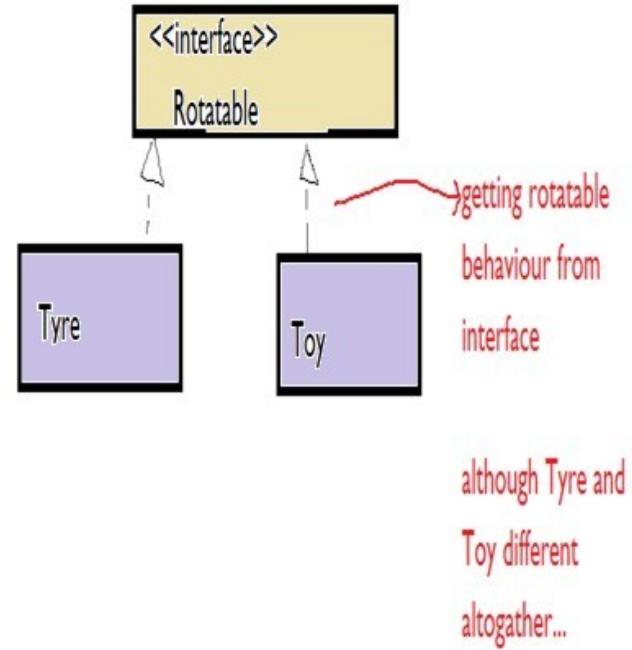

# Interface?

- ❖ Rules
  - ❖ All interface methods are always public and abstract, whether we say it or not.
  - ❖ Variable declared inside interface are always public static and final  
Interface method can't be static or final
  - ❖ Interface cant have constructor
  - ❖ An interface can extends other interface Can be used polymorphically
  - ❖ A class implementing an interface must implement all of its method otherwise it need to declare itself as an abstract class...

# Implementing an interface...

What we declare

```
interface Bouncable{  
    int i=9;  
    void bounce();  
    void setBounceFactor();  
}
```

What compiler think...

```
interface Bouncable{  
    public static final int i=9;  
    public abstract void bounce();  
    public abstract void setBounceFactor();  
}
```

All interface method  
must be  
implemented....

```
class Tyre implements Bouncable{  
  
    public void bounce() {  
        Sysout(i);  
        Sysout(i++);  
    }  
    public void setBounceFactor() {}  
}
```

# Note


Following interface constant declaration are identical

- int i=90;
- public static int i=90;
- public int i=90;
- public static int i=90;
- public static final int i=90;

Following interface method declaration don't compile

- **final void bounce();**
- **static void bounce();**
- **private void bounce();**
- **protected void bounce();**

# Decreasing Rigidity..increasing Flexibility

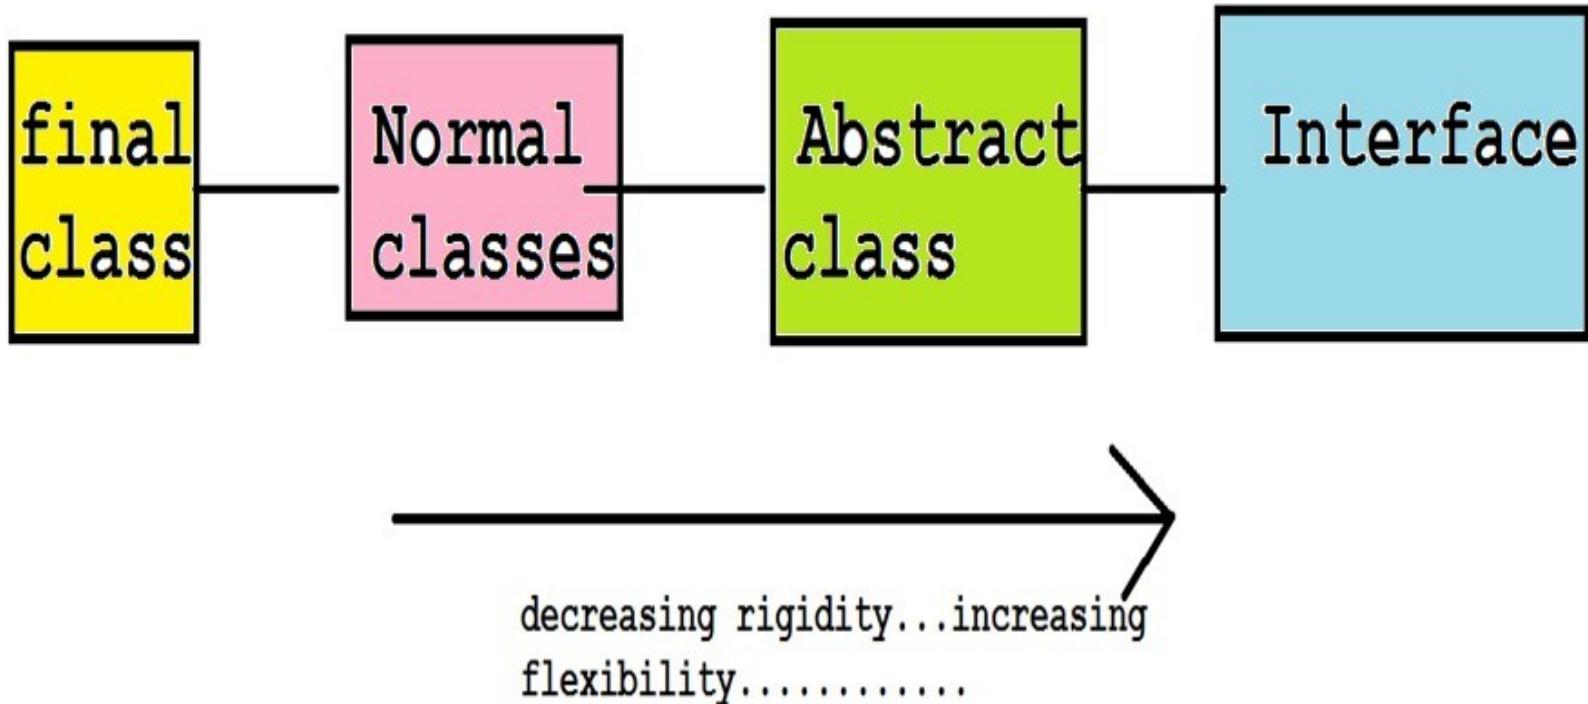

# Type of relationship bw objects


- ❖ USE-A
- ❖ HAS-A
- ❖ IS-A (Most costly ? )

ALWAYS GO FOR LOOSE COUPLING AND HIGH COHESION...

But HOW?

# IS-A    VS    HAS-A

## Inheritance [ is a ] Vs Composition [ has a ]

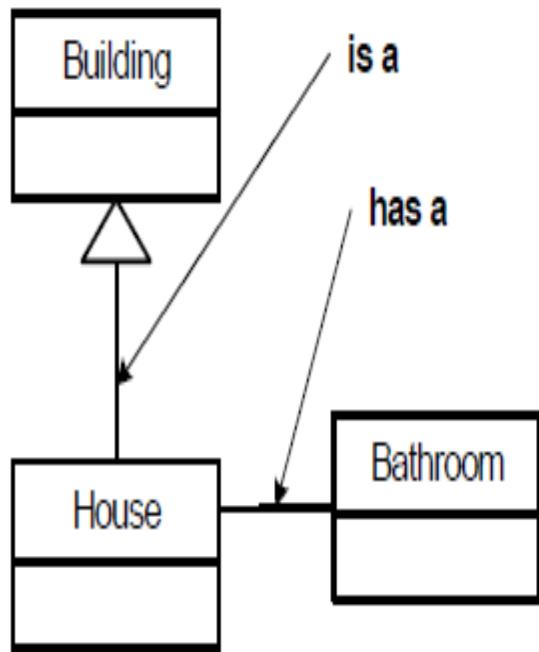

is a [House is a Building]

```
class Building{  
    ....  
}  
  
class House extends Building{  
    ....  
}
```

has a [House has a Bathroom]

```
class House {  
    Bathroom room = new Bathroom();  
    ....  
    public void getTotMirrors(){  
        room.getNoMirrors();  
        ....  
    }  
}
```

**DAY -4**

## **Day-4: Strings, Wrapper classes, Immutability, Inner classes, Lambda expression, Java 5 features , IO, Exception Handling**

- String class: Immutability and usages, stringbuilder and stringbuffer
- Wrapper classes and usages, Java 5 Language Features
- AutoBoxing and Unboxing, Enhanced For loop, Varargs, Static Import, Enums
- Inner classes: Regular inner class, method local inner class, anonymous inner class
- Char and byte oriented streams
- BufferedReader and BufferedWriter
- File handling
- Object Serialization and IO [ObjectInputStream / ObjectOutputStream]
- Exception Handling, Types of Exception, Exception Hierarchy, Exception wrapping and re throwing
- Hands On & Lab

# String

- ❖ Immutable i.e. once assigned then can't be changed
- ❖ Only class in java for which object can be created with or without using **new operator**

Ex: String s="india";

String s1=new String("india");  
difference?

What is the

- ❖ String concatenation can be in two ways:
  - String s1=s+ "paki";      Operator overloading
  - String s3=s1.concat("paki");

# Immutability

- ❖ Immutability means something that cannot be changed.
- ❖ Strings are immutable in Java. What does this mean?
  - ❖ String literals are very heavily used in applications and they also occupy a lot of memory.
  - ❖ Therefore for efficient memory management, all the strings are created and kept by the JVM in a place called string pool (which is part of Method Area).
  - ❖ Garbage collector does not come into string pool. How does this save memory?

## **RULES FOR IMMUTABILITY**

Declare the class as final so it can't be extended.

Make all fields private so that direct access is not allowed.

Don't provide setter methods for variables

Make all mutable fields final so that it's value can be assigned only once.

Initialize all the fields via a constructor performing deep copy.

Perform cloning of objects in the getter methods to return a copy rather than returning the actual object reference.

# How to make copy of an Object?

```
int[] src = new int[]{1,2,3,4,5};  
int[] dest = new int[5];  
System.arraycopy( src, 0, dest, 0, src.length );
```

```
int[] a = new int[]{1,2,3,4,5};  
int[] b = a.clone();  
  
int[] a = {1,2,3,4,5};  
int[] b = Arrays.copyOf(a, a.length);
```

Arrays.copyOfRange():  
If you want few elements of an array to be copied

```
public final class ImmutableReminder{  
    private final Date remindingDate;  
  
    public ImmutableReminder (Date remindingDate) {  
        if(remindingDate.getTime() < System.currentTimeMillis()) {  
            throw new IllegalArgumentException("Can not set reminder"  
                " for past time: " + remindingDate);  
        }  
        this.remindingDate = new Date(remindingDate.getTime());  
    }  
  
    public Date getRemindingDate() {  
        return (Date) remindingDate.clone();  
    }  
}
```

# Some common string methods...

| String             | methods                                                   |
|--------------------|-----------------------------------------------------------|
| charAt()           | Returns the character located at the specified index      |
| concat()           | Appends one String to the end of another ("+" also works) |
| equalsIgnoreCase() | Determines the equality of two Strings, ignoring case     |
| length()           | Returns the number of characters in a String              |
| replace()          | Replaces occurrences of a character with a new character  |
| substring()        | Returns a part of a String                                |
| toLowerCase()      | Returns a String with uppercase characters converted      |
| toString()         | Returns the value of a String                             |
| toUpperCase()      | Returns a String with lowercase characters converted      |
| trim()             | Removes whitespace from the ends of a String              |

# String comparison

- Two string should never be checked for equality using == operator  
**WHY?**
- Always use equals( ) method....

```
String s1="india"; String s2="paki";
```

```
if(s1.equals(s2))  
.....  
.....
```

# String vs StringBuilder comparison

|              | String               | StringBuffer   | StringBuilder  |
|--------------|----------------------|----------------|----------------|
| Storage Area | Constant String Pool | Heap           | Heap           |
| Modifiable   | No (immutable)       | Yes( mutable ) | Yes( mutable ) |
| Thread Safe  | Yes                  | Yes            | No             |
| Performance  | Fast                 | Very slow      | Fast           |

## Various memory area of JVM

1. Method area ----- Per JVM
2. heap area ----- Per JVM
3. stack area ----- Per thread
4. PC register area ----- Per thread
5. Native method area ----- Per thread

### String

String is **immutable**: you can't modify a string object but can replace it by creating a new instance. Creating a new instance is rather expensive.

```
//Inefficient version using immutable String
String output = "Some text"
Int count = 100;
for(int i=0; i<count; i++) {
    output += i;
}
return output;
```

The above code would build 99 new String objects, of which 98 would be thrown away immediately. Creating new objects is not efficient.

### StringBuffer / StringBuilder (added in J2SE 5.0)

StringBuffer is **mutable**: use StringBuffer or StringBuilder when you want to modify the contents. **StringBuilder** was added in Java 5 and it is identical in all respects to **StringBuffer** except that it is not synchronized, which makes it slightly faster at the cost of not being thread-safe.

```
//More efficient version using mutable StringBuffer
StringBuffer output = new StringBuffer(110); // set an initial size of 110
output.append("Some text");
for(int i=0; i<count; i++) {
    output.append(i);
}
return output.toString();
```

The above code creates only two new objects, the *StringBuffer* and the final *String* that is returned. *StringBuffer* expands as needed, which is costly however, so it would be better to initialize the *StringBuffer* with the correct size from the start as shown.

# Wrapper classes



Helps treating primitive data as an object

But why we should convert primitive to objects?

- We can't store primitive in java collections
- Object have properties and methods
- Have different behavior when passing as method argument

Eight wrapper for eight primitive

Integer, Float, Double, Character, Boolean etc...

```
Integer it=new Integer(33); int temp=it.intValue();
```

....

**primitive==>object**

```
Integer it=new Integer(i);
```

**object==>primitive**

```
int i=it.intValue()
```

**primitive ==>string**

```
String s=Integer.toString();
```

**String==>Numeric object**

```
Double val=Double.valueOf(str)
```

# Boxing / Unboxing Java 1.5

- **Boxing**

Integer iWrapper = 10; Prior to J2SE 5.0, we use  
Integer a = new Integer(10);

- **Unboxing**

int iPrimitive = iWrapper;  
Prior to J2SE 5.0, we use  
int b = iWrapper.intValue();

# Java 5 Language Features (I)

- AutoBoxing and Unboxing

- Enhanced For loop
- Varargs

- Covariant Return Types

- Static Import

- Enums

# Enhanced For loop

Provide easy looping construct to loop through array and collections

```
int x[]={};  
....  
....  
for(int temp:x)  
    Sysout("temp:"+temp);
```

```
class Animal{}  
class Cat extends Animal{}  
class Dog extends Animal{}
```

```
Animal []aa={new Cat(),new Dog(), new Cat()};
```

```
for(Animal a:aa)
```

.....

# Varargs

- ❖ Java starts supporting variable argument method in Java 1.5

```
class Foo{  
  
    public void foo(int ...j)  
    {  
        for(int temp:j)  
            Sysout(temp);  
    }  
    ....  
    ....  
}
```

Discuss function overloading in case of Varargs and wrapper classes

# Static Import

- Handy feature in Java 1.5 that allow something like this: `import static java.lang.Math.PI;`
- `import static  
java.lang.Math.cos;`
  - Now rather then using
    - ***double r = Math.cos(Math.PI \* theta);***
    - We can use something
      - like ***double r = cos(PI \* theta);*** - looks more readable ....
      - Avoid abusing static import like
        - *import static java.lang.Math.\*;*
- General guidelines to use static java import:
  - Use it to declare local copies of java constants
  - When you require frequent access to static members from one or two java classes

# Enums


- Enum is a special type of classes.
- enum type used to put restriction on the instance values

```
public enum myCars{  
    HONDA,BMW,TOYOTA  
};  
.....  
.....  
myCars currentcar=myCars.BMW;  
System.out.println("My Current Cars : "+ myCars.BMW);
```

its optional !!!

```
enum Day {  
    SUNDAY, MONDAY, TUESDAY, WEDNESDAY, THURSDAY,  
    FRIDAY, SATURDAY  
}  
  
//used  
Day today = Day.WEDNESDAY;  
switch(today){  
    case SUNDAY:  
        break;  
    //...  
}
```

# Inner classes

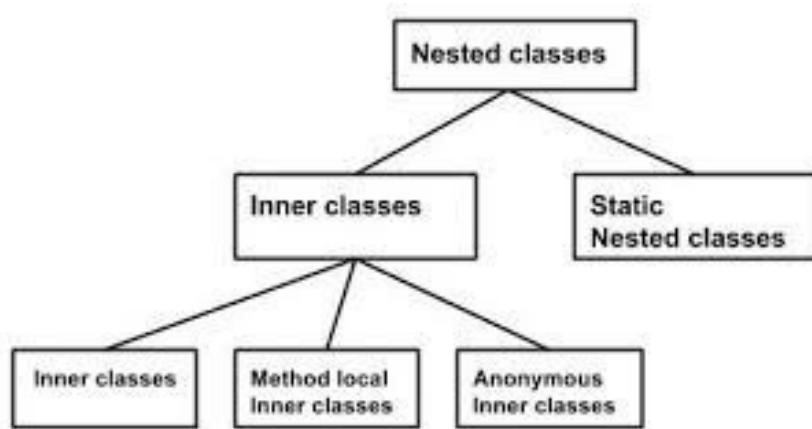

- ❖ Inner class?
  - ❖ A class defined inside another class.
  - ❖ Why to define inner classes
- ❖ Inner classes
  - Top level inner class
  - Method local inner class
  - Anonymous Inner class
  - Method local argument inner class
- ❖ Static inner classes

# Top level inner class

- Non static inner class object can't be created without outer class instance
- All the private data of outer class is available to inner class
- Non static inner class can't have static members

<http://www.avajava.com/tutorials/lessons/iterator-pattern.html>

```
class A
{
    private int i=90;

    class B
    {
        int i=90;//  
        void foo()
        {
            System.out.println("instance value of outer class:"+ A.this.i);

            System.out.println("instance value of inner class:"+this.i);
        }
    }
    public class Inner1 {

        public static void main(String[] args) {
            A.B objectB=new A().new B();

            objectB.foo();
        }
    }
}
```

# Method local inner class

- Class define inside an method
- Can not access local data define inside method
- Declare local data final to access it

```
class A
{
    private int i=90;
    void foo()
    {
        int i=22;
        final int j=44;
        class B
        {
            void foofy()
            {
                //System.out.println("value of method local variable cant be access:"+i);
                System.out.println("value of method local" +
                    " can be accessed if it is declared final:"+ j);
            }
        }
    }
}
```

```
B b=new B();
b.foofy();
```

# Anonymous Inner class

- A way to implement polymorphism
- “On the fly”

```
interface Cookable
{
    public void cook();
}

class Food
{
    Cookable c=new Cookable() {
        @Override
        public void cook() {
            System.out.println("Cooked.....");
        }
    };
}
```

# What is Exception?

- ❖ An exception is an abnormal condition that arises while running a program.
- ❖ Examples:
  - ❖ Attempt to divide an integer by zero causes an exception to be thrown at run time.
  - ❖ Attempt to call a method using a reference that is null. Attempting to open a nonexistent file for reading.
  - ❖ JVM running out of memory.
- ❖ Exception handling do not correct abnormal condition rather it make our program robust i.e. make us enable to take remedial action when exception occurs...Help in recovering...

# Type of exceptions

## **1. Unchecked Exception**

Also called Runtime Exceptions

## **2. Checked Exception**

Also called Compile time  
Exceptions

## **3. Error**

Should not to be handled by  
programmer..like JVM crash


- All exceptions happens at run time in programming and also in real life.....
- for checked ex, we need to tell java we know about those problems for example `readLine()` throws `IOException`

Exception key words

Catch

Throw


# Exception Hierarchy

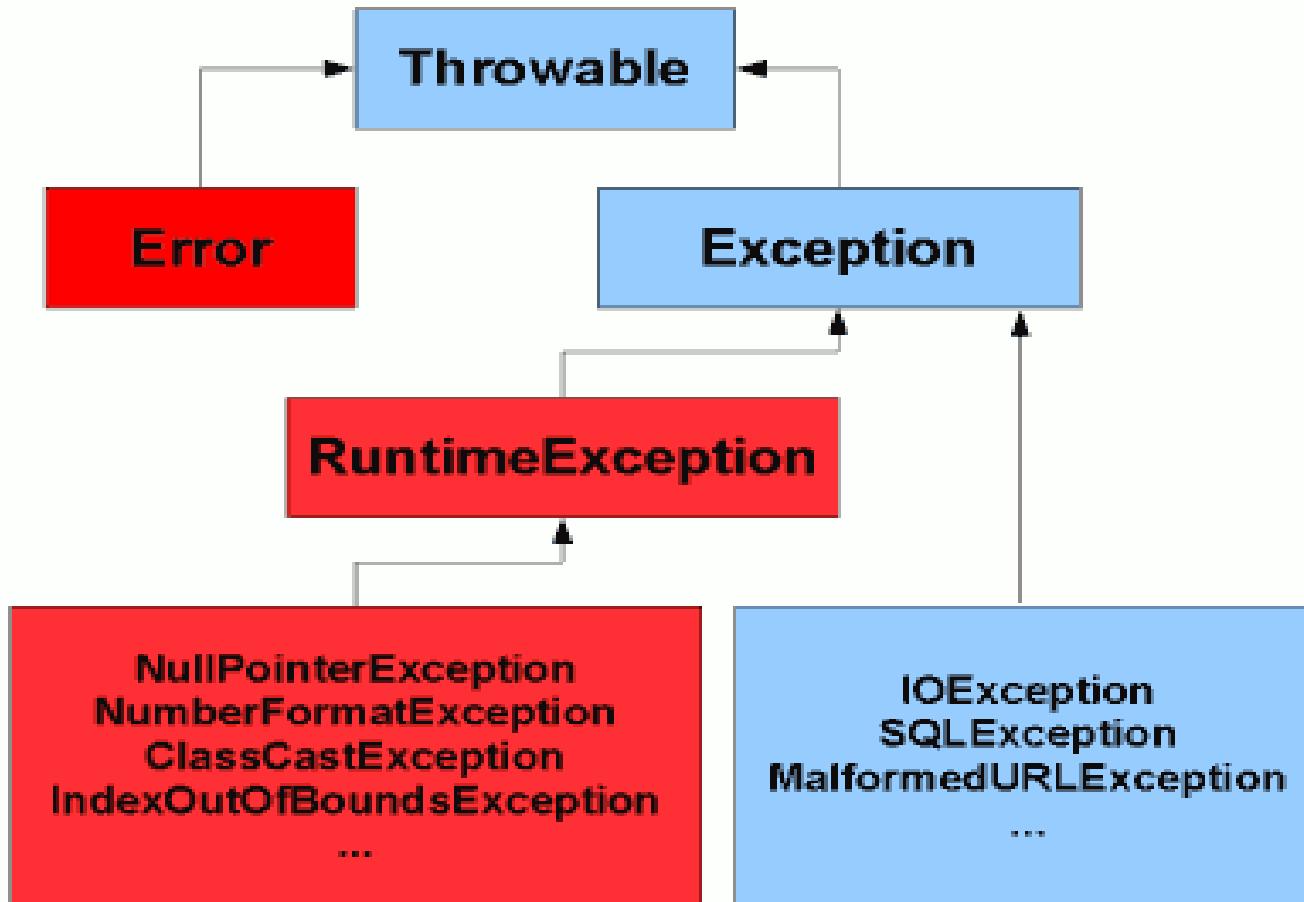

# Exception Hierarchy

**Figure:** Exception Hierarchy in Java

BenchResources.Net

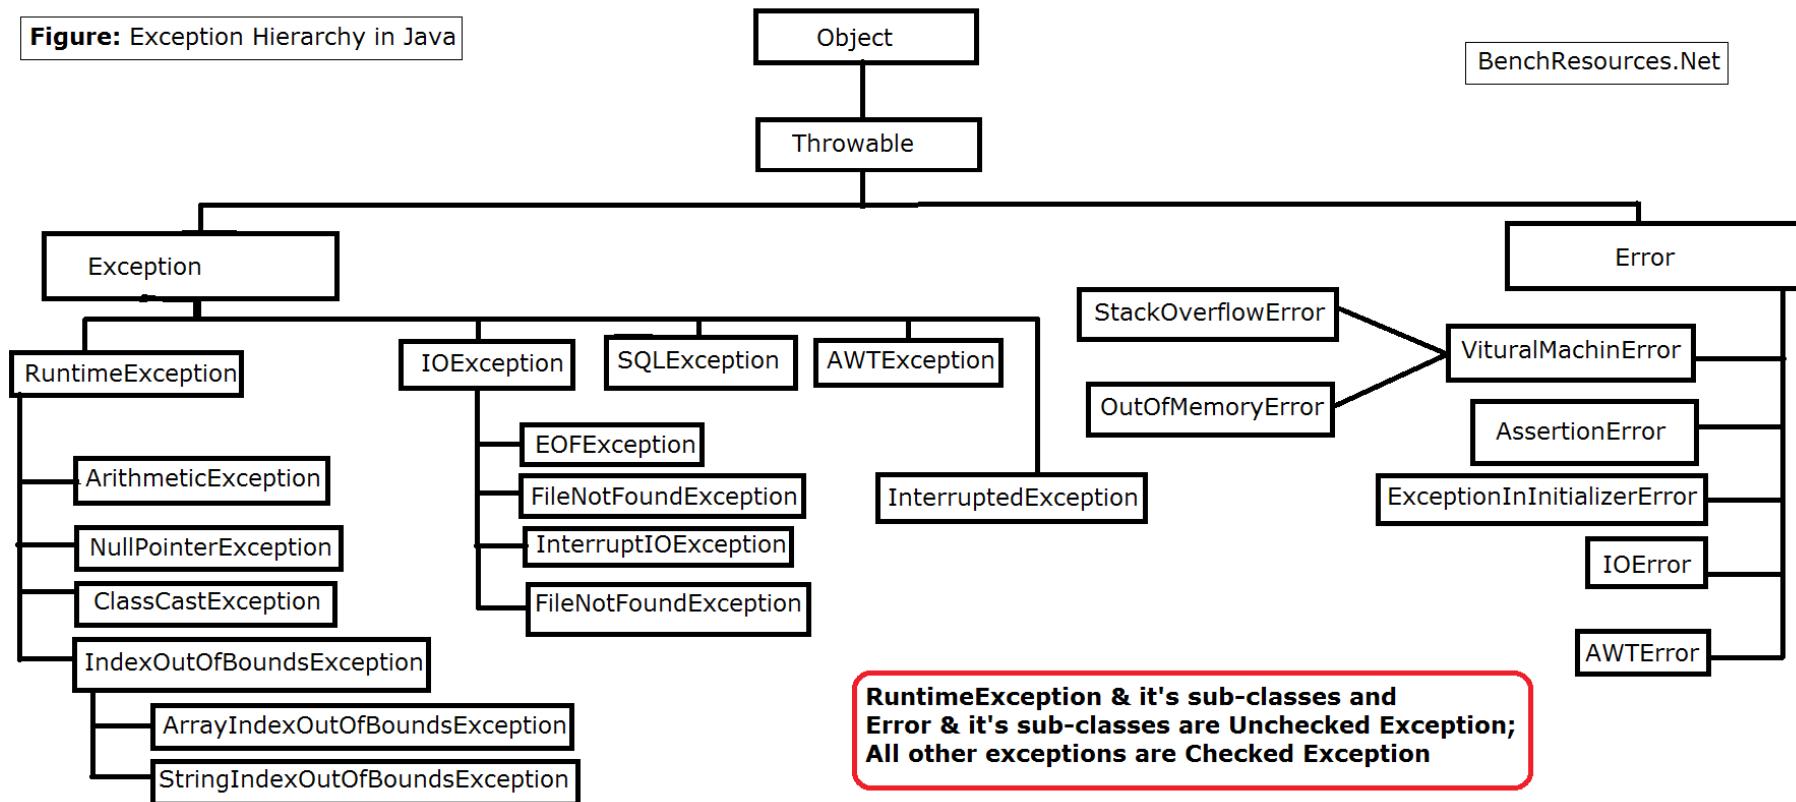

# Exceptions and their Handling

When the JVM encounters an error such as divide by zero, it creates an exception object and throws it – as a notification that an error has occurred.


If the exception object is not caught and handled properly, the interpreter will display an error and terminate the program.

If we want the program to continue with execution of the remaining code, then we should try to catch the exception object thrown by the error condition and then take appropriate corrective actions. This task is known as *exception handling*.

# Common Java Exceptions

- ArithmeticException
- ArrayIndexOutOfBoundsException
- ArrayStoreException
- FileNotFoundException
- IOException - general I/O failure
- NullPointerException – referencing a null object
- OutOfMemoryError
- SecurityException – when applet tries to perform an action not allowed by the browser's security setting.
- StackOverflowError
- StringIndexOutOfBoundsException

# Rules for throwing exception from overridden methods

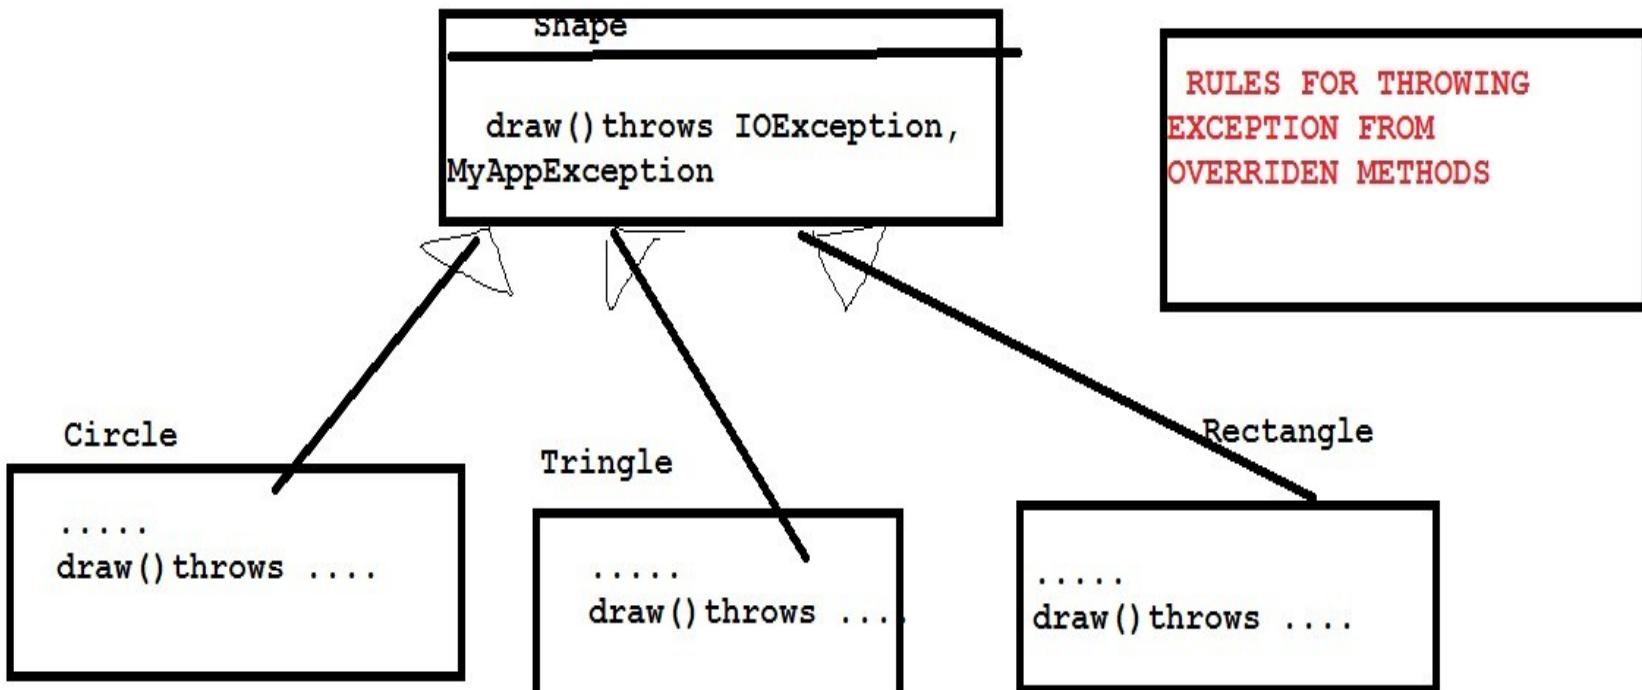


RULES FOR THROWING  
EXCEPTION FROM  
OVERRIDEN METHODS

\* Any checked exception thrown here must be subclass of  
IOException and MyAppException

\* can throw any unchecked exceptions

\*Not throwing any exception is also valid

# Rules for throwing exception from constructors

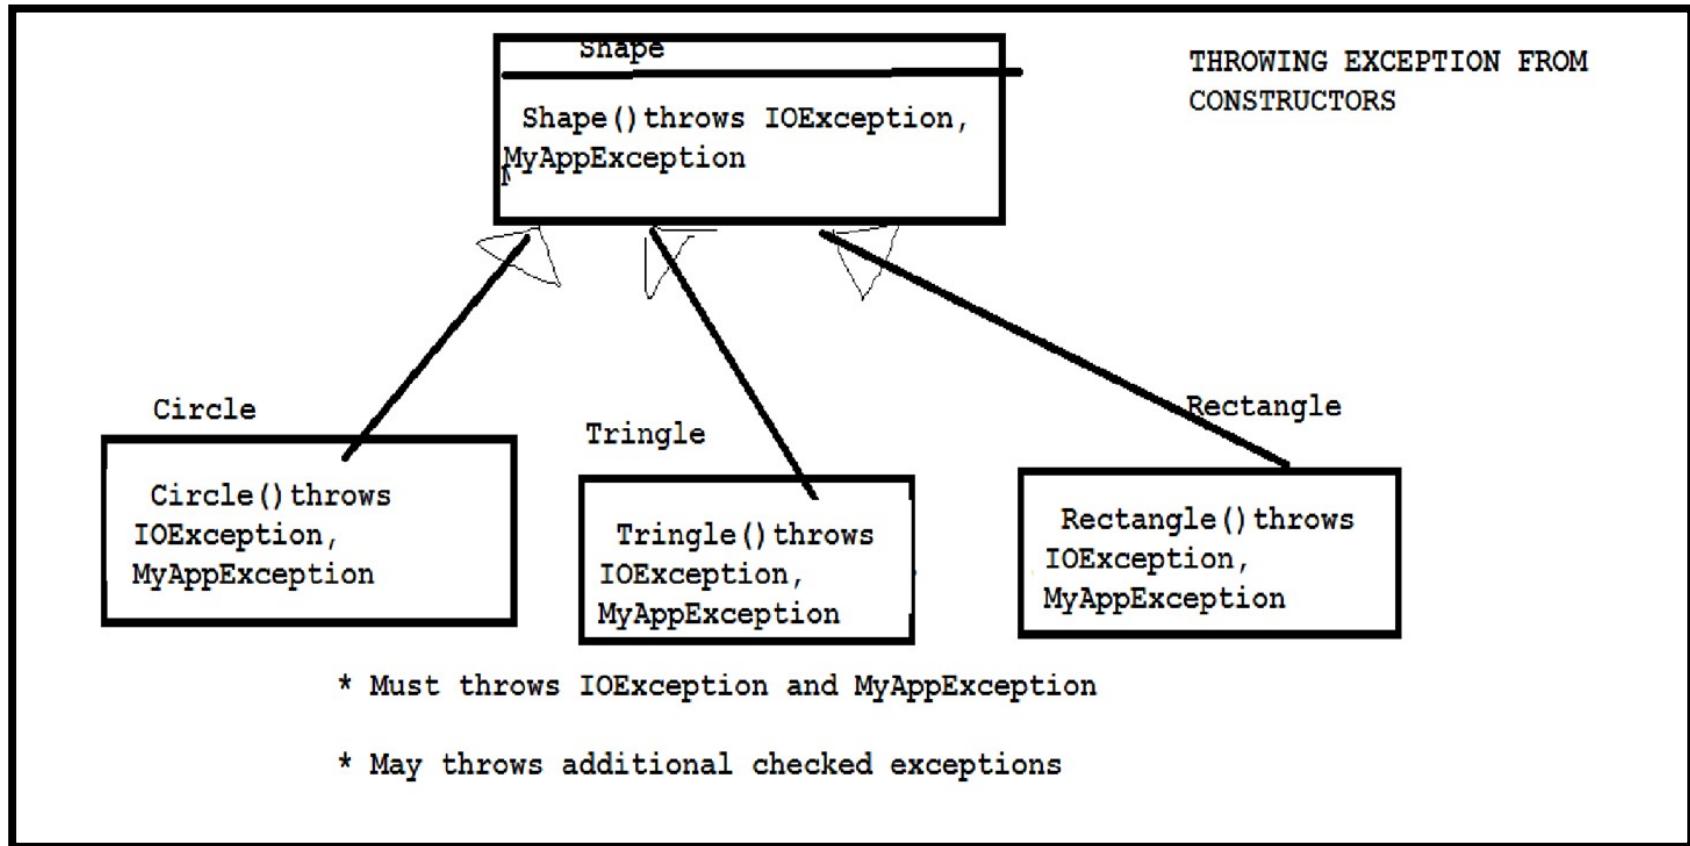

# Rules for throwing exception from overloaded and other methods

Throwing Exception from Overloaded  
and other methods...

```
class MyClass{  
    ...  
    void MyMethod(...) throws ...{}  
    void MyMethod(...,...) throws ....{}  
    void MyOtherMethod(...) throws ....{}  
}
```


\*Not an overriden method  
\*also not a const  
  
hence can throw any  
exception  
irrespective of  
exception thrown by  
other overloaded  
methods

Can throw any  
exception...




# Stream and IO

- ❖ Stream is logical connection bw source and destination
- ❖ Stream is an abstraction that either produces or consumes information. A stream is linked to a physical device by the Java I/O system.
- ❖ All streams behave in the same manner, even if the actual physical devices to which they are linked differ.
- ❖ **2 types of streams:**
  - ❖ byte : for binray data, contain 0,1 sequence
  - ❖ All byte stream class are like XXXXXXXXStream character: for **text data**
  - ❖ All char stream class are like XXXXXXXXReader/ XXXXXXWriter

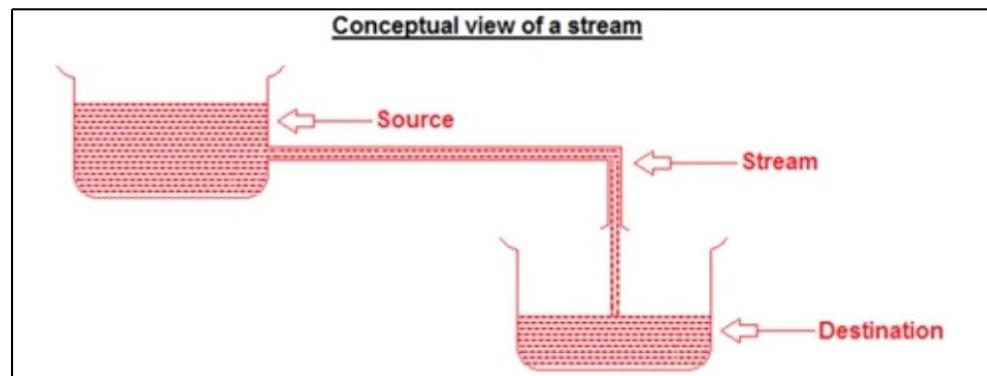


# Stream and IO

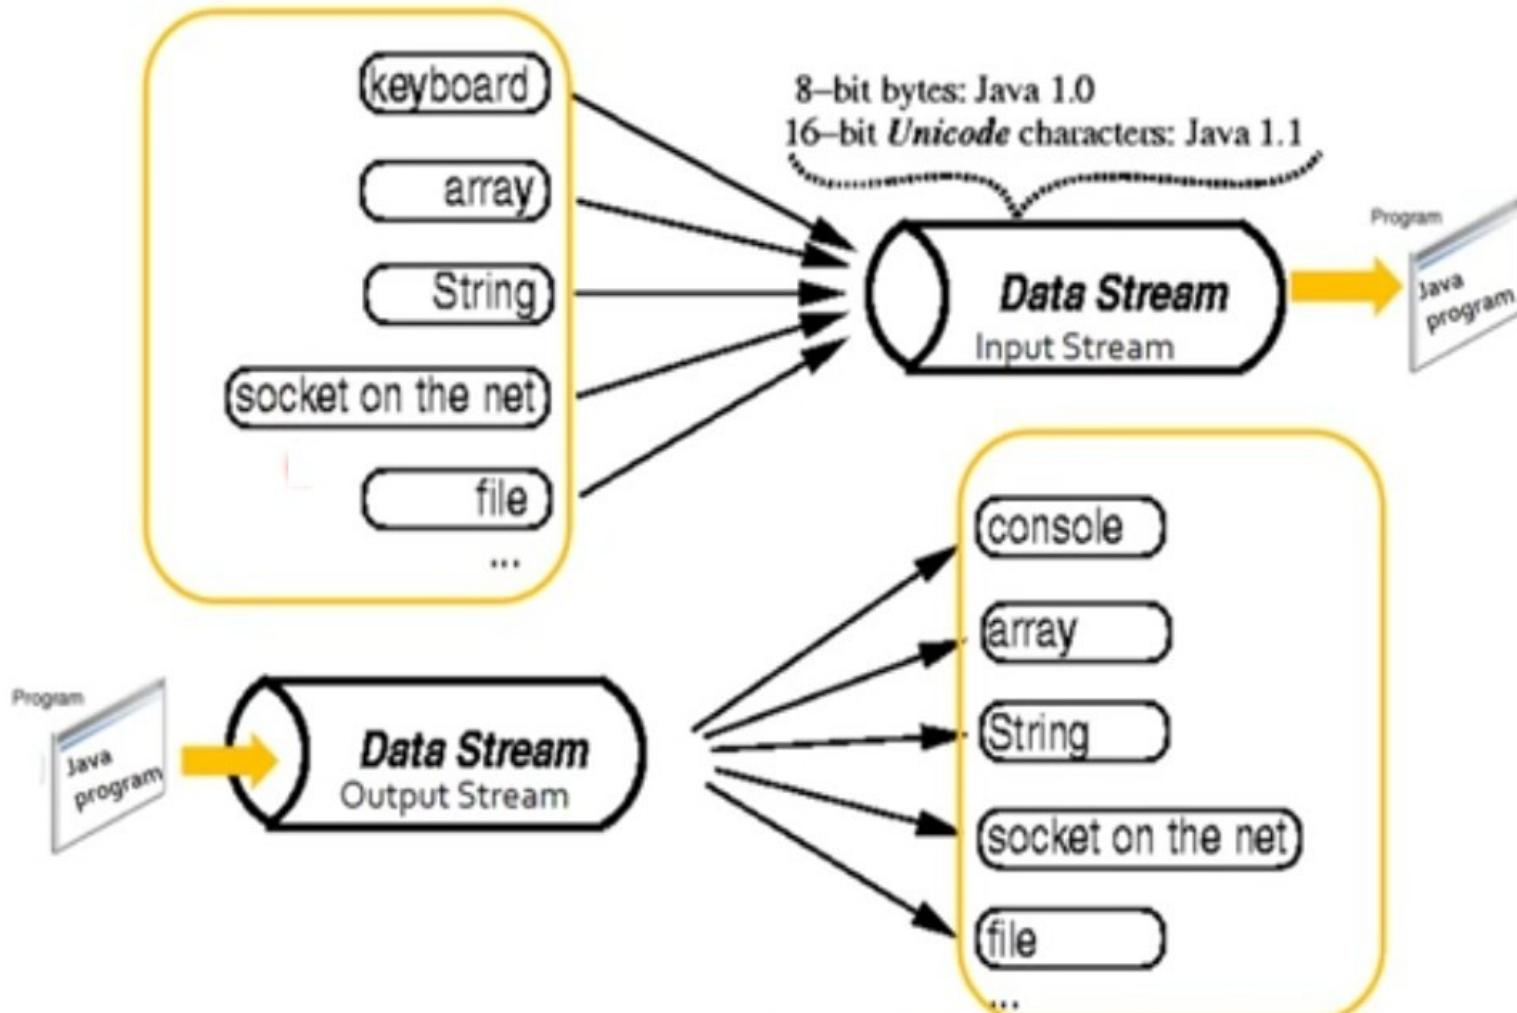

# Stream and IO



# Stream and IO

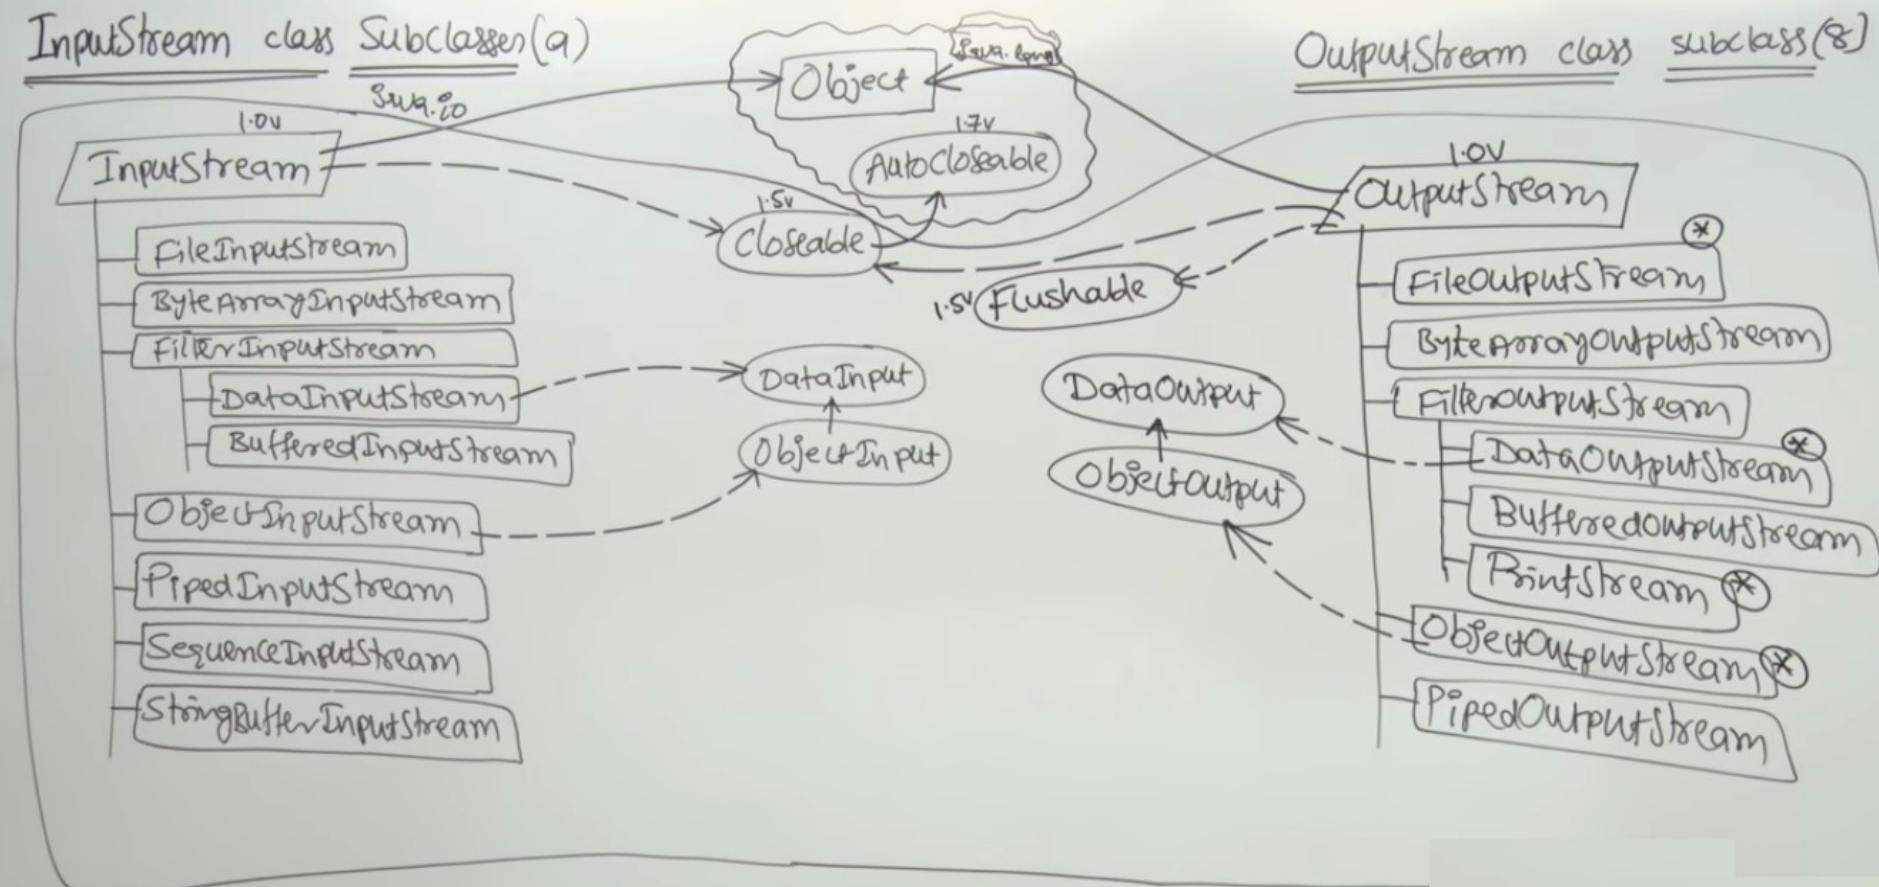

# System class in java


- System class defined in `java.lang` package
- It encapsulate many aspect of JRE
- System class also contain 3 predefine stream variables
  - in
  - `System.in (InputStream)`
  - out
  - `System.out(PrintStream)`
  - err
  - `System.err(console)`

# Buffered Reader and BufferedWriter


Reading from console

```
BufferedReader br=new BufferedReader(new InputStreamReader(System.in));
```

```
BufferedReader br=new BufferedReader(new FileReader(new  
File("c:\\raj\\foo.txt")));
```

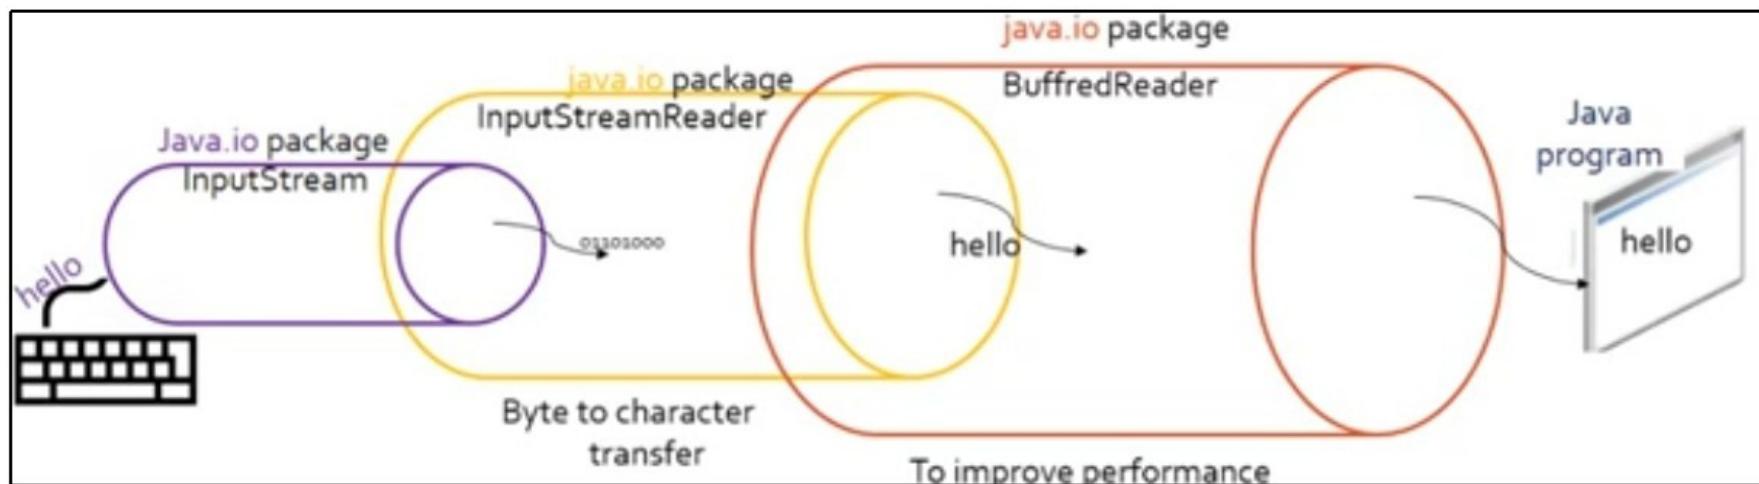

# Buffered Reader and BufferedWriter

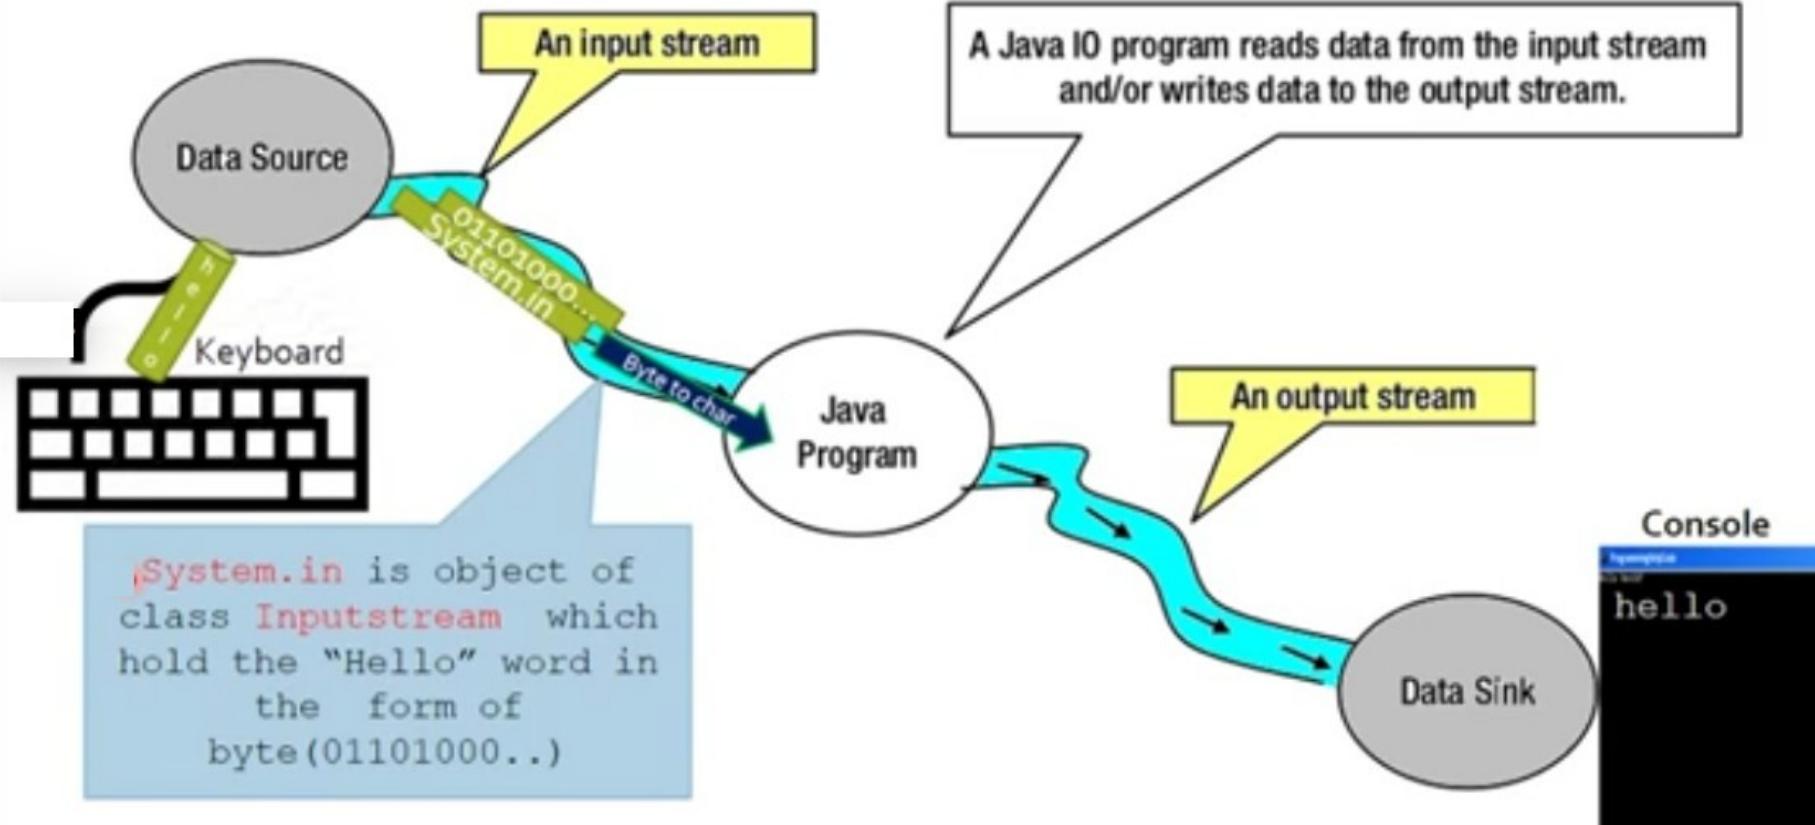

*Flow of data using an input/output stream in a Java program*

# File: using file, creating directories

File abstraction that represent file and directories

- ❖ File f=new File("....");  
boolean flag=  
file.createNewFile();  
boolean flag=  
file.mkdir(); boolean  
flag=file.exists();

```
public class DemoFileWriter {  
  
    public static void main(String[] args) {  
        try {  
            BufferedWriter bw=new BufferedWriter  
                (new FileWriter("demo5.txt"));  
  
            bw.write("java is key");  
            bw.flush();  
        } catch (IOException e) {  
            e.printStackTrace();  
        }  
    }  
}
```

# Using data output steam and data input stream


```
try {
    //writing in file
    DataOutputStream dos = new DataOutputStream
        (new FileOutputStream(
            new File("foo.txt")));
    for(int i=0; i<10;i++){
        dos.writeInt(i);
        dos.writeDouble(6.6);
        dos.writeShort(i);
    }
} catch (FileNotFoundException e) {
    e.printStackTrace();
} catch (Exception ex) {
    ex.printStackTrace();
}
```

```
try {
    //reading from file
    DataInputStream dis = new DataInputStream
        (new FileInputStream(
            new File("foo.txt")));
    for(int i=0; i<10;i++){
        System.out.println(dis.readFloat());
        System.out.println(dis.readInt());
    }
} catch (FileNotFoundException e) {
    e.printStackTrace();
} catch (Exception ex) {
    ex.printStackTrace();
}
```

# Serialization




- Storing the state of the object on a file along some metadata....so that it Can be recovered back.....
- Serialization used in RMI (Remote method invocation ) while sending an object from one place to another in network...

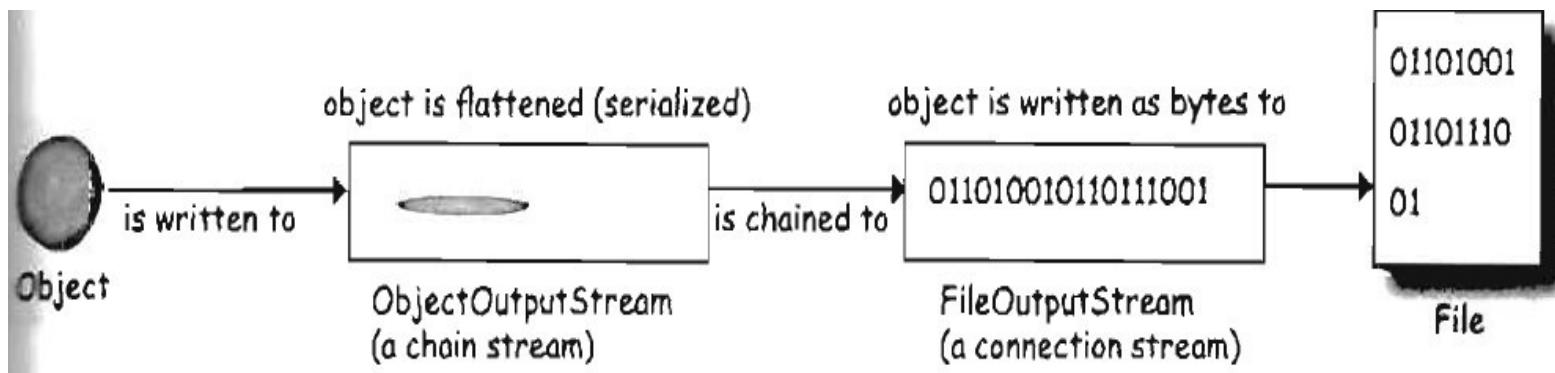

# What actually happens during Serialization


- ❖ The state of the object from heap is sucked and written along with some meta data in a file....

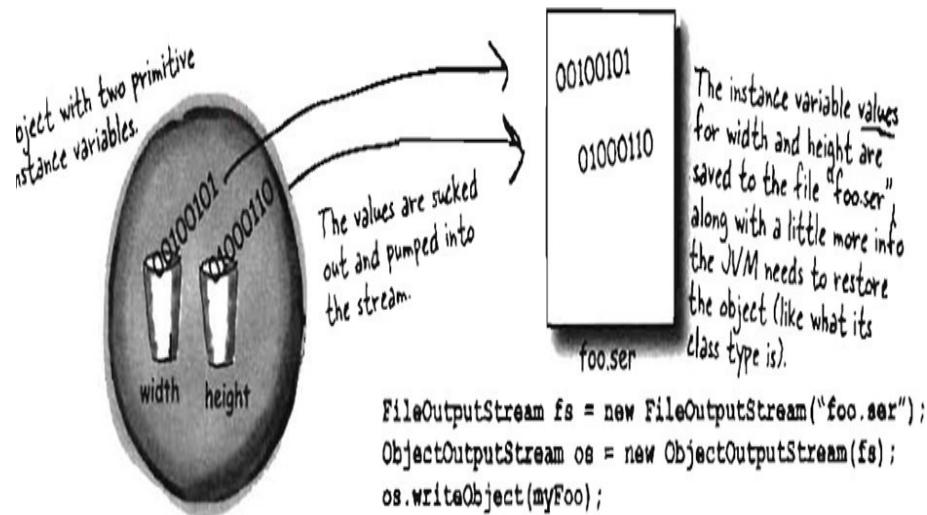

**When an object is serialized, all the objects it refers to from instance variables are also serialized. And all the objects those objects refer to are serialized. And all the objects those objects refer to are serialized... and the best part is, it happens automatically!**

# De- Serialization

- When an object is de-serialized, the JVM attempts to bring object back to the life by making a new object on the heap that have the same state as original object
- Transient variable don't get saved during serialization hence come with null !!!

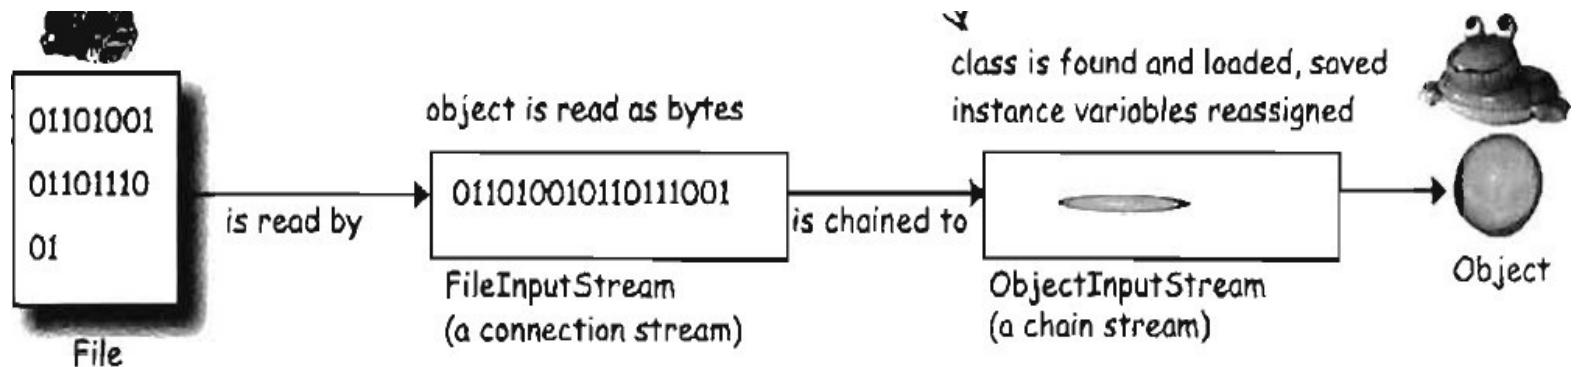

# Hello world

```
class Box implements Serializable{
    private static final long serialVersionUID = 1L;
    int l,b;

    public Box(int l, int b) {
        super();
        this.l = l;
        this.b = b;
    }

    public String toString() {
        return "Box [l=" + l + ", b=" + b + "]";
    }
}
```

# Example...

```
Box box=new Box(22, 33);
```

```
FileOutputStream fo=new FileOutputStream("c:\\raj\\foofoo.ser");
ObjectOutputStream os=new ObjectOutputStream(fo);

os.writeObject(box);
```

```
box=null;//nullify to prove that object come by de-ser...
```

```
FileInputStream fi=new FileInputStream("c:\\raj\\foofoo.ser");
ObjectInputStream oi=new ObjectInputStream(fi);

box=(Box)oi.readObject();
```

```
System.out.println(box);
```

# Serialization vs Externalization


| <b>Serialization</b>                                                                                 | <b>Externalization</b>                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>It is Meant for Default Serialization.</b>                                                        | <b>It is Meant for Customized Serialization.</b>                                                                                                                                 |
| <b>Here Everything Takes Care by JVM and Programmer doesn't have any Control.</b>                    | <b>Here Everything Takes Care by Programmer and JVM doesn't have any Control.</b>                                                                                                |
| <b>In Serialization Total Object will be Saved to the File Always whether it is required OR Not.</b> | <b>In Externalization Based on Our Requirement we can Save Either Total Object OR Part of the Object.</b>                                                                        |
| <b>Relatively Performance is Low.</b>                                                                | <b>Relatively Performance is High.</b>                                                                                                                                           |
| <b>Serialization is the best choice if we want to save total object to the file.</b>                 | <b>Externalization is the best choice if we want to save part of the Object to the file.</b>                                                                                     |
| <b>Serializable Interface doesn't contain any Method. It is a <i>Marker</i> Interface.</b>           | <b>Externalizable Interface contains 2 Methods, <i>wrtExternal()</i> and <i>readExternal()</i>. So it is Not Marker Interface.</b>                                               |
| <b>Serializable implemented Class Not required to contain public No - Argument Constructor.</b>      | <b>Externalizable implemented Class should Compulsory contain public No - Argument Constructor. Otherwise we will get Runtime Exception Saying <i>InvalidClassException</i>.</b> |
| <b>transient Key Word will Play Role in Serialization.</b>                                           | <b>transient Key Word won't Play any Role in Externalization. Of Course it is Not Required.</b>                                                                                  |

# **DAY -5**

## **Day 5: Introduction to Java threads, thread life cycle, synchronization, dead lock**

- Program vs process
- Thread as LWP
- Creating and running thread
- Thread life cycle
- Need of synchronization
- Producer consumer problem
- dead lock
- Hands on & Lab

# What is threads? LWP

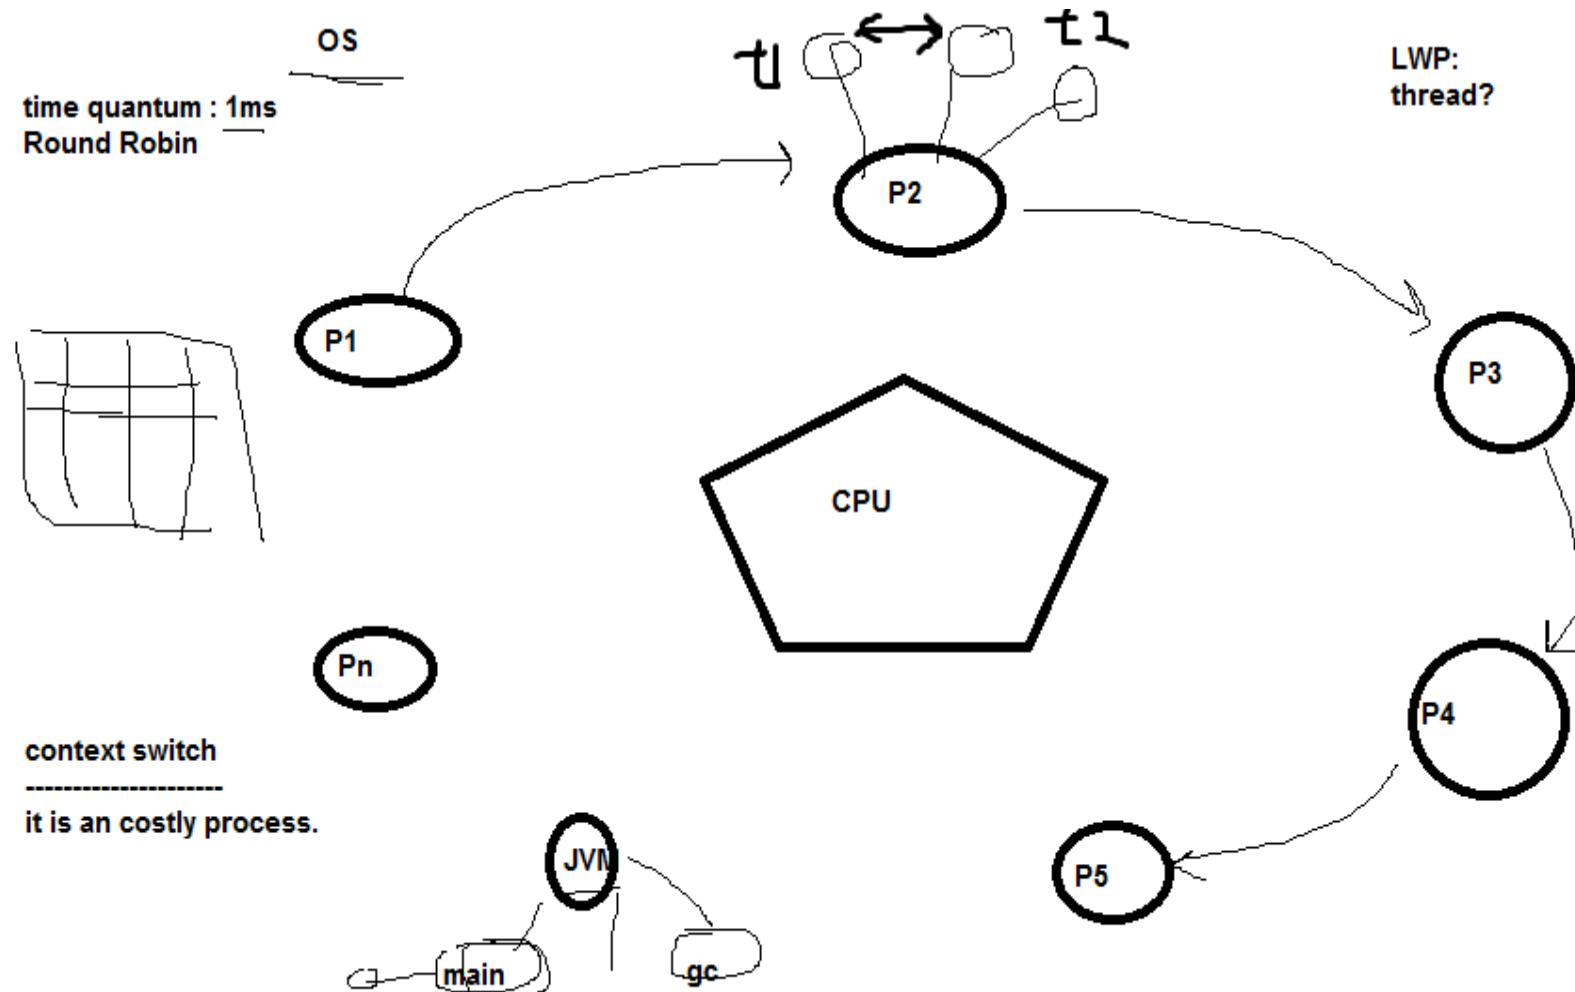

# Basic fundamentals


- Thread: class in java.lang
- thread: separate thread of execution

What happens during multithreading?

1. JVM calls main() method
2. main() starts a new thread. Main thread is temporary frozen while new thread starts running so JVM switches between created thread and main thread till both complete

# Creating threads in Java?


- Implements Runnable interface
- Extending Thread class.....
- Job and Worker analogy...

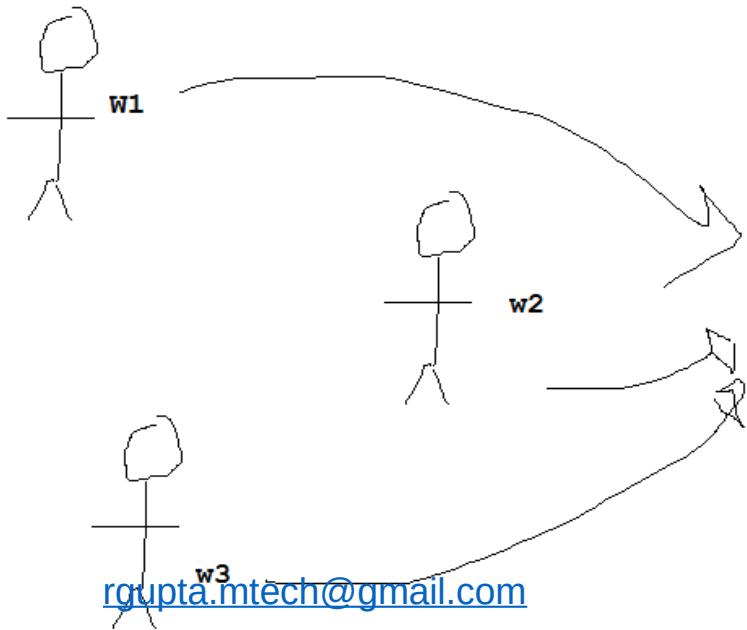

Thread

-----  
consider object of threads as  
worker

Implementation of Runnable as  
Job



Job

simulation

-----  
sleep()

```
class Job implements Runnable{
```


```
    public void run() {  
        // TODO Auto-generated method stub  
    }  
}
```

```
class MyThread extends Thread{
```

```
    public void run() {  
        // TODO Auto-generated method stub  
    }  
}
```

# Thread life cycle...

- If a thread is blocked ( put to sleep) specified no of ms should expire
- If thread waiting for IO that must be over..
- If a thread calls wait() then another thread must call notify() or notifyAll()
- If a thread is suspended() some one must call resume()

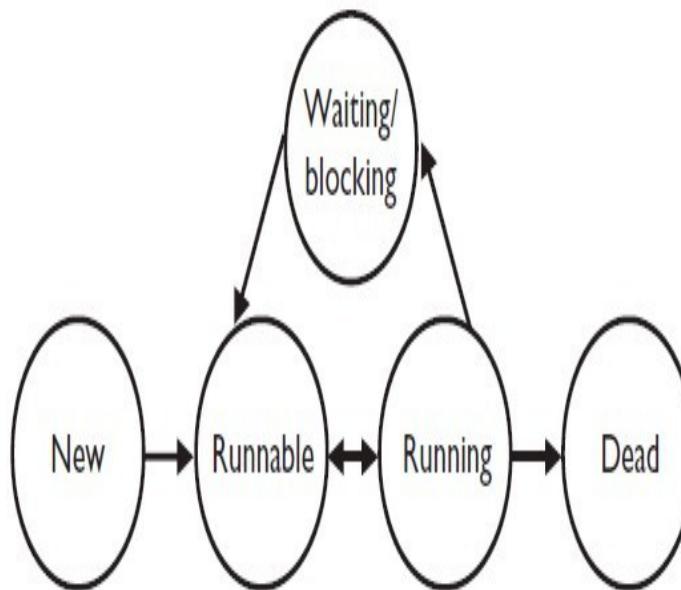

# Java.lang.Thread

- **Thread()**
  - construct new thread
- **void run()**
  - must be overriden
- **void start()**
  - start thread call run method
- **static void sleep(long ms)**
  - put currently executing thread to sleep for specified no of millisecond
- **boolean isAlive()**
  - return true if thread is started but not expired
- **void stop()**
- **void suspend() and void resume()**
  - Suspend thread execution....

# Java.lang.Thread

- void join(long ms)
  - Main thread Wait for specified thread to complete or till specified time is not over
- void join()
  - Main thread Wait for specified thread to complete
- static boolean interrupted()
- boolean isInterrupted()
- void interrupt()
  - Send interrupt request to a thread

# Creating Threads


- By extending Thread

```
class MyThread extends Thread
{
    @Override
    public void run()
    {
    }
}
```

- Implementing the Runnable interface

```
class MyRunnable implements Runnable
{
    @Override
    public void run()
    {
    }
}
```

# Understanding join() method

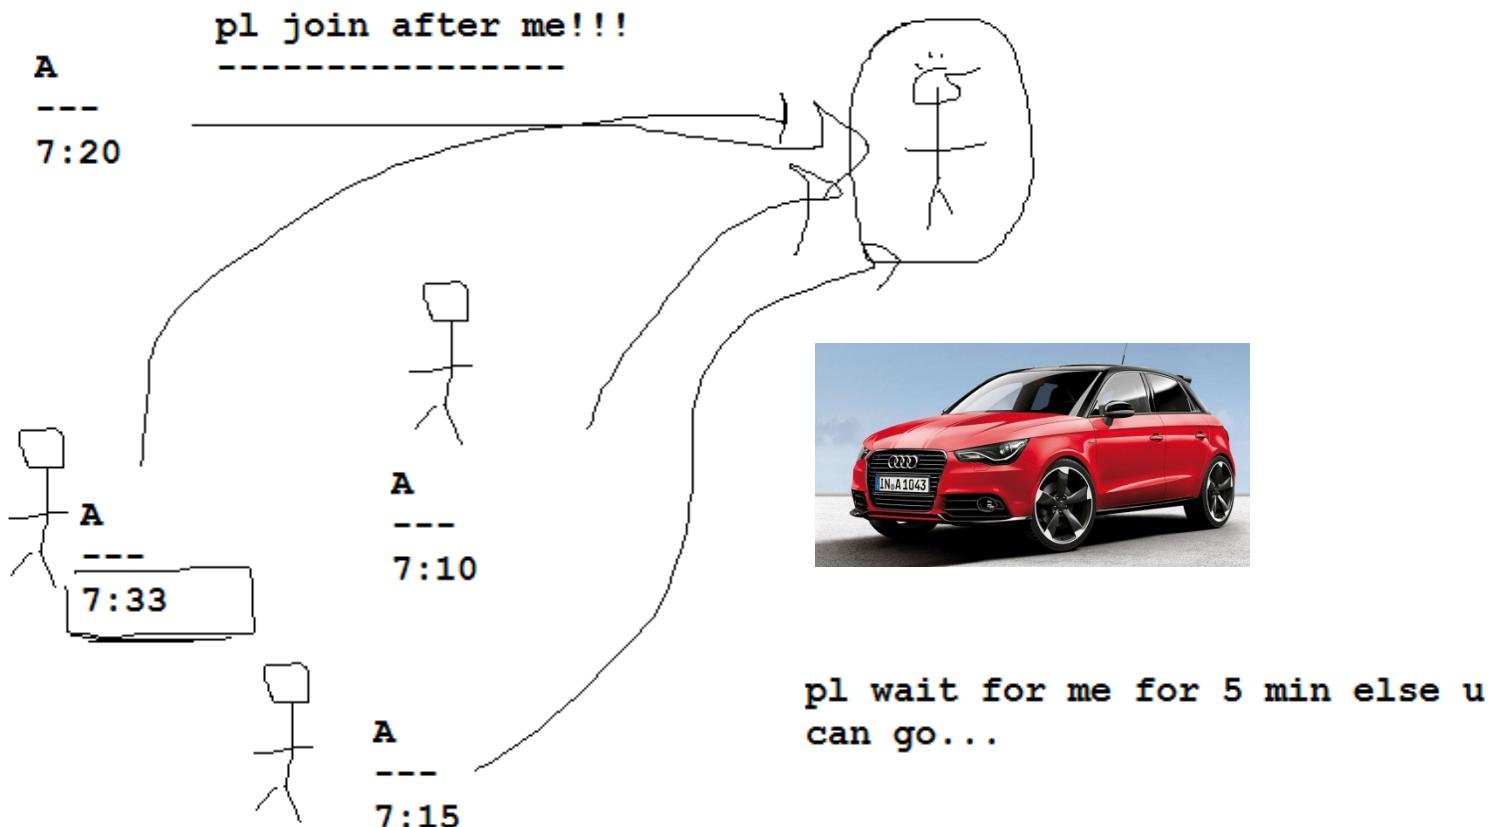

# Checking thread priorities


```
class Clicker implements Runnable
{
    int click=0;
    Thread t;
    private volatile boolean running=true;
    public Clicker(int p)
    {
        t=new Thread(this);
        t.setPriority(p);
    }
    public void run()
    {
        while(running)
            click++;
    }
    public void stop()
    {
        running=false;
    }
    public void start()
    {
        t.start();
    }
}
```

rgupta.mtech@gmail.com

```
.....
Thread.currentThread().setPriority(Thread.MAX_PRIORITY);
Clicker hi=new Clicker(Thread.NORM_PRIORITY+2);
Clicker lo=new Clicker(Thread.NORM_PRIORITY-2);
lo.start();
hi.start();
try
{
    Thread.sleep(10000);
}
catch(InterruptedException ex){}
lo.stop();
hi.stop();
//wait for child to terminate
try
{
    hi.t.join();
    lo.t.join();
}
catch(InterruptedException ex)
{
}

System.out.println("Low priority thread:"+lo.click);
System.out.println("High priority thread:"+hi.click);
.....
....
```

# Understanding thread synchronization

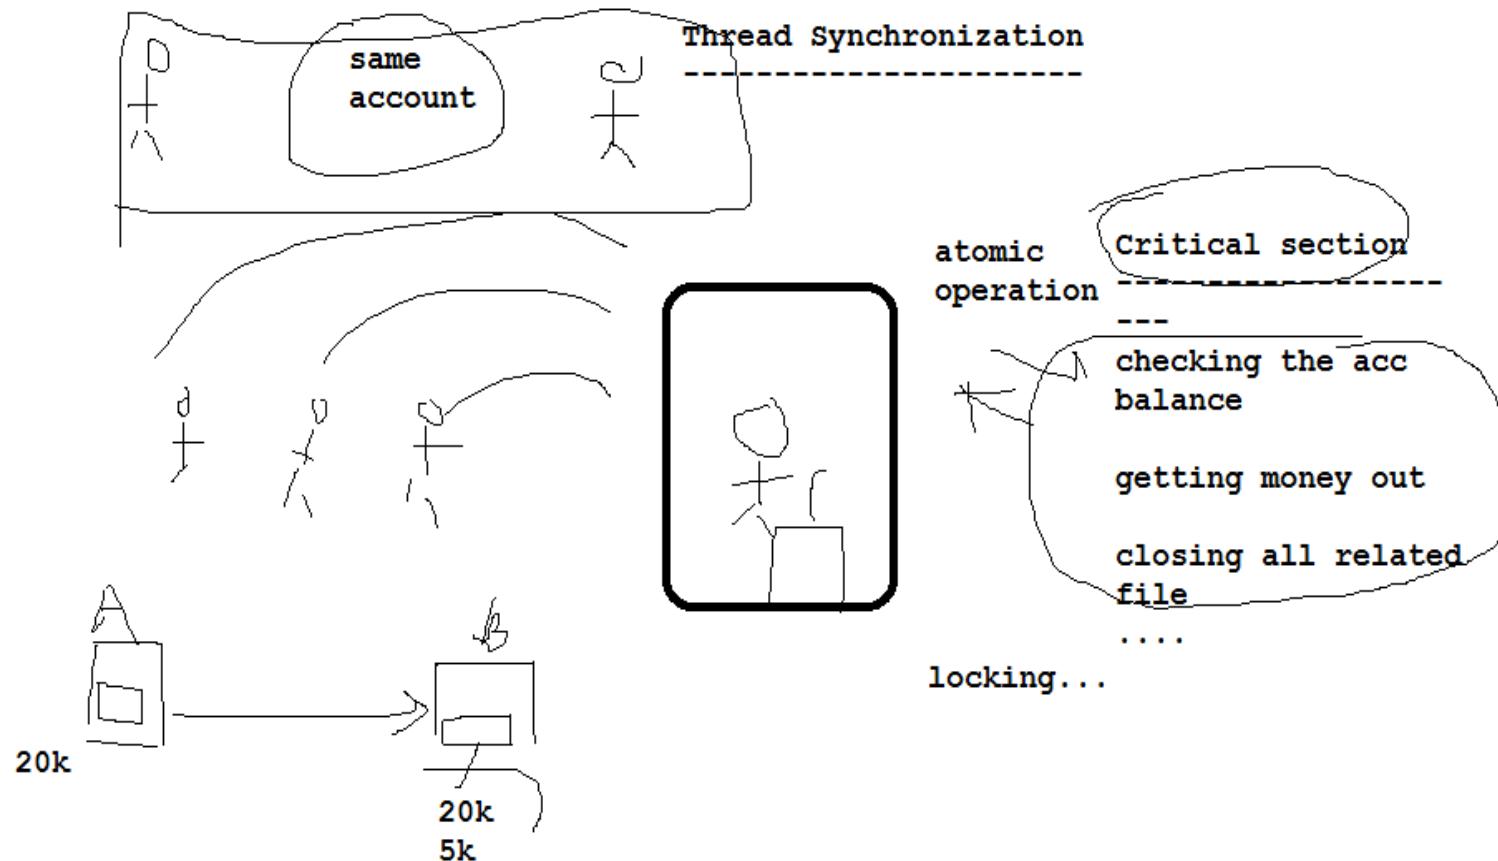


# Synchronization

- Synchronization
  - Mechanism to controls the order in which threads execute
  - Competition vs. cooperative synchronization
- Mutual exclusion of threads
  - Each synchronized method or statement is guarded by an object.
  - When entering a synchronized method or statement, the object will be locked until the method is finished.
  - When the object is locked by another thread, the current thread must wait.

# volatile

## CPU Cache Hierarchy

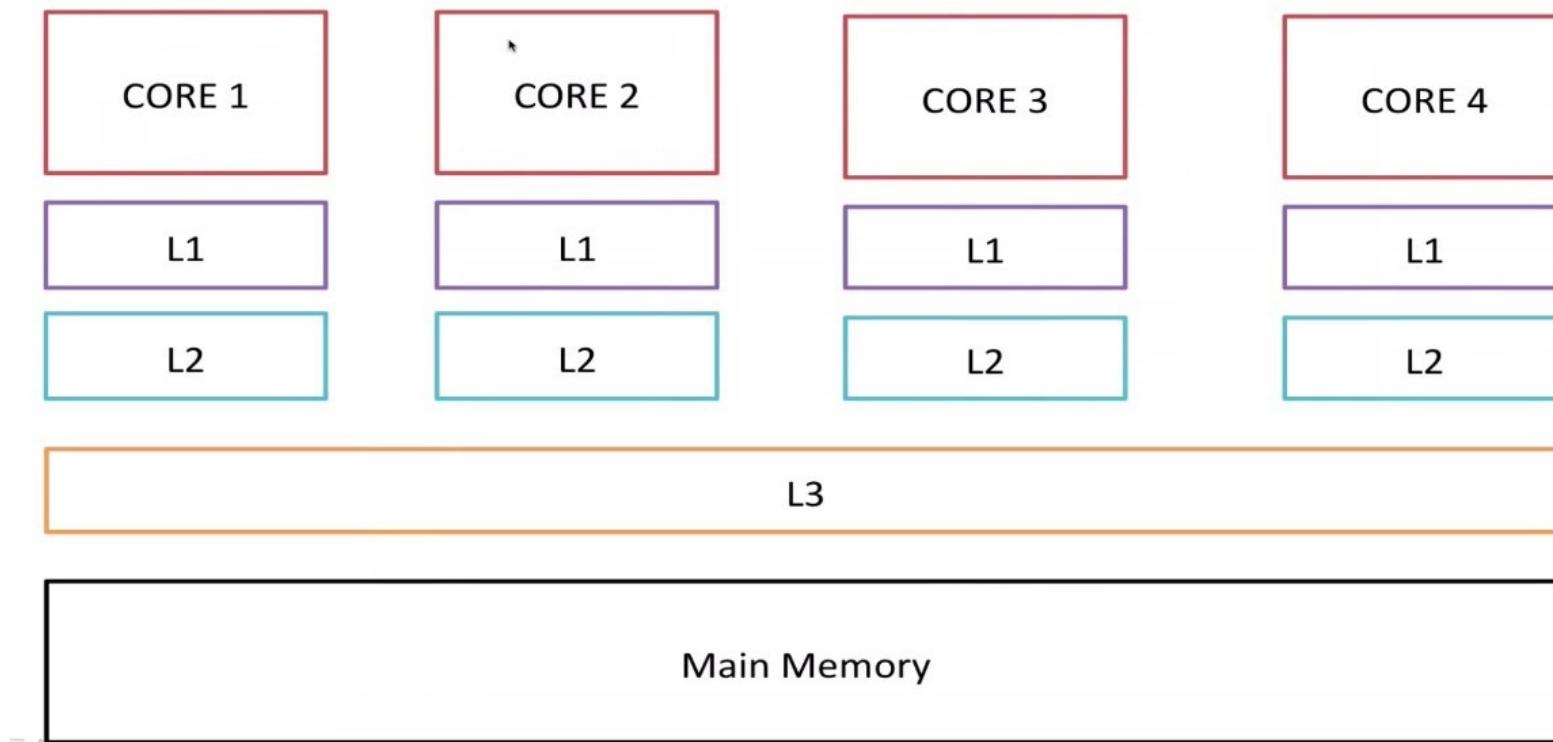

# Using thread synchronization

```
class CallMe
{
    synchronized void call(String msg)
    {
        System.out.print("[ "+msg);
        try
        {
            Thread.sleep(500);
        }
        catch(InterruptedException ex) {}
        System.out.println("] ");
    }
}
```

```
class Caller implements Runnable
{
    String msg;
    CallMe target;
    Thread t;
    public Caller(CallMe targ,String s)
    {
        target=targ;
        msg=s;
        t=new Thread(this);
        t.start();
    }
    public void run()
    {
        target.call(msg);
    }
}
```

```
Caller ob1=new Caller(target, "Hello");
Caller ob2=new Caller(target,"Synchronized");
Caller ob3=new Caller(target,"Java");
```

# Inter thread communication

- ❖ Java have elegant Interprocess communication using `wait()` `notify()` and `notifyAll()` methods
- ❖ All these method defined final in the Object class
- ❖ Can be only called from a synchronized context

# wait() and notify(), notifyAll()

## **wait()**

- Tells the calling thread to give up the monitor and go to the sleep until some other thread enter the same monitor and call notify()

## **notify()**

- Wakes up the first thread that called wait() on same object

## **notifyAll()**

- Wakes up all the thread that called wait() on same object, highest priority thread is going to run first

# Incorrect implementation of produce consumer ...

```
class Q
{
    int n;
    synchronized int get()
    {
        System.out.println("got:" + n);
        return n;
    }
    synchronized void put(int n)
    {
        this.n=n;
        System.out.println("Put:" + n);
    }
}
```

```
public class PandC {
public static void main(String[] args) {
    Q q=new Q();
    new Producer(q);
    new Consumer(q);
    System.out.println("ctrl C for exit");
}}
```

```
class Producer implements Runnable
{
    Q q;
    public Producer(Q q) {
        this.q=q;
        new Thread(this,"Producer").start();
    }
    public void run()
    {
        int i=0;
        while(true)
            q.put(i++);
    }
}
```

```
class Consumer implements Runnable
{
    Q q;
    Consumer(Q q)
    {
        this.q=q;
        new Thread(this,"consumer").start();
    }
    public void run()
    {
        while(true)
            q.get();
    }
}
```

# Correct implementation of produce consumer ...

```
class Q
{
    int n;
    boolean valueSet=false;
    synchronized int get()
    {
        if(!valueSet)
            try
            {
                wait();
            }
        catch(InterruptedException ex){}
        System.out.println("got:"+n);
        valueSet=false;
        notify();
        return n;
    }

    synchronized void put(int n)
    {
        if(valueSet)
            try
            {
                wait();
            }
        catch(InterruptedException ex){}
        this.n=n;
        valueSet=true;
        System.out.println("Put:"+n);
        notify();
    }
}
```

# **DAY - 6**

## **Day 6:Java Collection, Generics**

- Collections Framework introduction
- List, Set, Map
- Iterator, ListIterator and Enumeration
- Collections and Array classes
- Sorting and searching, Comparator vs Comparable
- Generics, wildcards, using extends and super, bounded type
- Hands on & Lab

# Object

- ❖ Object is an special class in java defined in `java.lang`
- ❖ Every class automatically inherit this class whether we say it or not...

We Writer like...

```
class Employee{  
    int id;  
    double salary;  
    ....  
    ....  
}
```

Java compiler convert it as...

```
class Employee extends Object{  
    int id;  
    double salary;  
    ....  
    ....  
}
```

Why Java has provided this class?

# Method defined in Object class...

String `toString()`

boolean `equals()`

int `hashCode()`

`clone()`

`void finalize()`

`getClass()`

Method that can't be overridden

`final void notify()`

`final void notifyAll()`

`final void wait()`

# toString()

- If we do not override `toString()` method of `Object` class it print Object Identification number by default
- We can override it to print some useful information....

```
class Employee{  
    private int id;  
    private double salary;  
  
    public Employee(int id, double salary) {  
        this.id = id;  
        this.salary = salary;  
    }  
  
    .....  
    .....  
    Employee e=new Employee(22, 333333.5);  
    System.out.println(e);  
    .....  
    ....
```

Java simply print object identification number not so useful message for client

O/P  
-----  
com.Employee@addbf1

# toString()

```
class Employee{  
    private int id;  
    private double salary;  
  
    public Employee(int id, double salary) {  
        this.id = id;  
        this.salary = salary;  
    }  
  
    @Override  
    public String toString() {  
        return "Employee [id=" + id + ", salary=" + salary + "]";  
    }  
}  
public class DemoToString {  
    public static void main(String[] args) {  
        Employee e=new Employee(22, 333333.5);  
        System.out.println(e);  
    }  
}
```

[rgupta.mtech@gmail.com](mailto:rgupta.mtech@gmail.com)

# equals


What O/P do you expect in this case.....

```
Employee e1=new Employee(22, 333333.5);
Employee e2=new Employee(22, 333333.5);

if(e1==e2)
    System.out.println("two employees are equals....");
else
    System.out.println("two employees are not equals....");
```

O/P would be two employees are not equals.... ???

- Problem is that using == java compare object id of two object and that can never be equals, so we are getting meaningless result...

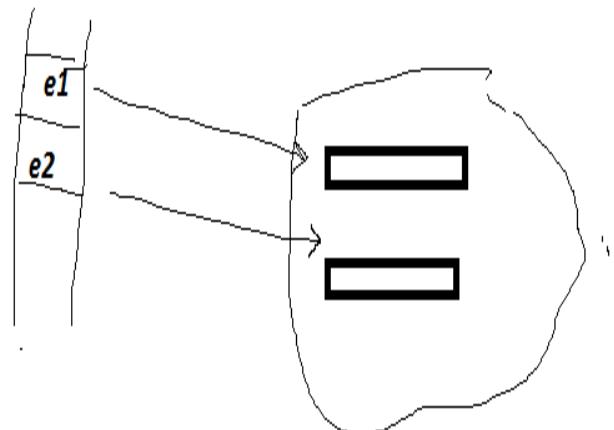

# Overriding equals()

Don't forget DRY run.....

```
@Override
    public boolean equals(Object obj) {
        if (this == obj)
            return true;
        if (obj == null)
            return false;
        if (getClass() != obj.getClass())
            return false;
        Employee other = (Employee) obj;
        if (id != other.id)
            return false;
        if (Double.doubleToLongBits(salary) != Double
                .doubleToLongBits(other.salary))
            return false;
        return true;
    }
```

# hashCode()

Whenever you override equals() for a type don't forget to override hashCode() method...

hashCode() make DS efficient What hashCode does

HashCode divide data into buckets  
Equals search data from that bucket...

```
@Override
    public int hashCode() {
        final int prime = 31;
        int result = 1;
        result = prime * result + id;
        long temp;
        temp = Double.doubleToLongBits(salary);
        result = prime * result + (int) (temp ^ (temp >>> 32));
        return result;
    }
```

# clone()

- Lets consider an object that creation is very complicated, what we can do we can make an clone of that object and use that
- Costly , avoid using cloning if possible, internally depends on serialization
- Must make class supporting cloning by implementing an marker interface ie Cloneable

```
class Employee implements Cloneable{
    private int id;
    private double salary;

    public Employee(int id, double salary) {
        this.id = id;
        this.salary = salary;
    }

    @Override
    protected Object clone() throws CloneNotSupportedException {
        // TODO Auto-generated method stub
        return super.clone();
        //can write more code
    }
}
```

# finalize()

As you are aware ..Java don't support destructor Programmer is free from memory management

Memory mgt is done by an component of JVM ie called Garbage collector GC GC runs as low priority thread..

We can override finalize() to request java

**“Please run this code before recycling this object”** Cleanup code can be written in finalize() method Not reliable, better not to use...

Demo programm

WAP to count total number of employee object in the memory at any moment of time if an object is nullified then reduce count....


# Java collection


- ❖ Java collections can be considered a kind of readymade data structure, we should only need to know how to use them and how they work....

- ❖ collection
  - ❖ Name of topic
- ❖ Collection
  - ❖ Base interface
- ❖ Collections
  - ❖ Static utility class provide various useful algorithm

# collection

- ❖ collection
  - ❖ Why it is called an framework?  
Readymade Data structure in Java...

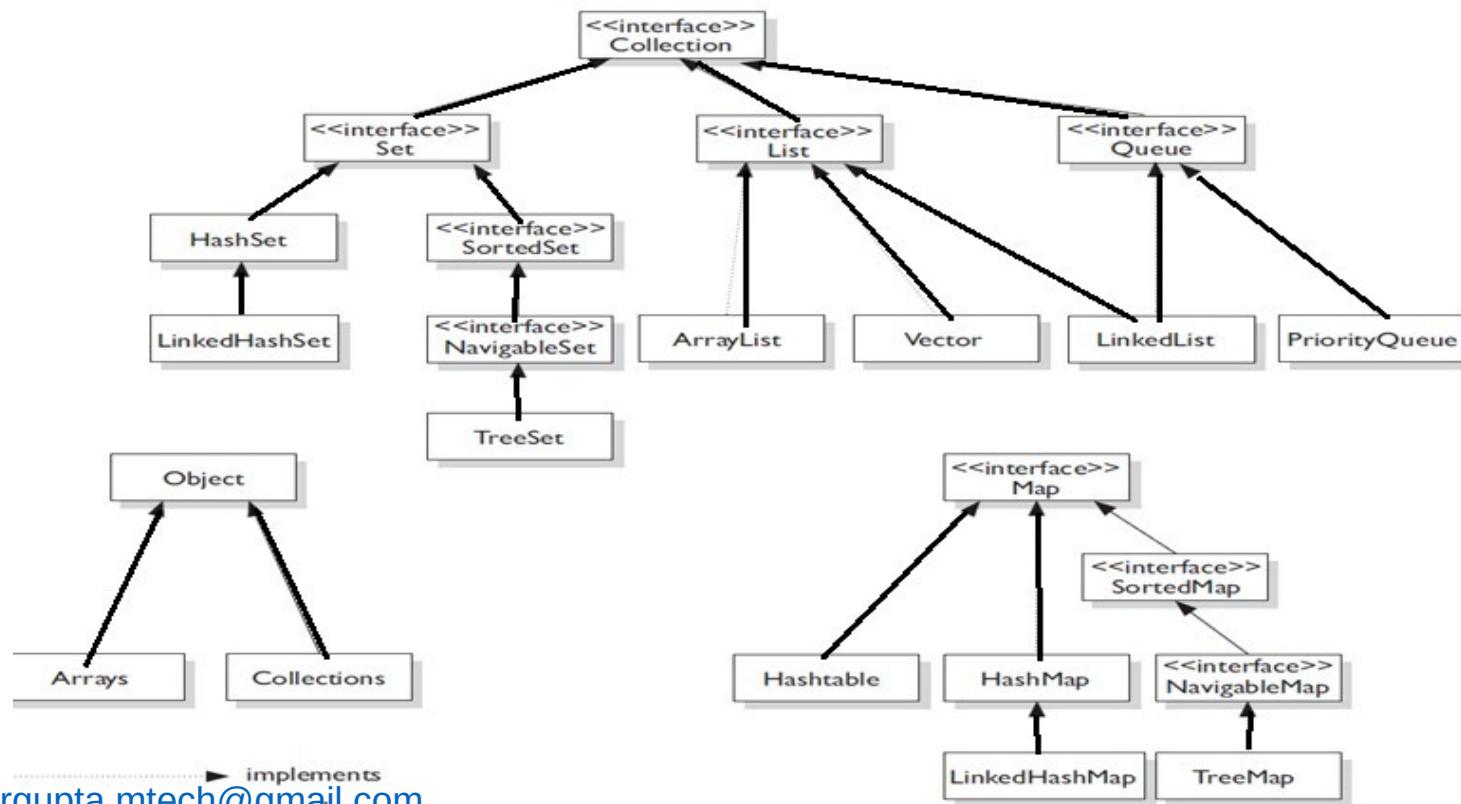

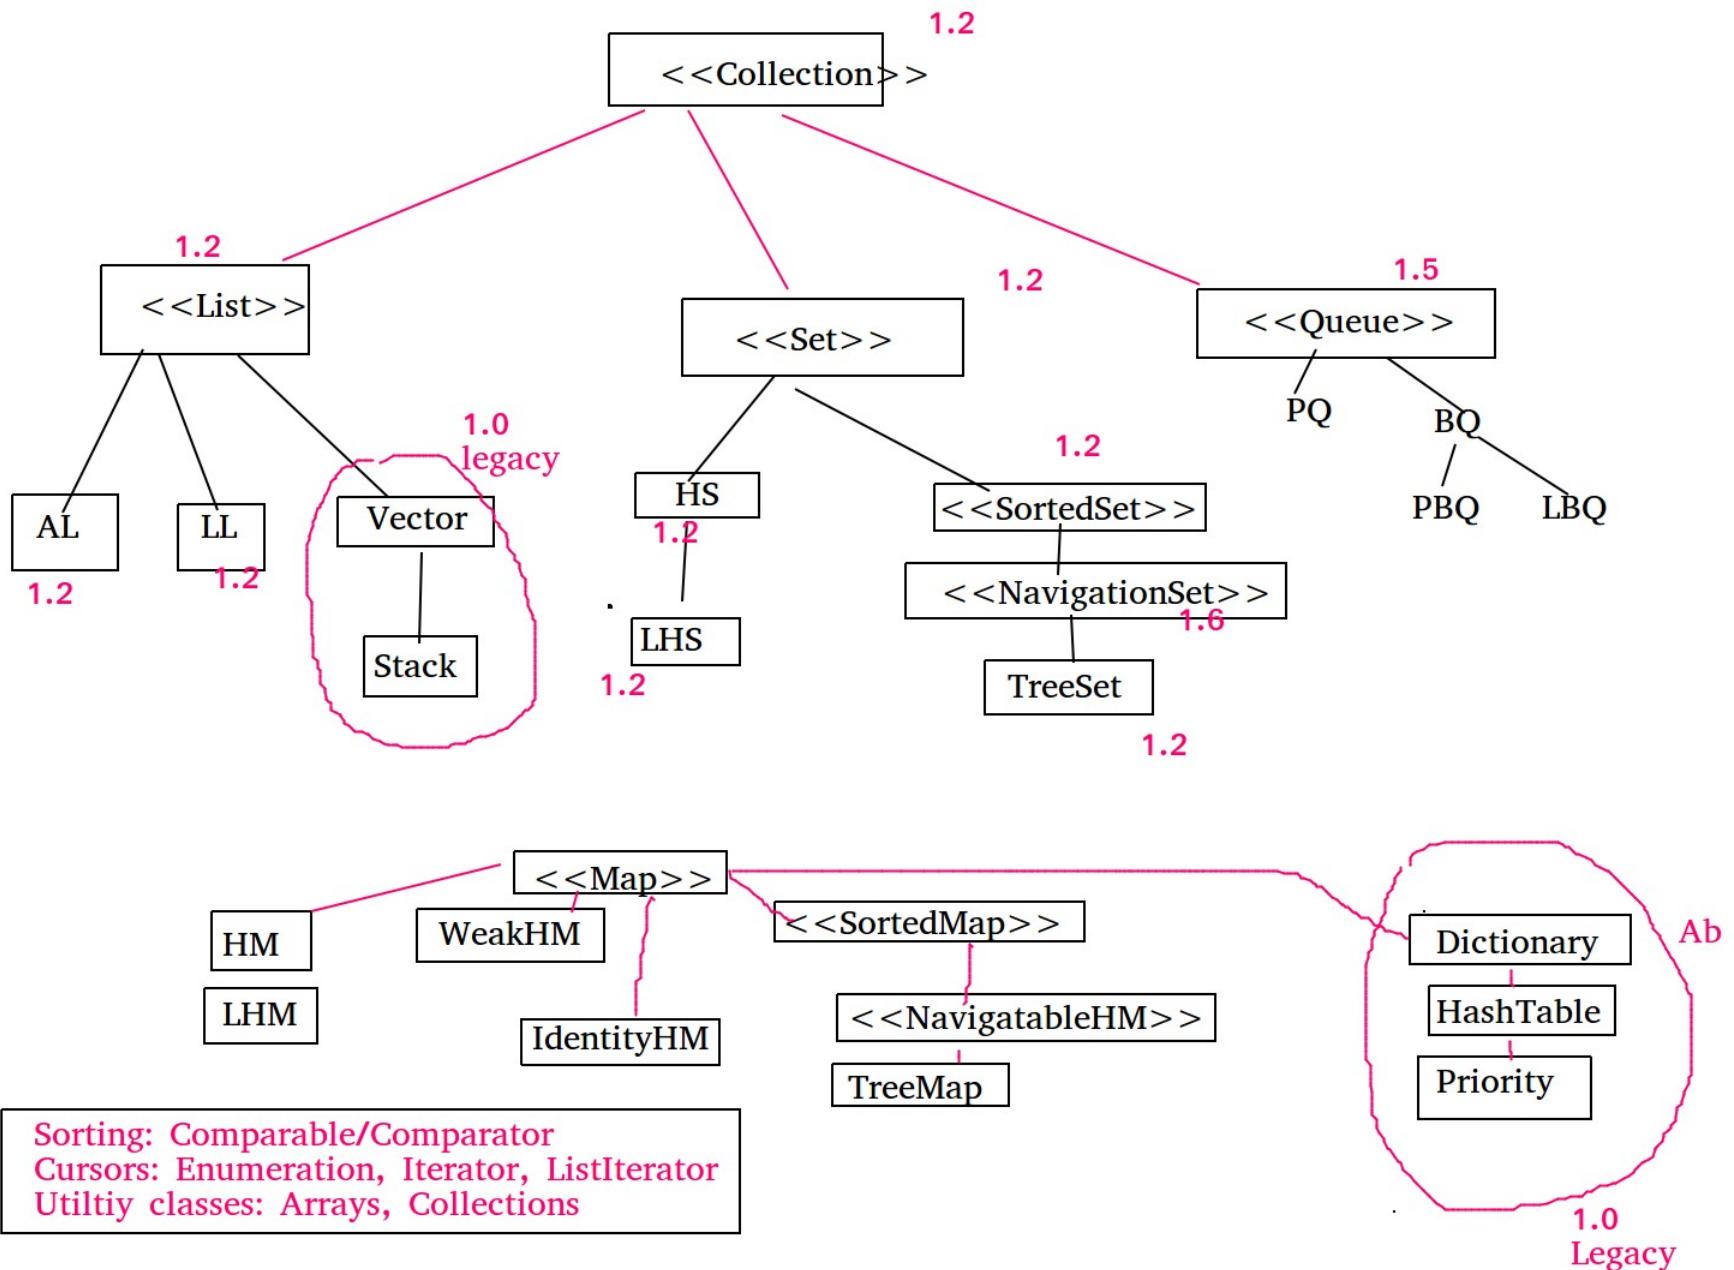

# Four type of collections

Collections come in four basic flavors:

- **Lists** Lists of things (classes that implement List).
- **Sets** *Unique* things (classes that implement Set).
- **Maps** Things with a *unique* ID (classes that implement Map).
- **Queues** Things arranged by the order in which they are to be processed.

# Iterator in Java

```
List<String>list=new LinkedList<String>();
list.add("a");
list.add("b");

ListIterator<String> it = list.listIterator();
while(it.hasNext()){
    String val=it.next();
    if(val.equals("raj"))
        it.remove();
    else if(val.equals("a"))
        it.add("aa");
    else if(val.equals("b"))
        it.set("b1");
}
```

# Array List:aka growable array...

```
List<String>list=new ArrayList<String>();  
...  
...  
list.size();  
list.contains("raj");  
  
test.remove("hi");  
  
Collections.sort(list);
```

## Note:

Collections.sort(list,Collections.reverseOrder());

Collections.addAll(list2,list1);

Add all elements from list1 to end of list2

Collections.frequency(list2,"foo");

print frequency of "foo" in the list2 collection

boolean flag=Collections.disjoint(list1,list);

return "true" if nothing is common in list1 and list2

Sorting with the Arrays Class

Arrays.sort(arrayToSort)

Arrays.sort(arrayToSort, Comparator)

# Iterator in Java

```
List<String>list=new LinkedList<String>();
list.add("a");
list.add("b");

ListIterator<String> it = list.listIterator();
while(it.hasNext()){
    String val=it.next();
    if(val.equals("raj"))
        it.remove();
    else if(val.equals("a"))
        it.add("aa");
    else if(val.equals("b"))
        it.set("b1");
}
```

# ArrayList of user defined object

```
class Employee{  
    int id;  
    float salary;  
    //getter setter  
    //const  
    //toString  
}  
  
List<Employee>list=new ArrayList<Employee>();  
  
list.add(new Employee(121,"rama"));  
list.add(new Employee(121,"rama"));  
list.add(new Employee(121,"rama"));
```

System.out.println(list);

Collections.sort(list);

How java can decide how  
to sort?

# Comparable and Comparator interface

We need to teach Java how to sort user define object  
Comparable and Comparator interface help us to tell java how to sort user define object....

**Comparable**

**java.lang**

**Natural sort**

**Only one sort sequence  
is possible**

**need to change the  
design of the class**

**need to override**

**public int**

**compareTo(Employee o)**

**Comparator**

**java.util**

**secondary sorts**

**as many as you want**

**Dont need to change  
desing of the class**

**need to override**

**public int**

**compare(Employee o1, Employee o2)**

# Implementing Comparable

```
class Employee implements Comparable<Employee>{
    private int id;
    private double salary;
    .....
    .....
    .....

    @Override
    public int compareTo(Employee o) {
        // TODO Auto-generated method stub
        Integer id1=this.getId();
        Integer id2=o.getId();
        return id1.compareTo(id2);
    }
}
```

# Comparator

- Don't need to change Employee class

```
class SalarySorter implements Comparator<Employee>{

    @Override
    public int compare(Employee o1, Employee o2) {
        // TODO Auto-generated method stub
        Double sal1=o1.getSalary();
        Double sal2=o2.getSalary();

        return sal1.compareTo(sal2);
    }

}
```

# Useful stuff

## Converting Arrays to Lists

---

```
String[] sa = {"one", "two", "three", "four"};
List sList = Arrays.asList(sa);
```

## Converting Lists to Arrays

---

```
List<Integer> iL = new ArrayList<Integer>();

for(int x=0; x<3; x++)
iL.add(x);

Object[] oa = iL.toArray(); // create an Object array

Integer[] ia2 = new Integer[3];

ia2 = iL.toArray(ia2); // create an Integer array
```

**Arrays.binarySearch(arrayFromWhichToSearch,"to search"))**

---

return -ve no if no found

array must be sorted before hand otherwise o/p is not predictiale

# Useful examples...

**user define funtion to print the arraylist/linkedlist**

---

```
printMe(list1);
...
...
public void printMe(List<String> list){
    for(String s:list)
    {
        System.out.println(s);
    }
}
```

**user define funtion to remove stuff from a arraylist /linkedlist**

---

```
removeStuff(list,2,5);
...
...
public void removeStuff(List<String> l, int from, int to)
{
    l.subList(from,to).clear();
}
```

# Useful examples...

## Merging two link lists

```
ListIterator ita=a.listIterator();
Iteratory itb=b.iterator();

while(itb.hasNext())
{
    if(ita.hasNext())
        ita.next();

    ita.add(itb.next());
}
```

## Removing every second element from an linkedList

```
itb=b.iterator();

while(itb.hasNext())
{
    itb.next();

    if(itb.hasNext())
    {
        itb.next();

        itb.remove();
    }
}
```

# LinkedList : AKA Doubly Link list.....

## can move back and forth.....

### Imp methods

---

```
boolean hasNext()  
Object next()  
boolean hasPrevious()  
Object previous()
```

### More methods

---

```
void addFirst(Object o);  
  
void addLast(Object o);  
  
object getFirst();  
  
object getLast();  
  
add(int pos, Object o);
```

# Useful examples...

**user define funtion to print linkedlist in reverse order**

```
reversePrint(list);
...
...

public void reversePrint(list<String>l ){

    ListIterator<String>it=l.iterator(l.size());

    while(it.hasPrevious())
        Sysout(it.previous());
}
```

# fundamental diff bw

# ArrayList and LinkedList

- ArrayLists manage arrays internally. [0][1] [2][3][4][5] ....
  - `List<Integer> arrayList = new ArrayList<Integer>();`
  - LinkedLists consists of elements where each element has a reference to the previous and next element
    - [0]->[1]->[2] ....
    - <-                    <-

# ArrayList vs LinkedList

- Java implements ArrayList as array internally
  - Hence good to provide starting size
    - i.e. `List<String> s=new ArrayList<String>(20);` is better than `List<String> s=new ArrayList<String>();`
  - Removing element from starting of arraylist is very slow?
    - `list.remove(0);`
    - if u remove first element, java internally copy all the element (shift by one)
    - Adding element at middle in ArrayList is very inefficient...

# Performance ArrayList vs LinkedList

```
import java.util.ArrayList;
import java.util.LinkedList;
import java.util.List;

public class App
{
    public static void main(String[] args)
    {
        List<Integer> arrayList = new ArrayList<Integer>();
        List<Integer> linkedList = new LinkedList<Integer>();

        doTimings("ArrayList", arrayList);
        doTimings("LinkedList", linkedList);
    }
}
```

```
private static void doTimings(String type, List<Integer> list)
{
    for(int i=0; i<1E5; i++)
        list.add(i);
    long start = System.currentTimeMillis();

    /*
     * Add items at end of list
     */
    for(int i=0; i<1E5; i++)
    {
        list.add(i);
    }
}

// Add items elsewhere in list
for(int i=0; i<1E5; i++)
{
    list.add(0, i);
}
long end = System.currentTimeMillis();

System.out.println("Time taken: " + (end - start) + " ms for " + type);
}
```

```
Time taken: 7546 ms for ArrayList
Time taken: 76 ms for LinkedList
```

# HashMap

Key ---->Value declaring an hashmap

- `HashMap<Integer, String> map = new HashMap<Integer, String>();`  
Populating values

```
map.put(5, "Five");
map.put(8, "Eight");
map.put(6, "Six");
map.put(4, "Four");
map.put(2, "Two");
```

```
String text = map.get(6);
```

```
System.out.println(text);
```

# Looping through HashMap

```
for(Integer key: map.keySet())
{
    String value = map.get(key);

    System.out.println(key + ":" + value);
}
```

most imp thing to remember

-----  
order of getting key value is not maintained

ie hashMap dont keep key and value in any particular order

# Other map variants

LinkedHashMap

Aka. Doubly link list

key and value are in same order in which you have inserted.....

TreeMa

p sort keys in natural order(what is natural order?)

for int

1,2,3.....

for string

"a","b".....

For user define key

Define sorting order using Comparable /Comparator

# set

## Don't allow duplicate element

three types:

---

- hashset
- linkedhashset
- treeset

HashSet does not retain order.

---

```
Set<String> set1 = new HashSet<String>();
```

Printing freq of unique words  
from a file in increasing order of freq

---

LinkedHashSet remembers the order you added items in

---

```
Set<String> set1 = new LinkedHashSet<String>();
```

TreeSet sorts in natural order

---

```
Set<String> set1 = new TreeSet<String>();
```

| words | freq |
|-------|------|
| Apple | 7    |
| Ball  | 5    |
| ...   |      |

# User define key in HashMap

If you are using user define key in HashMap do not forget to override hashCode for that class

Why?

We may not find that content again !

## HashMap vs Hashtable

- ❖ Hashtable is threadsafe, slow as compared to HashMap
- ❖ Better to use HashMap
  
- ❖ Some more interesting difference
  - ❖ Hashtable give runtime exception if key is “null” while HashMap don’t

# HashMap vs Hashtable

- ❖ Hashtable is threadsafe, slow as compared to HashMap
- ❖ Better to use HashMap
- ❖ Some more interesting difference
- ❖ Hashtable give runtime exception if key is “null” while HashMap don’t

# PriorityQueue

```
public class DemoPQ {  
    public static void main(String[] args) {  
        PriorityQueue<String> queue=new PriorityQueue<String>();  
        queue.add("Amit");  
        queue.add("Vijay");  
        queue.add("Karan");  
        queue.add("Jai");  
        queue.add("Rahul"); //same as offer  
        //retrieved not remove, throw exp  
        System.out.println("head:"+queue.element());  
        //retrieved not remove , return null  
        System.out.println("head:"+queue.peek());  
  
        System.out.println("iterating the queue elements:");  
        Iterator<String> itr=queue.iterator();  
        while(itr.hasNext()){  
            System.out.println(itr.next());  
        }  
        //remove from head, throws ex if empty  
        System.out.println(queue.remove());  
        //remove from head, return null if empty  
        System.out.println(queue.poll());  
    }  
}
```

# Generics

## Before Java 1.5

- `List list=new ArrayList();`
  - Can add anything in that list
  - Problem while retrieving

## Now Java 1.5 onward

- `List<String> list=new ArrayList<String>();`  
`list.add("foo");//ok`  
`list.add(22);// compile time error`
- Generics provide type safety
- Generics is compile time phenomena...

# Issues with Generics

- ❖ Try not to mix non Generics code and Generics code...we can have strange behaviour.

```
package com;
import java.util.*;

public class DemoGen1 {
    public static void main(String[] args) {

        List<String> list=new ArrayList<String>();
        list.add("foo");
        list.add("bar");

        strangMethod(list);

        for(String temp:list)
            System.out.println(temp);
    }

    private static void strangMethod(List list) {
        list.add(new Integer(22)); // OMG.....
    }
}

rgupta.mtech@gmail.com
```

# Polymorphic behaviour

```
class Animal {  
}  
  
class Cat extends Animal{  
}  
  
class Dog extends Animal{  
}
```

```
Animal []aa=new Cat[4] ;// allowed
```



```
List<Animal>list=new ArrayList<Cat>()
```



# <? extends XXXXXX>

```
package com;
import java.util.*;

public class DemoGen1 {
    public static void main(String[] args) {

        List<Integer> list=new ArrayList<Integer>();
        list.add(22);
        list.add(33);

        strangMethod(list);

        for(Integer temp:list)
            System.out.println(temp);
    }

    private static void strangMethod(List<? extends Number> list) {
        list.add(new Integer(22)); //Compile time error..... Good
    }
}
```

in strangMethod() we can pass any derivative of Number class but we are not allowed to modify the list

# <? Super XXXXX>

```
class Animal {  
}  
  
class Cat extends Animal{  
}  
  
class Dog extends Animal{  
}  
  
class CostlyDog extends Dog{  
}  
.....  
.....  
List<Dog>list=new ArrayList<Dog>();  
list.add(new Dog("white"));  
list.add(new Dog("red"));  
list.add(new Dog("black"));  
strangMethod(list);  
  
private static void strangMethod(List<? super Dog> list) {  
    list.add(new CostlyDog());  
}  
.....  
.....
```

Anytype of Dog is allowed and can also modify list

# Generic class

```
class MyObject<T>{
    T myObject;

    public T getMyObject() {
        return myObject;
    }

    public void setMyObject(T myObject) {
        this.myObject = myObject;
    }
}

public class GenClass {

    public static void main(String[] args) {
        MyObject<String> o=new MyObject<String>();
        o.setMyObject(new Integer(22)); → will not compile !!!
        //System.out.println(it.intValue());
    }
}
```

# Generaic method

```
class MaxOfThree{

    public static <T extends Comparable<T>> T maxi(T a,T b, T c) {
        T max=a;
        if(b.compareTo(a)>0)
            max=b;
        if(c.compareTo(max)>0)
            max=c;
        return max;
    }

}
```

# **DAY -7**

## **Day-7: Annotation, Java Reflection**

- Introduction to java reflection
- Java Annotation, JDK annotation, creating custom annotation, Annotation and reflection
- Introduction to Design pattern
- Hands on & Lab

# Java Reflection

Java Reflection:

- => Reflection is aka class manipulator?
  - => Used to manipulate classes and everything in a class
  - => Can slow down a program because the JVM can not optimize the code
  - => Can not used with applets
  - => Should be used sparingly
- What is Java reflection?

"Reflection is the process of analysing the capabilities of a class at runtime"

That is analysing the details about the class which include the methods in the class, the variables of the class, the constructors in the class, the interface that the class is implementing, the methods that are coming from the interface

To gather all the above details is provided by reflection api

Reflection api is not the project development but used for PRODUCT development

Example application area:

JVM development, server design, framework design, tool design, compiler

# Java Reflection

```
Private class A {  
}  
}
```



**Comment:** An outer class cannot have a PRIVATE declaration. An inner class can have PRIVATE declaration. A class can be declared as PUBLIC and DEFAULT; it cannot HAVE PRIVATE or PROTECTED access modifier

## COMPILER:

The compiler will read this class according to the CLASS RULES defined in the compiler.

## CLASS RULES

Can have only PUBLIC and DEFAULT access modifier in outer class. Will not allow PRIVATE OR PROTECTED access modifier for outer class. This rule is analysed by the REFLECTION API present in the compiler and it shows an error “MODIFIER PRIVATE not allowed”

Similarly rules for methods in the class, constructors in the class, interfaces inherited by the class, super classes extended by the class are also present and their access modifiers are also checked by REFLECTION API present in the compiler

# Java Reflection

## Reflection Package

`java.lang.reflect` package provides classes for performing reflection api.

Some classes in this reflect packages are :

`java.lang.Class` :

base class to perform reflection api.

This is used together to get metadata information about class

`java.lang.reflect.Field`:

Complete declarative information of a particular variable ie.  
metadata of a particular variable like access modifier, datatype,  
value and name of variable etc

`java.lang.reflect.Method`:

complete declarative information about a method ie. is able to store metadata  
about methods, method names, access modifier, return type, parameters in method,  
exception thrown etc

`java.lang.reflect.Constructor`:

information about constructs like name of constructors, access modifier, parameter type

`java.lang.reflect.Modifier`:

complete metadata about access modifier


# Java Reflection

```
public class Employee implements Serializable, Cloneable{
    // variable ==4
    public int empNo;
    public static int companyName;
    public String name;
    public final String add="delhi";

    // ctr==2
    public Employee(int empNo, String name) {
        this.empNo = empNo;
        this.name = name;
    }
    public Employee() {}

    // methods==2
    public void add(int id, String name, String address){
    }
    public Employee search(int id){return new Employee();}
}
```

# Java Reflection

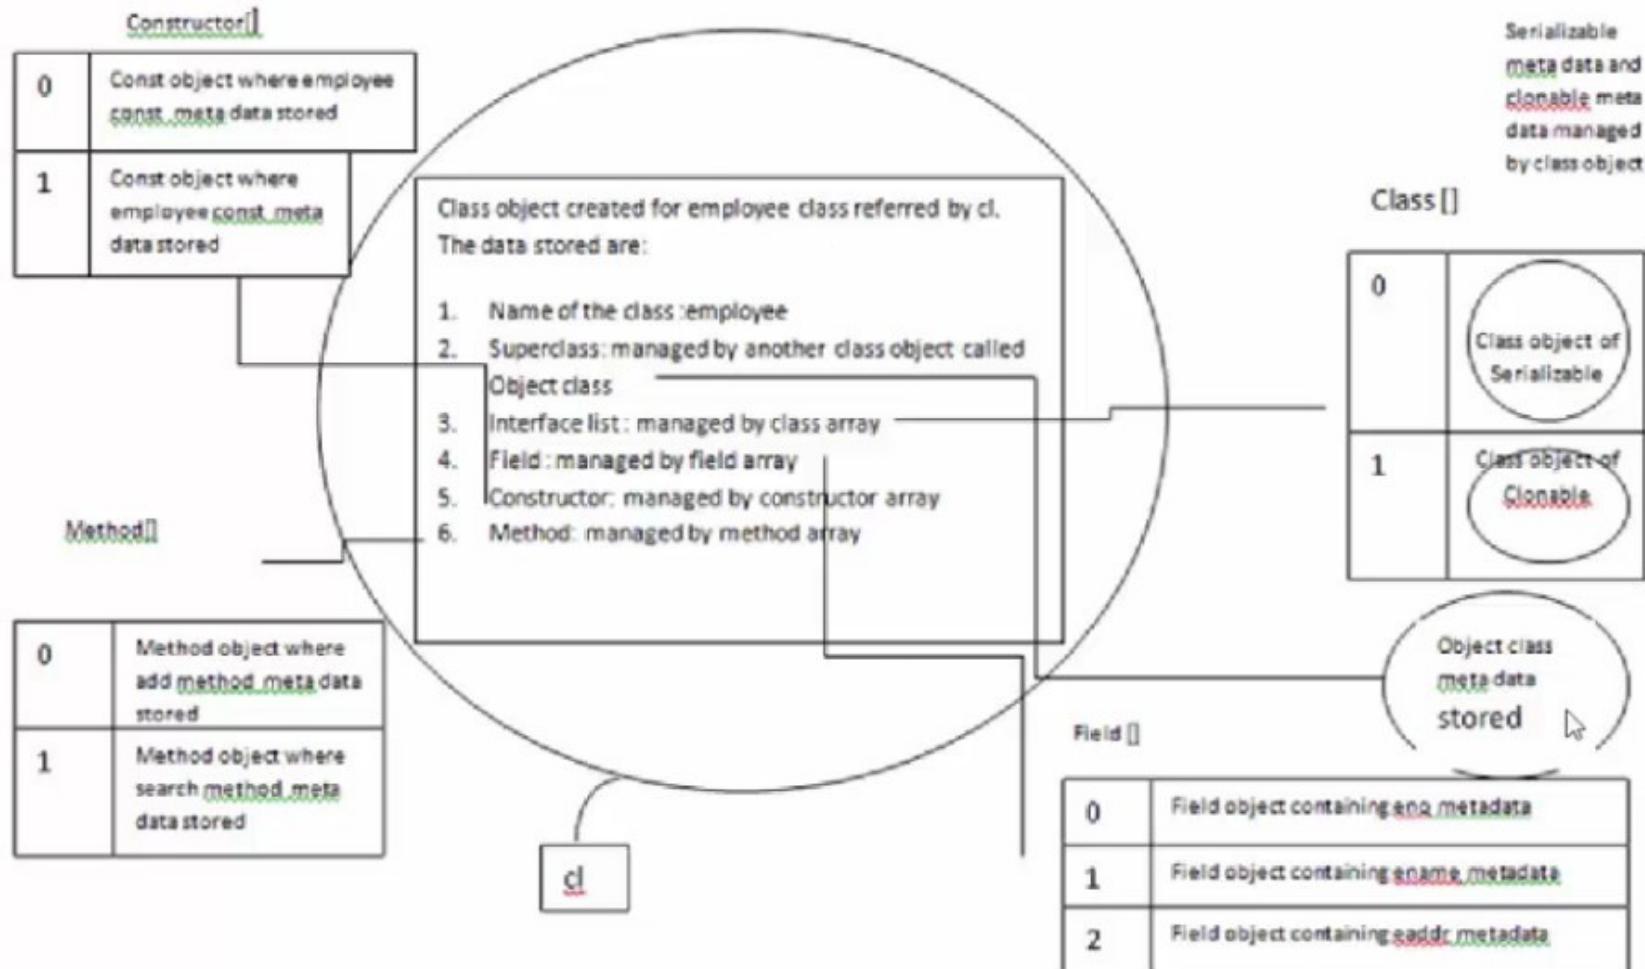

# Changing behaviour at runtime

Anyway, reflection does not allow you to change code behaviour, it can only explore current code, invoke methods and constructors, change fields values, that kind of things.

If you want to actually change the behaviour of a method you would have to use a bytecode manipulation library such as ASM. But this will not be very easy, probably not a good idea...

Patterns that might help you :

- If the class is not final and you can modify the clients, extend the existing class and overload the method, with your desired behaviour. Edit : that would work only if the method were not static !
- Aspect programming : add interceptors to the method using AspectJ

Anyway, the most logical thing to do would be to find a way to modify the existing class, work-arounds will just make your code more complicated and harder to maintain.

# Annotation

Annotations starting from 5.0.

This feature was added to Java 5.0 as a result of the JSR 175 namely “A Metadata Facility for the JavaTM Programming Language”.

Built-in Annotations in Java

@Override  
@Deprecated  
@SuppressWarnings  
@Target  
@Retention  
@FunctionalInterface


User-defined Annotations

```
Target({ElementType.FIELD, ElementType.LOCAL_VARIABLE})
public @interface Persistable{
    String fileName() default "defaultMovies.txt";
}
```

# Top 10 Object Oriented Design Principles

---

1. DRY (Don't repeat yourself) - avoids duplication in code.
2. Encapsulate what changes - hides implementation detail, helps in maintenance
3. Open Closed design principle - open for extension, closed for modification
4. SRP (Single Responsibility Principle) - one class should do one thing and do it well
5. DIP (Dependency Inversion Principle) - don't ask, let framework give to you
6. Favor Composition over Inheritance - Code reuse without cost of inflexibility
7. LSP (Liskov Substitution Principle) - Sub type must be substitutable for super type
8. ISP (Interface Segregation Principle) - Avoid monolithic interface, reduce pain on client side
9. Programming for Interface - Helps in maintenance, improves flexibility
10. Delegation principle - Don't do all things by yourself, delegate it

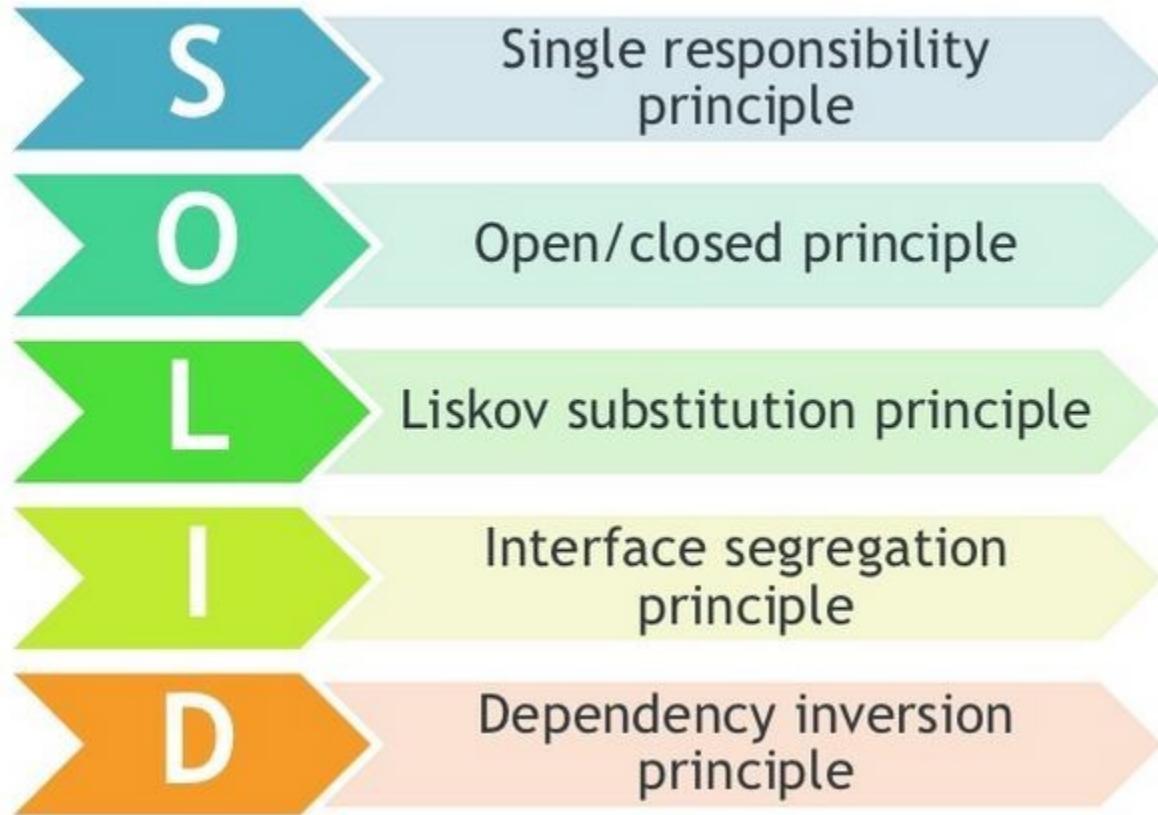

# **DAY -8**

## **Day 8: GOF design patterns**

- Pattern categories: Creational, Structural, Behavioral
- Creational Patterns: Singleton, Factory, Builder, Prototype
- Structural Patterns: Decorator, Facade Pattern, Proxy
- Behavioral Patterns: Iterator, Observer, Strategy,Template Method
- Hands on & Lab


# Design pattern

- **Proven way of doing things**
- **Gang of 4 design patterns ???**
- **total 23 patterns**
- **Classification patterns**
  1. **Creational**
  2. **Structural**
  3. **Behavioral**


“In software engineering, a software design pattern is a general **reusable solution** to a commonly occurring problem within a **given context** in software design. It is not a **finished design** that can be transformed directly into source or machine code. It is a **description** or **template** for how to solve a problem that can be used in many different situations.”





WIKIPEDIA  
The Free Encyclopedia

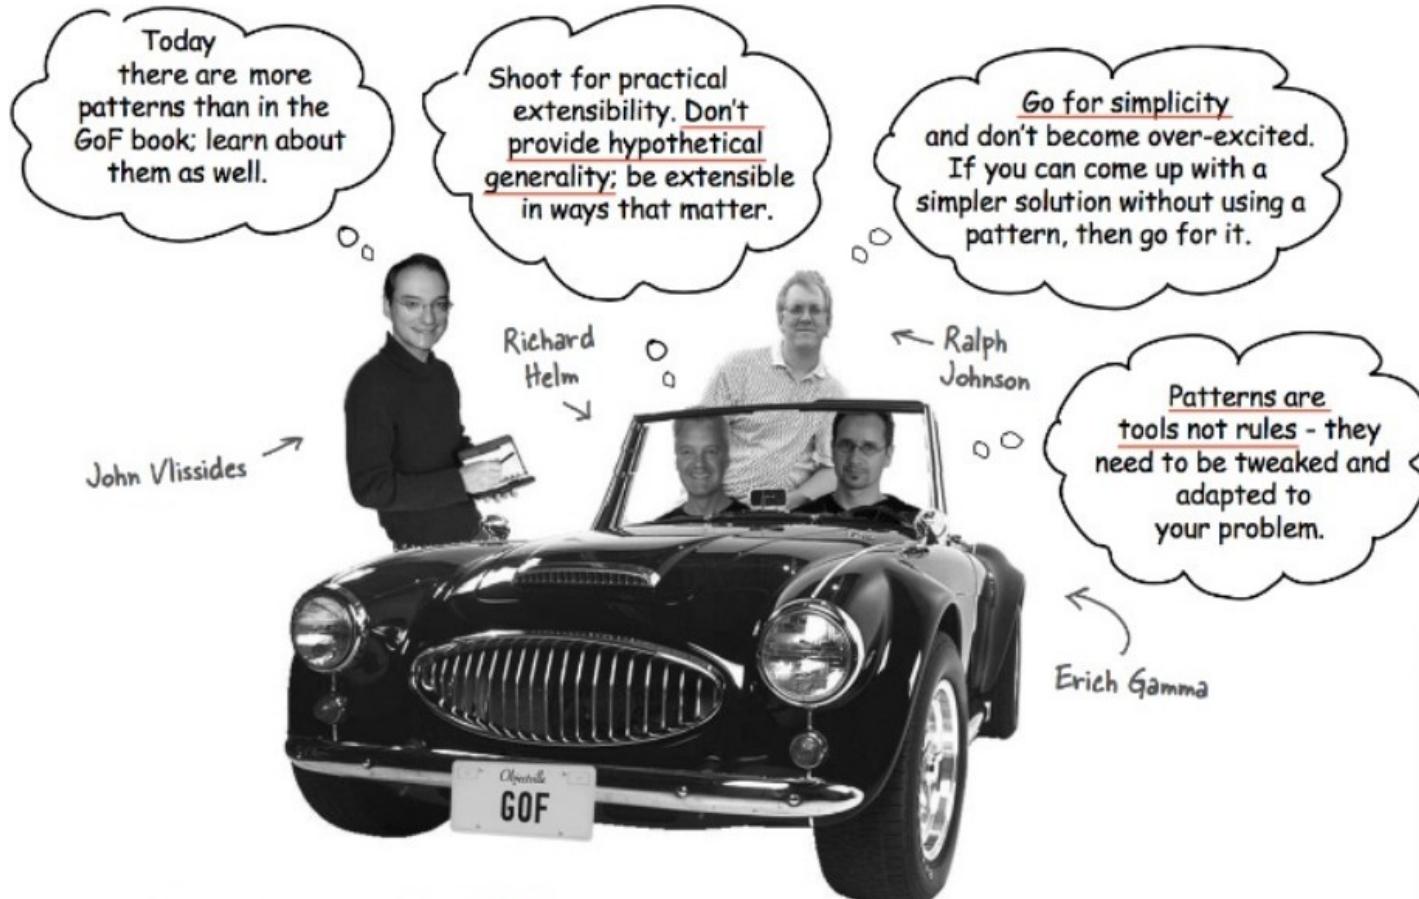

Keep it simple (KISS)



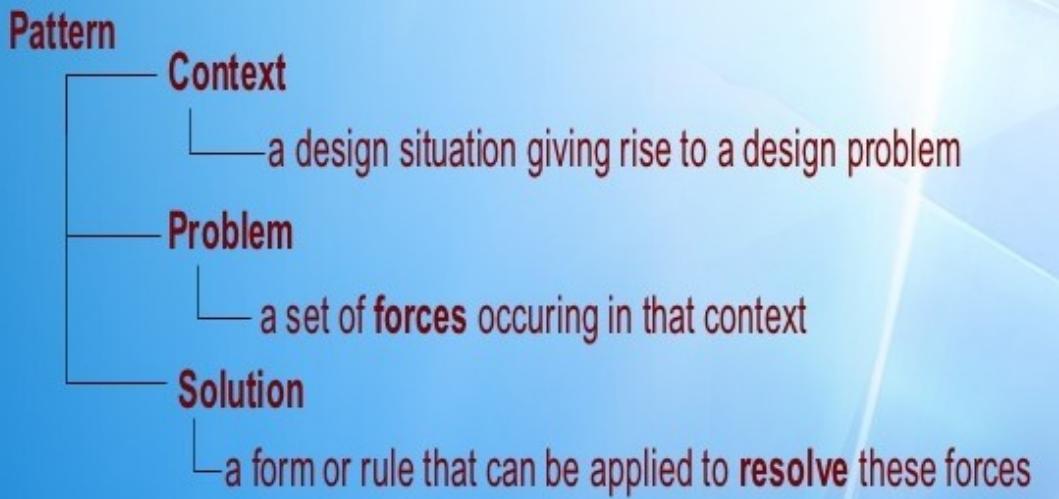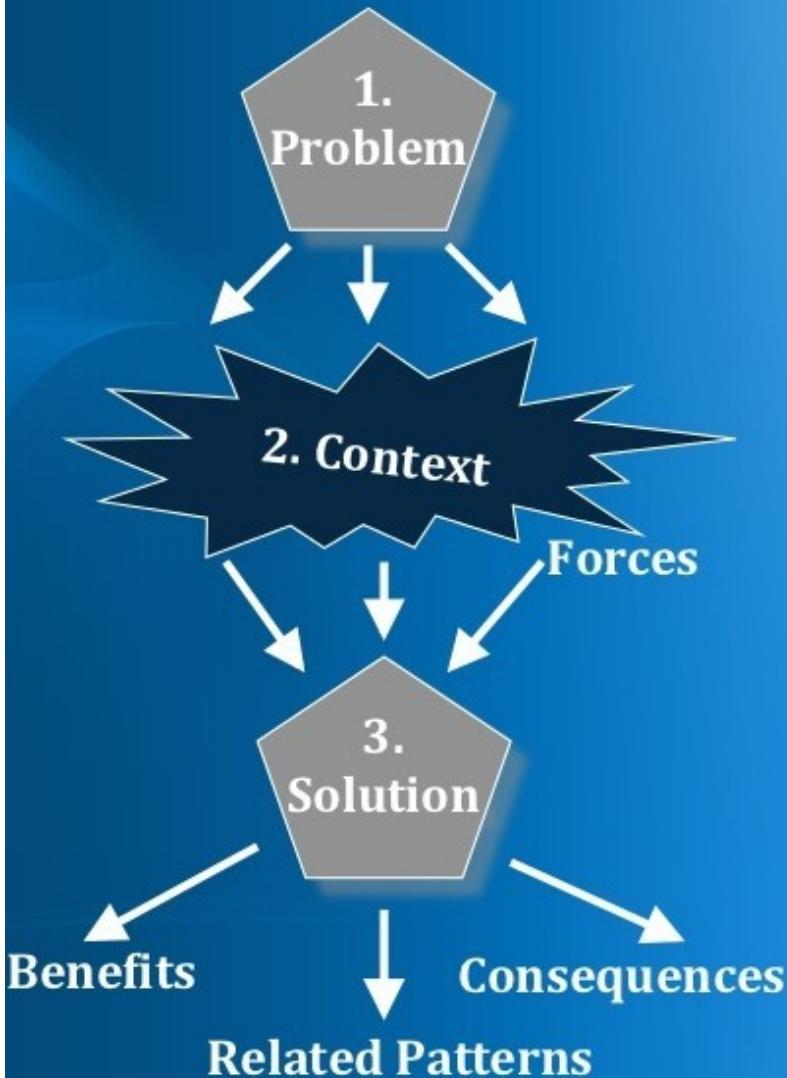

**IF** you find yourself in **CONTEXT**  
for example **EXAMPLES**,  
with **PROBLEM**,  
entailing **FORCES**  
**THEN** for some **REASONS**,  
apply **DESIGN FORM AND/OR RULE**  
to construct **SOLUTION**  
leading to **NEW CONTEXT & OTHER PATTERNS**

# DESIGN PATTERNS – CLASSIFICATION

## Structural Patterns

- 1. Decorator
- 2. Proxy
- 3. Bridge
- 4. Composite
- 5. Flyweight
- 6. Adapter
- 7. Facade

## Creational Patterns

- 1. Prototype
- 2. Factory Method
- 3. Singleton
- 4. Abstract Factory
- 5. Builder

## Behavioral Patterns

- 1. Strategy
- 2. State
- 3. TemplateMethod
- 4. Chain of Responsibility
- 5. Command
- 6. Iterator
- 7. Mediator
- 8. Observer
- 9. Visitor
- 10. Interpreter
- 11. Memento

# Patterns classification

- Creational patterns?
  - ❖ What is the best way to create object, new is not the best option
- structural patterns
  - ❖ Structural Patterns describe how objects and classes can be combined to form larger structures
- Behavioral Patterns
  - ❖ Behavioral patterns are those which are concerned with interactions between the objects ( talking to each other still loosely coupled)

# Creatioal Patterns


# Creational Patterns

```
Book book = new Book();
```

**All the Creational patterns define the best possible way in which an object can be instantiated.**

- ❖ The new Operator creates the instance of an object, but this is hard-coding.
- ❖ we can make use of Creational Patterns to give this a more general and flexible approach.

# Simple Factory

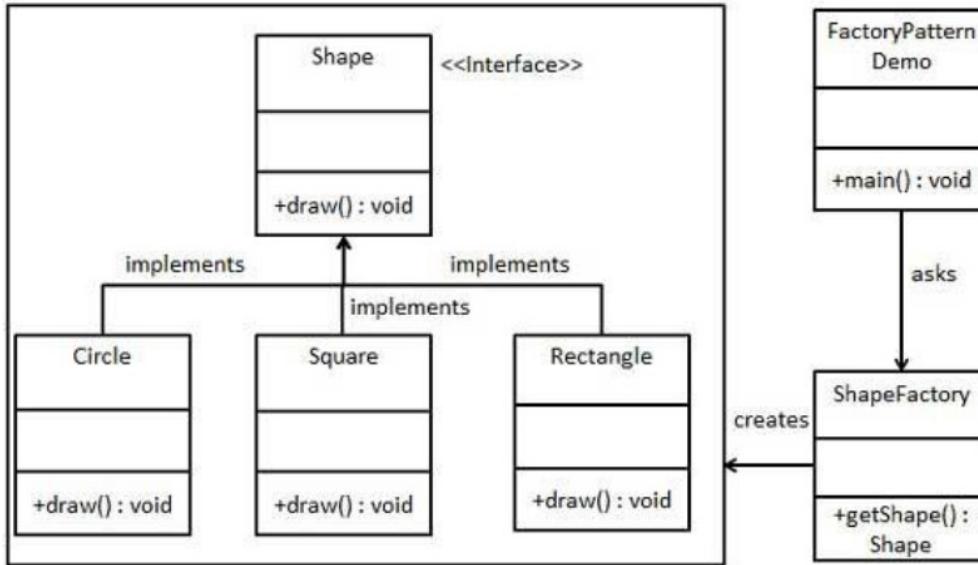

- **Factory of what? of classes. . . In simple words, “if we have a super class and an sub-classes, and based on data provided, we have to return the object of one of the sub-classes, we use a simple factory”**


# Factory Method Design Pattern

Define an **interface** for creating an object, but let **subclasses** decide which object to **instantiate**. Factory Method lets a class defer instantiation to subclasses.

# **Abstract Factory Pattern**

- This pattern is one level of abstraction higher than factory pattern. This means that the abstract factory returns the factory of classes
- Like Factory pattern returned one of the several sub-classes, this returns such factory which later will return one of the sub-classes.

# Abstract Factory Pattern

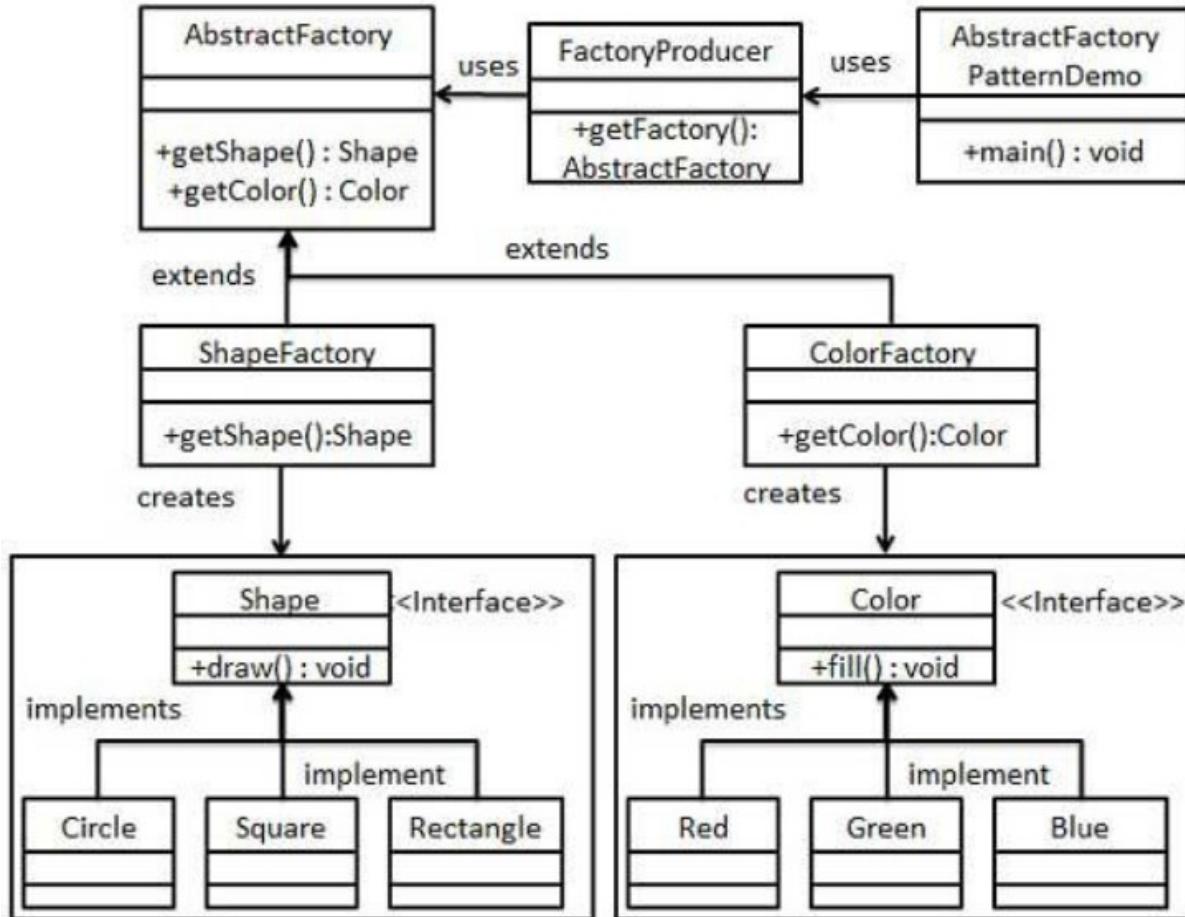

# Singleton Design Pattern


Singleton pattern restricts the instantiation of a class and ensures that only one instance of the class exists in the java virtual machine.

The singleton class must provide a global access point to get the instance of the class.

Singleton pattern is used for logging, drivers objects, caching and thread pool.

Singleton design pattern is also used in other design patterns like Abstract Factory, Builder, Prototype, Facade etc.

Singleton design pattern is used in core java classes also, for example `java.lang.Runtime`, `java.awt.Desktop`.

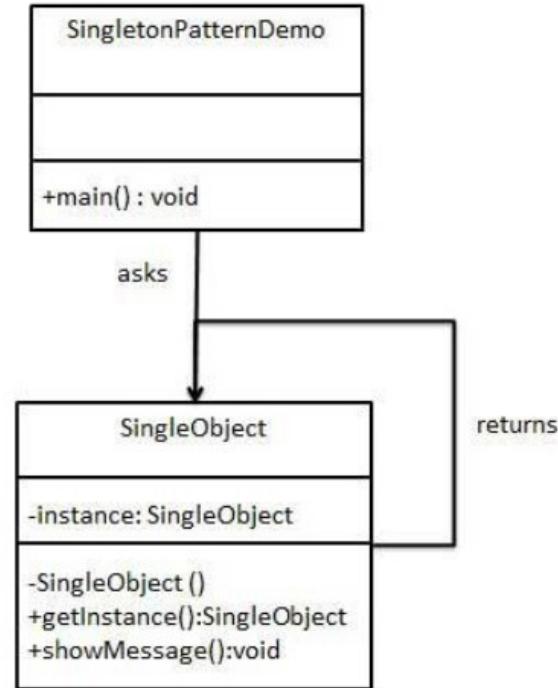

# Singleton Design Consideration

Eager initialization Static block initialization

Lazy Initialization Thread Safe Singleton

Serialization issue Cloning issue

Using Reflection to destroy Singleton Pattern

Enum Singleton

Best programming practices

# Builder Pattern

- The Builder pattern can be used to ease the construction of a complex object from simple objects.
- The Builder pattern also separates the construction of a complex object from its representation so that the same construction process can be used to create another composition of objects.

Need of builder is more then that of factory pattern because we aren't returning objects which are simple descendants of a base display object, but totally different user interfaces made up of different combinations of display objects
- Separates object construction from its representation
- Builder pattern is useful when the construction of the object is very complex.
- The main objective is to separate the construction of objects and their representations. If we are able to separate the construction and representation, we can then get many representations from the same construction.
-

# Prototype Pattern

- The prototype means making a clone.
- This implies cloning of an object to avoid creation. If the cost of creating a new object is large and creation is resource intensive, we clone the object.
- We use the interface Cloneable and call its method clone() to clone the object.

# Structural Patterns

# Adapter Pattern

The Adapter pattern is used so that two unrelated interfaces can work together.

When you want to create a reusable class that cooperates with unrelated or unforeseen classes, that is, classes that don't necessarily have compatible interfaces.

- A class adapter
  - uses multiple inheritance (by extending one class and/or implementing one or more classes) to adapt one interface to another.
- An object adapter
  - relies on object aggregation.



# Decorator design pattern


- Series of wrapper class that define functionality In the
- Decorator pattern, a decorator object is wrapped around the original object.  
The decorator must conform to the interface of the
- original object (the object being decorated).

**Adding behaviour statically or dynamically**

**Extending functionality without effecting the behaviour of other objects.**


**Adhering to Open for extension, closed for modification.**

# **java.io.\***

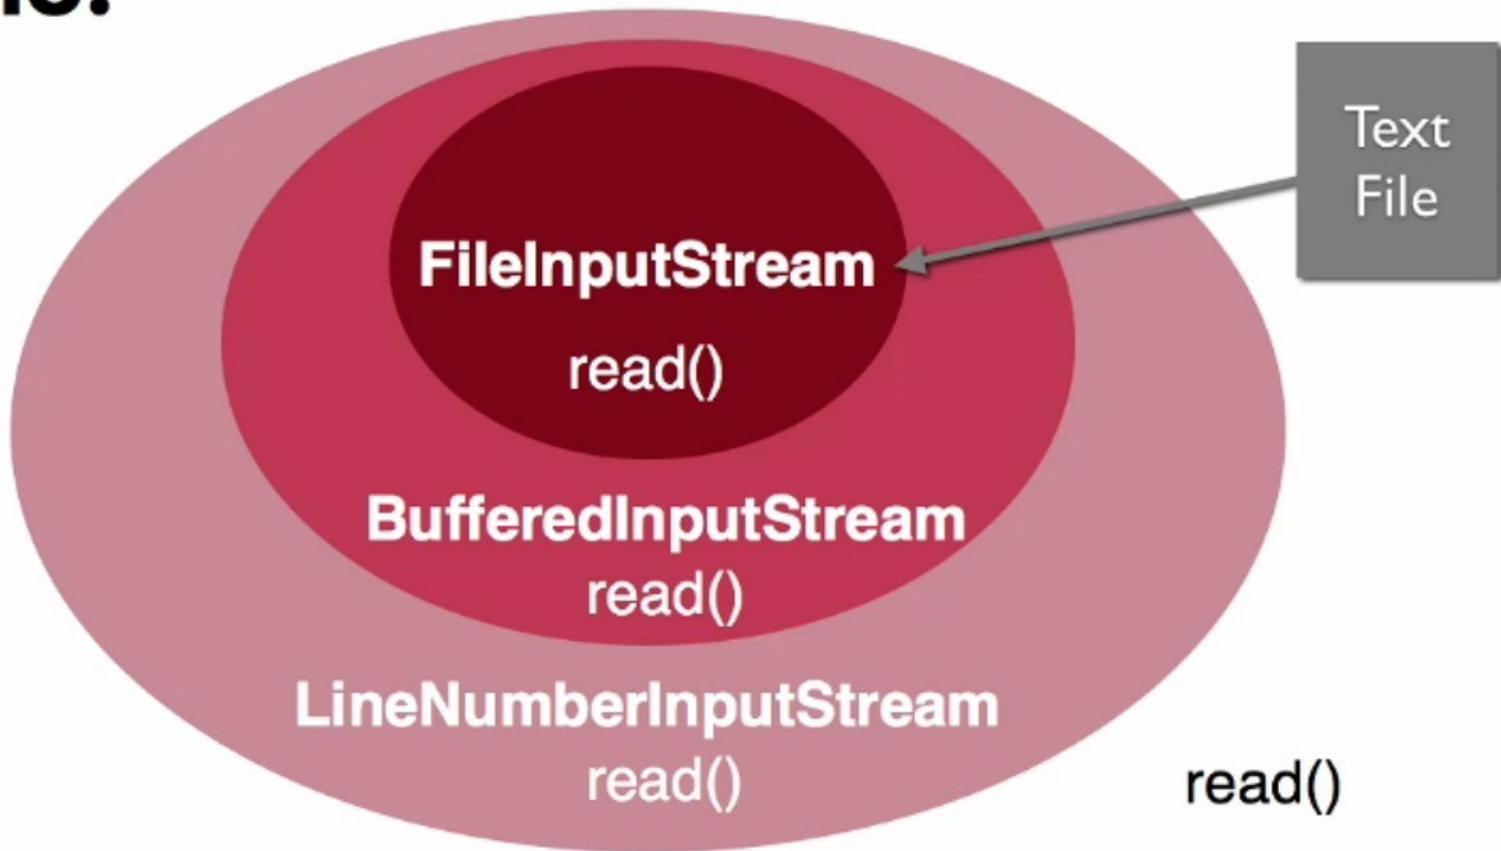

# Proxy design pattern

Proxy pattern, a class represents functionality of another class. This type of design pattern comes under structural pattern. In short, a proxy is a wrapper or agent object that is being called by the client to access the real serving object behind the scenes.

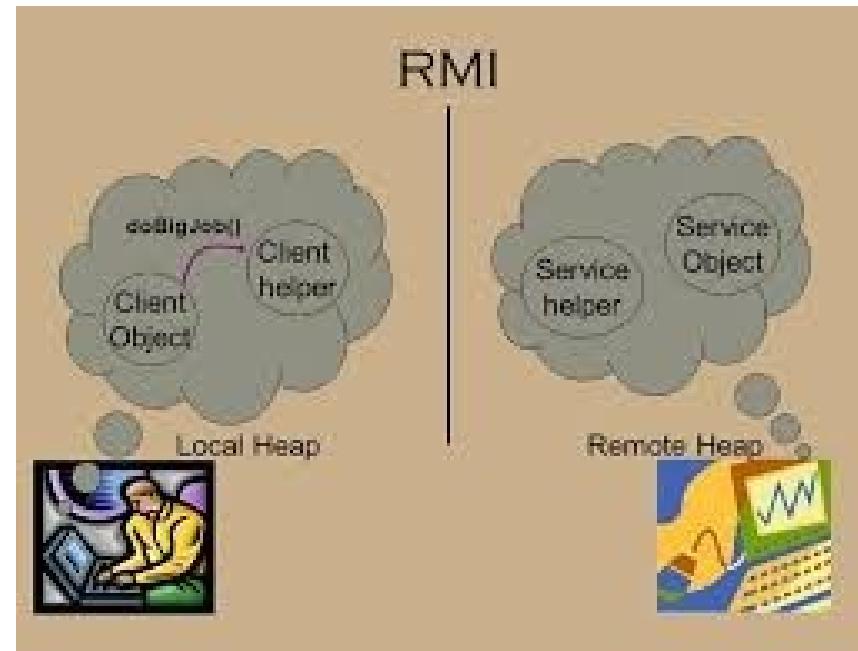


# Facade pattern

The **facade pattern** (also spelled *façade*) is a [software design pattern](#) commonly used with [object-oriented programming](#). The name is an analogy to an architectural *façade*.

A facade is an object that provides a simplified interface to a larger body of code, such as a [class library](#). A facade can

- make a [software library](#) easier to use, understand, and test, since the facade has convenient methods for common tasks,
- make the library more readable, for the same reason,
- reduce [dependencies](#) of outside code on the inner workings of a library, since most code uses the facade, thus allowing more flexibility in developing the system,
- wrap a poorly designed collection of [APIs](#) with a single well-designed API.

The Facade design pattern is often used when a system is very complex or difficult to understand because the system has a large number of interdependent classes or its source code is unavailable. This pattern hides the complexities of the larger system and provides a simpler interface to the client. It typically involves a single wrapper class that contains a set of members required by the client. These members access the system on behalf of the facade client and hide the implementation details.

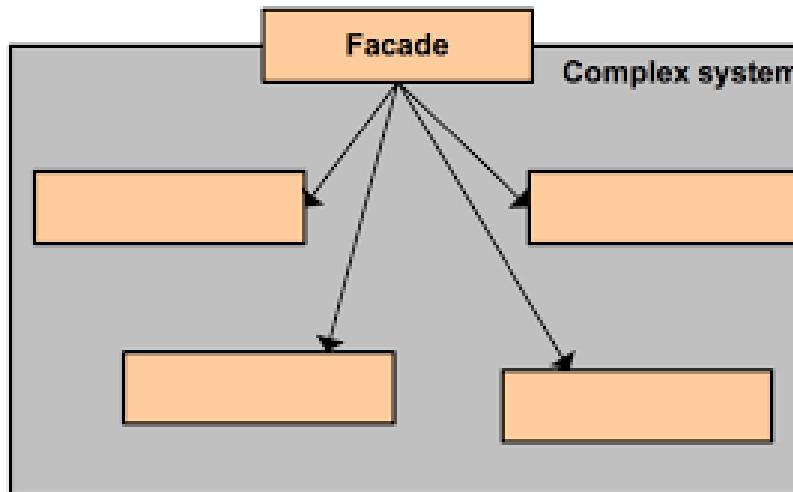






# Behavioural Patterns

# Strategy pattern /policy pattern


- The strategy pattern is intended to provide a means to define a family of algorithms, encapsulate each one as an object, and make them interchangeable
- It is useful for situations where it is necessary to dynamically swap the algorithms used in an application.
- select algo at run time
- convert IS-A to HAS-A

Client makes use of an encapsulated family of algorithms for both flying and quacking.


## Client




## Encapsulated fly behavior

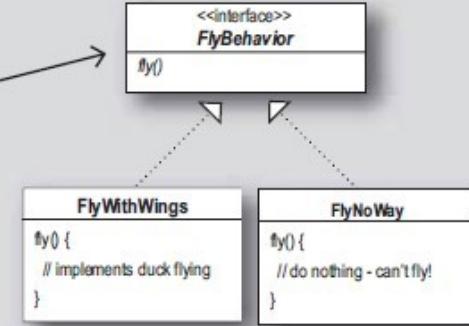

## Encapsulated quack behavior

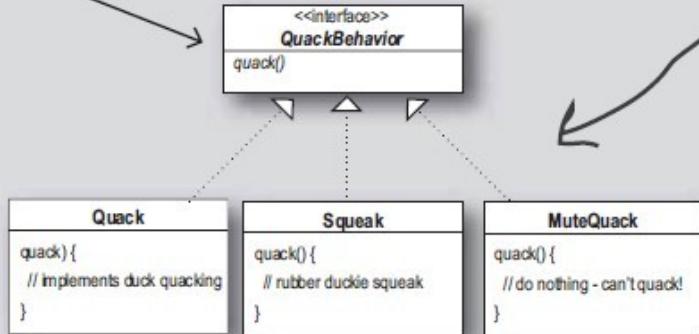

Think of each set of behaviors as a family of algorithms.



# Iterator Design Pattern

- The iterator pattern encapsulates iteration.
- The iterator pattern requires an interface called *Iterator*.
- The *Iterator* interface has two methods:
  - *hasNext()*
  - *next()*
- Iterators for different types of data structures are implemented from this interface.




**DAY -9**

## **Day 9:Java Database Connectivity**


- JDBC Fundamentals
- JDBC Drivers and architectures
- CURD operations using JDBC
- Autogenerated PK
- ResultSetMetaData, DataBaseMetaData
- Transaction management with JDBC

# JDBC


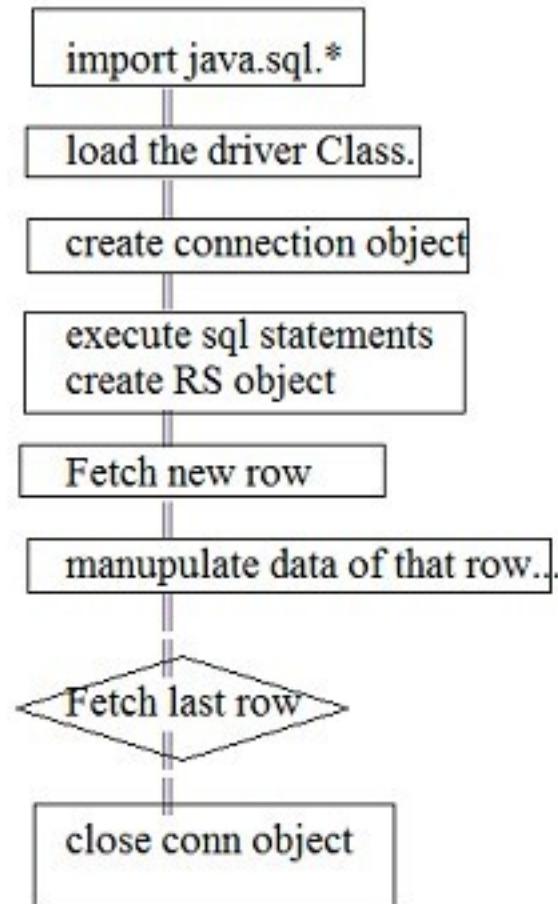


# DAO DTO design Pattern

## DAO / DTO design pattern

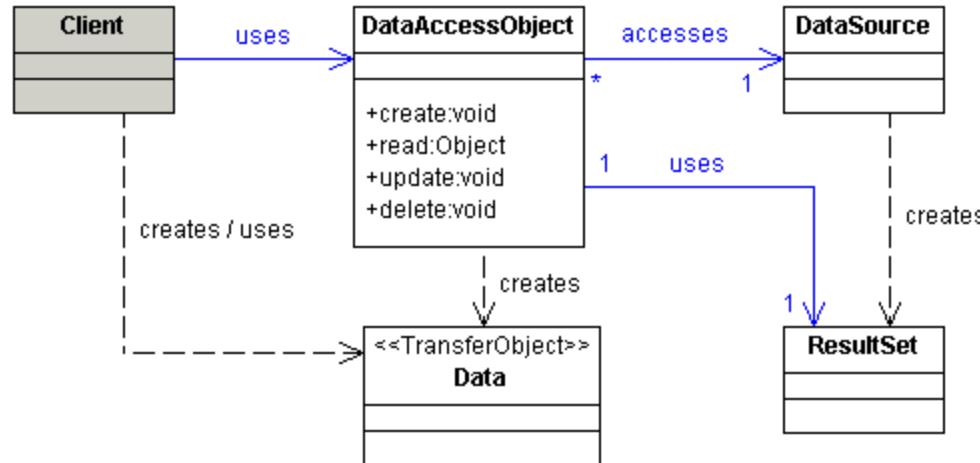

thank  
you

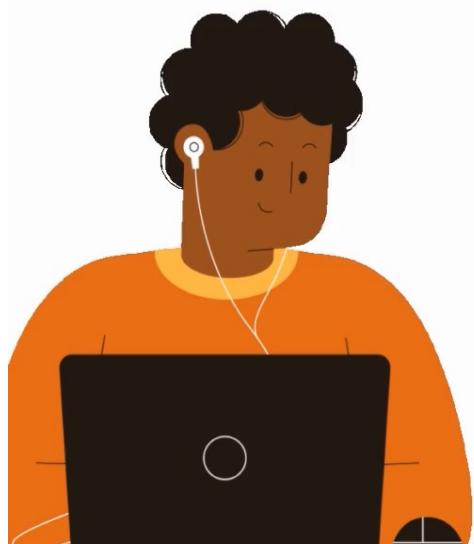

You're doing great!