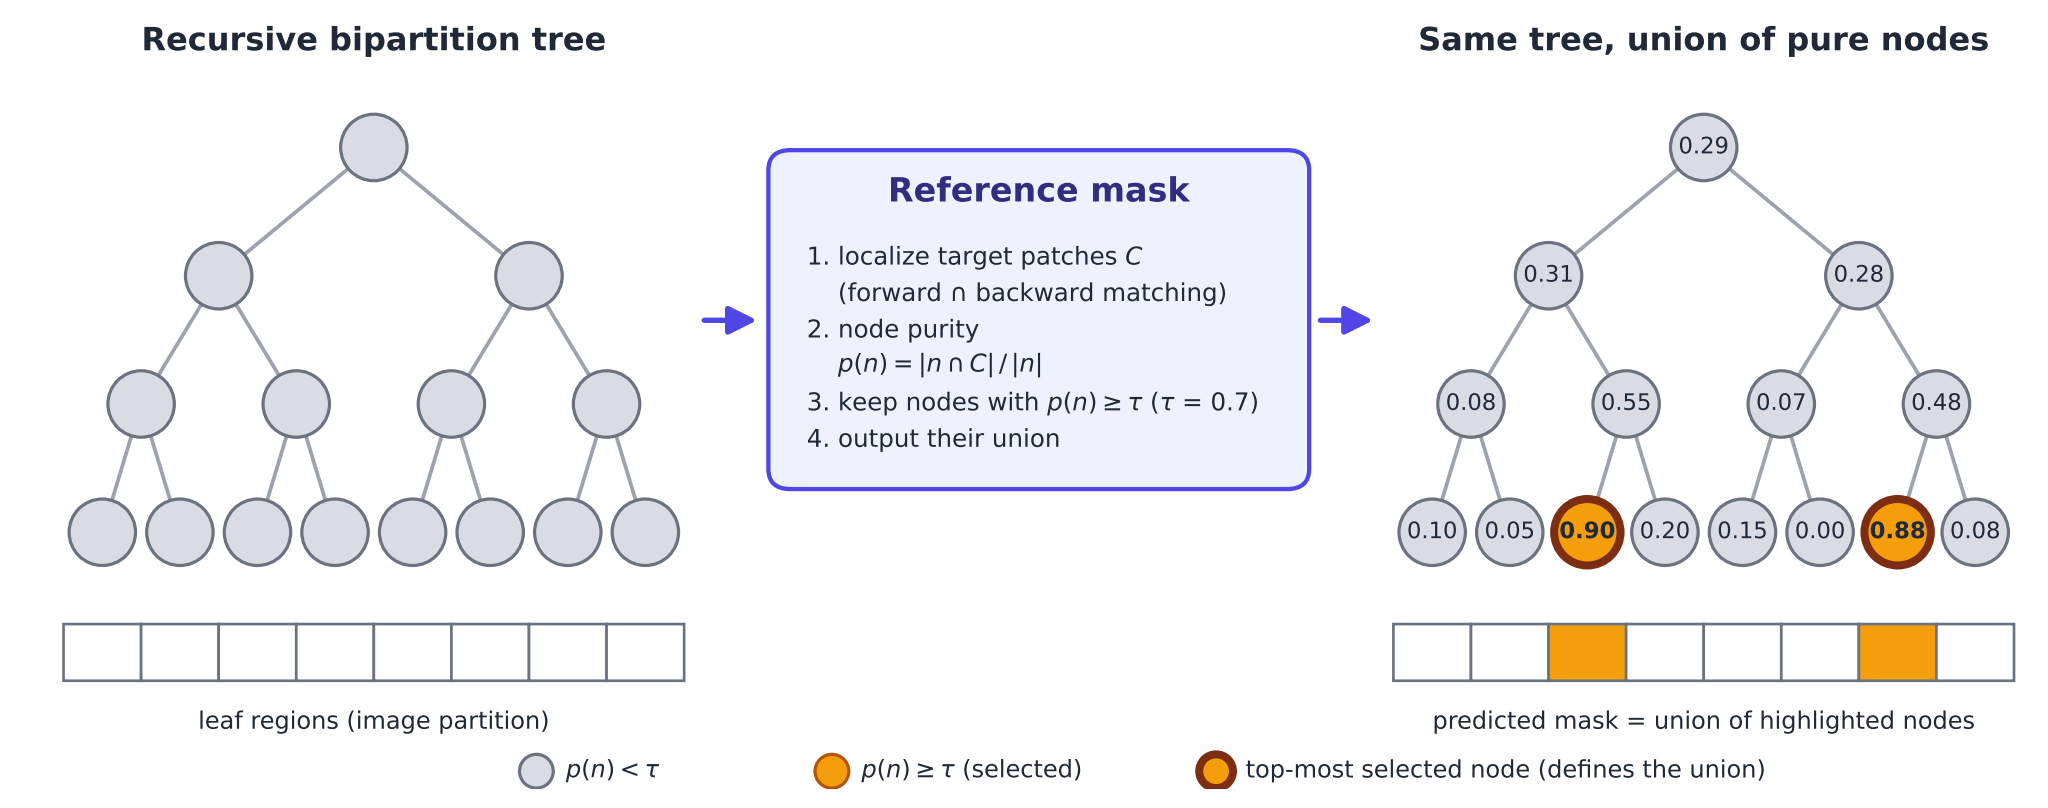
Recursive bipartition tree
Reference mask
1. localize target patches C
(forward ∩ backward matching)
2. node purity
p(n) = |n ∩ C| / |n|
3. keep nodes with p(n) ≥ τ (τ = 0.7)
4. output their union
Same tree, union of pure nodes
0.29
0.31
0.28
0.08
0.55
0.07
0.48
0.10
0.05
0.90
0.20
0.15
0.00
0.88
0.08
leaf regions (image partition)
predicted mask = union of highlighted nodes
p(n) < τ
p(n) ≥ τ (selected)
top-most selected node (defines the union)