colorlinks=true, linktocpage=true, pdfstartpage=1, pdfstartview=FitV, break-links=true, pdfpagemode=UseNone, pageanchor=true, pdfpagemode=UseOutlines, plainpages bookmarksnumbered, bookmarksopen=true, bookmarksopenlevel=1, hypertexnames=true, pdfhighlight=/O,urlcolor=webbrown, linkcolor=RoyalBlue, citecolor=webgreen, hyperfootnot pdfcreator=pdfLaTeX, pdfproducer=LaTeX with ArsClassica

colorlinks=true, breaklinks=true, bookmarks=true, bookmarksnumbered, urlcolor=webbrowninkcolor=RoyalBlue, citecolor=webgreen, pdftitle=, pdfauthor=©, pdfsubject=, pdfkeywords=, pdfcreator=pdfLaTeX, pdfproducer=LaTeX with hyperref and ClassicThesis

ERG3020 REPORT

ZHUOYU LI& BOKAI XU& XIYAN LUO

2021.5.5

CONTENTS

1	Introduction		4		
	1.1 The Properties of Markov Network and the Origin of	f			
	Our Idea		4		
	1.2 Why We Use The First Order Logic		5		
	1.3 The Nature of Markov Logic Networks		5		
	1.4 The Components of Markov Logic Networks		5		
2	Knowledges used in the Project				
	2.1 Natural Language Processing		6		
	2.2 Markov Logic Networks		6		
3	The Architecture of Jianfeng Demo		7		
	3.1 Users Can Post 3 Kinds of Comments		7		
	3.2 For Less Educated Users		9		
	3.3 Cumulative Action Library		10		
	3.4 Cumulative Predicate Library		12		
4	Packages used in the Project 1				
	4.1 Natural Language Processing		13		
	4.2 Markov Logic Networks		13		
	4.3 Flask		14		
5	Example				
6	Conclusion and further development				
7	1		16		
8			17		
	8.1 Paragraphs		17		
	8.2 Math		18		
9	D 1: 1D: :		19		
9	9.1 Subsection		20		
	9.2 Figure Composed of Subfigures		21		
Α	A · 1 . · 1		24		

ABSTRACT

This project is a demo of social network comment section with a special algorithm on the sorting and the presentation of comments. We aim at find and tell the truth so that we combine Natural Language Processing and Markov Networks to make a demo of social network comment section and we hope that a better social network comment section can be guaranteed.

^{*} School of Data Science, The Chinese University of Hong Kong, Shenzhen, China

INTRODUCTION 1

The Properties of Markov Network and the Origin of Our Idea

Markov Network is an undirected graphical model for representing dependencies between random variables.

A Markov network can be represented by an undirected graph G = (V, E) where the nodes in V represent random variables and edges in E represent dependency relationships.

Let us consider X, a kind of assignment of values to the variables in a Markov Network. We call C the set of maximal cliques in the network and assign a factor ψ_c to each clique $c \in C$. The probability P(X) is,

$$P(X = x) = \frac{1}{Z} \prod_{k} \phi_{k}(x_{(k)}) \tag{1}$$

We know that Markov Network can be used to represent a system, where this system is in general form, because the random variables in V can be either numerical or categorical.

If we want to represent a world in the form of Markov Network, we can consider binary case, for example, if Tom lied, we can assign True to the random variable lie(Tom). So each random variable in our desired network can only take one of the two binary values {True, False }.

The world above is an assignment of values of V.

We are continuously thinking about the way to infer the truth of the event. PageRank algorithm by Jimmy Page gave us the confidence to utilize graph theory to solve the truth of an event. We tried PageRank Algorithm to infer the truth of an event by assigning the relationship {Entailment, Contradiction, Independence} between any pairs of comments on the social network. Then we construct a directed graph of this set of comments. Each comment will post its importance to the comment that it entails, and we can construct a transition matrix, and then calculate A⁵⁰⁰ or above, until the matrix converges. Then we can find the stationary point. Then we can rank the comments according to their PageRank value. In this process, we observe the specific property of graph. However, this algorithm may not work very well in practice, because its time complexity is O(n!). Now we focus on the combination of graph and First Order Logic.

We find that un-directional graph may perform better than directional graph. Because the computer cannot really understand what you mean at a extremely high precision, and the sentences generated by users may not entail each other by our definition. So, to use First Order Logic and build an un-directional graph may be better than PageRank algorithm when we analyse the comments by netizens.

1.2 Why We Use The First Order Logic

Atom clauses can be easily understood by programming languages, and it is similar to functions and thus can be easily processed by algorithms. In this project, we aim to convert every natural language sentence into atom clauses of First Order Logic. For example, Tom accuses Bob of stealing can be converted into First Order Logic expression. And this form can be utilized by Markov Network as we mentioned above, because can be assigned a value between {True, False). The combination of First Order Logic and Markov Network can utilize the strength of two models.

However, we have to mention that the First Order Logic can be used with Markov Network in two ways: The first role is the representation of events. The second role is to help us determine the possible Markov Network. Why? Because the assignment of values of Markov Network is not known. We have to determine which possible way of assignment is more probable. Then we consider some constrains. These contrains are also written in First Order Logic form and can help to contruct Markov Logic Network.

The Nature of Markov Logic Networks

We can view Markov Logic Network (MLN) as the template of Markov Network. MLN is underdetermined and uncertain. We need to determine the variable value. However, because the value is difficult to determine, MLN uses constrains in First Order Logic (FOL) to select those most feasible world. Worlds with more conflicts with stronger constrains has a low probabilty of existence. So MLN meets our demand very well.

The Components of Markov Logic Networks

Before we get started, we shall first define the components of MLN. MLN consists of four parts represented in FOL:

- 1. Knowledge Base Some facts about this possible world, written in FOL. For example, "Tom accuses Bill of stealing the money" is represented as "accuseofstealingmoneyTom, Bill".
- 2. Function Declaration Some functions mentioned in the world, written in FOL. For example, "accuseofstealingperson, person". This function has two inputs, the first argument is a person and the second argument is also a person.
- 3. Named Entities Some entities that belong to some specific categories. For example, "person = {Tom, Jerry, Bob, Nazarbayev}".
- 4. Predicates Constrains Some general rules without pointing out any named entities, objects in the constrians are represented as

x,y,z, and some underdetermined objects. For example, stealthemoneyx^-.1667emaccuseofstealingx, y then liey means "if x stole the money and y did not accuse x of stealing money y lied."

2 KNOWLEDGES USED IN THE PROIECT

Natural Language Processing

Natural language processing (NLP) is a field concerned with the interactions between computers and human language, in particular how to program computers to process and analyze large amounts of natural language data. The result is a computer capable of "understanding" the contents of documents, including the contextual nuances of the language within them [1].

We have to deal with the natural language records so that we have to choose some NLP algorithms. The most important part is to do text segmentations, transfer the texts into first order logic and atomic sentences to match the requirements of the Markov Logic Network.

Markov Logic Networks

The markov networks model used in this project comes from the article written by Richardson and Domingos in 2006 [2]. The below statements in this subsection are from the article.

A Markov network (also known as Markov random field) is a model for the joint distribution of a set of variables $X = (X_1, X_2, \cdots, X_n) \in X$. The joint distribution represented by a Markov network is given by

$$P(X = x) = \frac{1}{Z} \prod_{k} \phi_{k}(x_{(k)})$$
 (2)

where $x_{(k)}$ is the state of the kth clique (i.e., the state of the variables that appear in that clique). Z, known as the partition function, is given by $Z = \sum_{x \in X} \prod_k \varphi_k(x_{(k)})$.

Definition 1 (Markov logic network). A Markov logic network L is a set of pairs (F_i, w_i) , where F_i is a formula in first-order logic and w_i is a real number. Together with a finite set of constants C = $c_1, c_2, \cdots, c_{|C|}$, it defines a Markov network $M_{L,C}$ (Equations 1 and 2) as follows:

1. M_{L,C} contains one binary node for each possible grounding of each predicate appearing in L. The value of the node is 1 if the ground atom is true, and 0 otherwise.

2. $M_{L,C}$ contains one feature for each possible grounding of each formula \boldsymbol{F}_i in L. The value of this feature is $\boldsymbol{1}$ if the ground formula is true, and 0 otherwise. The weight of the feature is the wi associated with $F_{\rm i}$ in L.

All the formulas and the constants in the Markov Logic Networks have to meet the 3 assumptions below:

- 1. **Unique names.** Different constants refer to different objects.
- 2. **Domain closure.** The only objects in the domain are those representable using the constant and function symbols in (L, C)
- 3. Known functions. For each function appearing in L, the value of the function applied to every possible tuple of arguments is known, and is an element of C.

THE ARCHITECTURE OF JIANFENG DEMO 3

Users Can Post 3 Kinds of Comments

Difference from traditional social network, here users can choose 3 different columns to post their comments: Facts, Predicates, Emotional.

For Facts column, users can post the facts they have mastered. For example, if the user know that Albert accuses Bob of stealing the final paper, he or she could type Albert accuses Bob of stealing the final paper. To make sure that the facts are valid, citation and source verification features will be added in the future.

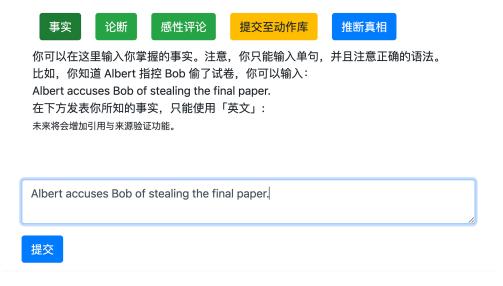


Figure 1: Prompting Users to Post facts

For Predicates column, users can post their own judgements and theories. These predicates are general and can reveal their thoughts. To make sure the meaning of the logic expression is correct, we only accept First Order Logic expressions. We expect well educated users to post on Predicates column. To make this process more smooth, we provide a toolbox for our users. For example, we provide widely used logic operators, function library, undetermined objects.

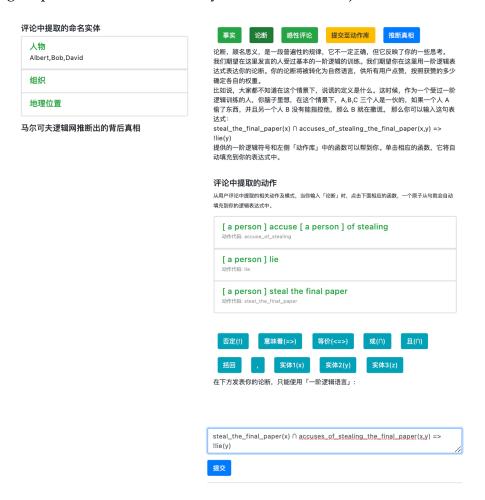


Figure 2: Prompting Users to Post Facts

After users post their *Predicates*, their logic expressions will be stored in our system and we design an algorithm to convert the logic expression into natural language. We display the natural language version of the Predicates on the front end, other users can give likes to each Predicates. We will determine the weights of the Predicates. The weights of each *Predicates* are important in Markov Logic Network, they are the *strength* of constraints.

For Emotional column. In this column, users are welcomed to post everything they want. This column is an area for users to post their emotional comments, and if users post emotional comments in Facts column, the comments will be transferred to this column because we also design an algorithm to recognize if the comments are really Facts or Predicates.

	e, we will have, y not lie and y not lie. 表达式: lie(x) => !lie(y) ^ !lie(y)
y not	
一阶逻辑	表达式: steal_the_final_paper(x) ^ accuse_of_stealing(y,x) => !lie(y)
If x st have,	eal the final paper and y not accuse x of stealing, we will y lie.
一阶逻辑	表达式: steal_the_final_paper(x) ^ !accuse_of_stealing(y,x) => lie(y)
个事实	:
	doesn't accuse David of stealing.
一四四里相	表达式: !accuse_of_stealing(David,David)
David	doesn't accuse Bob of stealing.
一阶逻辑	表达式: laccuse_of_stealing(David,Bob)
Bob a	ccuses Albert of stealing.
一阶逻辑	表达式:accuse_of_stealing(Bob,Albert)
Alber	t accuses Albert of stealing.
	表达式:accuse_of_stealing(Albert,Albert)
V == 1.1.	OTT A
个感性	评论

Figure 3: Displaying the Comments on Front End

For Less Educated Users

Jianfeng is desgined to the serve the public, and its users are mainly less educated users. Less educated users accounts for the majority of our users. So, we carefully designed the architecture of Jianfeng.

Less educated users can post the facts they know just by typing English sentences.

The facts in natural language will be processed by AllenNLP Open Information Extraction module [cite: https://demo.allennlp.org/openinformation-extraction] first. The result given by AllenNLP is as follows:

AllenNLP gives multiple results of one single sentence, and we want to find one that can best model that sentence. We choose the verb which can recognize most words as its arguments. We call that verb the best verb of that sentence.

Then we consider the best verb and its arguments. For example, we input the sentence Albert accuses Bob of stealing the final paper., and the output has two possible results: accuse and steal. Then we choose accuse as our best verb because it can utilize 3 components as its arguments.

The next step is to utilize AllenNLP Named Entity Recognition module to check each argument to see if it is a named entity, for example, Albert and Bob will be recognized as Person; of stealing the final paper will be not recognized. Then, we append of stealing the final paper to

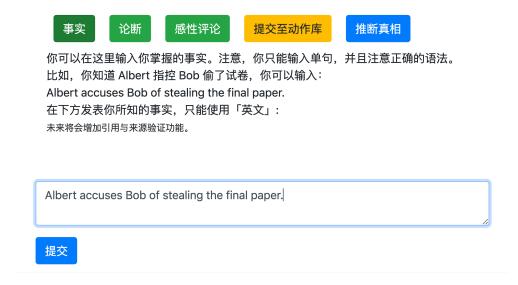


Figure 4: Prompting User to Commit Facts

the verb and only keep *Albert* and *Bob* as arguments. Then we can construct the function accuses_of_stealing_the_final_paper with two input arguments ARGo: Person and ARG1: Person. Here we can express this fact as accuse_of_stealing_the_final_paper (Albert, Bob).

After we extract the function mode, we will first append this function to the library, in Jianfeng Demo, we call it The Actions Extracted From User Comments. But in consideration the experience of less educated users, we design an algorithm to convert functions into natural language expressions. For example, if the user submitted Albert accuses Bob of stealing the money, we will first extract the function mode and store it into action library and then compile it into natural language expression, then display it on the front end.

Less educated users can also post emotional comments. We give them a choice to post whatever they want. Users can choose Emotional module to post their comments.

We also design an algorithm to convert First Order Logic expression into natural language. Because some well educated users can post First Order Logic expressions and complex expressions, it is usually hard to read for less educated users. It is necessary to convert every piece of logic expression into natural language. And we realize this function in Jianfeng demo.

Cumulative Action Library 3.3

Jianfeng Demo will continuously collect actions submitted by users. Once user post a fact containing valid information, we will automatically analyze the action mode in this sentence. Then it will be stored in our Action Library and we will convert it into a form which can be easily understood by users and then display them on the front end.

2 Total Extractions

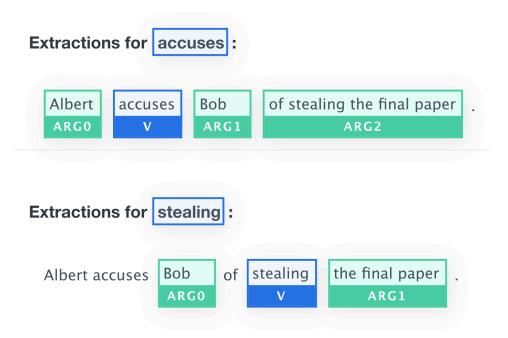


Figure 5: Primary Result Given by AllenNLP Open Information Extraction module

Users can submit new action modes to Action Library. We provide a column for users to submit new mode. Users only need to provide a sentence in this dialogue, and they don't need think about the details. We will automatically analyze the sentence and extract the action mode in this sentence.

Besides, the *Action Library* in Jianfeng Demo is cumulative. We will keep all the action modes in our database, and once a new event emerges, users can conveniently use previously defined action modes.

We expect in a few months, we can collect all the possible action modes in human language. In that case, we will provide more complete toolbox for educated users who have a good command of First Order Logic to composite their predicates.

Furthermore, the action modes in consideration within an event comply with the following conditions:

- 1. That action mode is mentioned in Facts.
- 2. That action mode is mentioned in *Predicates*.

Action modes satisfy the above conditions will be declared in Markov Logic Network inference process (refer to Components of Markov Logic Network part).

3 个论断



Figure 6: Natural Language Converted

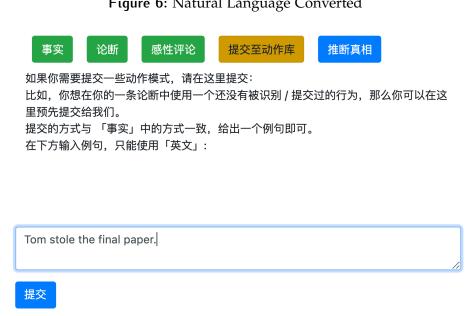


Figure 7: Action Mode Submission Dialog

Cumulative Predicate Library

The *Predicates* are of vital importance in Markov Logic Network, they can help to construct the whole network. Some general Predicates can be utilized in many cases automatically. That helps to improve the inference result.

Besides, because Markov Logic Network can learn from the final results, thus determining the weights of each predicate, it is important to determine the weight of each predicate. Jianfeng system is designed to perform MLN learning process once we know the posterior results. Then we can determine the weights of each predicates in the corresponding event. Because sometimes the learning result is not in (0,1). Then we use logistic function to convert them into (0,1). The next problem is to find the relative weights in case two irrelative predicates come together. To solve the problem, we should first operate Jianfeng system for months, collect enough scenarios. Then perform the following MLN learning:

- 1. Training for *predicate A:* Use only the *facts* that involved in *predi*cate A, determining the weight of predicate A.
- 2. Training for predicate B: Use only the facts that involved in predicate B, determining the weight of predicate B.
 - 3. Training for

评论中提取的动作

从用户评论中提取的相关动作及模式,当你输入「论断」时,点击下面相 应的函数,一个原子从句就会自动填充到你的逻辑表达式中。

[a person] accuse [a person] of stealing 动作代码: accuse_of_stealing [a person] lie 动作代码: lie [a person] steal the final paper 动作代码: steal_the_final_paper

Figure 8: Natural Language Expression of Action Library

PACKAGES USED IN THE PROJECT 4

Natural Language Processing 4.1

The NLP package used in this project is AllenNLP [3]. We use the methods of AllenNLP to do text segmentations, transfer the texts into first order logic and atomic sentences so that we can match the requirements from the Markov Logic Network.

Markov Logic Networks

Pracmln is a toolbox for statistical relational learning and reasoning and as such also includes tools for standard graphical models [4]. We

use this package to build the markov logic networks and give the results.

Flask 4.3

Flask is a micro web framework written in Python [?]. We use Flask to show the demo of social network comments section. From the figure

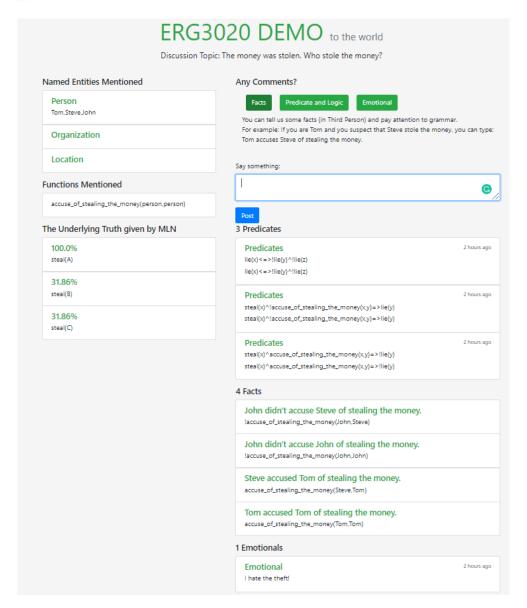


Figure 9: An Screenshot of the website

we can find that we can input and post comments in a text area. We even can choose the type of the comments. However, if we choose the wrong type, the NLP model will indentify it and change the type into the correct one. All of the comments will be showed below the text area. Also, the names and functions in the comments will be showed in the left sides. The result of the Markov Logic Networks will be showed below them.

5 EXAMPLE

Here we show a example with full steps of the usage of the demo. We first input some facts:

facts.jpg

Then we input some predicates and logic:

predicates and logic.jpg

Also we can input some emotionals (Whichever the type we choose they will be shown as the emotionals finally):

emotionals.jpg

Now, we can find that all of the names and functions appeared in the comments are clearly showed in the left side:

appear.jpg

We click the button of running the markov logic networks and find that the result is showed below in the form of probabilities:

result.jpg

6 CONCLUSION AND FURTHER DEVELOPMENT

7 INTRODUCTION

A statement requiring citation.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Some mathematics in the text: $\cos \pi = -1$ and α .

8 **METHODS**

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetuer.

- 1. First item in a list
- 2. Second item in a list
- 3. Third item in a list

Paragraphs

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. PARAGRAPH DESCRIPTION Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

DIFFERENT PARAGRAPH DESCRIPTION Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetuer at, consectetuer sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

8.2 Math

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

$$\cos^3 \theta = \frac{1}{4} \cos \theta + \frac{3}{4} \cos 3\theta \tag{3}$$

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis.

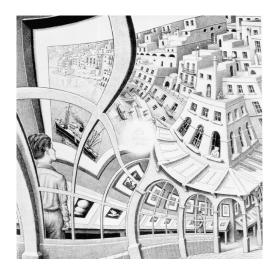


Figure 10: An example of a floating figure (a reproduction from the Gallery of prints, M. Escher, from http://www.mcescher.com/).

Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetuer.

Definition 2 (Gauss). To a mathematician it is obvious that $\int_{-\infty}^{+\infty} e^{-x^2} dx =$

Theorem 1 (Pythagoras). The square of the hypotenuse (the side opposite the right angle) is equal to the sum of the squares of the other two sides.

Proof. We have that $\log(1)^2 = 2\log(1)$. But we also have that $\log(-1)^2 = \log(1) = 0$. Then $2\log(-1) = 0$, from which the proof.

RESULTS AND DISCUSSION

Reference to Figure 10.

Suspendisse vitae elit. Aliquam arcu neque, ornare in, ullamcorper quis, commodo eu, libero. Fusce sagittis erat at erat tristique mollis. Maecenas sapien libero, molestie et, lobortis in, sodales eget, dui. Morbi ultrices rutrum lorem. Nam elementum ullamcorper leo. Morbi dui. Aliquam sagittis. Nunc placerat. Pellentesque tristique sodales est. Maecenas imperdiet lacinia velit. Cras non urna. Morbi eros pede, suscipit ac, varius vel, egestas non, eros. Praesent malesuada, diam id pretium elementum, eros sem dictum tortor, vel consectetuer odio sem sed wisi.

9.1 Subsection

Sed feugiat. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Ut pellentesque augue sed urna. Vestibulum diam eros, fringilla et, consectetuer eu, nonummy id, sapien. Nullam at lectus. In sagittis ultrices mauris. Curabitur malesuada erat sit amet massa. Fusce blandit. Aliquam erat volutpat. Aliquam euismod. Aenean vel lectus. Nunc imperdiet justo nec dolor.

Subsubsection 9.1.1

Etiam euismod. Fusce facilisis lacinia dui. Suspendisse potenti. In mi erat, cursus id, nonummy sed, ullamcorper eget, sapien. Praesent pretium, magna in eleifend egestas, pede pede pretium lorem, quis consectetuer tortor sapien facilisis magna. Mauris quis magna varius nulla scelerisque imperdiet. Aliquam non quam. Aliquam porttitor quam a lacus. Praesent vel arcu ut tortor cursus volutpat. In vitae pede quis diam bibendum placerat. Fusce elementum convallis neque. Sed dolor orci, scelerisque ac, dapibus nec, ultricies ut, mi. Duis nec dui quis leo sagittis commodo.

word Definition

CONCEPT Explanation

IDEA Text

Etiam euismod. Fusce facilisis lacinia dui. Suspendisse potenti. In mi erat, cursus id, nonummy sed, ullamcorper eget, sapien. Praesent pretium, magna in eleifend egestas, pede pede pretium lorem, quis consectetuer tortor sapien facilisis magna. Mauris quis magna varius nulla scelerisque imperdiet. Aliquam non quam. Aliquam porttitor quam a lacus. Praesent vel arcu ut tortor cursus volutpat. In vitae pede quis diam bibendum placerat. Fusce elementum convallis neque. Sed dolor orci, scelerisque ac, dapibus nec, ultricies ut, mi. Duis nec dui quis leo sagittis commodo.

- First item in a list
- Second item in a list
- Third item in a list

Table 9.1.2

Aliquam lectus. Vivamus leo. Quisque ornare tellus ullamcorper nulla. Mauris porttitor pharetra tortor. Sed fringilla justo sed mauris. Mauris tellus. Sed non leo. Nullam elementum, magna in cursus sodales, augue est scelerisque sapien, venenatis congue nulla arcu et pede. Ut suscipit enim vel sapien. Donec congue. Maecenas urna mi, suscipit in, placerat ut, vestibulum ut, massa. Fusce ultrices nulla et nisl.

Table 1: Table of Grades

Na		
First name	Last Name	Grade
John	Doe	7.5
Richard	Miles	2

Reference to Table 1.

Figure Composed of Subfigures

Reference the figure composed of multiple subfigures as Figure 11 on the following page. Reference one of the subfigures as Figure 11b on the next page.

Nulla in ipsum. Praesent eros nulla, congue vitae, euismod ut, commodo a, wisi. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Aenean nonummy magna non leo. Sed felis erat, ullamcorper in, dictum non, ultricies ut, lectus. Proin vel arcu a odio lobortis euismod. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Proin ut est. Aliquam odio. Pellentesque massa turpis, cursus eu, euismod nec, tempor congue, nulla. Duis viverra gravida mauris. Cras tincidunt. Curabitur eros ligula, varius ut, pulvinar in, cursus faucibus, augue.

Nulla mattis luctus nulla. Duis commodo velit at leo. Aliquam vulputate magna et leo. Nam vestibulum ullamcorper leo. Vestibulum condimentum rutrum mauris. Donec id mauris. Morbi molestie justo et pede. Vivamus eget turpis sed nisl cursus tempor. Curabitur mollis sapien condimentum nunc. In wisi nisl, malesuada at, dignissim sit amet, lobortis in, odio. Aenean consequat arcu a ante. Pellentesque porta elit sit amet orci. Etiam at turpis nec elit ultricies imperdiet. Nulla facilisi. In hac habitasse platea dictumst. Suspendisse viverra aliquam risus. Nullam pede justo, molestie nonummy, scelerisque eu, facilisis vel, arcu.

Curabitur tellus magna, porttitor a, commodo a, commodo in, tortor. Donec interdum. Praesent scelerisque. Maecenas posuere sodales odio. Vivamus metus lacus, varius quis, imperdiet quis, rhoncus a, turpis. Etiam ligula arcu, elementum a, venenatis quis, sollicitudin sed, metus. Donec nunc pede, tincidunt in, venenatis vitae, faucibus vel, nibh. Pellentesque wisi. Nullam malesuada. Morbi ut tellus ut pede tincidunt porta. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam congue neque id dolor.

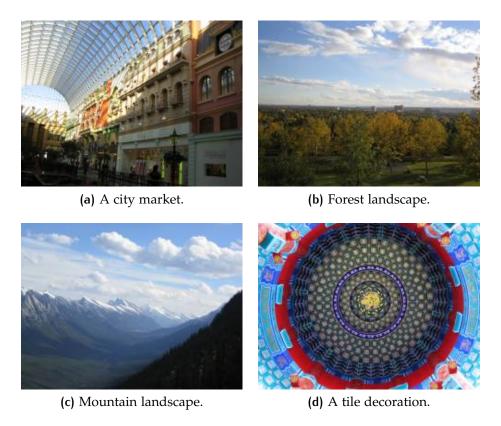


Figure 11: A number of pictures with no common theme.

Donec et nisl at wisi luctus bibendum. Nam interdum tellus ac libero. Sed sem justo, laoreet vitae, fringilla at, adipiscing ut, nibh. Maecenas non sem quis tortor eleifend fermentum. Etiam id tortor ac mauris porta vulputate. Integer porta neque vitae massa. Maecenas tempus libero a libero posuere dictum. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Aenean quis mauris sed elit commodo placerat. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Vivamus rhoncus tincidunt libero. Etiam elementum pretium justo. Vivamus est. Morbi a tellus eget pede tristique commodo. Nulla nisl. Vestibulum sed nisl eu sapien cursus rutrum.

REFERENCES

- [1] Wikipedia contributors. Natural language processing Wikipedia, the free encyclopedia. https://en.wikipedia.org/w/index.php?title=Naturallanguageprocessingoldid = 1020063620, 2021.[Online; accessed5 — May — 2021].
- [2] Matthew Richardson and Pedro Domingos. Markov logic networks. *Machine learning*, 62(1-2):107–136, 2006.
- [3] Matt Gardner, Joel Grus, Mark Neumann, Oyvind Tafjord, Pradeep Dasigi, Nelson F. Liu, Matthew Peters, Michael Schmitz, and Luke S. Zettlemoyer. Allennlp: A deep semantic natural language processing platform. 2017.
- [4] Daniel Nyga, Mareike Picklum, Michael Beetz, et al. pracmln markov logic networks in Python, 2013–. [Online; accessed <date>].
- [5] Miguel Grinberg. Flask web development: developing web applications with python. "O'Reilly Media, Inc.", 2018.

A GUIDENCE TO RUNNING CODE

First we have to make sure the working director of the ternimal is the code folder. Then we type the below codes:

Then we can find that all the requirements are installed. The next steps are to run the flask app.

And then

Therefore, the flask app is run and we can see the website.