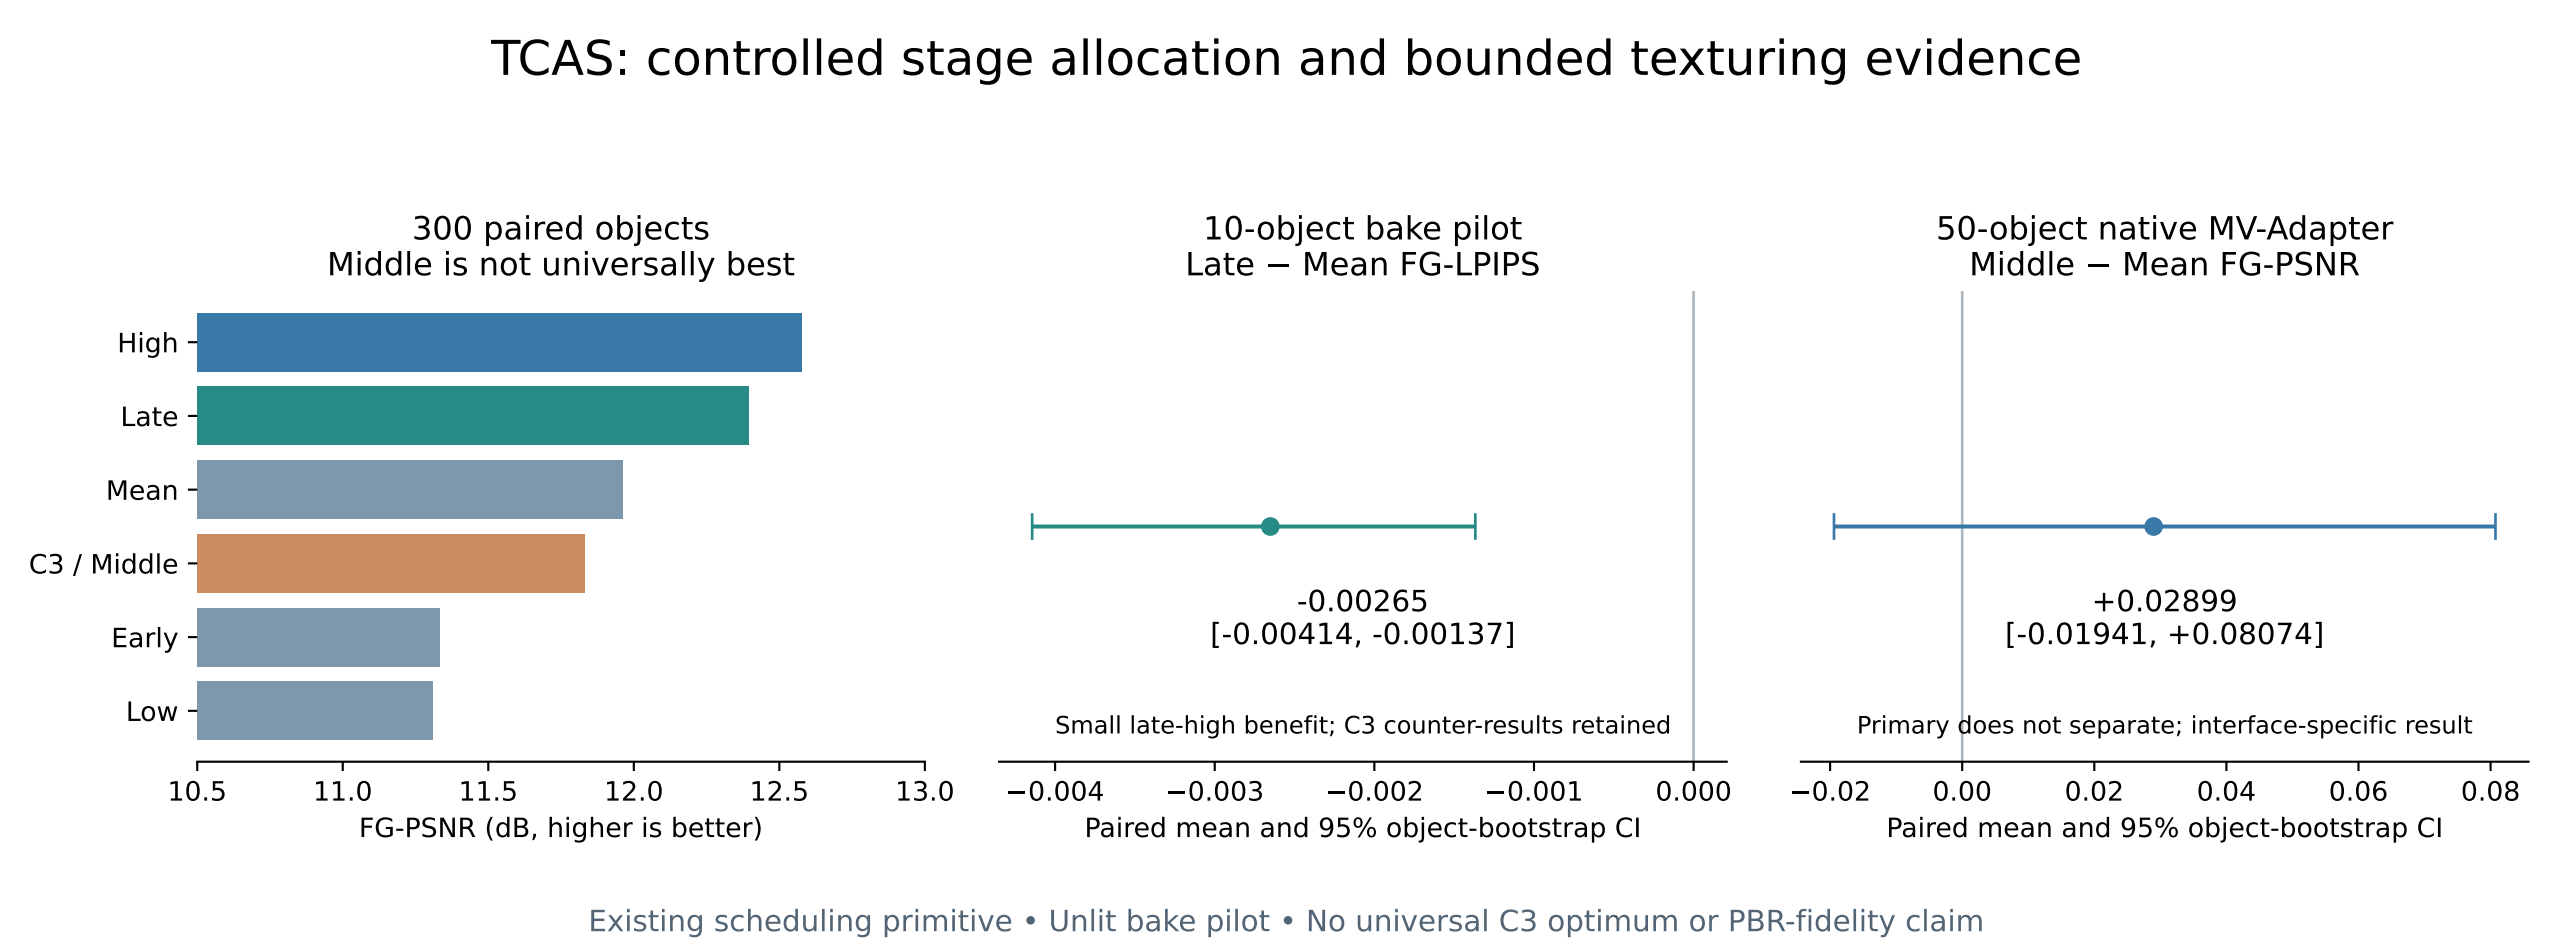
TCAS: controlled stage allocation and bounded texturing evidence
300 paired objects
Middle is not universally best
High
Late
Mean
C3 / Middle
Early
Low
10.5
11.0
11.5
12.0
12.5
13.0
FG-PSNR (dB, higher is better)
10-object bake pilot
Late − Mean FG-LPIPS
-0.00265
[-0.00414, -0.00137]
Small late-high benefit; C3 counter-results retained
−0.004
−0.003
−0.002
−0.001
0.000
Paired mean and 95% object-bootstrap CI
50-object native MV-Adapter
Middle − Mean FG-PSNR
+0.02899
[-0.01941, +0.08074]
Primary does not separate; interface-specific result
−0.02
0.00
0.02
0.04
0.06
0.08
Paired mean and 95% object-bootstrap CI
Existing scheduling primitive • Unlit bake pilot • No universal C3 optimum or PBR-fidelity claim