

Controlled target-view protocol ablation

Same current checkpoint, six objects, six schedules, seeds, sampler, and inference settings.

Single intervention: the fourth target slot changes from view 16 to a duplicate of view 15.

Condition	unique6 CIEDE ↓	legacy CIEDE ↓	legacy – unique	Legacy worse
No Adapter	46.66	47.04	+0.38	3/6
GFL	19.64	19.80	+0.16	3/6
GFH	28.42	28.60	+0.18	3/6
C3	23.41	23.53	+0.12	3/6
Generic Linear	29.35	29.21	-0.14	2/6
LLH	27.67	27.41	-0.26	2/6


In legacy mode, the fourth reference tile duplicates the second for all six objects. This is a confirmed target-view protocol defect. Its effect on quality is limited to the paired metrics above and the following full RGB grids.

All metric differences are descriptive on six failure-enriched historical examples. Color is measured from saved PNGs; PSNR, LPIPS, and Edge-SSIM use the locked evaluation code and matching target mode.


View protocol ablation — fig4_row1

Only target_view_mode changes: unique6 [0,15,12,16,13,14] vs legacy_duplicate_top [0,15,12,15,13,14].

unique6

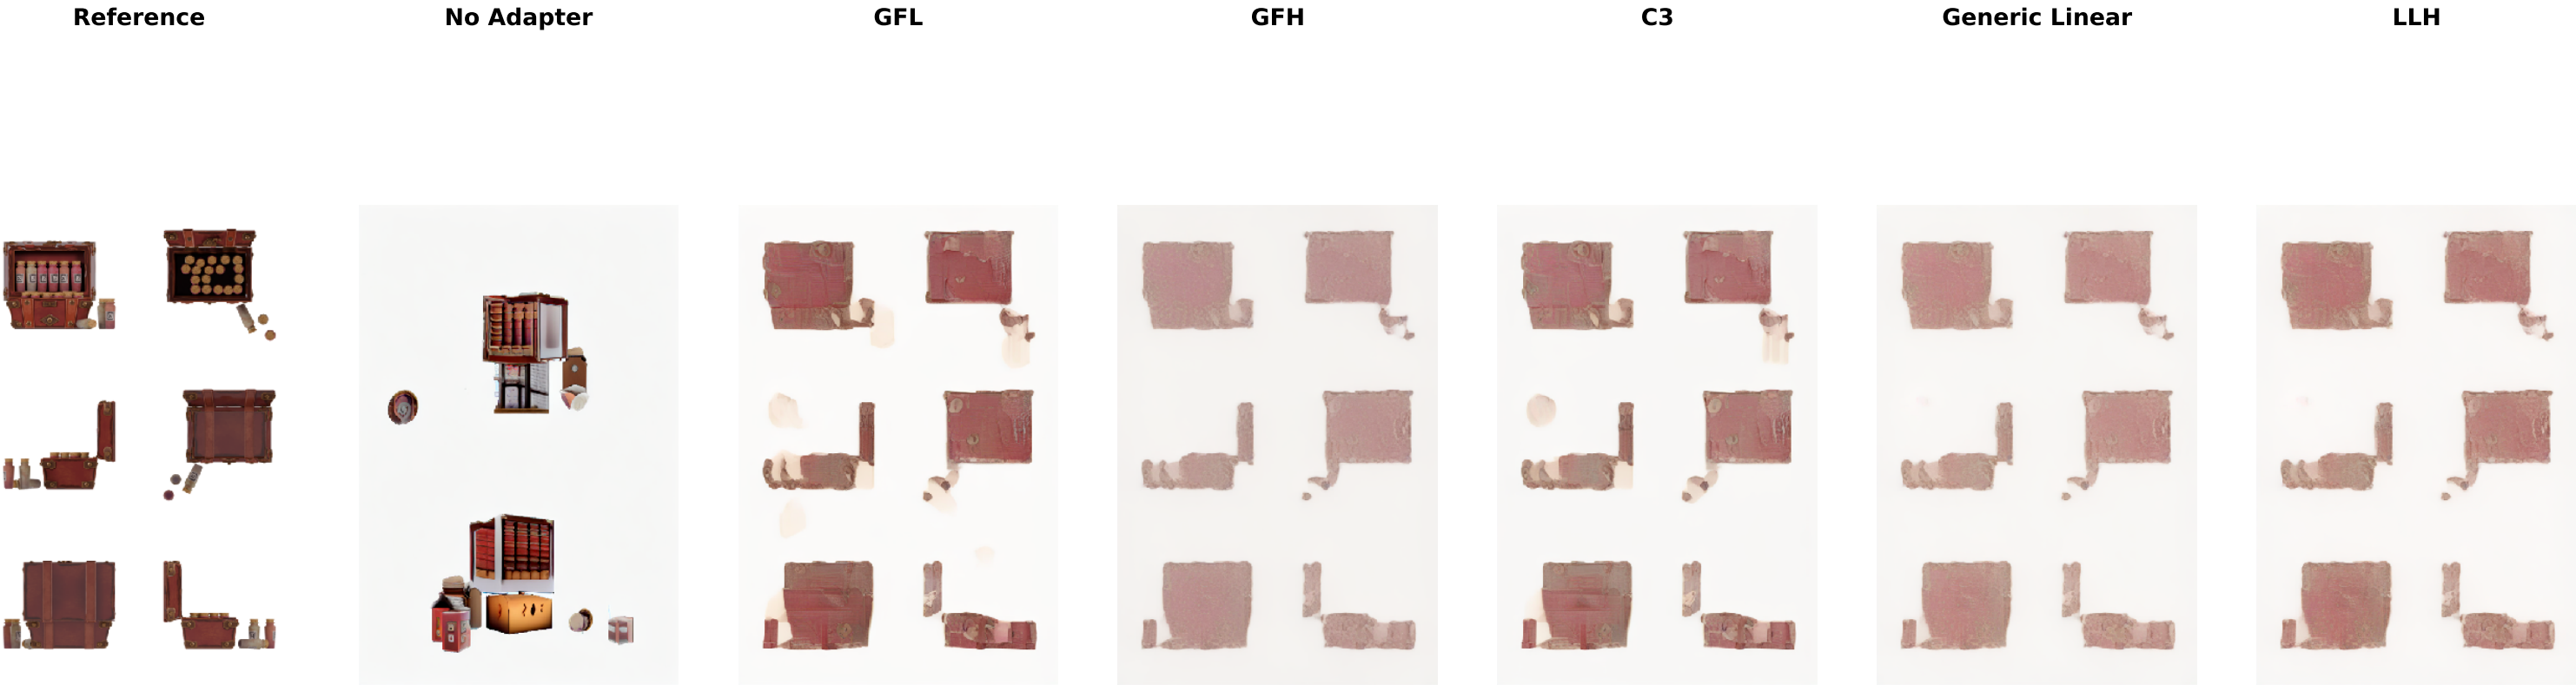

legacy_duplicate_top

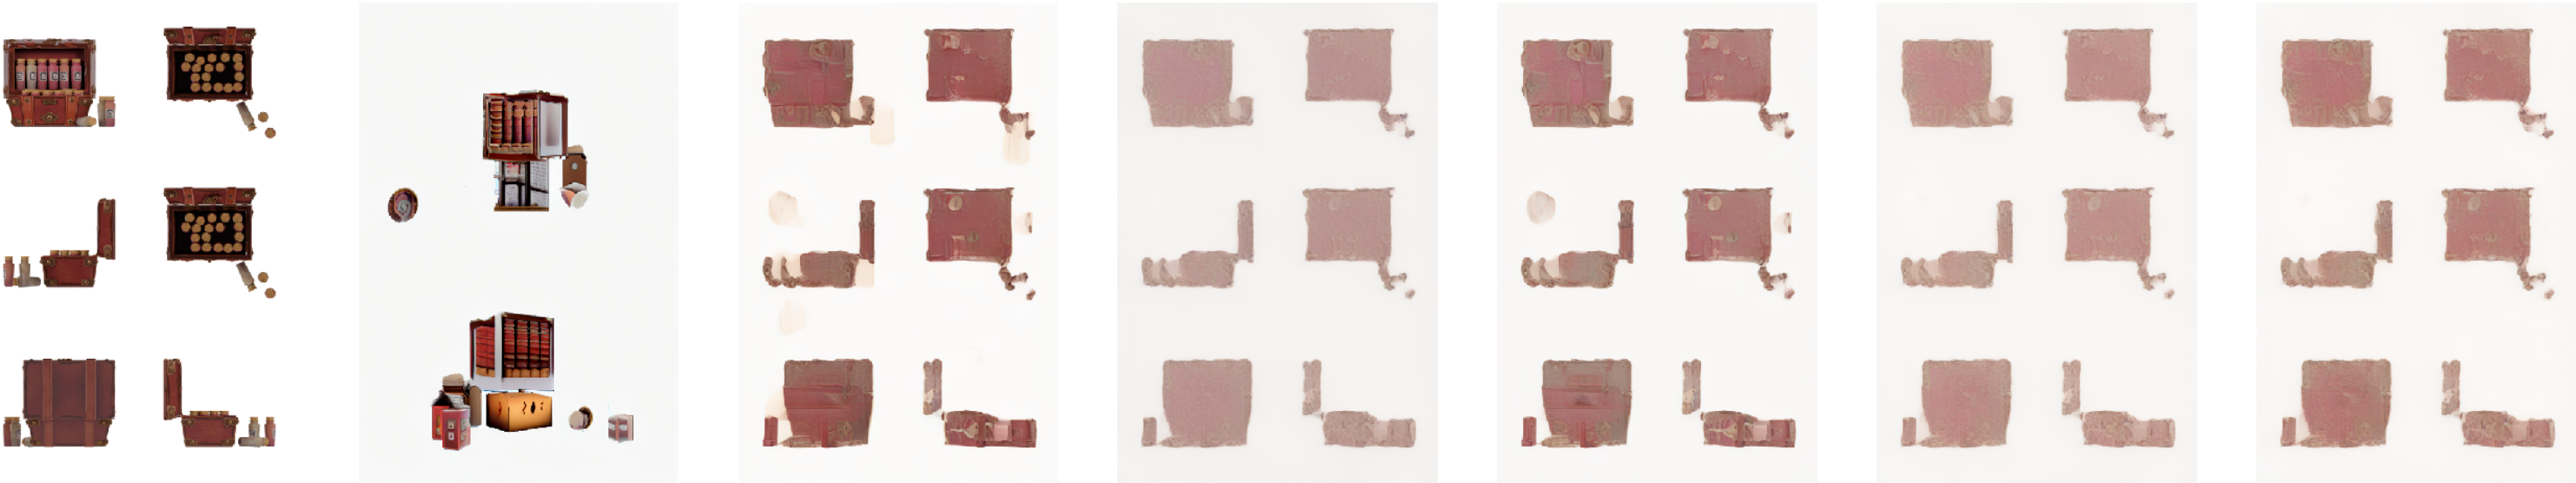

View protocol ablation — fig4_row2

Only target_view_mode changes: unique6 [0,15,12,16,13,14] vs legacy_duplicate_top [0,15,12,15,13,14].

unique6

Reference

No Adapter


GFL

GFH


C3

Generic Linear

LLH

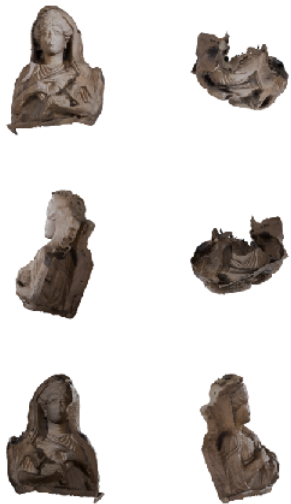


legacy_duplicate_top

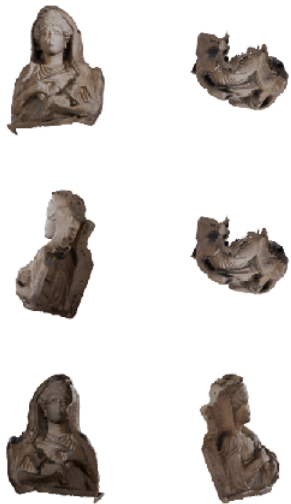


View protocol ablation — fig4_row3

Only target_view_mode changes: unique6 [0,15,12,16,13,14] vs legacy_duplicate_top [0,15,12,15,13,14].

unique6

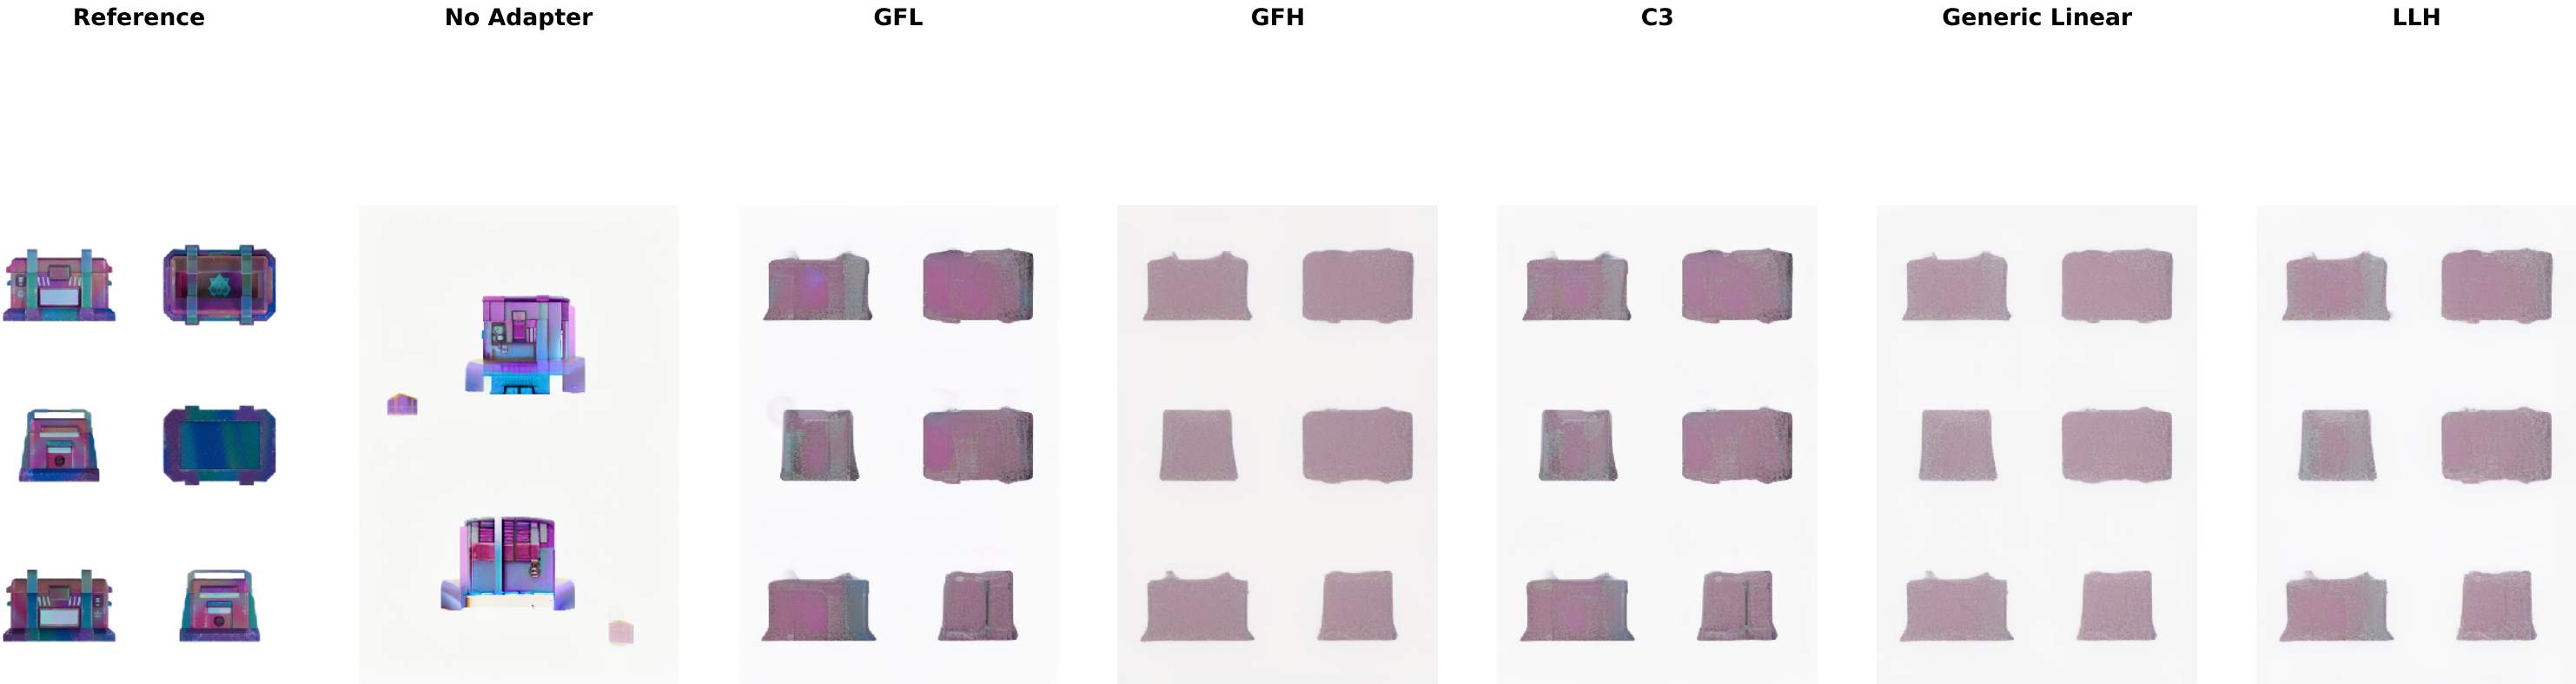

legacy_duplicate_top

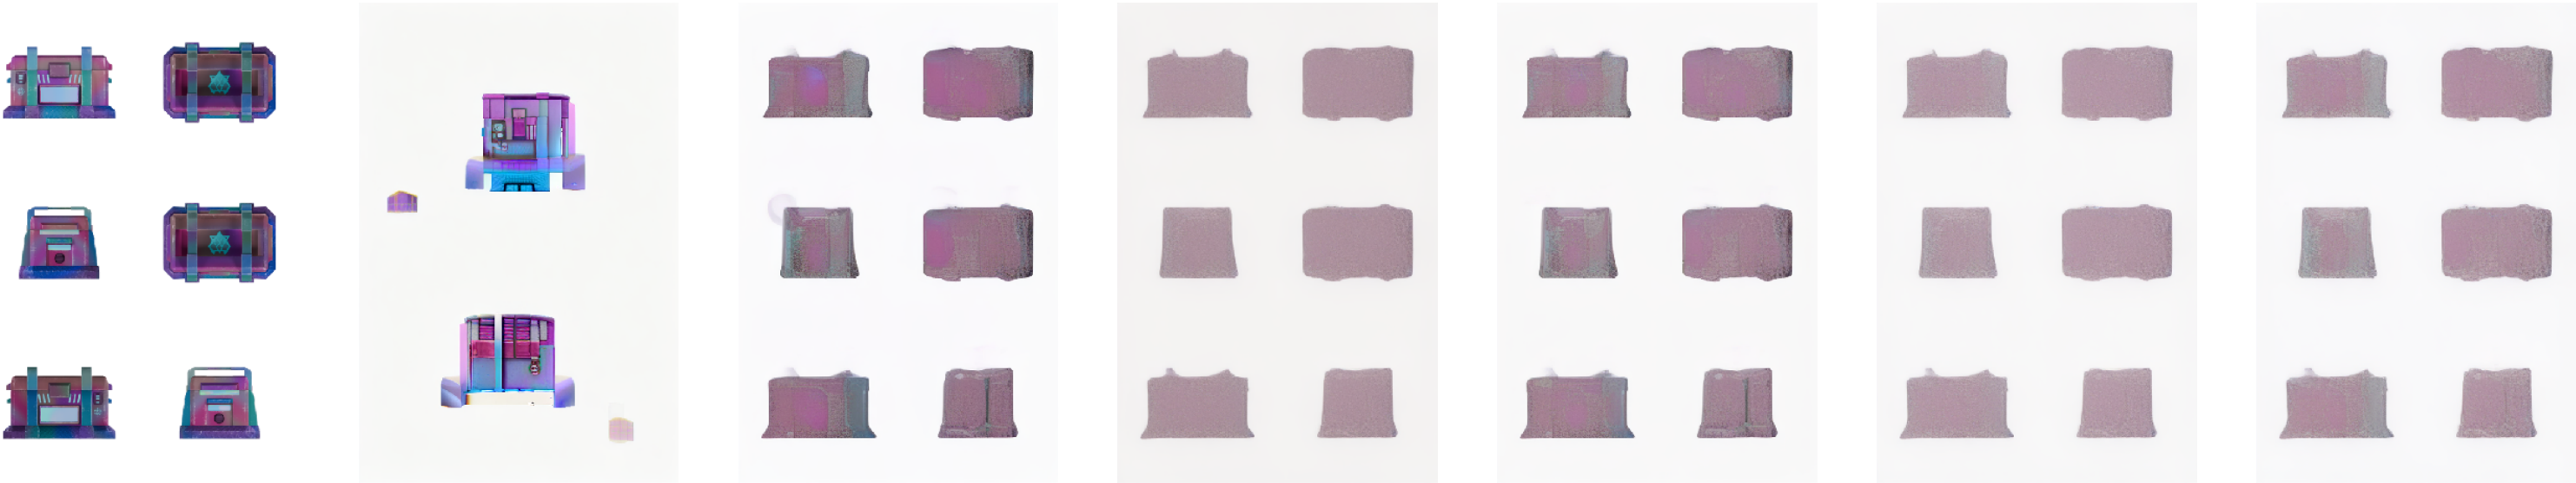

View protocol ablation — fig6_row1

Only target_view_mode changes: unique6 [0,15,12,16,13,14] vs legacy_duplicate_top [0,15,12,15,13,14].

unique6

Reference

No Adapter






GFL

GFH






C3

Generic Linear

LLH

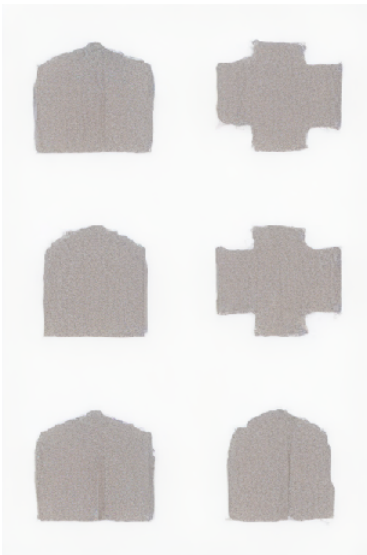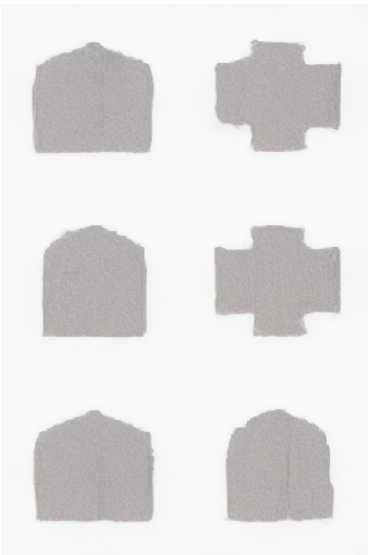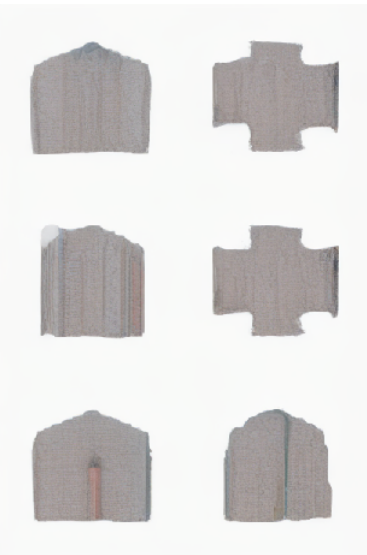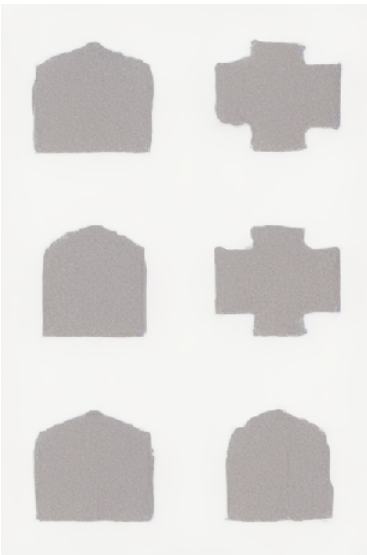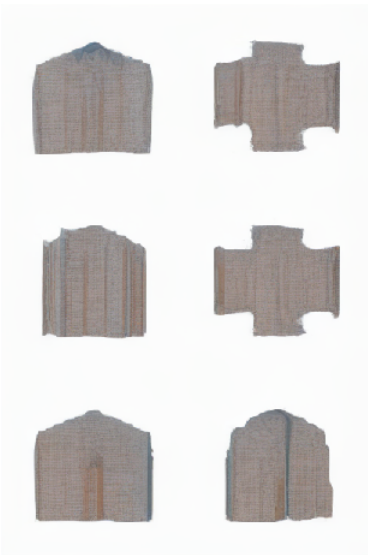


legacy_duplicate_top

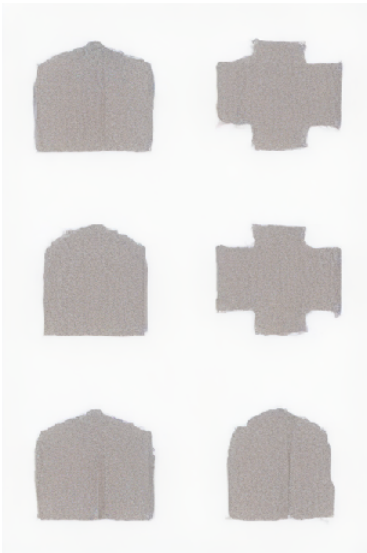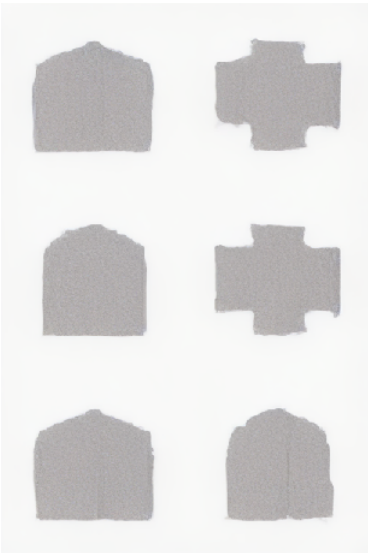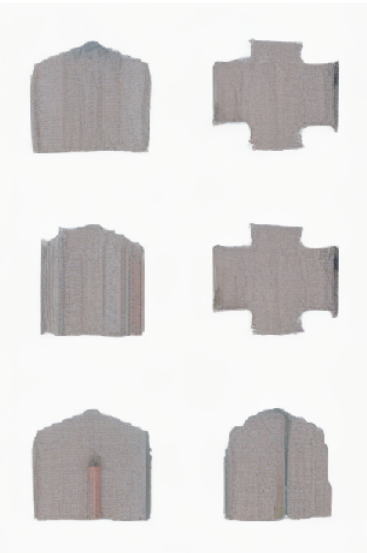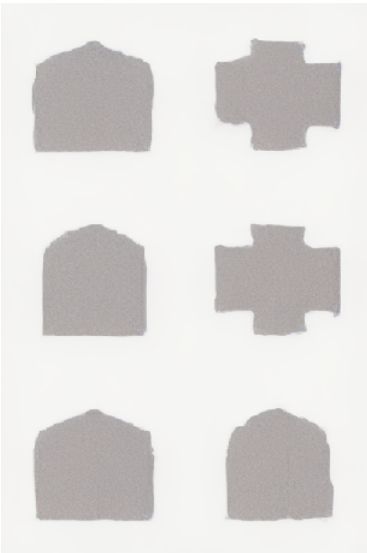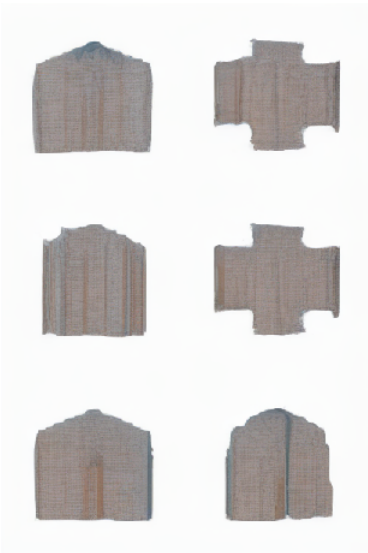

View protocol ablation — fig6_row2

Only target_view_mode changes: unique6 [0,15,12,16,13,14] vs legacy_duplicate_top [0,15,12,15,13,14].

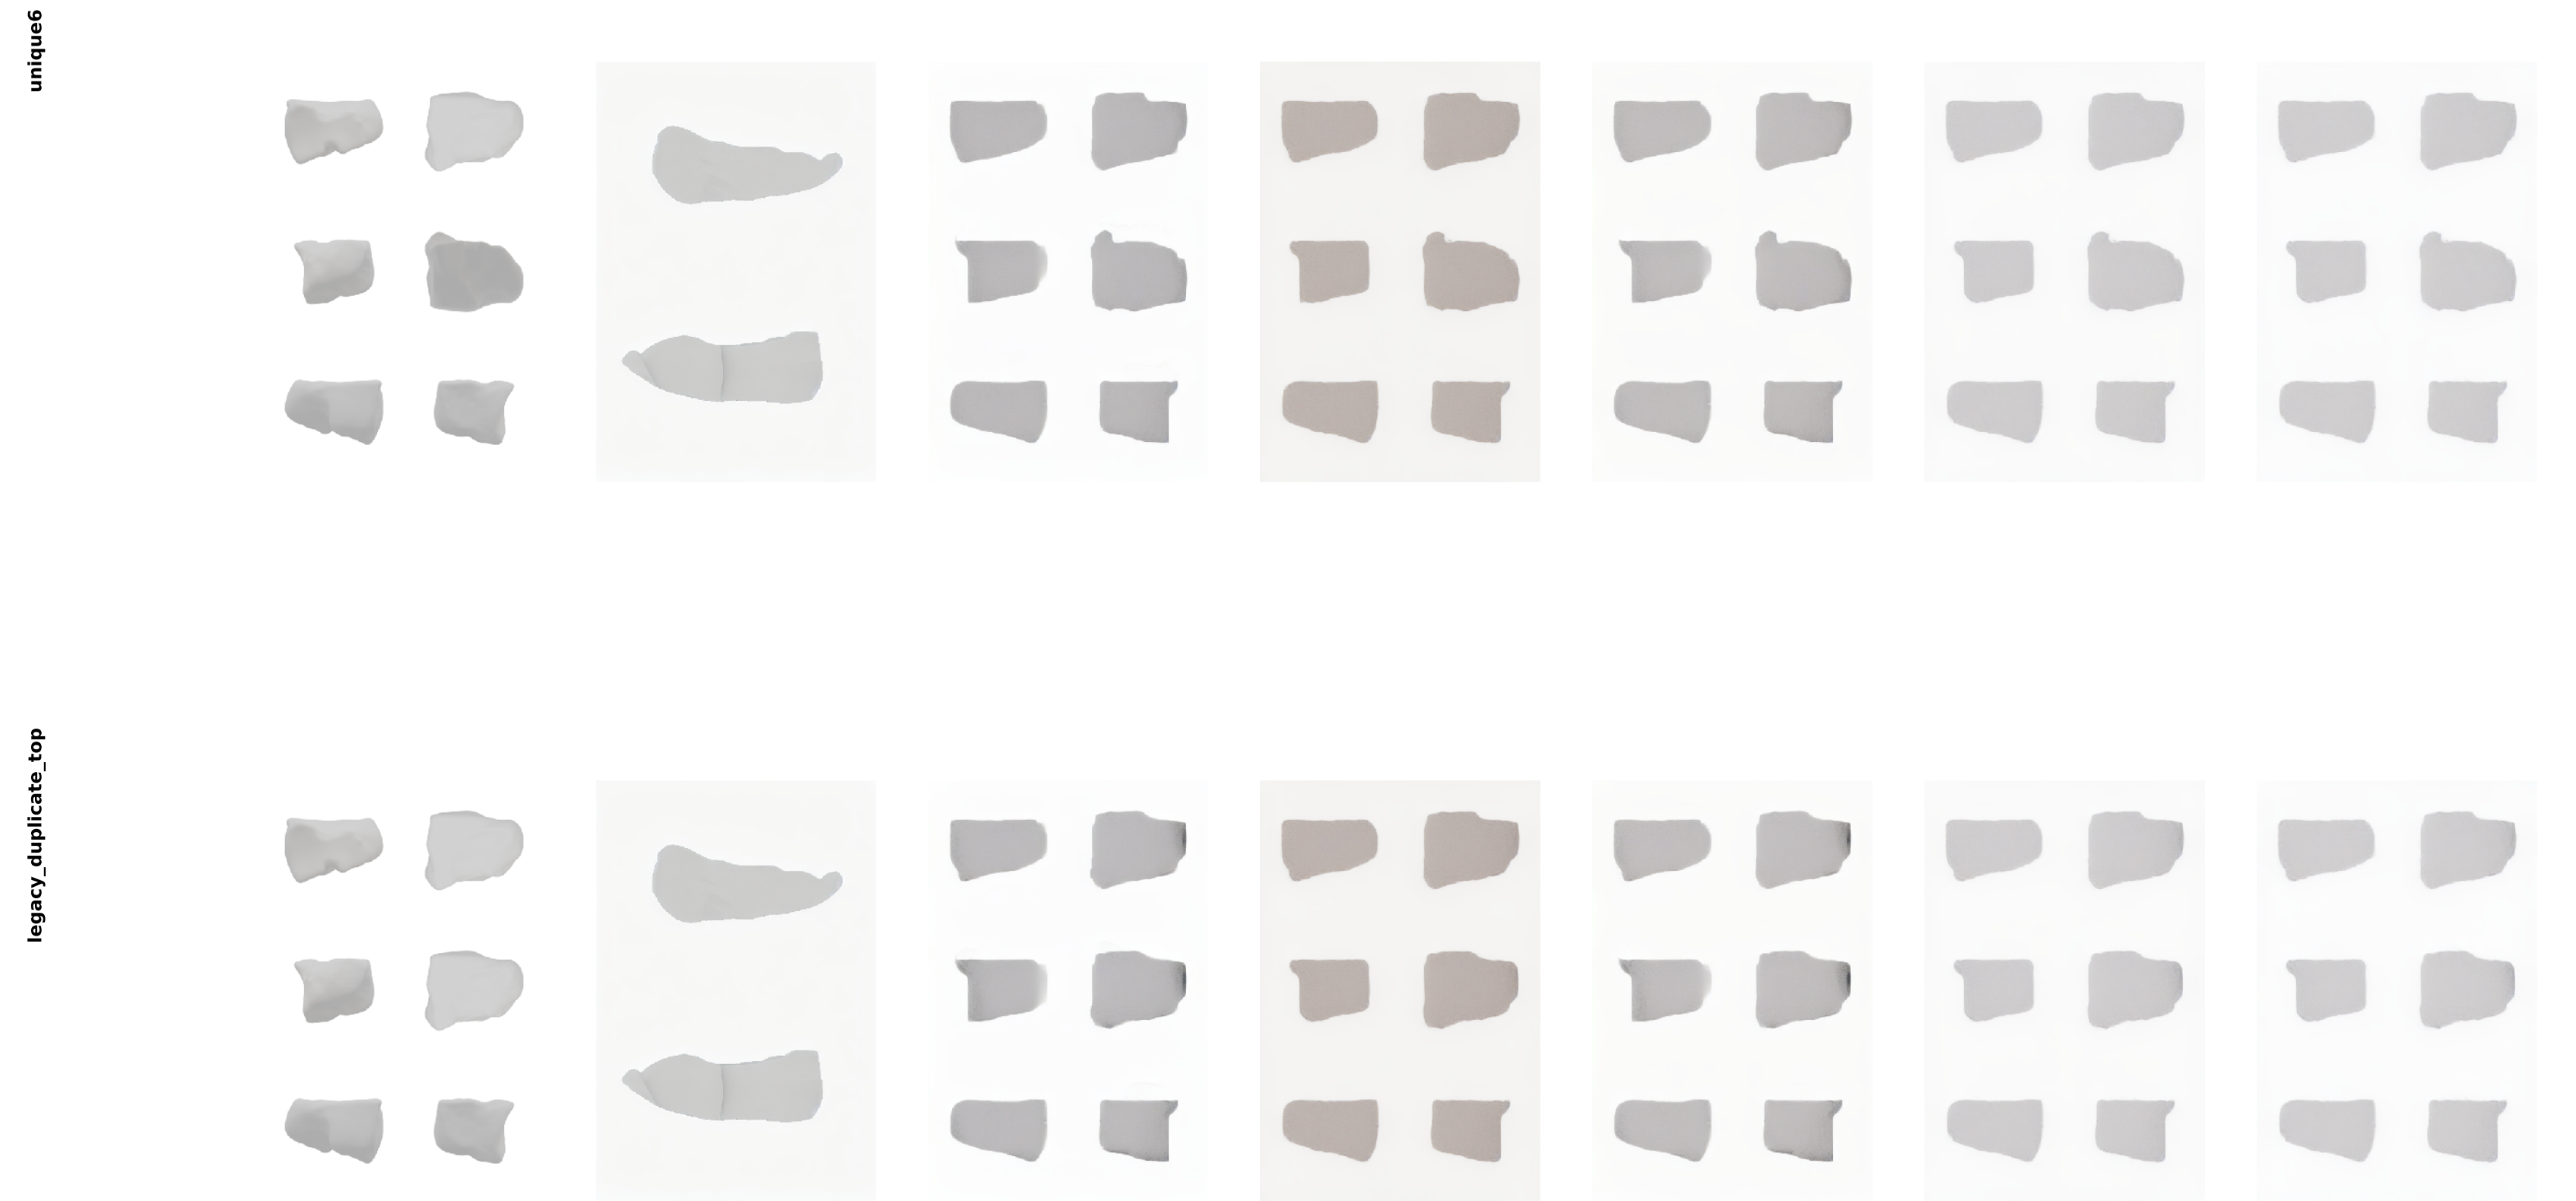

View protocol ablation — fig6_row3

Only target_view_mode changes: unique6 [0,15,12,16,13,14] vs legacy_duplicate_top [0,15,12,15,13,14].

unique6



legacy_duplicate_top

