# Timestep-Conditioned Adapter Scaling

A bounded study of stage-wise geometry control in multi-view diffusion

## TCAS requested scale

Training-free profile on an existing adapter path

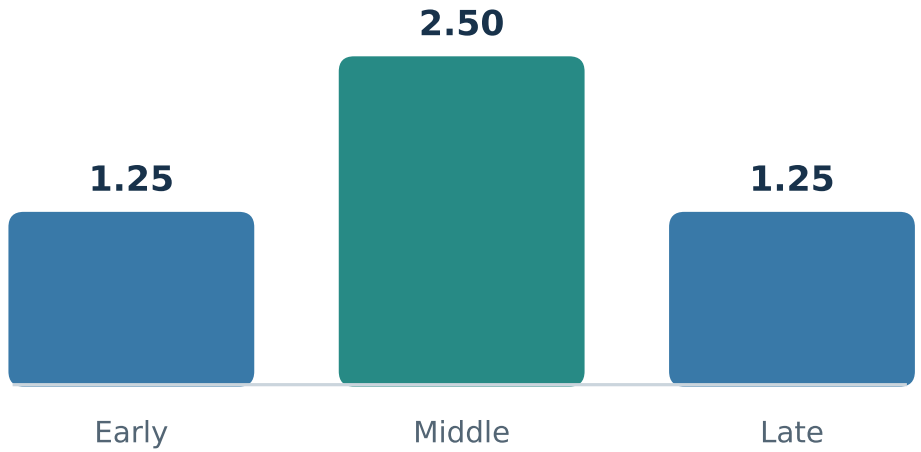


Requested values; wrapper caps and residual magnitudes are separate.

## Fresh C · 300 matched objects

One frozen checkpoint · shared runner and inference protocol

C3 − GFL FG-PSNR

**+0.522 dB**

95% CI
[+0.404, +0.641]

**Counter-results retained**

GFH and Generic Linear have more favorable means than C3 on all four displayed endpoints.

**C3–GFL changes applied deep/middle scale sums; its estimate is not timing-only.**

---

Image-space endpoints do not establish baked-texture, seam, PBR, unseen-view, or human-preference quality.