

Computers & Graphics

Timestep-Conditioned Adapter Scaling for Multi-view Diffusion Texture Generation --Manuscript Draft--

Manuscript Number:	
Article Type:	VSI: CAG_SS_CAD/Graphics 2026
Keywords:	multi-view diffusion model; 3D texture generation; adapter scaling; timestep-conditioned scaling; shape-texture trade-off; geometric control
Corresponding Author:	Libo Sun, Ph.D. Southeast University - Sipailou Campus Nanjing, Jiangsu CHINA
First Author:	Xueyuan Che, M.Eng.
Order of Authors:	Xueyuan Che, M.Eng. Libo Sun, Ph.D
Abstract:	Multi-view diffusion pipelines for 3D asset texturing commonly inject geometric conditions, such as normal and depth maps, through adapter modules, and the adapter scale at inference time is usually chosen empirically, although the generated views are later baked into the final mesh texture. We show that a single uniform scale is a blunt control: on the studied adapter, aggressive uniform scaling improves structural metrics such as foreground structural similarity (FG-SSIM) but suppresses the texture synthesis capability of the base model, causing flattened surfaces, reduced color variation, and loss of high-frequency details. We further identify an adapter-specific temporal conflict: geometric residuals are most useful for mid-stage structure refinement, whereas strong residual injection in the early or late stages disturbs global formation or suppresses texture synthesis. We introduce a measurable stage-utility analysis with structural guardrails and derive Timestep-Conditioned Adapter Scaling (TCAS), a training-free low-high-low schedule that concentrates strong geometric correction in the middle denoising stage and uses conservative scales otherwise. The schedule C3 = (1.25, 2.50, 1.25) is selected using only a 24-object probe set from 17 scaling variants and then evaluated unchanged, without further search, on the strictly disjoint 276-object holdout (pooled 300-object statistics also reported). TCAS achieves FG-SSIM comparable to aggressive uniform scaling while improving the peak signal-to-noise ratio (PSNR) by 0.96 dB, retaining substantially more texture, and receiving higher preference in a blinded human study. These results suggest treating adapter strength as a stage-dependent inference control variable rather than a fixed hyperparameter, at least for adapter-conditioned multi-view texture generation.

Acknowledgements

This work was supported by the Key R&D Program of Jiangsu Province under Grant BE2023010-3, the Basic Research Program of Jiangsu under Grant BK20253037, the Advanced Technology Research and Development Program of Jiangsu under Grant BF2025018, and the Modern Agricultural Machinery Equipment and Technology Promotion Project of Jiangsu under Grant NJ2025-10.

Cover Letter

Dear Editor,

We would like to submit our manuscript entitled “Timestep-Conditioned Adapter Scaling for Multi-view Diffusion Texture Generation” for consideration for publication in *Computers & Graphics*, as part of the Virtual Special Issue CAG_SS_CAD/Graphics 2026. **This work is recommended by CAD/Graphics 2026** (upon revision, Paper 75). In accordance with the journal’s guidelines for extended versions of conference papers, a copy of the original conference paper (Paper 75) is attached as supplementary material, and the manuscript explicitly states the extensions relative to it.

In this manuscript, we study a fine-grained inference-time control problem in geometry-controlled multi-view diffusion texturing: how strongly, and at which denoising stages, a geometric adapter should act. We first show that a uniform adapter scale is a blunt control — aggressive uniform scales improve structural metrics such as FG-SSIM but suppress the texture synthesis capability of the base model, causing surface flattening and loss of high-frequency detail. We then formalize the effect with a measurable Correction–Alignment–Interference (CAI) stage-utility model and derive Timestep-Conditioned Adapter Scaling (TCAS), a training-free low–high–low schedule that concentrates geometric correction in the middle denoising stage. The schedule $C3 = (1.25, 2.50, 1.25)$ is selected using only a 24-object probe set and then evaluated unchanged, without further search, on the strictly disjoint 276-object holdout (pooled 300-object statistics also reported), where it matches the structure of aggressive scaling while improving PSNR by 0.96 dB, retaining substantially more texture, and receiving the highest overall preference (58.1%) in a blinded human study with cluster-aware significance analysis. To the best of our knowledge, no prior work analyzes the shape–texture trade-off of adapter scaling or derives a timestep-conditioned schedule from measurable stage utilities; the closest prior art (MVPainter, arXiv 2025; MV-Adapter, arXiv 2024; ControlNet, ICCV 2023; limited-interval classifier-free guidance, NeurIPS 2024) is cited and compared explicitly in Sections 2.3 and 4.4 of the manuscript.

Thank you very much for your attention and consideration.

Sincerely,

The Authors

(Per the journal’s double-anonymized review policy, this cover letter contains no author details; author names, affiliations, and the corresponding author’s contact information are provided on the separately uploaded title page and in Editorial Manager.)

Declaration of interests

☒The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

☐The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

Response to Reviewers

Manuscript: *Timestep-Conditioned Adapter Scaling for Multi-view Diffusion Texture Generation* (recommended by CAD/Graphics 2026 for publication in *Computers & Graphics*)

Dear Editors and Reviewers,

We thank the CAD/Graphics 2026 program committee for recommending this manuscript, upon revision, for publication in *Computers & Graphics* (VSI: CAG_SS_CAD/Graphics 2026), and we thank all three reviewers for their careful and constructive comments. All main TCAS results and conclusions are retained in the revised manuscript; following the reviewers' suggestions, we have added new analyses, documentation, and controlled experiments, as detailed below. This submission is an extended version of our CAD/Graphics 2026 paper (Paper 75); in accordance with the journal's guidelines for extended versions of conference papers, a copy of the original conference paper is attached as supplementary material, and the introduction of the revised manuscript states the extensions relative to it explicitly. For transparency, we note that the learned FAC extension, initially reported positively under our earlier protocol, is now re-examined under a strictly paired, strictly disjoint protocol with a negative outcome (Section 4.6; see our response to Comment 1 of Reviewer 1). In the marked manuscript, the corresponding changes are highlighted in color (added text in blue, deleted text in red); the manuscript itself is double-anonymized, and author names and affiliations appear only on the separately uploaded title page.

Best regards

The Authors

(Author identities and acknowledgements are provided on the separately uploaded title page, per the journal's double-anonymized review process.)

Response to Reviewer 1

1. The data splits and the FAC evaluation are unclear; FAC requires a fully described training objective and separate training, tuning, and test sets.

Response: Thank you for this helpful comment. We revised the manuscript in two aspects.

- (1) We clarified the data splits and disclosed the probe/holdout structure. Section 4.1 now documents the complete data pipeline: all objects are drawn from the Objaverse

3D asset collection; ground-truth multi-view images are rendered offline with Blender (Cycles engine, 17 views at 512×512 , white background); the adapter training pool contains 1,118 rendered objects and the evaluation pool contains 300 rendered objects, and we verified that the two identifier sets intersect in zero objects, so no evaluation object was seen during adapter training. We additionally disclose that the 24-object probe set (obj_0000–obj_0023) is part of the 300-object pool, and every transfer claim is now also verified on the strictly disjoint 276-object holdout (obj_0024–obj_0299). The 50-object scale-sweep set, the 26-object texture-audit set, the 50-object CLIP-IQA subset, and the 30-object preference-study subset are all subsets of the 300-object pool, and no training object appears in any of them. (Please see the “Implementation and dataset details” paragraph in Section 4.1 and Section 4.7 of the revised manuscript.)

- (2) We fully described the FAC training configuration and added a controlled re-examination. Section 4.6 now specifies the complete configuration: roughly 6×10^3 trainable parameters (the LTAG/GSG/FSC controllers only; the base model, VAE, and adapter remain frozen), the same enhanced denoising objective as the base adapter (a latent noise-prediction MSE with $1.7 \times$ foreground and $1.3 \times$ edge spatial reweighting plus a latent-SSIM term), AdamW with peak learning rate 10^{-4} (100 warm-up steps) for 2,000 training steps, and a training pool strictly disjoint from all evaluation objects (no evaluation object is used for training or model selection). We further report controls spanning the most favourable training conditions we could construct: a warm-start control whose gate is initialized at the exact C3 schedule and left untrained is statistically indistinguishable from TCAS (paired Δ FG-PSNR = -0.18 dB on the control subset, 95% CI crossing zero, validating the evaluation path), whereas every trained configuration degrades fidelity, with paired deficits ranging from -1.1 to -2.9 dB FG-PSNR (win rates at most 16%) and increasing monotonically with the amount of controller training. Preserving the temporal envelope is therefore necessary but not sufficient: the limitation lies in the learned-modulation training signal itself, which trades foreground fidelity for denoising-objective loss. The training-free TCAS remains the main and sole method of the paper. For transparency, we note that an earlier version of this extension, evaluated on the main adapter under our initial protocol before the strictly paired and strictly disjoint training controls were adopted, had suggested a positive FAC gain; that preliminary comparison differed in both evaluation protocol and adapter instance, and under the strictly paired, strictly disjoint protocol no trained configuration replicates the gain, so the earlier comparison is superseded by the controlled re-examination. (Please see Section 4.6 of the revised manuscript; the

complete dose–response table over all seven trained configurations is provided in the supplementary material.)

2. Provide the exact implementation details and checkpoints, conditioning, resolution, sampler, scheduler, prompts or references.

Response: Thank you for this suggestion. We added a dedicated “Implementation and dataset details” subsection (Section 4.1.3) with a consolidated reproducibility reference. It specifies: the base pipeline (an MVPainter-style geometry-controlled multi-view diffusion model built on a joint six-view latent UNet, used frozen together with its VAE); the adapter input (a five-channel geometric input of a 3-channel normal map, a 1-channel depth map, and a 1-channel foreground mask) and its multi-scale injection into multiple UNet resolution levels; the adapter checkpoint used for all tables and its scale semantics (the requested scale is applied multiplicatively at every injected layer); the sampler and scheduler (Euler discrete, 50 denoising steps); the fixed random seed (42) shared by all schedules within an experiment, so all variants share the same initial latents; the six target views and the ground-truth rendering configuration; and the exact metric implementations (foreground-masked FG-SSIM/Edge-SSIM/PSNR, edge masks derived from depth/normal discontinuities, LPIPS with the AlexNet backbone, and foreground Laplacian-variance/RGB-std/gradient-magnitude diagnostics computed under identical views and masks). The pipeline is reference-image-conditioned; no text prompts are used. In addition, the supplementary material now contains a consolidated reproducibility table listing the data source and subsets, the exact base-pipeline and adapter checkpoint identifiers, the scheduler, steps, seed, conditioning, resolution, and metric implementations. (Please see Section 4.1 of the revised manuscript and the reproducibility table in the supplementary material.)

3. Preference decisions are clustered by participant and object; use mixed-effects analysis or participant- and object-level bootstrap intervals, and report study instructions, randomization, and other design details.

Response: Thank you for this valuable comment, which we fully addressed in two respects.

- (1) We now report the complete study design in Section 4.5: a blinded three-alternative forced-choice (3AFC) preference study on 30 objects drawn from the evaluation pool with 24 participants; for each object and each of the three criteria (texture naturalness, shape consistency, overall quality), participants viewed the anonymized outputs of the three conditions side by side; the left-to-right condition order was randomized independently per trial; participants were not informed which method produced which image or how many conditions existed; instructions asked participants to select the best image

for the stated criterion only; and every participant judged all 30 objects under all three criteria, yielding 720 valid first-choice decisions per criterion.

- (2) We adopted cluster-aware inference. Because first-choice decisions are clustered within both participants and objects, we report 95% confidence intervals obtained by a two-level cluster bootstrap (resampling participants and objects with replacement, 10,000 resamples). C3’s overall-quality share is 58.1% (CI [50.1%, 65.8%]), exceeding the conservative and aggressive baselines by +33.6 points (CI [19.3, 47.2]) and +40.6 points (CI [29.4, 51.8]); both differences exclude zero, so the overall-preference advantage of C3 is significant. By contrast, the baselines’ single-criterion advantages are not significant (texture naturalness: $s = 1.25$ over C3 +6.7 points, CI [−7.9, 21.5]; shape consistency: $s = 2.50$ over C3 +5.3 points, CI [−6.7, 17.9]). Overall quality is therefore the only criterion with a significant preference, supporting the interpretation of TCAS as the perceptually preferred balance rather than a per-criterion maximum. We report the cluster bootstrap rather than a binomial test, since the latter would overstate significance under clustering. (Please see Section 4.5 of the revised manuscript.)

Response to Reviewer 2

1. Generalizability is insufficiently demonstrated; all experiments run on a single pipeline.

Response: Thank you for this important comment. We agree that the main experiments use a single pipeline, and the revision addresses this directly rather than claiming unsupported generality. New Section 4.7 (“Adapter-Dependence of High-Scale Failure Modes”) reports controlled mechanism probes on additional adapter checkpoints of the same architecture under an identical inference protocol: across three regimes spanning a spectrum of trained residual magnitudes, uniform high scale ($s = 2.50$) produced (i) texture flattening with the main adapter studied in the paper, (ii) high-frequency artifact amplification with a strong-residual adapter under per-layer caps, and (iii) no appreciable effect with a deliberately weakened adapter. A per-layer scale-cap ablation reproduces both directions on a single checkpoint, isolating the inference-time scale semantics as the determining factor for the failure direction; a residual-magnitude sweep (scaling the adapter’s output projection from $0.1\times$ to $3\times$) shows that the intervention strength is monotonic in the trained residual magnitude; and a cross-adapter stage ablation shows that even the most sensitive denoising stage is adapter-dependent. What remains stable is stated precisely: in every regime where scaling had a non-negligible effect, the low–high–low temporal schedule (C3) yielded the best shape–texture balance, because concentrating correction in the middle stage exploits the

stage-dependent division of labor observed in our experiments (global layout $\rightarrow$ geometry refinement $\rightarrow$ texture synthesis), which we verify across the tested adapter regimes rather than claim as a model-independent property. We explicitly acknowledge in Section 5 (Limitations) that the evidence remains within one architecture family, that the schedule has not yet been validated on a different geometry-conditioned multi-view diffusion backbone, and that cross-backbone validation is future work; the contribution is now framed as a conditional structural rule with re-estimable stage utilities rather than a universal optimum. (Please see Sections 4.7 and 5 of the revised manuscript.)

2. TCAS is heuristic; the boundaries and values are not explained.

Response: Thank you for pointing this out. The revision replaces the heuristic framing with a formal derivation plus robustness checks. First, Section 3.3 introduces a measurable Correction–Alignment–Interference (CAI) stage-utility model, stated as Proposition 1 with a proof: a two-stage, guardrailed epsilon-optimal selection rule — first maximize the fidelity objective over the admissible schedules, then minimize the texture-deviation risk among schedules whose fidelity is within $\epsilon = 0.1$ dB of the maximum (risk is compared by a non-worsening, Pareto-style rule across the texture diagnostics, with no artificial weights). The measured utilities select exactly the low–high–low assignment ($U_e = -0.788$ dB, CI $[-1.420, -0.156]$, guardrail-violating; $U_m = +0.574$ dB, CI $[0.391, 0.756]$ — above epsilon on its own, so the high scale must be retained in the middle stage; $U_l = +0.077$ dB, CI $[0.006, 0.149]$ — estimated utility 0.077 dB below $\epsilon = 0.1$ dB with a statistically insignificant FG-SSIM change, so the late stage is fidelity-equivalent under either assignment and the risk-dominant conservative scale is selected, with confidence intervals serving only as auxiliary uncertainty information outside the epsilon-equivalence condition; these utilities are measured on the strong-residual, per-layer-capped adapter instance of Section 4.7, where per-stage effects are most visible, while the main adapter’s 17-variant probe independently selects the same low–high–low assignment). The proposition is explicitly conditional on the measured adapter regime. Second, a boundary/peak sensitivity sweep (three high-scale windows $\times$ five peak scales, fifteen candidates on the 24-object probe protocol of the same strong-residual instance, Section 4.7) shows that the canonical middle-third window lies in a stable high-performance region (its 2.50 setting achieves 16.71 dB PSNR; the best setting in the same window, 2.75, achieves 16.79 dB but with worse texture diagnostics and lower FG-SSIM), so C3 is a robust middle-stage choice rather than a boundary-sensitive point estimate. Third, the probe variants already include timestep-conditioned alternatives that place the high scale in early, late, or broader windows (Table 2 and Fig. 7 of the revised manuscript; Table 2 shows eight representative variants), and the disjoint-holdout transfers

described in our response to Reviewer 3 rule out the remaining generic schedules (linear warm-up, cosine bump, trapezoid, and Gaussian-peak). (Please see Sections 3.3 and 4.7 of the revised manuscript.)

3. The subset sources/construction/overlap and the FAC training details are insufficient.

Response: Thanks for pointing this out. The subset construction and the now-disclosed probe/holdout overlap are addressed in Section 4.1 (please see our response to Comment 1 of Reviewer 1, item (1)). The complete FAC training configuration and the controlled re-examination, including the warm-start control and its scoped interpretation, are reported in Section 4.6 (please see our response to Comment 1 of Reviewer 1, item (2)). TCAS remains the main and sole method of the paper.

Response to Reviewer 3

1. Competing schedules are validated only on the probe set; evaluate cosine bump and linear warm-up on the large independent set.

Response: Done, thank you for this suggestion. Linear warm-up and the cosine bump were regenerated at the full 300-object scale on the strong-residual, per-layer-capped adapter instance described in Section 4.7, and the transfer statistics are reported on the strictly disjoint 276-object holdout (obj_0024–obj_0299; Section 4.7): C3 improves PSNR over linear warm-up by +0.323 dB (95% CI [0.263, 0.386], 214/276 wins) while matching its structure (FG-SSIM difference -0.001 , statistically tied), and over the cosine bump by +0.902 dB (95% CI [0.824, 0.981], 253/276 wins) with a higher FG-SSIM (+0.046). Together with the transferred trapezoid (+0.258 dB, CI [0.207, 0.308], 206/276 wins) and Gaussian-peak (+0.324 dB, CI [0.281, 0.367], 232/276 wins) schedules, the holdout ordering matches the probe: warm-up approaches C3 in structure but loses in signal fidelity, and the smooth bump loses in both because its effective high-scale duration is shorter than the full middle third. These statistics are now also summarized in a dedicated scheduling-transfer table (Table 9 in Section 4.7). (Please see Section 4.7 of the revised manuscript.)

2. The aggregation procedures in the texture tables appear to differ; clarify the computation.

Response: The reviewer is correct, and we thank them for the careful reading. The two tables used different aggregation orders (a ratio of per-condition means versus the mean of per-object ratios). The revised captions now state the rule explicitly: absolute foreground

statistics are means over objects and views, and each ratio is the mean over objects of the per-object ratio relative to the corresponding $s = 1.25$ statistic (equal object weighting). All win rates and confidence intervals have been re-verified from the per-object results. (Please see the captions of the texture tables in Section 4.5 of the revised manuscript.)

3. Clarify the statistical reporting ($\pm$, paired test, bootstrap procedure).


Response: Thank you for this suggestion. Statistical reporting is now clarified at first use in Section 4.1 and in the relevant captions. Specifically, for CLIP-IQA: $\pm$ denotes the standard deviation across the 50 objects; the paired comparison is a two-sided paired t-test ($t(49) = 10.52$, $p \approx 3.6 \times 10^{-14}$ for C3 vs. $s = 2.50$); and the 95% confidence interval of the paired mean difference is constructed by object-level percentile bootstrap with 10,000 resamples ([0.0037, 0.0054], excluding zero). For the preference study, two-level (participant- and object-level) cluster-bootstrap intervals are reported in Section 4.5 (please see our response to Comment 3 of Reviewer 1). All other paired statements (stage utilities, holdout deltas) use object-level paired statistics with percentile bootstrap 95% CIs, and the procedure is stated once in Section 4.1.3. (Please see Sections 4.1 and 4.5 of the revised manuscript.)

4. Provide more complete dataset/implementation details; FAC training data, loss, optimization, parameter count, and the exclusion of the 300 validation objects.

Response: Thank you for this comment. The dataset and implementation details, including the verified zero train-eval overlap, are provided in Section 4.1 (please see our responses to Comments 1 and 2 of Reviewer 1). For FAC, Section 4.6 now specifies exactly what is requested: training data (the 1,118-object adapter training pool, strictly disjoint from all evaluation objects; no evaluation object is used for training or model selection), loss (the same enhanced denoising objective as the base adapter, specified in Section 4.6), optimization (AdamW, peak learning rate 10^{-4} , 2,000 steps), parameter count (roughly 6×10^3 trainable parameters), and the strictly paired evaluation with a warm-start control. The controlled outcome and its scoped interpretation are reported in the manuscript, and the training-free TCAS remains the main and sole method. (Please see Section 4.6 of the revised manuscript.)

We believe the revision is substantially strengthened, and we thank the reviewers again: their comments directly led to the CAI stage-utility model, the disjoint holdout protocol, the adapter-dependence analysis, and the cluster-aware statistical reporting.

Sincerely, The Authors



Timestep-Conditioned Adapter Scaling for Multi-view Diffusion Texture Generation

ARTICLE INFO

Keywords: multi-view diffusion model, 3D texture generation, adapter scaling, timestep-conditioned scaling, shape-texture trade-off, geometric control, texture quality assessment

ABSTRACT

Multi-view diffusion pipelines for 3D asset texturing commonly inject geometric conditions, such as normal and depth maps, through adapter modules, and the adapter scale at inference time is usually chosen empirically, although the generated views are later baked into the final mesh texture. We show that a single uniform scale is a blunt control: on the studied adapter, aggressive uniform scaling improves structural metrics such as foreground structural similarity (FG-SSIM) but suppresses the texture synthesis capability of the base model, causing flattened surfaces, reduced color variation, and loss of high-frequency details. We further identify an adapter-specific temporal conflict: geometric residuals are most useful for mid-stage structure refinement, whereas strong residual injection in the early or late stages disturbs global formation or suppresses texture synthesis. We introduce a measurable stage-utility analysis with structural guardrails and, extending our preliminary conference version, derive Timestep-Conditioned Adapter Scaling (TCAS), a training-free low-high-low schedule that concentrates strong geometric correction in the middle denoising stage and uses conservative scales otherwise. The schedule $C3 = (1.25, 2.50, 1.25)$ is selected using only a 24-object probe set from 17 scaling variants and then evaluated unchanged, without further search, on the strictly disjoint 276-object holdout. TCAS achieves FG-SSIM comparable to aggressive uniform scaling while improving the peak signal-to-noise ratio (PSNR) by 0.96 dB, retaining substantially more texture, and receiving higher preference in a blinded human study. These results suggest treating adapter strength as a stage-dependent inference control variable rather than a fixed hyperparameter, at least for adapter-conditioned multi-view texture generation.

1. Introduction

Recent advances in single-image 3D generation have substantially improved the recovery of geometry, multi-view consistency, and sparse-view reconstruction [1, 2, 3, 4, 5, 6, 7, 8]. As geometric generation models become increasingly mature, generating high-quality textures on an existing 3D shape has become a key factor affecting the realism and usability of 3D content. For an object whose geometry has already been determined, the final visual quality depends not only on whether the shape is complete, but also on whether the texture is faithful to the reference image, aligned with the 3D surface, and rich in local details.

Existing multi-view texture generation methods usually generate RGB images from multiple target views using 2D im-

age diffusion models, and then map the generated images back to the 3D surface through projection or texture baking [9, 10, 11, 12]. This route benefits from the generative capability of image diffusion models, but it still faces challenges in reference appearance alignment, geometry-texture consistency, and local texture detail preservation. Geometry-controlled multi-view diffusion methods represented by MVPainter introduce geometric conditions such as normals and depth maps to improve the alignment between generated textures and the underlying 3D surface, demonstrating the importance of explicit geometric control for 3D texture generation [13].

However, introducing geometric conditions is not only a question of whether a control signal should be used, but also a question of how strongly it should be applied. In adapter-

augmented diffusion pipelines, geometric conditions are usually injected into the model through an adapter or control branch, and their influence is regulated by a scaling factor. In practice, this factor is often set empirically: a small scale may lead to insufficient geometric constraints, whereas a larger scale is usually expected to improve structural consistency.

In multi-view texture generation, however, stronger adapter scaling is not necessarily better. Texture generation requires not only contours and structures to be consistent with geometry, but also surface color variations, material details, and high-frequency patterns to be preserved. Overly strong geometric control may force the model to follow normal, depth, or edge conditions too aggressively, thereby suppressing the intrinsic texture synthesis capability of the base diffusion model. In this case, some structural metrics may still improve, while the visual result suffers from texture flattening, reduced color variation, and detail loss.

Therefore, adapter scaling in geometry-controlled multi-view diffusion deserves further analysis. Compared with prior work that mainly studies how to build texture generation pipelines, how to introduce geometric conditions, and how to improve overall generation quality, adapter strength is a fine-grained inference-time control problem. It directly affects the balance between shape consistency and texture detail, and is an easily overlooked factor in multi-view texture generation quality.

This problem is related to, but not solved by, existing guidance scheduling strategies. CFG scheduling changes the extrapolation between conditional and unconditional predictions, while a geometry adapter injects residuals into intermediate representations. Generic ControlNet or adapter scale scheduling similarly treats condition strength mainly as a condition-adherence knob. In texture generation, however, the key question is not only how strongly to follow the geometry, but also when geometric residuals should dominate and when they should recede so that the base model can synthesize color, material, and high-frequency texture. Simple monotonic schedules such as linear or cosine decay do not explicitly address this non-monotonic requirement. Even the recent finding that classifier-free guidance is most useful only in a limited noise interval [28] does not answer this question: it identifies where conditioning helps for CFG, but not which stages of a geometry-conditioned texture pipeline require strong geometric residuals, where the late-stage risk is texture suppression rather than diversity loss.

The goal of this paper is not to propose a new full texture generation system, but to analyze and improve inference-time adapter scaling within a fixed geometry-controlled multi-view diffusion pipeline.

The main contributions of this paper are as follows:

(1) We systematically diagnose the shape-texture trade-off caused by adapter scaling in multi-view diffusion texture generation, showing that higher scales can improve structural metrics while simultaneously causing texture degradation whose specific form (flattening, artifact amplification, or no effect) depends on the adapter's residual magnitude and scale semantics.

(2) We identify an adapter-specific temporal conflict between geometric residual injection and texture formation, and propose

Timestep-Conditioned Adapter Scaling (TCAS), which concentrates strong geometric correction in the middle denoising stage while using conservative scales in the early and late stages.

(3) Through uniform scale sweeps, texture audits, a 24-object probe analysis of 17 uniform, layer-wise, and temporal scaling variants, and a 300-object evaluation pool without any further schedule search, we show why fixed high scales and simple stage transfers of guidance scheduling are insufficient for the shape-texture trade-off.

(4) We further provide a large-scale texture preservation analysis on the 300-object evaluation pool, showing that TCAS substantially reduces texture flattening compared with full high-scale scaling: C3 outperforms $s = 2.50$ on 87.7%, 95.0%, and 83.0% of objects in Laplacian variance, RGB standard deviation, and gradient magnitude, respectively, while the 95% confidence interval for the FG-SSIM difference crosses zero, indicating no significant difference in structural similarity.

A preliminary version of this study was submitted to CAD/Graphics 2026 (Paper 75) [41]. This article extends that submission substantially: (i) the TCAS schedule is now grounded in an explicit two-stage epsilon-optimal selection rule (Proposition 1) with assumptions and proofs; (ii) the empirical protocol now separates a strictly disjoint 276-object holdout from the 24-object probe set, and C3 is evaluated unchanged on this holdout, with pooled 300-object statistics reported alongside; and (iii) the presentation, including the abstract, introduction, and conclusions, is substantially rewritten to state these extensions.

2. Related Work

2.1. 3D Texture Generation and Multi-view Diffusion

Single-image 3D generation is often decomposed into geometry generation and texture generation. In recent years, single-image-to-3D, multi-view diffusion, and sparse-view reconstruction methods have made notable progress in structural stability, shape completeness, and cross-category generalization [1, 2, 3, 4, 5, 6, 7, 8]. Nevertheless, high-quality texture generation remains a key bottleneck for the realism and usability of 3D content. Existing texture generation methods usually rely on 2D diffusion models to synthesize RGB images from multiple views, and then project or bake these images onto the 3D surface [9, 10, 11, 12]. While this strategy inherits the strong generative capability of image diffusion models, it still suffers from reference appearance misalignment, geometry-texture inconsistency, and insufficient local texture detail.

To address these issues, methods such as Paint3D, MVPaint, Hunyuan3D 2.0, and MVPainter formulate 3D texture generation as a geometry-controlled multi-view diffusion task, generating multi-view images under geometric control and baking them into UV textures [14, 15, 16, 13]. MV-Adapter further shows that adapter-style multi-view control can enhance cross-view consistency without fully retraining the base model [17]. By injecting geometric information such as normals and depth maps into the diffusion model as conditional signals, the generated results better follow the 3D surface structure and remain consistent across views. Unlike prior methods that focus mainly

on multi-view image generation or general 3D reconstruction, these works emphasize precise alignment between texture and geometry as well as local detail recovery, significantly improving 3D texture generation quality. However, they mainly answer how to introduce geometric conditions and how to construct a texture generation pipeline, while the influence of geometric control strength at inference time on shape and texture quality remains underexplored.

2.2. Adapter-augmented Diffusion Models and Geometric Control

Adapter modules have become an important mechanism for introducing additional conditions into diffusion models. T2I-Adapter and ControlNet inject spatial conditions such as edges, depth maps, and normals into a pretrained diffusion model through lightweight parallel branches with a controllable scaling factor [18, 19]. IP-Adapter introduces image prompts through decoupled attention [20]. LoRA and its variants implement lightweight model adaptation through low-rank residual updates [21, 22, 23]. Although these methods differ in architecture, they generally include some form of scaling factor that controls the influence of the external condition or adapter residual on the base model.

In practice, the adapter scale is often treated as an empirical hyperparameter. A larger scale usually improves condition adherence, for example by better following normals, depth maps, or reference images. In texture generation tasks, however, overly strong conditional constraints may weaken the base diffusion model’s ability to synthesize color, material, and high-frequency details. Adapter scaling is therefore not a simple matter of increasing the strength as much as possible; it involves a balance between geometric constraints and texture fidelity. This paper focuses on exactly this inference-time control problem: given a fixed adapter structure and fixed geometric conditions, how should the adapter strength be set or scheduled to preserve both shape consistency and texture detail?

2.3. Diffusion Guidance Scheduling and Timestep Control

The denoising process of diffusion models is highly stage-dependent. Early steps mainly determine global layout and coarse structure, middle steps refine shape and semantic structure, and late steps are more responsible for color, texture, and high-frequency details [24, 25]. Based on this observation, many guidance scheduling strategies have been explored in both research and practice. For example, classifier-free guidance scales may be adjusted linearly, with cosine schedules, or dynamically to mitigate oversaturation, detail loss, or reduced diversity caused by overly strong guidance [26, 27]. In addition, the development of latent diffusion, high-resolution diffusion, and Transformer-based diffusion models further shows the close relationship among generation quality, noise schedules, conditional injection, and network architecture [29, 30, 31, 32, 33, 34, 35, 36].

These methods all exploit the staged nature of denoising to regulate conditional strength. Notably, Kynkäänniemi et al. show that classifier-free guidance is harmful at high noise levels, largely unnecessary at low noise levels, and beneficial

mainly in a middle interval, motivating limited-interval guidance [28]; mid-stage concentration of conditioning strength therefore has a close precedent in CFG scheduling. However, different control signals act through different mechanisms. CFG scheduling adjusts the weight between conditional and unconditional predictions, mainly affecting the balance among semantic control, diversity, and visual fidelity. By contrast, the scale of a geometric adapter acts directly on intermediate features or residual branches, controlling how strongly geometric conditions intervene in the generation process. TCAS differs from limited-interval guidance in both mechanism and target: it scales adapter feature residuals rather than score extrapolation, raises the middle scale above a conservative baseline instead of switching guidance on and off, and addresses the shape–texture trade-off of geometry-conditioned texture generation, where late-stage over-control suppresses the synthesis of color and high-frequency texture. ControlNet-style scale control is closer in spirit, but it is still usually interpreted as a condition-adherence strength; directly applying a larger, smaller, or smoothly decayed control scale does not specify which denoising stage should receive strong geometric residuals for texture generation.

This distinction matters because the desired schedule for geometry-controlled texture generation is not necessarily monotonic. A monotonic decay or warm-up can reduce over-control in one part of the trajectory, but it cannot simultaneously avoid unstable early residuals, strengthen the middle stage where geometry refinement is most useful, and weaken late residuals that compete with color and high-frequency texture formation. Thus, timestep-conditioned scheduling of adapter strength cannot be treated as a direct transfer of CFG scheduling or generic ControlNet scale scheduling; it requires a dedicated analysis of how geometric residual injection interacts with texture synthesis.

3. Method

3.1. Task Definition and Base Pipeline

This paper builds on the MVPainter-style geometry-controlled multi-view texture generation framework [13] and studies how the inference-time strength of geometric condition injection affects the generated results. Figure 1 illustrates the overall pipeline: the adapter injects geometric residuals into UNet features, TCAS adjusts their strength across denoising stages, and the final multi-view outputs are projected and baked into a textured 3D mesh. Given a single reference image and the corresponding 3D geometry, the base pipeline first generates RGB texture images from six target views and then obtains a textured mesh through projection or texture baking. We do not modify the base UNet, VAE, or pretrained adapter weights. Instead, the adapter scaling factor is treated as the key inference-time control variable.

During multi-view diffusion, the 3D geometry is rendered into normal maps, depth maps, and foreground masks, denoted as:

$$\mathbf{G} = \{G_{\text{normal}}, G_{\text{depth}}, G_{\text{mask}}\}. \quad (1)$$

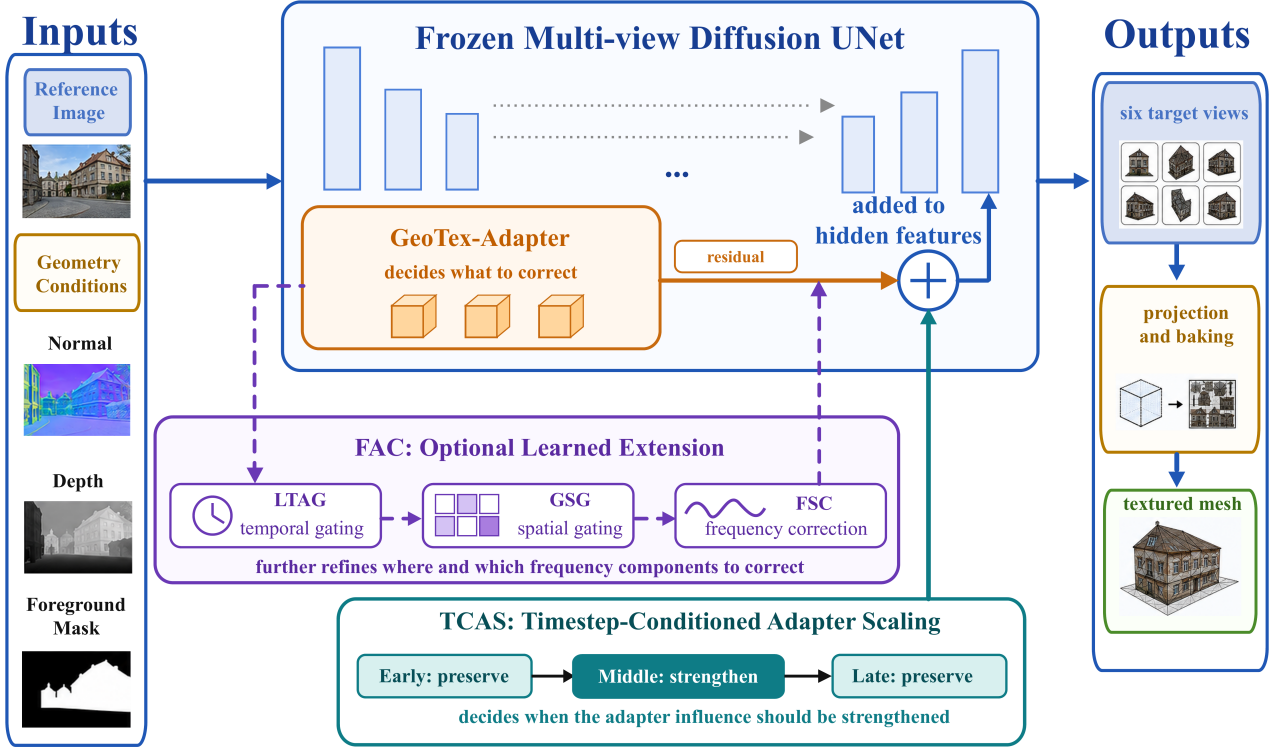


Fig. 1. Method overview. GeoTex-Adapter generates geometric residuals and injects them into UNet features. TCAS dynamically adjusts the residual strength according to denoising stages to balance geometric consistency and texture fidelity. FAC is an optional learned extension module. The final multi-view outputs are projected and baked into a textured 3D mesh.

The geometric adapter maps these conditions to a residual correction term and injects it into the intermediate hidden states of the UNet. For the t -th denoising step, the adapter injection can be written as:

$$\mathbf{h}'_t = \mathbf{h}_t + s(p_t) \cdot A_\phi(\mathbf{h}_t, \mathbf{G}), \quad (2)$$

where $\mathbf{h}_t$ and $\mathbf{h}'_t$ denote the hidden states before and after injection, p_t denotes the sampling progress, and $s(p_t)$ is the adapter scaling strength at the current denoising stage. This formulation highlights a key difference from CFG-style guidance: changing $s(p_t)$ does not reweight two predicted scores, but changes the magnitude of a geometry-conditioned residual added to the feature stream. A larger s usually enhances geometric condition adherence. However, if strong residuals are continuously applied in the late denoising stage, they may suppress the synthesis of color, material, and high-frequency details by the base diffusion model. This paper therefore studies how to schedule s during denoising to balance shape consistency and texture detail preservation.

3.2. Shape-Texture Diagnostic Metrics

The influence of adapter scaling on generated results cannot be evaluated by a single structural metric. We divide evaluation metrics into three groups. The first group consists of shape and structure metrics, including FG-SSIM, Edge-SSIM, and Crop-SSIM, which measure consistency with ground-truth renderings in the foreground, edge regions, and local foreground

crops based on the structural similarity index [37]. The second group contains signal fidelity and perceptual similarity metrics, including PSNR and the learned perceptual image patch similarity (LPIPS) [38], which reflect pixel-level error and differences in deep feature space. The third group consists of texture diagnostic metrics, including Laplacian variance, RGB standard deviation, and gradient magnitude, which are used to detect weakened color variation, surface smoothing, and high-frequency detail loss.

Taking Laplacian variance as an example, the foreground texture response is defined as:

$$M_{\text{tex}} = \text{Var}(\text{Lap}(I_{\text{out}} \odot G_{\text{mask}})), \quad (3)$$

where Lap denotes the Laplacian filter, G_{mask} denotes the foreground mask, and Var denotes spatial variance. A larger M_{tex} usually corresponds to richer local high-frequency variation. If structural metrics improve while Laplacian variance, RGB standard deviation, or gradient magnitude decreases, the improvement may mainly come from contour smoothing or boundary convergence rather than true texture quality improvement.

3.3. Timestep-Conditioned Adapter Scaling

The diffusion denoising process is stage-dependent: early steps mainly establish the global layout and coarse contours; middle steps refine geometric structure and cross-view alignment; late steps are more responsible for color, material, and

local texture synthesis. Based on this observation, we propose Timestep-Conditioned Adapter Scaling (TCAS), which places a globally fixed adapter scale with a stage-dependent scale function. TCAS is not intended as a generic smooth guidance schedule. Its low-high-low form encodes the adapter-specific hypothesis that geometry residuals should be strongest only after coarse structure becomes stable and before late texture synthesis dominates.

To avoid ambiguity caused by different raw timestep directions in different schedulers, we use sampling progress p to represent the denoising process, where $p = 0$ denotes the start from noise and $p = 1$ denotes the end of sampling close to the final image state. TCAS divides denoising into early, middle, and late stages:

$$s(p) = \begin{cases} s_e, & 0 \leq p < 1/3 \\ s_m, & 1/3 \leq p < 2/3 \\ s_l, & 2/3 \leq p \leq 1 \end{cases} \quad (4)$$

The selected C3 configuration used in this paper is:

$$(s_e, s_m, s_l) = (1.25, 2.50, 1.25). \quad (5)$$

This design follows three principles. First, the early stage uses a conservative scale to avoid disrupting global structure formation with strong geometric residuals. Second, the middle stage uses a higher scale to strengthen geometric constraints from normals, depth maps, and foreground contours. Third, the late stage reduces the scale again to prevent geometric residuals from suppressing color variation, material detail, and high-frequency texture synthesis. This non-monotonic schedule is therefore different from simply decaying or increasing the adapter strength across all timesteps. TCAS introduces no new parameters and does not modify the base model or adapter weights; it only replaces the scaling factor during inference, so its computational overhead is negligible.

Why mid-stage concentration is selected: the CAI model. The low-high-low form is not assumed but derived from a measurable Correction-Alignment-Interference (CAI) stage-utility model; we state the selection rule formally. Let $Q(s_e, s_m, s_l)$ denote a fidelity objective (PSNR here), let L denote the fixed-low schedule, let R denote the texture-deviation risk, given by the artifact-sensitive foreground texture diagnostics of Section 3.2 (Laplacian variance, RGB standard deviation, and gradient magnitude), and let $z_k \in \{0, 1\}$ indicate whether the high scale is assigned to stage $k \in \{e, m, l\}$. Risk is compared by a non-worsening (Pareto) rule rather than a weighted scalarization: one assignment has lower risk than another only if it is no worse on every diagnostic and strictly better on at least one, so no artificial weights are introduced.

Proposition 1 (Guardrailed ϵ -optimal selection). Suppose (i) the stage-utility model $Q(s_e, s_m, s_l) = Q(L) + \sum_k U_k z_k$ where $U_k = Q(\text{high scale only in } k) - Q(L)$ is the measured finite-difference utility of stage k , and (ii) per-stage guardrails under which stage k is admissible for the high scale only if its intervention does not reduce FG-SSIM by more than τ

nor raise the texture-deviation risk beyond a factor ρ relative to L . Selection proceeds in two stages. First, maximize fidelity over the admissible schedules $\mathcal{F}$: the fidelity-optimal assignment is $z_k^{\text{fid}} = \mathbf{1}[U_k > 0 \text{ and } k \text{ admissible}]$, with value $Q_{\max} = \max_{z \in \mathcal{F}} Q(z)$. Second, restrict attention to the ϵ -equivalent set $\mathcal{F}_\epsilon = \{z \in \mathcal{F} : Q(z) \geq Q_{\max} - \epsilon\}$ for a small fidelity-equivalence margin $\epsilon > 0$, and select $z^* = \arg \min_{z \in \mathcal{F}_\epsilon} R(z)$. Then: an inadmissible stage is fixed at the conservative scale; any admissible stage whose estimated utility alone exceeds ϵ must retain the high scale; and a stage whose estimated utility satisfies $0 < U_k < \epsilon$, with a structurally insignificant change, is fidelity-equivalent under either assignment, so the risk-dominant conservative scale is selected. Measured confidence intervals serve as auxiliary uncertainty information and do not enter the membership condition of $\mathcal{F}_\epsilon$.

Proof. Under (i), for any $z \in \mathcal{F}$, $Q(z) = Q_{\max} - \sum_{k: z_k^{\text{fid}}=1} U_k (1 - z_k)$, so $z \in \mathcal{F}_\epsilon$ exactly when the total positive utility dropped by reassigning high-scale stages to the conservative scale does not exceed ϵ . Condition (ii) fixes $z_k = 0$ for inadmissible stages and leaves the admissible stages independent, so each stage can be examined separately. A stage with $U_k > \epsilon$ cannot be dropped from the fidelity optimum without leaving $\mathcal{F}_\epsilon$, hence $z_k^* = 1$. A stage with estimated utility $0 < U_k < \epsilon$ contributes at most ϵ when dropped, so both assignments lie in $\mathcal{F}_\epsilon$; within $\mathcal{F}_\epsilon$ the second selection stage minimizes texture-deviation risk, and for such a stage the structural change is insignificant while the conservative scale strictly reduces the risk, so $z_k^* = 0$. $\square$

Remark 1. The utilities are measured finite differences on a 24-object stage ablation of the strong-residual, per-layer-capped adapter instance (regime (b) of Section 4.7), where per-stage effects are most visible: $U_e = -0.788$ dB (95% CI $[-1.420, -0.156]$) with a guardrail violation (FG-SSIM -0.105 , CI $[-0.141, -0.069]$; foreground Laplacian variance $3.85 \times \text{fixed-low}$), $U_m = +0.574$ dB $[0.391, 0.756]$, and $U_l = +0.077$ dB $[0.006, 0.149]$ with a structurally insignificant FG-SSIM change $(+0.001, \text{CI } [-0.002, 0.003])$. Proposition 1 selects exactly the conservative-high-conservative assignment C3: the early stage is inadmissible, the middle stage must retain the high scale because its utility alone $(+0.574 \text{ dB})$ exceeds any meaningful equivalence margin such as $\epsilon = 0.1$ dB, and the late stage has estimated utility $U_l = 0.077 < \epsilon = 0.1$ dB while its FG-SSIM change is statistically insignificant, so removing the late high-scale intervention remains within the ϵ -equivalent fidelity set and reduces texture risk; the risk-dominant conservative scale is therefore selected. The same conservative-high-conservative assignment is independently selected by the main adapter’s 17-variant probe (Table 2); the utilities above explain, rather than determine, that selection, and Remark 2 delimits the conditional scope of this explanation.

Remark 2. Additivity is an approximation: stage effects interact, and the complete C3 schedule is therefore validated directly (Secs. 4.4–4.7). Changing the adapter, its residual magnitude, or the scale semantics changes the measured U_k and requires re-estimation. Proposition 1 thus provides a conditional decision rule within the measured adapter regime—explaining why

the mid-stage assignment follows from data rather than from a hand-tuned rule—and not a universal guarantee.

3.4. GeoTex-Adapter and FAC Adaptive Extension

GeoTex-Adapter, TCAS, and FAC correspond to three complementary dimensions of adapter control. GeoTex-Adapter determines what geometric residual correction should be injected. TCAS determines when the residual should be strengthened or weakened along the denoising-time dimension. FAC further modulates the residual in a fine-grained manner along spatial positions and frequency components.

GeoTex-Adapter is used as a fixed geometric residual backbone. It receives a 5-channel geometric input consisting of a 3-channel normal map, a 1-channel depth map, and a 1-channel foreground mask. A multi-scale geometric encoder produces a feature pyramid, and residual corrections are injected into multiple resolution levels of the UNet. TCAS acts on the global temporal scale of these residuals to control the influence of geometric conditions at different denoising stages without changing the adapter architecture.

To further examine whether stage-wise adapter control can be extended to learned adaptive correction, we also conduct experiments with Full Adaptive Correction (FAC). FAC contains three lightweight modules: LTAG learns timestep-dependent gating, GSG generates spatial gates from geometric features, and FSC performs frequency-selective correction on adapter residuals. Unlike fixed TCAS, FAC finely modulates adapter residuals in the temporal, spatial, and frequency domains. In the extension experiments, FAC uses TCAS as the base temporal schedule and further adds GSG and FSC for spatial and frequency correction.

It should be emphasized that FAC requires learning a small number of additional parameters. Therefore, TCAS, which requires no training, remains the main method in this paper. FAC is used only as a learned adaptive extension; Section 4.6 reports a controlled re-examination that delimits when learned modulation can be expected to help.

4. Experiments

4.1. Experimental Setup

4.1.1. Experimental protocol and comparisons

Experiments are conducted using an MVPainter-style geometry-controlled multi-view diffusion pipeline. Each object contains a single reference image and corresponding 3D geometry. During preprocessing, the 3D geometry is rendered into target-view normal maps, depth maps, foreground masks, and ground-truth RGB images. The model generates six target views at a time, and all comparisons with ground-truth renderings are performed under unified views, resolution, and foreground masks.

Except for the FAC extension experiment, all scaling experiments keep the object list, reference image, target views, random seed, base UNet, VAE, adapter weights, and number of denoising steps fixed; only the adapter scale or schedule is changed. The number of sampling steps is 50. C3 is selected using only a 24-object probe set; the same schedule is then frozen

and applied to the 300-object evaluation pool, where no parameter search is performed. This probe-to-pool protocol isolates the effect of adapter scaling from changes in model architecture, training data, sampling budget, or evaluation-set tuning.

Accordingly, the comparisons in this paper are comparisons among inference-time adapter scaling strategies under the same base pipeline, rather than a system-level benchmark among different texture generation architectures. Uniform adapter scales serve as the primary deployment baselines because they correspond to the most direct way of choosing a single fixed adapter strength at inference time. The probe variants further test whether the trade-off can be resolved by simple alternatives such as globally high scales, layer-wise redistribution, or moving high adapter strength to early, late, or multiple denoising stages. TCAS changes only how this strength is scheduled across denoising stages.

4.1.2. Evaluation sets and metrics

We use four evaluation sets: (1) a 50-object scale-sweep set for analyzing the overall trend of structural metrics under 13 uniform scales; (2) a 26-object texture audit set for comparing texture degradation under $s = 1.25$ and $s = 2.50$; (3) a 24-object probe set for evaluating 17 uniform, layer-wise, and timestep-conditioned scheduling variants and selecting C3; and (4) a 300-object evaluation pool, comprising the 24-object probe and a 276-object held-out subset (detailed below), for testing the selected C3 schedule, uniform baselines, and the FAC extension without any further schedule search.

Evaluation metrics are divided into three categories: shape and structure metrics (FG-SSIM, Edge-SSIM, and Crop-SSIM), signal and perceptual metrics (PSNR and LPIPS), and texture diagnostic metrics (Laplacian variance, RGB standard deviation, and gradient magnitude). All metrics are first computed over six target views and then averaged over views and objects. For texture-related conclusions, we report means, object-level win rates, and significance tests to avoid judging generation quality based on a single structural score.

The FAC extension uses the same object list and evaluation protocol as the 300-object evaluation pool, and its lightweight modules are trained only on the adapter’s training pool, which is disjoint from all evaluation objects. TCAS is used as the main baseline, while LTAG, LTAG+GSG, and Full FAC are evaluated as ablation variants under the same paired protocol. The base model and original adapter remain frozen, and only lightweight adaptive correction parameters are learned.

4.1.3. Implementation and dataset details

All objects are drawn from the Objaverse 3D asset collection: ground-truth multi-view images are rendered offline with Blender (Cycles engine, 17 views at 512×512 , white background), and six target views (front, front-right, right, back, left, front-left) are used throughout the paper. The adapter’s training pool contains 1,118 rendered objects and the evaluation pools described above are drawn independently; we verified that the training and evaluation identifier sets intersect in zero objects, so no evaluation object is seen during adapter training. Within the 300-object evaluation pool, the 24-object probe set corre-

sponds to the first 24 identifiers (obj₀₀₀₀–obj₀₀₂₃) and the remaining 276 identifiers (obj₀₀₂₄–obj₀₂₉₉) form a holdout that is strictly disjoint from the probe; Section 4.7 reports transfer statistics on this disjoint holdout for the strong-residual, per-layer-capped adapter instance, in addition to the full-pool tables. The 50-object scale-sweep set comprises the first 50 objects of the pool (obj₀₀₀₀–obj₀₀₄₉), and the 26-object audit set is a purposive subset of these 50 objects, selected to span the observed range of per-object Δ FG-SSIM behavior for manual inspection; all evaluation sets are subsets of the 300-object pool, and no training object appears in any of them.

The base pipeline is an MVPainter-style geometry-controlled multi-view diffusion model built on a joint six-view latent UNet, used frozen together with its VAE. The pipeline is reference-image-conditioned; no text prompts are used. The GeoTex-Adapter takes a five-channel geometric input (3-channel normal map, 1-channel depth map, 1-channel foreground mask), produces a multi-scale residual pyramid, and injects corrections into multiple UNet resolution levels; for the adapter studied in the main tables, the requested scale is applied multiplicatively at every injected layer. Inference uses the Euler discrete scheduler with 50 denoising steps and a fixed random seed (42) shared by all schedules within an experiment, so all variants share the same initial latents; the model generates six views per object.

FG-SSIM, Edge-SSIM (edge masks derived from depth/normal discontinuities), PSNR, and LPIPS (AlexNet backbone) are computed on foreground-masked regions after background normalization; the texture diagnostics (foreground Laplacian variance, RGB standard deviation, gradient magnitude) are computed on foreground pixels and compared against the same ground-truth renderings under identical views and masks. The adapter checkpoint used for all tables is the GeoTex-Adapter trained on the 1,118-object training pool described above; the checkpoint and evaluation code will be made available upon reasonable request, and a consolidated reproducibility table (data subsets, checkpoint identifiers, scheduler, seed, and metric implementations) is provided in the supplementary material.

Statistical reporting. Object-level paired comparisons report two-sided paired tests and 95% confidence intervals constructed by percentile bootstrap over objects with 10,000 resamples. Where a mean is accompanied by $\pm$, the quantity is the standard deviation across objects. Preference-study intervals add a participant-level bootstrap level (Section 4.5).

4.2. Shape-Texture Trade-off of Adapter Scaling

Table 1 reports the results of a 13-scale uniform adapter sweep on 50 objects.

As the scale increases from $s = 0.75$ to $s = 2.50$, Δ FG-SSIM rises from -0.013 to $+0.145$, and the number of objects with positive improvement increases from 20/50 to 44/50. This indicates that stronger adapter residuals indeed improve the model’s adherence to geometric conditions such as normals, depth maps, and foreground contours. Figure 2 visualizes this trend: FG-SSIM keeps increasing with adapter scale, while Crop-SSIM saturates and slightly decreases at high scales.

Table 1. Uniform adapter scale sweep results.

Scale	Δ FG-SSIM $\uparrow$	POS	Δ Crop-SSIM $\uparrow$	Δ PSNR $\uparrow$
0.75	-0.013	20/50	+0.113	7.53
0.90	+0.024	30/50	+0.137	8.32
1.00	+0.047	34/50	+0.147	8.79
1.10	+0.070	36/50	+0.159	9.08
1.15	+0.071	36/50	+0.157	9.25
1.25	+0.088	37/50	+0.161	9.37
1.35	+0.100	39/50	+0.163	9.63
1.50	+0.113	40/50	+0.163	9.76
1.60	+0.120	42/50	+0.166	9.83
1.75	+0.127	43/50	+0.173	9.97
2.00	+0.134	44/50	+0.169	9.96
2.25	+0.142	43/50	+0.175	9.91
2.50	+0.145	44/50	+0.165	9.91

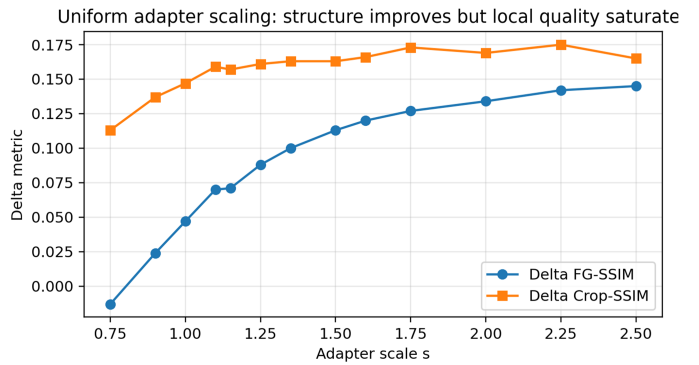


Fig. 2. Structural metric changes under uniform adapter scaling. The curves show that FG-SSIM keeps increasing with adapter scale, while Crop-SSIM saturates and slightly decreases at high scales. Stronger geometric control therefore mainly improves structural alignment, but does not necessarily keep improving local foreground quality.

Overall, the FG-SSIM improvement is stable, but the marginal benefit becomes smaller in the high-scale region. For example, increasing the scale from $s = 2.25$ to $s = 2.50$ yields only a limited FG-SSIM gain, while Crop-SSIM already decreases. This suggests that the nature of the high-scale benefit may change: the gain comes more from contour smoothing and foreground alignment than from preservation of local texture details. Figure 3 shows the per-object Δ FG-SSIM heatmap, confirming that most objects gain higher structural scores as the scale increases, but with clear object-level differences.

4.3. Texture Audit: High Scale Causes Texture Flattening

To determine whether the FG-SSIM gain at high scales reflects better visual quality, we further conduct a texture audit on 26 objects, comparing texture metrics and foreground shape changes for $s = 2.50$ relative to $s = 1.25$. Figure 4 should be read as a local texture comparison rather than as a claim that any method fully matches the ground truth: the key evidence is the progressive loss of color variation, material marks, and high-frequency patterns inside the marked regions as the scale increases. The conservative scale $s = 1.25$ better preserves color variation and local texture, while $s = 2.50$ more easily produces uniform and smooth surfaces.

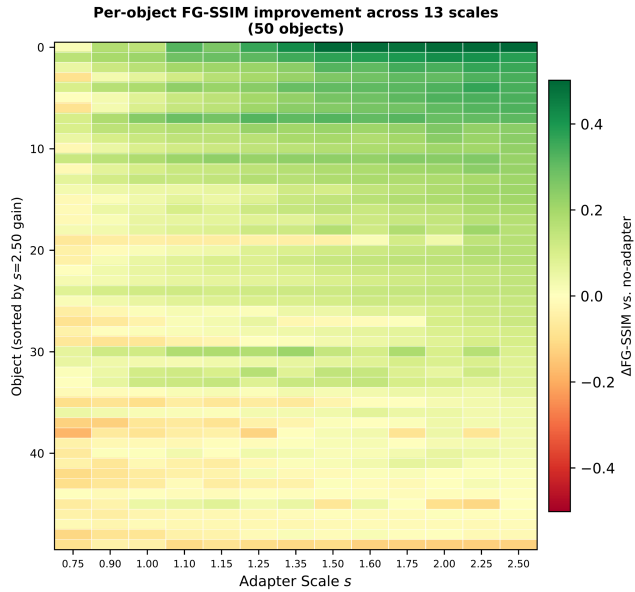


Fig. 3. Δ FG-SSIM heatmap for 50 objects under 13 adapter scales. Most objects obtain higher structural gains as the scale increases, but there are clear object-level differences.

The results show that 24 out of 26 objects (92%) exhibit a pattern of “texture loss without true shape gain.” Only two objects show comparable texture quality, and no object shows a clear texture improvement from the high scale. Here, “true shape gain” is not equivalent to an increase in FG-SSIM. It refers to whether the high scale brings substantive improvement in effective foreground area, contour structure, or geometric detail compared with the conservative scale. If the metric improvement mainly comes from smoothed foreground boundaries or averaged contour errors without visible geometric improvement, it is categorized as having no true shape gain. Therefore, although a high adapter scale can improve structural metrics, such improvement does not necessarily indicate better visual shape or texture quality. Figure 5 further quantifies this texture loss.

For multi-view texture generation, overly strong geometric control can suppress the color and detail synthesis capability of the base diffusion model during late denoising steps, making surfaces more uniform. Therefore, scale selection should not rely only on standard metrics such as FG-SSIM or PSNR, but should also incorporate texture-sensitive diagnostics.

4.4. Timestep-Conditioned Adapter Scaling: Shape-Texture Balance of C3

Based on the texture audit, we do not pursue higher adapter scales throughout the entire denoising process. Instead, we further explore how different scaling strategies balance shape gain and texture loss. We construct 17 adapter scaling variants and evaluate them on the 24-object probe set. To avoid turning the 300-object evaluation pool into a hyperparameter search, the schedule selected in this probe stage is frozen before large-scale evaluation. These variants include three categories: uniform

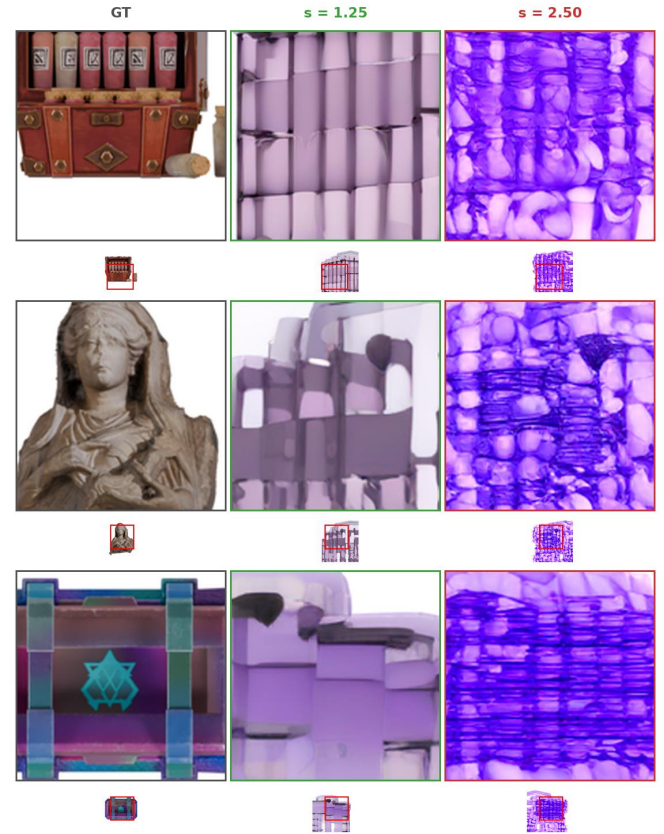


Fig. 4. Texture degradation under different adapter scales. Each row shows one object; large crops highlight local texture regions (thumbnails below indicate crop locations). Green borders denote conservative scaling $s = 1.25$; red borders denote aggressive scaling $s = 2.50$. Within each row, increasing the adapter scale causes progressive loss of color variation and high-frequency detail: surfaces become more uniform and color-saturated, indicating that stronger geometric correction suppresses the base model’s texture synthesis capability.

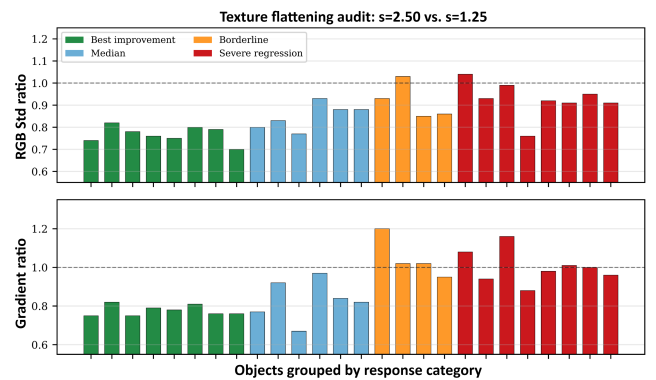


Fig. 5. Texture flattening at $s = 2.50$. Top: RGB standard deviation ratio on 26 objects ($s = 2.50 / s = 1.25$). Bottom: gradient magnitude ratio. Values below 1.0 indicate texture loss. Even the eight best-improvement objects (green) show 18% to 30% texture loss despite positive FG-SSIM gains.

scaling baselines, layer-wise scaling strategies, and timestep-conditioned scaling strategies. Uniform scaling tests the effect of globally strengthening adapter influence and serves as the closest counterpart to using a single ControlNet-style con-

Table 2. Shape-texture trade-off on the 24-object probe set. Delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks; $\Delta\text{Lap Var}$ closer to 0 indicates smaller texture loss. Eight representative variants of the 17 evaluated are shown; the complete set is visualized in Fig. 7.

Variant	Category	$\Delta\text{FG-SSIM}\uparrow$	$\Delta\text{Lap Var} \rightarrow 0$	Assessment
C4	Late-stage high	0.105	-0.0120	Trap
C2	Timestep sched.	0.104	-0.0110	Trap
B2	Layer-wise sched.	0.090	-0.0135	Trap
A_s2.00	Uniform	0.087	-0.0062	Trap
C3 (TCAS)	Mid-stage high	0.084	-0.0006	Promising
A_s2.25	Uniform	0.079	-0.0096	Trap
A_s2.50	Uniform	0.078	-0.0108	Trap
B6	Layer-wise sched.	0.000	-0.0027	OK

dition scale. Layer-wise scaling examines whether redistributing the same geometric intervention across UNet levels is sufficient. Timestep scaling tests stage placement directly, including variants that put high adapter strength in early, middle, late, or broader temporal regions. This design is intended to rule out the simple explanation that any guidance-like schedule or any stronger control scale would solve the problem.

All variants are evaluated using $\Delta\text{FG-SSIM}$ for shape gain and $\Delta\text{Lap Var}$ for texture detail change. Delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks. Importantly, the objective of this probe experiment is not to find the single highest structural score, but to identify a stable compromise strategy that avoids the trap of “higher structural metrics but flattened texture.” This criterion is crucial: if a schedule improves FG-SSIM by applying strong geometry residuals late but causes a clear drop in texture response, then it does not solve the adapter-specific conflict even though it appears favorable under a structure-only metric.

Table 2 summarizes representative scheduling variants on the 24-object probe set. C4 and other late-stage high-scale strategies obtain higher $\Delta\text{FG-SSIM}$, but they are accompanied by obvious decreases in Laplacian variance, indicating that their structural gains come at the cost of texture loss. This is the main reason a direct transfer of guidance scheduling intuition is insufficient: a schedule can make the condition stronger at apparently useful timesteps and still damage the texture signal that matters for 3D appearance. Uniform high-scale strategies show a similar problem. For example, $s = 2.50$ achieves $\Delta\text{FG-SSIM}$ of +0.078, but $\Delta\text{Lap Var}$ decreases to -0.0108. In contrast, C3 achieves $\Delta\text{FG-SSIM}$ of +0.084. Although it is slightly lower than some aggressive variants in structure gain, its Laplacian variance loss is only -0.0006, close to zero texture loss. Therefore, C3 is the only variant labeled Promising. We freeze this configuration before large-scale evaluation and do not tune it on the 300-object set.

The specific configuration of C3 uses the conservative scale $s = 1.25$ in the early and late stages, and the strong scale $s = 2.50$ in the middle geometry-refinement stage, i.e., C3 = (1.25, 2.50, 1.25). Its motivation follows the staged role of diffusion denoising. In the early stage, latent variables are still highly noisy, and strong geometric correction can interfere with global structure formation. In the middle stage, the signal be-

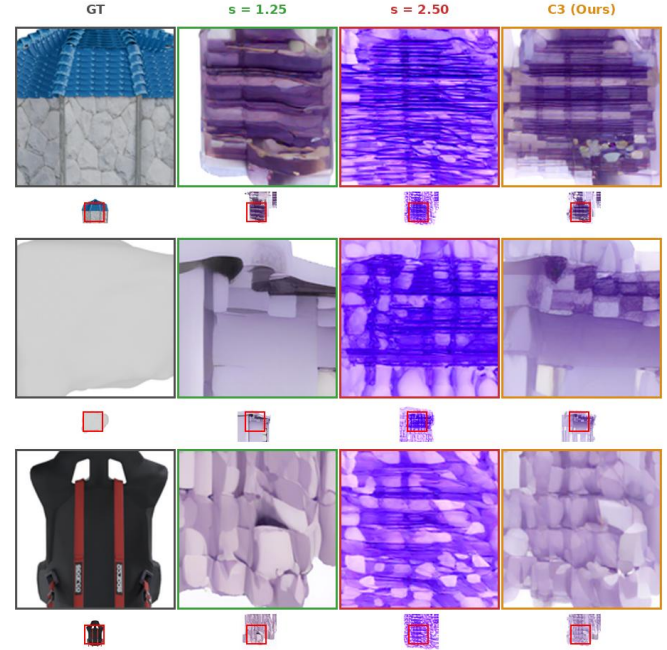


Fig. 6. Qualitative comparison between C3 and uniform adapter scaling. Large crops show local texture regions (thumbnails below indicate crop locations). Columns: GT (gray), $s = 1.25$ (green), $s = 2.50$ (red), and C3 (Ours) (orange). Compared with $s = 2.50$, C3 retains more local color variation and material texture while preserving stronger geometric correction than the conservative scale.

comes more stable, making it suitable to strengthen geometric constraints such as normals, depth maps, and foreground contours. In the late stage, generation mainly focuses on color, material, and fine texture synthesis, so adapter intervention should be reduced to preserve the texture generation space of the base diffusion model.

Figure 6 provides a qualitative comparison between C3 and uniform adapter scaling. The red-boxed zoom-in regions make the intended comparison visible: conservative scaling preserves more color variation but provides weaker structural correction, whereas aggressive scaling strengthens geometric constraints but flattens surface texture. C3 applies strong geometric correction in the middle stage and reduces adapter intervention in the late stage, thereby preserving more local texture than $s = 2.50$ while retaining stronger geometric correction than the conservative scale.

Figure 7 further shows the distribution of the 17 variants in the shape-texture space. Most variants with high shape gain are accompanied by large texture loss and fall into the Trap region, whereas C3 maintains a relatively high shape gain while keeping texture loss near zero. Thus, the value of C3 is not that it maximizes every metric, but that it avoids the trap of “higher structural scores but flattened texture,” resulting in a more stable shape-texture compromise.

Mechanistically, the advantage of C3 is not simply the result of hyperparameter tuning; it comes from the functional alignment between adapter correction and the diffusion process’s stage-dependent objective. A natural hypothesis might be that correction should be strongest where the correction-to-noise ra-

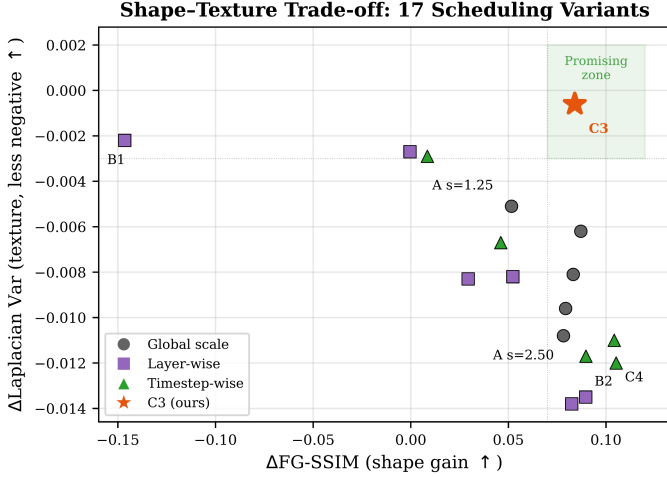


Fig. 7. Shape-texture Pareto trade-off among 17 variants. The horizontal axis is shape gain, where farther right is better; the vertical axis is the Laplacian-variance change, where higher (closer to zero) is better; therefore, the top-right region represents a more desirable compromise. C3 (star) lies in the Promising region, with high shape gain and nearly zero texture loss. Most high-shape-gain variants fall into the Trap region, where structural scores are obtained at the cost of large texture loss. Variants such as B1 have smaller texture degradation but almost no shape gain.

in Laplacian variance, making it a typical Trap variant where structural metrics improve while texture is flattened. Uniform high-scale variants similarly improve condition adherence but lose texture detail, showing that the issue is not solved by a stronger ControlNet-like scale. An aggressive C3 variant further increases the middle-stage strength but reduces signal fidelity, suggesting that even middle-stage correction has diminishing returns and can lead to over-constraint.

Table 3. Comparison of representative variants under extended texture metrics. All delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks. This table verifies that the advantage of C3 is not due to a single Laplacian variance metric.

Variant	Δ Lap Var	Δ RGB Std	Δ Grad	Δ HF Energy
C3	-0.001	-0.023	+0.142	+0.058
C4	-0.012	-0.032	+0.086	+0.062
A_s2.50	-0.011	-0.044	+0.054	+0.078
A_s2.00	-0.006	-0.040	+0.100	+0.070
A_s1.25	-0.005	-0.032	+0.104	+0.053

Table 3 compares representative variants under extended texture metrics. C3 has nearly zero loss in Laplacian variance and remains relatively stable in RGB standard deviation, gradient magnitude, and high-frequency energy. Compared with C4 and uniform high-scale strategies, C3 shows weaker texture degradation, indicating that its shape-texture balance is not an artifact of a single metric.

4.5. Large-scale Pooled Evaluation

Finally, as a transfer test rather than another search, we compare conservative uniform scaling ($s = 1.25$), aggressive uniform scaling ($s = 2.50$), and selected C3 (TCAS) on 300 objects. C3 is not searched again on the 300-object set; it directly uses the timestep schedule selected on the 24-object probe set to evaluate the transferability of the strategy to a larger object set. Because the 24-object probe is a subset of the 300-object pool, the main-table comparison is not probe-disjoint; a disjoint holdout re-verification is provided in Section 4.7.

As shown in Table 4, conservative uniform scaling $s = 1.25$ has lower FG-SSIM and Edge-SSIM, indicating insufficient geometric constraints. Aggressive uniform scaling $s = 2.50$ obtains the highest Edge-SSIM, suggesting that continuously strengthening adapter residuals helps edge and contour alignment. However, its PSNR is lower than that of C3, indicating that overly strong geometric intervention reduces overall signal fidelity. In contrast, C3 achieves an FG-SSIM of 0.476, which is comparable to $s = 2.50$, while increasing PSNR to 18.86 and slightly reducing FG-LPIPS. These results show that timestep-conditioned scaling preserves structural alignment while improving signal quality.

PSNR mainly reflects global pixel error and should not be directly equated with texture detail quality. To further verify texture preservation, we compute Laplacian variance, RGB standard deviation, and gradient magnitude on the same 300 objects to measure foreground high-frequency response, color variation amplitude, and local gradient strength, respectively. All results

tion is highest. However, under the Euler sigma schedule, this ratio increases monotonically throughout denoising (from approximately 8 at full noise to over 400 near completion), which would predict that late-stage correction is most effective—a prediction inconsistent with the scheduling-variant results. The correct explanation involves *functional alignment* rather than signal-to-noise ratio. The adapter correction is derived from geometric conditions (normals, depth, contours) and is therefore constructive only when the diffusion process is actively refining geometric structure. In the early stage ($\sigma > 5$), global structure has not yet emerged, so the correction has no stable target to reinforce and instead disrupts layout formation. In the middle stage ($\sigma \approx 5-1.2$), coarse structure is established and the denoiser is performing geometric refinement—the adapter correction direction aligns with this objective, making it maximally constructive. In the late stage ($\sigma < 1.2$), generation shifts to color, material, and fine texture synthesis; geometric correction is orthogonal to this objective and competes with the texture formation process. C3’s low-high-low schedule therefore allocates strong correction proportional to functional alignment, not to signal clarity. Notably, this allocation is the reverse of limited-interval CFG guidance [28]: under adapter residual injection, geometric correction must also be withdrawn near the end of sampling, because the late-stage risk is competition with texture synthesis rather than diversity loss. The schedule is tied to the denoising process’s functional role at each stage rather than to validation-set-specific tuning or a generic monotonic guidance rule.

This explanation is consistent with the scheduling-variant results. Early high-scale or early-and-late high-scale variants provide limited structural gain, indicating that early strong intervention is unstable. The late-stage high-scale configuration C4 obtains a high structural score but shows a significant decrease

Table 4. Large-scale pooled evaluation on the full 300-object evaluation pool (pooled statistics; the pool contains the 24 probe objects). Values are absolute metrics of generated outputs with respect to ground truth.

Method	FG-SSIM↑	Edge-SSIM↑	PSNR↑	FG-LPIPS↓
$s = 1.25$	0.430	0.513	17.95	0.174
$s = 2.50$	0.473	0.559	17.90	0.172
C3 (TCAS)	0.476	0.529	18.86	0.171

Table 5. Large-scale pooled texture-preservation evaluation on the full 300-object evaluation pool (pooled statistics; the pool contains the 24 probe objects). Higher texture metrics indicate better preservation of foreground color variation and high-frequency details. Absolute values are means over objects and views; the ratios in Table 6 are the mean over objects of each per-object ratio relative to the corresponding $s = 1.25$ statistic (equal object weighting).

Method	Lap Var↑	RGB Std↑	Grad Mag↑
$s = 1.25$	0.0151	0.0408	0.3258
$s = 2.50$	0.0095	0.0251	0.2616
C3 (TCAS)	0.0129	0.0377	0.2919

Table 6. Texture retention ratios and object-level stability of C3. Each ratio is the mean over objects of the per-object ratio of the corresponding foreground statistic to that of $s = 1.25$ (equal object weighting); object-level win rates for C3 over $s = 2.50$ are reported in the text.

Method	Lap Var Ratio↑	RGB Std Ratio↑	Grad Mag Ratio↑
$s = 1.25$	1.000	1.000	1.000
$s = 2.50$	0.678	0.643	0.807
C3 (TCAS)	0.835	0.970	0.883

use the same object list, random seed, 50 denoising steps, and adapter weights to ensure comparability.

Table 5 shows that although $s = 2.50$ achieves the highest Edge-SSIM, it has the lowest values across all three texture metrics, indicating that full high-scale scaling weakens color variation and high-frequency details. C3 has FG-SSIM comparable to $s = 2.50$ while substantially improving Laplacian variance, RGB standard deviation, and gradient magnitude, demonstrating a better balance between structural alignment and texture preservation.

As shown in Table 6, compared with conservative scaling $s = 1.25$, aggressive scaling $s = 2.50$ retains only 67.8% of Laplacian variance, 64.3% of RGB standard deviation, and 80.7% of gradient magnitude, indicating that full high-scale scaling substantially weakens foreground color variation and high-frequency details. In contrast, C3 retains 83.5%, 97.0%, and 88.3% of these metrics, respectively, and clearly outperforms $s = 2.50$ across all three texture measures. This shows that TCAS still incurs some texture reduction, but it substantially alleviates texture flattening compared with full high-scale scaling.

Object-level statistics further show that C3 outperforms $s = 2.50$ on 87.7%, 95.0%, and 83.0% of objects in Laplacian variance, RGB standard deviation, and gradient magnitude, respectively. The corresponding bootstrap 95% confidence intervals do not cross zero, indicating statistically stable texture-preservation advantages. C3 also outperforms $s = 2.50$ on

Table 7. CLIP-IQA perceptual validation on 50 objects from the evaluation pool. Scores are reported for foreground regions and full rendered views; $\pm$ denotes the standard deviation across the 50 objects. Higher is better.

Method	CLIP-IQA (FG)↑	CLIP-IQA (Full)↑	Win vs. $s = 2.50$
$s = 1.25$	0.4920 $\pm$ 0.0032	0.4918 $\pm$ 0.0030	98.0%
$s = 2.50$	0.4860 $\pm$ 0.0018	0.4857 $\pm$ 0.0017	–
C3 (TCAS)	0.4906 $\pm$ 0.0028	0.4903 $\pm$ 0.0025	94.0%

74.3% of objects in PSNR. By contrast, the confidence interval for the FG-SSIM difference includes zero, so these data do not establish a significant difference in foreground structural similarity between C3 and $s = 2.50$. Therefore, TCAS does not noticeably sacrifice structural alignment, while significantly reducing the texture degradation caused by full high-scale scaling.

In summary, the 300-object experiments demonstrate that adapter scaling affects both structural alignment and texture detail preservation. Full high-scale scaling strengthens edge constraints but is more likely to cause texture flattening. TCAS strengthens geometric correction in the middle stage and reduces adapter intervention in the late stage, thereby maintaining structural alignment while substantially reducing texture loss. It should be noted that C3 still has some texture decrease relative to $s = 1.25$; therefore, we do not claim that TCAS completely eliminates texture loss, but rather that it significantly reduces texture degradation compared with full high-scale scaling.

Perceptual validation with CLIP-IQA. To address the concern that proxy texture statistics do not directly measure perceptual quality, we additionally evaluate CLIP-IQA [39], which builds on CLIP image–text representations [40], on a 50-object subset of the evaluation pool as a complementary no-reference perceptual signal. CLIP-IQA is used as complementary perceptual evidence rather than a complete replacement for human preference evaluation.

Table 7 shows that C3 achieves a foreground CLIP-IQA score of 0.4906 versus 0.4860 for $s = 2.50$, scoring higher on 47 of the 50 objects (94.0%). The paired comparison uses a two-sided paired t -test over objects ($t(49) = 10.52$, $p \approx 3.6 \times 10^{-14}$), and the 95% confidence interval of the paired mean difference is constructed by object-level percentile bootstrap with 10,000 resamples, giving [0.0037, 0.0054], which excludes zero. The ordering $s = 1.25 > C3 > s = 2.50$ supports the diagnosis that aggressive scaling reduces perceptual quality, while TCAS recovers most of this loss with stronger geometry than conservative scaling.

Blinded preference study. To further examine whether the diagnostic texture differences are perceptually meaningful, we conducted a blinded three-alternative forced-choice (3AFC) preference study on 30 objects drawn from the evaluation pool. Twenty-four participants viewed, for each object and each of the three criteria (texture naturalness, shape consistency, overall quality), the anonymized outputs of conservative uniform scaling, aggressive uniform scaling, and C3 side by side; the left-to-right order of the three conditions was randomized independently per trial, and participants were not informed which

method produced which image or how many conditions existed. Instructions asked participants to select the best image for the stated criterion only. Each participant judged all 30 objects for all three criteria, yielding 720 valid first-choice decisions for each criterion. The study complements the proxy diagnostics by testing whether the observed texture and structure differences are reflected in human preference.

Table 8. Blinded three-alternative first-choice preference study. Percentages are computed over 720 valid decisions per criterion.

Method	Texture naturalness↑	Shape consistency↑	Overall quality↑
$s = 1.25$	332/720 (46.1%)	96/720 (13.3%)	176/720 (24.4%)
$s = 2.50$	104/720 (14.4%)	331/720 (46.0%)	126/720 (17.5%)
C3 (TCAS)	284/720 (39.4%)	293/720 (40.7%)	418/720 (58.1%)

The preference pattern in Table 8 follows the intended trade-off. Conservative scaling is most often selected for texture naturalness, while aggressive scaling is most often selected for shape consistency. C3 stays close to both single-scale baselines on their respective strengths and receives the highest overall preference, with 58.1% of all overall-quality votes. Thus, TCAS is not claimed to maximize every individual criterion; it provides a perceptually preferred balance between geometric adherence and texture preservation.

Because first-choice decisions are clustered within both participants and objects, we additionally report 95% confidence intervals obtained by a two-level cluster bootstrap (resampling participants and objects with replacement, 10,000 resamples). C3’s overall-quality share is 58.1% (95% CI [50.1%, 65.8%]), exceeding the conservative and aggressive baselines by +33.6 (CI [19.3, 47.2]) and +40.6 percentage points (CI [29.4, 51.8]); both differences exclude zero, so the overall-preference advantage of C3 is significant under cluster-aware inference. By contrast, the baselines’ single-criterion advantages are not significant (texture naturalness: $s = 1.25$ over C3 +6.7 points, CI [−7.9, 21.5]; shape consistency: $s = 2.50$ over C3 +5.3 points, CI [−6.7, 17.9]). Overall quality is therefore the only criterion with a significant preference, supporting the interpretation of TCAS as the perceptually preferred balance rather than a per-criterion maximum.

4.6. FAC Adaptive Correction Extension: A Controlled Re-examination

TCAS uses a fixed three-stage scale, which has the advantages of requiring no training, being simple to implement, and introducing low computational overhead. However, its residual scaling is still uniform across spatial positions and frequency components, lacking fine-grained adaptivity. To examine whether stage-wise adapter control can be extended to learned adaptive correction, we trained the FAC extension—LTAG for timestep gating, GSG for spatial gating, and FSC for frequency-selective correction on top of the TCAS temporal schedule. The base model, VAE, and GeoTex-Adapter remain frozen; only the three lightweight controllers are trainable, adding roughly 6×10^3 parameters. The controllers are trained with the same enhanced denoising objective as the base adapter—a latent noise-prediction MSE with $1.7\times$ foreground

and $1.3\times$ edge spatial reweighting plus a latent-SSIM term—using AdamW (peak learning rate 10^{-4} , 100 warm-up steps) for 2,000 steps on the adapter’s training pool, which is strictly disjoint from all evaluation objects, and all variants are evaluated on the strong-residual, per-layer-capped adapter instance of Section 4.7 under a strictly paired protocol (identical objects, seeds, and evaluation code).

In this controlled setting, no learned variant reached the training-free schedule. We tested seven configurations spanning the most favorable training conditions we could construct: joint training of all controllers; a two-stage scheme with the temporal gate warm-started at the exact C3 envelope and frozen while the spatial and frequency controllers train; an envelope penalty that constrains the gate to remain near C3 during joint training; a fidelity-weighted objective; and a gently scheduled variant with fourfold-reduced training. Their paired deficits relative to the TCAS baseline range from -1.1 to -2.9 dB foreground PSNR (FG-PSNR; win rates at most 16%), increasing monotonically with the amount of controller training. A warm-start control in which the gate is left untrained at the exact C3 envelope is statistically indistinguishable from TCAS (paired FG-PSNR $\Delta = -0.18$ dB on the 12-object control, 95% CI [−0.42, +0.05], crossing zero), validating the evaluation path. No configuration or hyperparameter was selected on any evaluation object; the complete dose–response study over all seven configurations is provided in the supplementary material.

For transparency, we note that an earlier version of this extension, evaluated on the main adapter under our initial protocol before the strictly paired and strictly disjoint training controls were adopted, had suggested a positive FAC gain. That preliminary comparison differed in both evaluation protocol and adapter instance, and it does not meet the controls we now consider necessary for a transfer claim; under the strictly paired, strictly disjoint protocol above, no trained configuration replicates the gain. We therefore report only the controlled re-examination and treat the earlier comparison as superseded.

The outcome delimits the scenario in which learned modulation affects the paper’s conclusions. Preserving the temporal envelope is necessary but not sufficient: with the envelope preserved and the controllers untrained, the extension neither helps nor harms, while every trained configuration degraded fidelity, indicating that the remaining damage is driven by the learned-modulation training signal itself, which trades foreground fidelity for denoising-objective loss. Learning a modulation that improves upon the C3 schedule therefore requires a training signal that does not trade away foreground fidelity (e.g., fidelity-weighted objectives, envelope-preserving constraints, or post-hoc rather than gradient-learned gates), which we identify as future work. With the tested lightweight controllers, the fixed schedule is the stronger default, and TCAS, which is training-free and plug-and-play, remains the main and sole method of this paper.

4.7. Adapter-Dependence of High-Scale Failure Modes

The preceding experiments demonstrate the texture-flattening failure mode under high adapter scaling on the studied adapter checkpoint. A natural question is whether

this failure mode is universal or specific to the adapter’s trained residual properties. We conduct additional analysis across adapter checkpoints with different residual magnitudes to characterize how the failure mode depends on adapter properties.

We find that the specific failure mode of aggressive adapter scaling is not universal. Across three adapter checkpoints spanning a spectrum of trained residual magnitudes, uniform high scale ($s = 2.50$) produced: (a) texture flattening when all layers are scaled without per-layer caps; (b) high-frequency artifact amplification when per-layer caps restrict the fine-texture layer to a low scale while coarse layers are boosted; or (c) no appreciable effect when the adapter’s residual magnitude is very small. A per-layer scale-cap ablation on the same checkpoint reproduced both (a) and (b), isolating the inference-time scale semantics as the determining factor for the failure *direction*.

A residual-magnitude sweep further shows that the intervention *strength* is monotonic in the trained residual magnitude: scaling the adapter’s output projection from $0.1\times$ to $3\times$ transitions the behavior from no-effect, to artifact amplification under high scale, to over-constraint even under conservative scale.

Moreover, a six-object stage ablation shows that even *which denoising stage is most sensitive to high scale* is adapter-dependent: on the artifact-prone adapter, early-stage high scale reproduced nearly all of the damage (FG-SSIM $\downarrow$ from 0.266 to 0.187) while late-stage high scale was nearly harmless (FG-SSIM 0.261), whereas on the paper’s main adapter the late stage was the primary source of texture loss.

Despite this variability, in every regime where scaling had a non-negligible effect, the temporal low-high-low schedule C3 yielded the best shape-texture balance. This indicates that TCAS’s value is structural rather than incidental: by relying on the diffusion process’s stage-dependent roles (global layout $\rightarrow$ geometry refinement $\rightarrow$ texture synthesis), it mitigates the harm of high-scale intervention regardless of the adapter’s specific failure mode. The failure mode (flatten vs. artifact vs. no-op), its strength, and its temporal location are all adapter-dependent; what remains stable in our experiments is that across the tested regimes the middle denoising stage consistently emerged as the optimal window for geometric correction, although whether this holds across adapter families remains an open question for future work.

Two further robustness checks were performed on the strong residual, per-layer-capped adapter instance described above. First, a boundary/peak sensitivity sweep (three high-scale windows $[0.25, 0.75]$, $[1/3, 2/3]$, $[0.4, 0.6] \times$ five peak scales from 2.00 to 3.00, fifteen candidates on the 24-object probe protocol) shows that the canonical middle-third window lies in the stable high-performance region: its 2.50 setting achieves 16.71 dB whole-image PSNR, the best setting in the same window (2.75) achieves 16.79 dB with worse texture diagnostics and lower FG-SSIM, and the broader and narrower windows reach at most 16.73 and 16.62 dB. C3 is therefore a robust middle-stage choice rather than a boundary-sensitive point estimate. Second, because the 24-object probe is part of the 300-object pool, transfer claims were re-verified on the disjoint 276-object holdout ($\text{obj}_{0024}-\text{obj}_{0299}$), summarized in Table 9: C3

Table 9. Scheduling transfer on the disjoint 276-object holdout ($\text{obj}_{0024}-\text{obj}_{0299}$; strong-residual, per-layer-capped adapter instance of Section 4.7). Δ PSNR (dB) is the paired C3-minus-competitor difference (positive favors C3); 95% CIs use object-level percentile bootstrap with 10,000 resamples. Absolute metrics are means over holdout objects and views.

Schedule	FG-SSIM $\uparrow$	PSNR $\uparrow$	Δ PSNR vs. C3 (95% CI)	C3 wins
Trapezoid	0.356	19.04	+0.258 [0.207, 0.308]	206/276
Gaussian peak	0.358	18.97	+0.324 [0.281, 0.367]	232/276
Linear warm-up	0.377	18.97	+0.323 [0.263, 0.386]	214/276
Cosine bump	0.330	18.39	+0.902 [0.824, 0.981]	253/276
C3 (TCAS)	0.376	19.29	– (reference)	–

improves PSNR over the strongest non-C3 probe candidates by +0.258 dB (95% CI [0.207, 0.308], 206/276 wins) over a trapezoid schedule and +0.324 dB ([0.281, 0.367], 232/276 wins) over a Gaussian-peak schedule, and over the reviewer-relevant generic schedules by +0.323 dB ([0.263, 0.386], 214/276 wins, FG-SSIM statistically tied) over linear warm-up and +0.902 dB ([0.824, 0.981], 253/276 wins, FG-SSIM +0.046) over the cosine bump. The holdout ordering matches the probe: warm-up approaches C3 in structure but loses in signal fidelity, and the smooth bump loses in both because its effective high-scale duration is shorter than the full middle third.

5. Limitations

This paper mainly focuses on inference-time adapter scaling and does not retrain the base multi-view diffusion model or the adapter. Therefore, TCAS can alleviate texture degradation under high scales—which may manifest as flattening or artifact amplification depending on the adapter’s residual properties—but it cannot fundamentally solve the limitations of the base model in invisible-region completion, complex material synthesis, and cross-view detail consistency.

Second, Laplacian variance, RGB standard deviation, and gradient magnitude are proxy metrics for texture degradation. They are effective for detecting high-frequency loss and surface smoothing, but they cannot fully replace human perceptual evaluation. For objects with strong reflection, transparency, thin structures, or highly stylized textures, discrepancies may exist between these metrics and subjective quality.

In addition, the current TCAS uses fixed stage boundaries and a fixed scale combination, $C3 = (1.25, 2.50, 1.25)$. This setting is simple and stable, but it should be understood as a validated inference strategy for the studied geometry-adapter pipeline rather than a universally optimal schedule. As shown in Section 4.7, the failure mode of high-scale intervention is adapter-dependent, and even the most sensitive denoising stage differs across adapters; yet C3’s middle-stage concentration was the best-performing schedule among all tested variants in every regime examined, suggesting that its temporal structure is robust even when specific failure mechanisms vary. It has not yet been adapted to object complexity, material type, input reference image quality, or different sampler families, and the schedule has not yet been validated on a different geometry-conditioned multi-view diffusion backbone. Future work could study content-adaptive stage boundaries, SNR-aware scaling, and learned scale selection strategies.

Finally, our controlled re-examination of the learned FAC extension indicates that unconstrained lightweight gating can flatten the temporal envelope that makes TCAS effective; learned modulation is therefore promising only under envelope-preserving constraints, which we identify as a concrete direction for future work, while TCAS remains the main training-free method.

6. Conclusion

This paper presents a systematic experimental analysis of adapter scaling in multi-view diffusion texture generation. The experiments show that higher adapter scales continuously improve structural metrics such as FG-SSIM, but such improvement can mask texture quality degradation. In the 26-object texture audit, 92% of objects show texture flattening and high-frequency detail loss under $s = 2.50$. This reveals an adapter-specific temporal conflict that is not captured by simply treating the scale as a generic guidance strength.

To address this shape-texture trade-off, we propose Timestep-Conditioned Adapter Scaling (TCAS). The selected configuration, C3, applies strong adapter correction in the middle denoising stage and uses conservative scales in the early and late stages. The 24-object probe set is used only to select C3 from 17 scaling variants that include uniform, layer-wise, and temporal alternatives. With this schedule fixed, the 300-object evaluation pool further shows that C3 achieves FG-SSIM comparable to aggressive uniform scaling $s = 2.50$ while improving PSNR by 0.96 dB.

Therefore, the core contribution of this paper is not to claim that the generated results are visually close to the ground truth in all cases, nor to present TCAS as a universal replacement for all guidance schedules. Instead, the contribution is to reveal and validate a hidden shape-texture trade-off caused by geometry-adapter residual injection, and to show that a simple non-monotonic inference schedule can mitigate this trade-off better than fixed high-scale control and other tested scheduling variants. This conclusion suggests that, in the geometry-controlled multi-view pipeline studied here—and plausibly in similar geometry-conditioned texture pipelines—adapter strength is better treated as a stage-dependent inference control variable than as a single fixed hyperparameter.

As an additional check, a controlled re-examination of the learned-correction extension (FAC) under a strictly paired protocol showed that unconstrained lightweight gating does not preserve the schedule’s shape; the analysis delimits the scenario in which learned modulation helps—only under envelope-preserving constraints—and the training-free TCAS remains the main and sole method. Relative to the preliminary conference version [41], this article adds the two-stage epsilon-optimal selection rule behind TCAS and the strictly disjoint 276-object holdout evaluation, and the presentation has been rewritten accordingly.

Data availability

All data included in this study are available upon request by contact with the corresponding author.

Declaration of competing interests

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- [1] Liu R, Wu R, Van Hoorick B, et al. Zero-1-to-3: Zero-shot one image to 3D object. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [2] Shi R, Chen H, Zhang Z, et al. Zero123++: A single image to consistent multi-view diffusion base model. arXiv:2310.15110, 2023.
- [3] Liu Y, Lin C, Zeng Z, et al. SyncDreamer: Generating multiview-consistent images from a single-view image. arXiv:2309.03453, 2023.
- [4] Long X, Guo Y C, Lin C, et al. Wonder3D: Single image to 3D using cross-domain diffusion. arXiv:2310.15008, 2023.
- [5] Shi Y, Wang P, Ye J, et al. MVDream: Multi-view diffusion for 3D generation. *International Conference on Learning Representations*, 2024.
- [6] Wang P, et al. ImageDream: Image-prompt multi-view diffusion for 3D generation. arXiv:2312.02201, 2023.
- [7] Xu J, et al. InstantMesh: Efficient 3D mesh generation from a single image with sparse-view large reconstruction models. *Advances in Neural Information Processing Systems*, 2024.
- [8] Ke Q, et al. Era3D: High-resolution multiview diffusion using efficient row-wise attention. arXiv:2405.11616, 2024.
- [9] Chen D Z, et al. Text2Tex: Text-driven texture synthesis via diffusion models. arXiv preprint, 2023.
- [10] Richardson E, et al. TEXTure: Semantic texture transfer using diffusion models. arXiv preprint, 2023.
- [11] Poole B, Jain A, Barron J T, Mildenhall B. DreamFusion: Text-to-3D using 2D diffusion. *International Conference on Learning Representations*, 2023.
- [12] Chen R, Chen Y, Jiao N, Jia K. Fantasia3D: Disentangling geometry and appearance for high-quality text-to-3D content creation. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [13] Shao M, Xiong F, Sun Z, Xu M. MVPainter: Accurate and detailed 3D texture generation via multi-view diffusion with geometric control. arXiv:2505.12635, 2025.
- [14] Zeng X, Chen X, Qi Z, et al. Paint3D: Paint anything 3D with lighting-immersive texture generation. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024.
- [15] Cheng W, Mu J, Zeng X, et al. MVPaint: Synchronized multi-view diffusion for painting anything 3D. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025.
- [16] Zhao Z, Lai Z, Lin Q, et al. Hunyuan3D 2.0: Scaling diffusion models for high resolution textured 3D assets generation. arXiv:2501.12202, 2025.
- [17] Huang Z, et al. MV-Adapter: Multi-view consistent image generation made easy. arXiv:2412.03632, 2024.
- [18] Mou C, Wang X, Xie L, et al. T2I-Adapter: Learning adapters to dig out more controllable ability for text-to-image diffusion models. arXiv:2302.08453, 2023.
- [19] Zhang L, Rao A, Agrawala M. Adding conditional control to text-to-image diffusion models. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [20] Ye H, Zhang J, Liu S, Han X, Yang W. IP-Adapter: Text compatible image prompt adapter for text-to-image diffusion models. arXiv:2308.06721, 2023.
- [21] Hu E J, Shen Y, Wallis P, et al. LoRA: Low-rank adaptation of large language models. *International Conference on Learning Representations*, 2022.
- [22] Liu S Y, Wang C Y, Yin H, et al. DoRA: Weight-decomposed low-rank adaptation. arXiv:2402.09353, 2024.
- [23] Zhang Q, Zuo S, Liang C, et al. AdaLoRA: Adaptive budget allocation for parameter-efficient fine-tuning. *International Conference on Learning Representations*, 2023.
- [24] Ho J, Jain A, Abbeel P. Denoising diffusion probabilistic models. *Advances in Neural Information Processing Systems*, 2020.
- [25] Song J, Meng C, Ermon S. Denoising diffusion implicit models. *International Conference on Learning Representations*, 2021.

- [26] Ho J, Salimans T. Classifier-free diffusion guidance. *NeurIPS Workshop*, 2022.
- [27] Castillo A, Legenstein R, et al. Adaptive guidance: Training-free acceleration of conditional diffusion models. arXiv:2312.12487, 2023.
- [28] Kynkäänniemi T, Aittala M, Karras T, et al. Applying guidance in a limited interval improves sample and distribution quality in diffusion models. *Advances in Neural Information Processing Systems*, 2024.
- [29] Rombach R, Blattmann A, Lorenz D, Esser P, Ommer B. High-resolution image synthesis with latent diffusion models. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022.
- [30] Esser P, Kulal S, Blattmann A, et al. Scaling rectified flow transformers for high-resolution image synthesis. *International Conference on Machine Learning*, 2024.
- [31] Black Forest Labs. FLUX: Flow matching for image generation. 2024.
- [32] Loshchilov I, Hutter F. Decoupled weight decay regularization. *International Conference on Learning Representations*, 2019.
- [33] Cherti M, Beaumont R, Wightman R, et al. Reproducible scaling laws for contrastive language-image learning. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023.
- [34] Nichol A, Dhariwal P, Ramesh A, et al. GLIDE: Towards photorealistic image generation and editing with text-guided diffusion models. *International Conference on Machine Learning*, 2022.
- [35] Saharia C, Chan W, Saxena S, et al. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in Neural Information Processing Systems*, 2022.
- [36] Peebles W, Xie S. Scalable diffusion models with transformers. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [37] Wang Z, Bovik A C, Sheikh H R, Simoncelli E P. Image quality assessment: From error visibility to structural similarity. *IEEE Transactions on Image Processing*, 2004, 13(4): 600–612.
- [38] Zhang R, Isola P, Efros A A, Shechtman E, Wang O. The unreasonable effectiveness of deep features as a perceptual metric. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2018.
- [39] Wang J, Chan K C K, Loy C C. Exploring CLIP for assessing the look and feel of images. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2023.
- [40] Radford A, Kim J W, Hallacy C, et al. Learning transferable visual models from natural language supervision. *International Conference on Machine Learning*, 2021.
- [41] Anonymous. Adapter scaling trade-off and timestep-conditioned scheduling in multi-view diffusion texture generation. Submission #75 of CAD/Graphics 2026, 2026.



Timestep-Conditioned Adapter Scaling for Multi-view Diffusion Texture Generation

ARTICLE INFO

Keywords: multi-view diffusion model, 3D texture generation, adapter scaling, timestep-conditioned scaling, shape-texture trade-off, geometric control, texture quality assessment

ABSTRACT

Multi-view diffusion pipelines for 3D asset texturing commonly inject geometric conditions, such as normal and depth maps, through adapter modules, and the adapter scale at inference time is usually chosen empirically, although the generated views are later baked into the final mesh texture. We show that a single uniform scale is a blunt control: on the studied adapter, aggressive uniform scaling improves structural metrics such as foreground structural similarity (FG-SSIM) but suppresses the texture synthesis capability of the base model, causing flattened surfaces, reduced color variation, and loss of high-frequency details. We further identify an adapter-specific temporal conflict: geometric residuals are most useful for mid-stage structure refinement, whereas strong residual injection in the early or late stages disturbs global formation or suppresses texture synthesis. We introduce a measurable stage-utility analysis with structural guardrails and, extending our preliminary conference version, derive Timestep-Conditioned Adapter Scaling (TCAS), a training-free low-high-low schedule that concentrates strong geometric correction in the middle denoising stage and uses conservative scales otherwise. The schedule $C3 = (1.25, 2.50, 1.25)$ is selected using only a 24-object probe set from 17 scaling variants and then evaluated unchanged, without further search, on the strictly disjoint 276-object holdout. TCAS achieves FG-SSIM comparable to aggressive uniform scaling while improving the peak signal-to-noise ratio (PSNR) by 0.96 dB, retaining substantially more texture, and receiving higher preference in a blinded human study. These results suggest treating adapter strength as a stage-dependent inference control variable rather than a fixed hyperparameter, at least for adapter-conditioned multi-view texture generation.

1. Introduction

Recent advances in single-image 3D generation have substantially improved the recovery of geometry, multi-view consistency, and sparse-view reconstruction [1, 2, 3, 4, 5, 6, 7, 8]. As geometric generation models become increasingly mature, generating high-quality textures on an existing 3D shape has become a key factor affecting the realism and usability of 3D content. For an object whose geometry has already been determined, the final visual quality depends not only on whether the shape is complete, but also on whether the texture is faithful to the reference image, aligned with the 3D surface, and rich in local details.

Existing multi-view texture generation methods usually generate RGB images from multiple target views using 2D im-

age diffusion models, and then map the generated images back to the 3D surface through projection or texture baking [9, 10, 11, 12]. This route benefits from the generative capability of image diffusion models, but it still faces challenges in reference appearance alignment, geometry-texture consistency, and local texture detail preservation. Geometry-controlled multi-view diffusion methods represented by MVPainter introduce geometric conditions such as normals and depth maps to improve the alignment between generated textures and the underlying 3D surface, demonstrating the importance of explicit geometric control for 3D texture generation [13].

However, introducing geometric conditions is not only a question of whether a control signal should be used, but also a question of how strongly it should be applied. In adapter-

augmented diffusion pipelines, geometric conditions are usually injected into the model through an adapter or control branch, and their influence is regulated by a scaling factor. In practice, this factor is often set empirically: a small scale may lead to insufficient geometric constraints, whereas a larger scale is usually expected to improve structural consistency.

In multi-view texture generation, however, stronger adapter scaling is not necessarily better. Texture generation requires not only contours and structures to be consistent with geometry, but also surface color variations, material details, and high-frequency patterns to be preserved. Overly strong geometric control may force the model to follow normal, depth, or edge conditions too aggressively, thereby suppressing the intrinsic texture synthesis capability of the base diffusion model. In this case, some structural metrics may still improve, while the visual result suffers from texture flattening, reduced color variation, and detail loss.

Therefore, adapter scaling in geometry-controlled multi-view diffusion deserves further analysis. Compared with prior work that mainly studies how to build texture generation pipelines, how to introduce geometric conditions, and how to improve overall generation quality, adapter strength is a fine-grained inference-time control problem. It directly affects the balance between shape consistency and texture detail, and is an easily overlooked factor in multi-view texture generation quality.

This problem is related to, but not solved by, existing guidance scheduling strategies. CFG scheduling changes the extrapolation between conditional and unconditional predictions, while a geometry adapter injects residuals into intermediate representations. Generic ControlNet or adapter scale scheduling similarly treats condition strength mainly as a condition-adherence knob. In texture generation, however, the key question is not only how strongly to follow the geometry, but also when geometric residuals should dominate and when they should recede so that the base model can synthesize color, material, and high-frequency texture. Simple monotonic schedules such as linear or cosine decay do not explicitly address this non-monotonic requirement. Even the recent finding that classifier-free guidance is most useful only in a limited noise interval [28] does not answer this question: it identifies where conditioning helps for CFG, but not which stages of a geometry-conditioned texture pipeline require strong geometric residuals, where the late-stage risk is texture suppression rather than diversity loss.

The goal of this paper is not to propose a new full texture generation system, but to analyze and improve inference-time adapter scaling within a fixed geometry-controlled multi-view diffusion pipeline.

The main contributions of this paper are as follows:

(1) We systematically diagnose the shape-texture trade-off caused by adapter scaling in multi-view diffusion texture generation, showing that higher scales can improve structural metrics while simultaneously causing texture degradation whose specific form (flattening, artifact amplification, or no effect) depends on the adapter's residual magnitude and scale semantics.

(2) We identify an adapter-specific temporal conflict between geometric residual injection and texture formation, and propose

Timestep-Conditioned Adapter Scaling (TCAS), which concentrates strong geometric correction in the middle denoising stage while using conservative scales in the early and late stages.

(3) Through uniform scale sweeps, texture audits, a 24-object probe analysis of 17 uniform, layer-wise, and temporal scaling variants, and a 300-object evaluation pool without any further schedule search, we show why fixed high scales and simple stage transfers of guidance scheduling are insufficient for the shape-texture trade-off.

(4) We further provide a large-scale texture preservation analysis on the 300-object evaluation pool, showing that TCAS substantially reduces texture flattening compared with full high-scale scaling: C3 outperforms $s = 2.50$ on 87.7%, 95.0%, and 83.0% of objects in Laplacian variance, RGB standard deviation, and gradient magnitude, respectively, while the 95% confidence interval for the FG-SSIM difference crosses zero, indicating no significant difference in structural similarity.

A preliminary version of this study was submitted to CAD/Graphics 2026 (Paper 75) [41]. This article extends that submission substantially: (i) the TCAS schedule is now grounded in an explicit two-stage epsilon-optimal selection rule (Proposition 1) with assumptions and proofs; (ii) the empirical protocol now separates a strictly disjoint 276-object holdout from the 24-object probe set, and C3 is evaluated unchanged on this holdout, with pooled 300-object statistics reported alongside; and (iii) the presentation, including the abstract, introduction, and conclusions, is substantially rewritten to state these extensions.

2. Related Work

2.1. 3D Texture Generation and Multi-view Diffusion

Single-image 3D generation is often decomposed into geometry generation and texture generation. In recent years, single-image-to-3D, multi-view diffusion, and sparse-view reconstruction methods have made notable progress in structural stability, shape completeness, and cross-category generalization [1, 2, 3, 4, 5, 6, 7, 8]. Nevertheless, high-quality texture generation remains a key bottleneck for the realism and usability of 3D content. Existing texture generation methods usually rely on 2D diffusion models to synthesize RGB images from multiple views, and then project or bake these images onto the 3D surface [9, 10, 11, 12]. While this strategy inherits the strong generative capability of image diffusion models, it still suffers from reference appearance misalignment, geometry-texture inconsistency, and insufficient local texture detail.

To address these issues, methods such as Paint3D, MVPaint, Hunyuan3D 2.0, and MVPainter formulate 3D texture generation as a geometry-controlled multi-view diffusion task, generating multi-view images under geometric control and baking them into UV textures [14, 15, 16, 13]. MV-Adapter further shows that adapter-style multi-view control can enhance cross-view consistency without fully retraining the base model [17]. By injecting geometric information such as normals and depth maps into the diffusion model as conditional signals, the generated results better follow the 3D surface structure and remain consistent across views. Unlike prior methods that focus mainly

on multi-view image generation or general 3D reconstruction, these works emphasize precise alignment between texture and geometry as well as local detail recovery, significantly improving 3D texture generation quality. However, they mainly answer how to introduce geometric conditions and how to construct a texture generation pipeline, while the influence of geometric control strength at inference time on shape and texture quality remains underexplored.

2.2. Adapter-augmented Diffusion Models and Geometric Control

Adapter modules have become an important mechanism for introducing additional conditions into diffusion models. T2I-Adapter and ControlNet inject spatial conditions such as edges, depth maps, and normals into a pretrained diffusion model through lightweight parallel branches with a controllable scaling factor [18, 19]. IP-Adapter introduces image prompts through decoupled attention [20]. LoRA and its variants implement lightweight model adaptation through low-rank residual updates [21, 22, 23]. Although these methods differ in architecture, they generally include some form of scaling factor that controls the influence of the external condition or adapter residual on the base model.

In practice, the adapter scale is often treated as an empirical hyperparameter. A larger scale usually improves condition adherence, for example by better following normals, depth maps, or reference images. In texture generation tasks, however, overly strong conditional constraints may weaken the base diffusion model’s ability to synthesize color, material, and high-frequency details. Adapter scaling is therefore not a simple matter of increasing the strength as much as possible; it involves a balance between geometric constraints and texture fidelity. This paper focuses on exactly this inference-time control problem: given a fixed adapter structure and fixed geometric conditions, how should the adapter strength be set or scheduled to preserve both shape consistency and texture detail?

2.3. Diffusion Guidance Scheduling and Timestep Control

The denoising process of diffusion models is highly stage-dependent. Early steps mainly determine global layout and coarse structure, middle steps refine shape and semantic structure, and late steps are more responsible for color, texture, and high-frequency details [24, 25]. Based on this observation, many guidance scheduling strategies have been explored in both research and practice. For example, classifier-free guidance scales may be adjusted linearly, with cosine schedules, or dynamically to mitigate oversaturation, detail loss, or reduced diversity caused by overly strong guidance [26, 27]. In addition, the development of latent diffusion, high-resolution diffusion, and Transformer-based diffusion models further shows the close relationship among generation quality, noise schedules, conditional injection, and network architecture [29, 30, 31, 32, 33, 34, 35, 36].

These methods all exploit the staged nature of denoising to regulate conditional strength. Notably, Kynkäänniemi et al. show that classifier-free guidance is harmful at high noise levels, largely unnecessary at low noise levels, and beneficial

mainly in a middle interval, motivating limited-interval guidance [28]; mid-stage concentration of conditioning strength therefore has a close precedent in CFG scheduling. However, different control signals act through different mechanisms. CFG scheduling adjusts the weight between conditional and unconditional predictions, mainly affecting the balance among semantic control, diversity, and visual fidelity. By contrast, the scale of a geometric adapter acts directly on intermediate features or residual branches, controlling how strongly geometric conditions intervene in the generation process. TCAS differs from limited-interval guidance in both mechanism and target: it scales adapter feature residuals rather than score extrapolation, raises the middle scale above a conservative baseline instead of switching guidance on and off, and addresses the shape–texture trade-off of geometry-conditioned texture generation, where late-stage over-control suppresses the synthesis of color and high-frequency texture. ControlNet-style scale control is closer in spirit, but it is still usually interpreted as a condition-adherence strength; directly applying a larger, smaller, or smoothly decayed control scale does not specify which denoising stage should receive strong geometric residuals for texture generation.

This distinction matters because the desired schedule for geometry-controlled texture generation is not necessarily monotonic. A monotonic decay or warm-up can reduce over-control in one part of the trajectory, but it cannot simultaneously avoid unstable early residuals, strengthen the middle stage where geometry refinement is most useful, and weaken late residuals that compete with color and high-frequency texture formation. Thus, timestep-conditioned scheduling of adapter strength cannot be treated as a direct transfer of CFG scheduling or generic ControlNet scale scheduling; it requires a dedicated analysis of how geometric residual injection interacts with texture synthesis.

3. Method

3.1. Task Definition and Base Pipeline

This paper builds on the MVPainter-style geometry-controlled multi-view texture generation framework [13] and studies how the inference-time strength of geometric condition injection affects the generated results. Figure 1 illustrates the overall pipeline: the adapter injects geometric residuals into UNet features, TCAS adjusts their strength across denoising stages, and the final multi-view outputs are projected and baked into a textured 3D mesh. Given a single reference image and the corresponding 3D geometry, the base pipeline first generates RGB texture images from six target views and then obtains a textured mesh through projection or texture baking. We do not modify the base UNet, VAE, or pretrained adapter weights. Instead, the adapter scaling factor is treated as the key inference-time control variable.

During multi-view diffusion, the 3D geometry is rendered into normal maps, depth maps, and foreground masks, denoted as:

$$\mathbf{G} = \{G_{\text{normal}}, G_{\text{depth}}, G_{\text{mask}}\}. \quad (1)$$

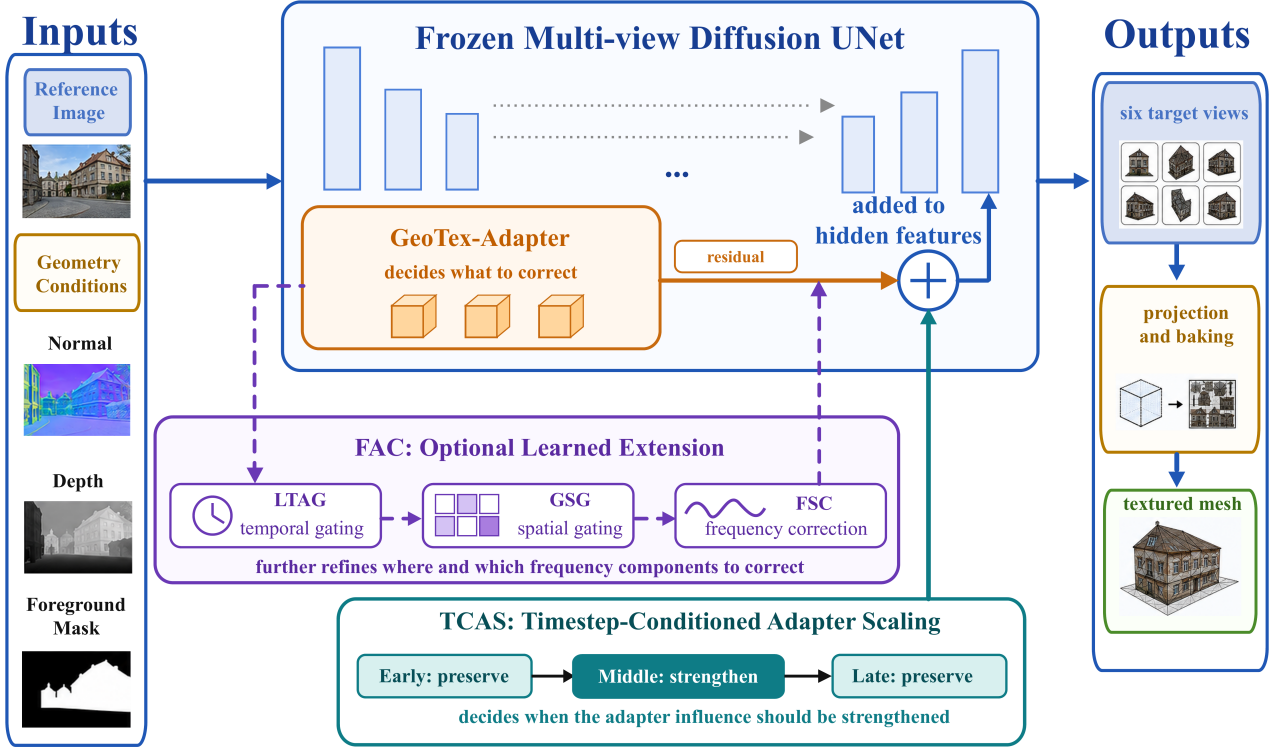


Fig. 1. Method overview. GeoTex-Adapter generates geometric residuals and injects them into UNet features. TCAS dynamically adjusts the residual strength according to denoising stages to balance geometric consistency and texture fidelity. FAC is an optional learned extension module. The final multi-view outputs are projected and baked into a textured 3D mesh.

The geometric adapter maps these conditions to a residual correction term and injects it into the intermediate hidden states of the UNet. For the t -th denoising step, the adapter injection can be written as:

$$\mathbf{h}'_t = \mathbf{h}_t + s(p_t) \cdot A_\phi(\mathbf{h}_t, \mathbf{G}), \quad (2)$$

where $\mathbf{h}_t$ and $\mathbf{h}'_t$ denote the hidden states before and after injection, p_t denotes the sampling progress, and $s(p_t)$ is the adapter scaling strength at the current denoising stage. This formulation highlights a key difference from CFG-style guidance: changing $s(p_t)$ does not reweight two predicted scores, but changes the magnitude of a geometry-conditioned residual added to the feature stream. A larger s usually enhances geometric condition adherence. However, if strong residuals are continuously applied in the late denoising stage, they may suppress the synthesis of color, material, and high-frequency details by the base diffusion model. This paper therefore studies how to schedule s during denoising to balance shape consistency and texture detail preservation.

3.2. Shape-Texture Diagnostic Metrics

The influence of adapter scaling on generated results cannot be evaluated by a single structural metric. We divide evaluation metrics into three groups. The first group consists of shape and structure metrics, including FG-SSIM, Edge-SSIM, and Crop-SSIM, which measure consistency with ground-truth renderings in the foreground, edge regions, and local foreground

crops based on the structural similarity index [37]. The second group contains signal fidelity and perceptual similarity metrics, including PSNR and the learned perceptual image patch similarity (LPIPS) [38], which reflect pixel-level error and differences in deep feature space. The third group consists of texture diagnostic metrics, including Laplacian variance, RGB standard deviation, and gradient magnitude, which are used to detect weakened color variation, surface smoothing, and high-frequency detail loss.

Taking Laplacian variance as an example, the foreground texture response is defined as:

$$M_{\text{tex}} = \text{Var}(\text{Lap}(I_{\text{out}} \odot G_{\text{mask}})), \quad (3)$$

where Lap denotes the Laplacian filter, G_{mask} denotes the foreground mask, and Var denotes spatial variance. A larger M_{tex} usually corresponds to richer local high-frequency variation. If structural metrics improve while Laplacian variance, RGB standard deviation, or gradient magnitude decreases, the improvement may mainly come from contour smoothing or boundary convergence rather than true texture quality improvement.

3.3. Timestep-Conditioned Adapter Scaling

The diffusion denoising process is stage-dependent: early steps mainly establish the global layout and coarse contours; middle steps refine geometric structure and cross-view alignment; late steps are more responsible for color, material, and

local texture synthesis. Based on this observation, we propose Timestep-Conditioned Adapter Scaling (TCAS), which places a globally fixed adapter scale with a stage-dependent scale function. TCAS is not intended as a generic smooth guidance schedule. Its low-high-low form encodes the adapter-specific hypothesis that geometry residuals should be strongest only after coarse structure becomes stable and before late texture synthesis dominates.

To avoid ambiguity caused by different raw timestep directions in different schedulers, we use sampling progress p to represent the denoising process, where $p = 0$ denotes the start from noise and $p = 1$ denotes the end of sampling close to the final image state. TCAS divides denoising into early, middle, and late stages:

$$s(p) = \begin{cases} s_e, & 0 \leq p < 1/3 \\ s_m, & 1/3 \leq p < 2/3 \\ s_l, & 2/3 \leq p \leq 1 \end{cases} \quad (4)$$

The selected C3 configuration used in this paper is:

$$(s_e, s_m, s_l) = (1.25, 2.50, 1.25). \quad (5)$$

This design follows three principles. First, the early stage uses a conservative scale to avoid disrupting global structure formation with strong geometric residuals. Second, the middle stage uses a higher scale to strengthen geometric constraints from normals, depth maps, and foreground contours. Third, the late stage reduces the scale again to prevent geometric residuals from suppressing color variation, material detail, and high-frequency texture synthesis. This non-monotonic schedule is therefore different from simply decaying or increasing the adapter strength across all timesteps. TCAS introduces no new parameters and does not modify the base model or adapter weights; it only replaces the scaling factor during inference, so its computational overhead is negligible.

Why mid-stage concentration is selected: the CAI model. The low-high-low form is not assumed but derived from a measurable Correction-Alignment-Interference (CAI) stage-utility model; we state the selection rule formally. Let $Q(s_e, s_m, s_l)$ denote a fidelity objective (PSNR here), let L denote the fixed-low schedule, let R denote the texture-deviation risk, given by the artifact-sensitive foreground texture diagnostics of Section 3.2 (Laplacian variance, RGB standard deviation, and gradient magnitude), and let $z_k \in \{0, 1\}$ indicate whether the high scale is assigned to stage $k \in \{e, m, l\}$. Risk is compared by a non-worsening (Pareto) rule rather than a weighted scalarization: one assignment has lower risk than another only if it is no worse on every diagnostic and strictly better on at least one, so no artificial weights are introduced.

Proposition 1 (Guardrailed ϵ -optimal selection). Suppose (i) the stage-utility model $Q(s_e, s_m, s_l) = Q(L) + \sum_k U_k z_k$ where $U_k = Q(\text{high scale only in } k) - Q(L)$ is the measured finite-difference utility of stage k , and (ii) per-stage guardrails under which stage k is admissible for the high scale only if its intervention does not reduce FG-SSIM by more than τ

nor raise the texture-deviation risk beyond a factor ρ relative to L . Selection proceeds in two stages. First, maximize fidelity over the admissible schedules $\mathcal{F}$: the fidelity-optimal assignment is $z_k^{\text{fid}} = \mathbf{1}[U_k > 0 \text{ and } k \text{ admissible}]$, with value $Q_{\max} = \max_{z \in \mathcal{F}} Q(z)$. Second, restrict attention to the ϵ -equivalent set $\mathcal{F}_\epsilon = \{z \in \mathcal{F} : Q(z) \geq Q_{\max} - \epsilon\}$ for a small fidelity-equivalence margin $\epsilon > 0$, and select $z^* = \arg \min_{z \in \mathcal{F}_\epsilon} R(z)$. Then: an inadmissible stage is fixed at the conservative scale; any admissible stage whose estimated utility alone exceeds ϵ must retain the high scale; and a stage whose estimated utility satisfies $0 < U_k < \epsilon$, with a structurally insignificant change, is fidelity-equivalent under either assignment, so the risk-dominant conservative scale is selected. Measured confidence intervals serve as auxiliary uncertainty information and do not enter the membership condition of $\mathcal{F}_\epsilon$.

Proof. Under (i), for any $z \in \mathcal{F}$, $Q(z) = Q_{\max} - \sum_{k: z_k^{\text{fid}}=1} U_k (1 - z_k)$, so $z \in \mathcal{F}_\epsilon$ exactly when the total positive utility dropped by reassigning high-scale stages to the conservative scale does not exceed ϵ . Condition (ii) fixes $z_k = 0$ for inadmissible stages and leaves the admissible stages independent, so each stage can be examined separately. A stage with $U_k > \epsilon$ cannot be dropped from the fidelity optimum without leaving $\mathcal{F}_\epsilon$, hence $z_k^* = 1$. A stage with estimated utility $0 < U_k < \epsilon$ contributes at most ϵ when dropped, so both assignments lie in $\mathcal{F}_\epsilon$; within $\mathcal{F}_\epsilon$ the second selection stage minimizes texture-deviation risk, and for such a stage the structural change is insignificant while the conservative scale strictly reduces the risk, so $z_k^* = 0$. $\square$

Remark 1. The utilities are measured finite differences on a 24-object stage ablation of the strong-residual, per-layer-capped adapter instance (regime (b) of Section 4.7), where per-stage effects are most visible: $U_e = -0.788$ dB (95% CI $[-1.420, -0.156]$) with a guardrail violation (FG-SSIM -0.105 , CI $[-0.141, -0.069]$; foreground Laplacian variance $3.85 \times \text{fixed-low}$), $U_m = +0.574$ dB $[0.391, 0.756]$, and $U_l = +0.077$ dB $[0.006, 0.149]$ with a structurally insignificant FG-SSIM change $(+0.001, \text{CI } [-0.002, 0.003])$. Proposition 1 selects exactly the conservative-high-conservative assignment C3: the early stage is inadmissible, the middle stage must retain the high scale because its utility alone $(+0.574 \text{ dB})$ exceeds any meaningful equivalence margin such as $\epsilon = 0.1$ dB, and the late stage has estimated utility $U_l = 0.077 < \epsilon = 0.1$ dB while its FG-SSIM change is statistically insignificant, so removing the late high-scale intervention remains within the ϵ -equivalent fidelity set and reduces texture risk; the risk-dominant conservative scale is therefore selected. The same conservative-high-conservative assignment is independently selected by the main adapter’s 17-variant probe (Table 2); the utilities above explain, rather than determine, that selection, and Remark 2 delimits the conditional scope of this explanation.

Remark 2. Additivity is an approximation: stage effects interact, and the complete C3 schedule is therefore validated directly (Secs. 4.4–4.7). Changing the adapter, its residual magnitude, or the scale semantics changes the measured U_k and requires re-estimation. Proposition 1 thus provides a conditional decision rule within the measured adapter regime—explaining why

the mid-stage assignment follows from data rather than from a hand-tuned rule—and not a universal guarantee.

3.4. GeoTex-Adapter and FAC Adaptive Extension

GeoTex-Adapter, TCAS, and FAC correspond to three complementary dimensions of adapter control. GeoTex-Adapter determines what geometric residual correction should be injected. TCAS determines when the residual should be strengthened or weakened along the denoising-time dimension. FAC further modulates the residual in a fine-grained manner along spatial positions and frequency components.

GeoTex-Adapter is used as a fixed geometric residual backbone. It receives a 5-channel geometric input consisting of a 3-channel normal map, a 1-channel depth map, and a 1-channel foreground mask. A multi-scale geometric encoder produces a feature pyramid, and residual corrections are injected into multiple resolution levels of the UNet. TCAS acts on the global temporal scale of these residuals to control the influence of geometric conditions at different denoising stages without changing the adapter architecture.

To further examine whether stage-wise adapter control can be extended to learned adaptive correction, we also conduct experiments with Full Adaptive Correction (FAC). FAC contains three lightweight modules: LTAG learns timestep-dependent gating, GSG generates spatial gates from geometric features, and FSC performs frequency-selective correction on adapter residuals. Unlike fixed TCAS, FAC finely modulates adapter residuals in the temporal, spatial, and frequency domains. In the extension experiments, FAC uses TCAS as the base temporal schedule and further adds GSG and FSC for spatial and frequency correction.

It should be emphasized that FAC requires learning a small number of additional parameters. Therefore, TCAS, which requires no training, remains the main method in this paper. FAC is used only as a learned adaptive extension; Section 4.6 reports a controlled re-examination that delimits when learned modulation can be expected to help.

4. Experiments

4.1. Experimental Setup

4.1.1. Experimental protocol and comparisons

Experiments are conducted using an MVPainter-style geometry-controlled multi-view diffusion pipeline. Each object contains a single reference image and corresponding 3D geometry. During preprocessing, the 3D geometry is rendered into target-view normal maps, depth maps, foreground masks, and ground-truth RGB images. The model generates six target views at a time, and all comparisons with ground-truth renderings are performed under unified views, resolution, and foreground masks.

Except for the FAC extension experiment, all scaling experiments keep the object list, reference image, target views, random seed, base UNet, VAE, adapter weights, and number of denoising steps fixed; only the adapter scale or schedule is changed. The number of sampling steps is 50. C3 is selected using only a 24-object probe set; the same schedule is then frozen

and applied to the 300-object evaluation pool, where no parameter search is performed. This probe-to-pool protocol isolates the effect of adapter scaling from changes in model architecture, training data, sampling budget, or evaluation-set tuning.

Accordingly, the comparisons in this paper are comparisons among inference-time adapter scaling strategies under the same base pipeline, rather than a system-level benchmark among different texture generation architectures. Uniform adapter scales serve as the primary deployment baselines because they correspond to the most direct way of choosing a single fixed adapter strength at inference time. The probe variants further test whether the trade-off can be resolved by simple alternatives such as globally high scales, layer-wise redistribution, or moving high adapter strength to early, late, or multiple denoising stages. TCAS changes only how this strength is scheduled across denoising stages.

4.1.2. Evaluation sets and metrics

We use four evaluation sets: (1) a 50-object scale-sweep set for analyzing the overall trend of structural metrics under 13 uniform scales; (2) a 26-object texture audit set for comparing texture degradation under $s = 1.25$ and $s = 2.50$; (3) a 24-object probe set for evaluating 17 uniform, layer-wise, and timestep-conditioned scheduling variants and selecting C3; and (4) a 300-object evaluation pool, comprising the 24-object probe and a 276-object held-out subset (detailed below), for testing the selected C3 schedule, uniform baselines, and the FAC extension without any further schedule search.

Evaluation metrics are divided into three categories: shape and structure metrics (FG-SSIM, Edge-SSIM, and Crop-SSIM), signal and perceptual metrics (PSNR and LPIPS), and texture diagnostic metrics (Laplacian variance, RGB standard deviation, and gradient magnitude). All metrics are first computed over six target views and then averaged over views and objects. For texture-related conclusions, we report means, object-level win rates, and significance tests to avoid judging generation quality based on a single structural score.

The FAC extension uses the same object list and evaluation protocol as the 300-object evaluation pool, and its lightweight modules are trained only on the adapter’s training pool, which is disjoint from all evaluation objects. TCAS is used as the main baseline, while LTAG, LTAG+GSG, and Full FAC are evaluated as ablation variants under the same paired protocol. The base model and original adapter remain frozen, and only lightweight adaptive correction parameters are learned.

4.1.3. Implementation and dataset details

All objects are drawn from the Objaverse 3D asset collection: ground-truth multi-view images are rendered offline with Blender (Cycles engine, 17 views at 512×512 , white background), and six target views (front, front-right, right, back, left, front-left) are used throughout the paper. The adapter’s training pool contains 1,118 rendered objects and the evaluation pools described above are drawn independently; we verified that the training and evaluation identifier sets intersect in zero objects, so no evaluation object is seen during adapter training. Within the 300-object evaluation pool, the 24-object probe set corre-

sponds to the first 24 identifiers (obj₀₀₀₀–obj₀₀₂₃) and the remaining 276 identifiers (obj₀₀₂₄–obj₀₂₉₉) form a holdout that is strictly disjoint from the probe; Section 4.7 reports transfer statistics on this disjoint holdout for the strong-residual, per-layer-capped adapter instance, in addition to the full-pool tables. The 50-object scale-sweep set comprises the first 50 objects of the pool (obj₀₀₀₀–obj₀₀₄₉), and the 26-object audit set is a purposive subset of these 50 objects, selected to span the observed range of per-object Δ FG-SSIM behavior for manual inspection; all evaluation sets are subsets of the 300-object pool, and no training object appears in any of them.

The base pipeline is an MVPainter-style geometry-controlled multi-view diffusion model built on a joint six-view latent UNet, used frozen together with its VAE. The pipeline is reference-image-conditioned; no text prompts are used. The GeoTex-Adapter takes a five-channel geometric input (3-channel normal map, 1-channel depth map, 1-channel foreground mask), produces a multi-scale residual pyramid, and injects corrections into multiple UNet resolution levels; for the adapter studied in the main tables, the requested scale is applied multiplicatively at every injected layer. Inference uses the Euler discrete scheduler with 50 denoising steps and a fixed random seed (42) shared by all schedules within an experiment, so all variants share the same initial latents; the model generates six views per object.

FG-SSIM, Edge-SSIM (edge masks derived from depth/normal discontinuities), PSNR, and LPIPS (AlexNet backbone) are computed on foreground-masked regions after background normalization; the texture diagnostics (foreground Laplacian variance, RGB standard deviation, gradient magnitude) are computed on foreground pixels and compared against the same ground-truth renderings under identical views and masks. The adapter checkpoint used for all tables is the GeoTex-Adapter trained on the 1,118-object training pool described above; the checkpoint and evaluation code will be made available upon reasonable request, and a consolidated reproducibility table (data subsets, checkpoint identifiers, scheduler, seed, and metric implementations) is provided in the supplementary material.

Statistical reporting. Object-level paired comparisons report two-sided paired tests and 95% confidence intervals constructed by percentile bootstrap over objects with 10,000 resamples. Where a mean is accompanied by $\pm$, the quantity is the standard deviation across objects. Preference-study intervals add a participant-level bootstrap level (Section 4.5).

4.2. Shape-Texture Trade-off of Adapter Scaling

Table 1 reports the results of a 13-scale uniform adapter sweep on 50 objects.

As the scale increases from $s = 0.75$ to $s = 2.50$, Δ FG-SSIM rises from -0.013 to $+0.145$, and the number of objects with positive improvement increases from 20/50 to 44/50. This indicates that stronger adapter residuals indeed improve the model’s adherence to geometric conditions such as normals, depth maps, and foreground contours. Figure 2 visualizes this trend: FG-SSIM keeps increasing with adapter scale, while Crop-SSIM saturates and slightly decreases at high scales.

Table 1. Uniform adapter scale sweep results.

Scale	Δ FG-SSIM $\uparrow$	POS	Δ Crop-SSIM $\uparrow$	Δ PSNR $\uparrow$
0.75	-0.013	20/50	+0.113	7.53
0.90	+0.024	30/50	+0.137	8.32
1.00	+0.047	34/50	+0.147	8.79
1.10	+0.070	36/50	+0.159	9.08
1.15	+0.071	36/50	+0.157	9.25
1.25	+0.088	37/50	+0.161	9.37
1.35	+0.100	39/50	+0.163	9.63
1.50	+0.113	40/50	+0.163	9.76
1.60	+0.120	42/50	+0.166	9.83
1.75	+0.127	43/50	+0.173	9.97
2.00	+0.134	44/50	+0.169	9.96
2.25	+0.142	43/50	+0.175	9.91
2.50	+0.145	44/50	+0.165	9.91

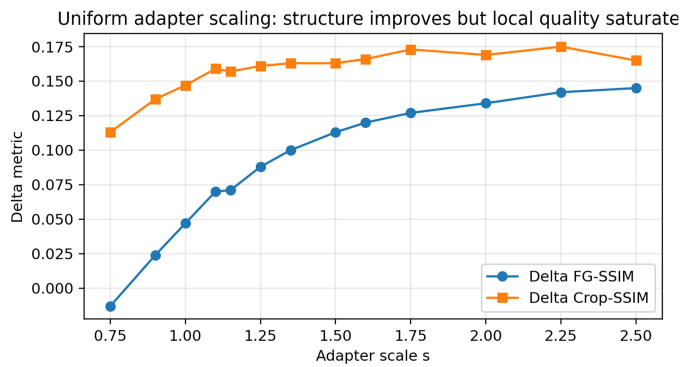


Fig. 2. Structural metric changes under uniform adapter scaling. The curves show that FG-SSIM keeps increasing with adapter scale, while Crop-SSIM saturates and slightly decreases at high scales. Stronger geometric control therefore mainly improves structural alignment, but does not necessarily keep improving local foreground quality.

Overall, the FG-SSIM improvement is stable, but the marginal benefit becomes smaller in the high-scale region. For example, increasing the scale from $s = 2.25$ to $s = 2.50$ yields only a limited FG-SSIM gain, while Crop-SSIM already decreases. This suggests that the nature of the high-scale benefit may change: the gain comes more from contour smoothing and foreground alignment than from preservation of local texture details. Figure 3 shows the per-object Δ FG-SSIM heatmap, confirming that most objects gain higher structural scores as the scale increases, but with clear object-level differences.

4.3. Texture Audit: High Scale Causes Texture Flattening

To determine whether the FG-SSIM gain at high scales reflects better visual quality, we further conduct a texture audit on 26 objects, comparing texture metrics and foreground shape changes for $s = 2.50$ relative to $s = 1.25$. Figure 4 should be read as a local texture comparison rather than as a claim that any method fully matches the ground truth: the key evidence is the progressive loss of color variation, material marks, and high-frequency patterns inside the marked regions as the scale increases. The conservative scale $s = 1.25$ better preserves color variation and local texture, while $s = 2.50$ more easily produces uniform and smooth surfaces.

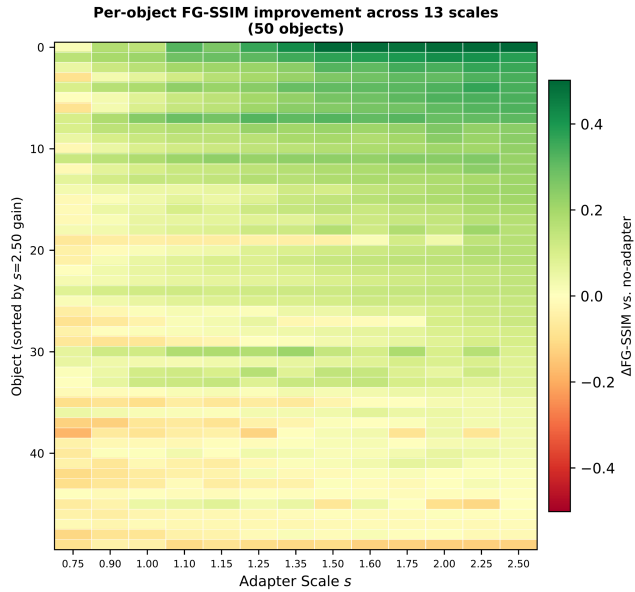


Fig. 3. Δ FG-SSIM heatmap for 50 objects under 13 adapter scales. Most objects obtain higher structural gains as the scale increases, but there are clear object-level differences.

The results show that 24 out of 26 objects (92%) exhibit a pattern of “texture loss without true shape gain.” Only two objects show comparable texture quality, and no object shows a clear texture improvement from the high scale. Here, “true shape gain” is not equivalent to an increase in FG-SSIM. It refers to whether the high scale brings substantive improvement in effective foreground area, contour structure, or geometric detail compared with the conservative scale. If the metric improvement mainly comes from smoothed foreground boundaries or averaged contour errors without visible geometric improvement, it is categorized as having no true shape gain. Therefore, although a high adapter scale can improve structural metrics, such improvement does not necessarily indicate better visual shape or texture quality. Figure 5 further quantifies this texture loss.

For multi-view texture generation, overly strong geometric control can suppress the color and detail synthesis capability of the base diffusion model during late denoising steps, making surfaces more uniform. Therefore, scale selection should not rely only on standard metrics such as FG-SSIM or PSNR, but should also incorporate texture-sensitive diagnostics.

4.4. Timestep-Conditioned Adapter Scaling: Shape-Texture Balance of C3

Based on the texture audit, we do not pursue higher adapter scales throughout the entire denoising process. Instead, we further explore how different scaling strategies balance shape gain and texture loss. We construct 17 adapter scaling variants and evaluate them on the 24-object probe set. To avoid turning the 300-object evaluation pool into a hyperparameter search, the schedule selected in this probe stage is frozen before large-scale evaluation. These variants include three categories: uniform

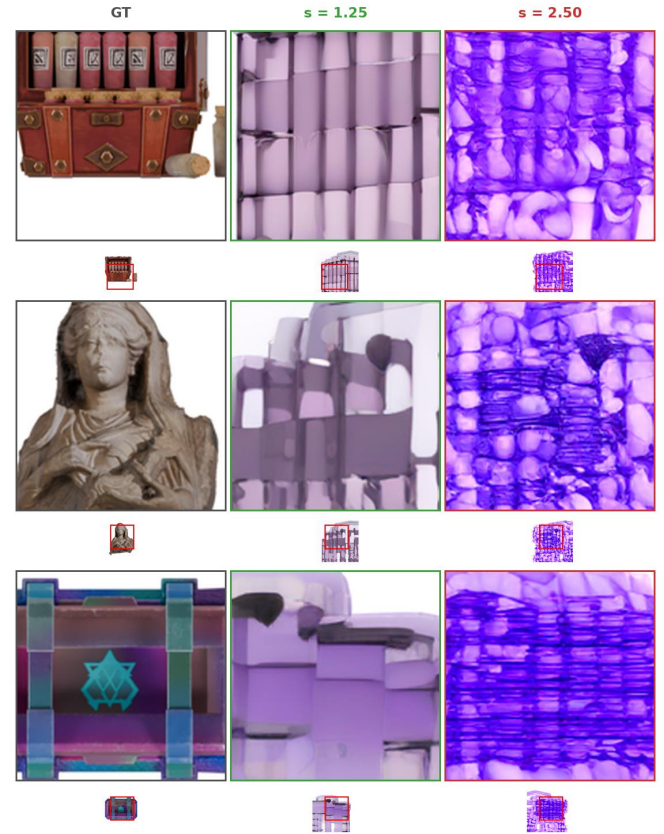


Fig. 4. Texture degradation under different adapter scales. Each row shows one object; large crops highlight local texture regions (thumbnails below indicate crop locations). Green borders denote conservative scaling $s = 1.25$; red borders denote aggressive scaling $s = 2.50$. Within each row, increasing the adapter scale causes progressive loss of color variation and high-frequency detail: surfaces become more uniform and color-saturated, indicating that stronger geometric correction suppresses the base model’s texture synthesis capability.

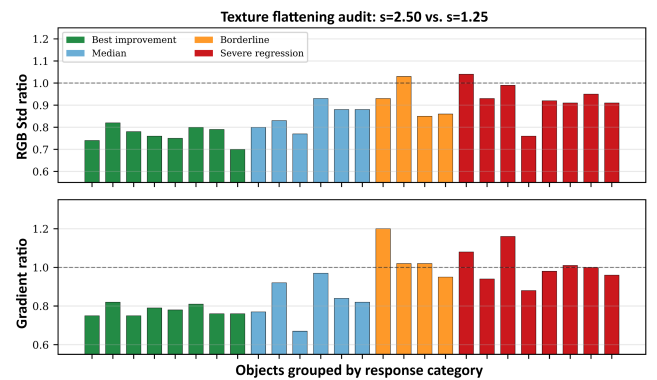


Fig. 5. Texture flattening at $s = 2.50$. Top: RGB standard deviation ratio on 26 objects ($s = 2.50 / s = 1.25$). Bottom: gradient magnitude ratio. Values below 1.0 indicate texture loss. Even the eight best-improvement objects (green) show 18% to 30% texture loss despite positive FG-SSIM gains.

scaling baselines, layer-wise scaling strategies, and timestep-conditioned scaling strategies. Uniform scaling tests the effect of globally strengthening adapter influence and serves as the closest counterpart to using a single ControlNet-style con-

Table 2. Shape-texture trade-off on the 24-object probe set. Delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks; $\Delta\text{Lap Var}$ closer to 0 indicates smaller texture loss. Eight representative variants of the 17 evaluated are shown; the complete set is visualized in Fig. 7.

Variant	Category	$\Delta\text{FG-SSIM}\uparrow$	$\Delta\text{Lap Var} \rightarrow 0$	Assessment
C4	Late-stage high	0.105	-0.0120	Trap
C2	Timestep sched.	0.104	-0.0110	Trap
B2	Layer-wise sched.	0.090	-0.0135	Trap
A_s2.00	Uniform	0.087	-0.0062	Trap
C3 (TCAS)	Mid-stage high	0.084	-0.0006	Promising
A_s2.25	Uniform	0.079	-0.0096	Trap
A_s2.50	Uniform	0.078	-0.0108	Trap
B6	Layer-wise sched.	0.000	-0.0027	OK

dition scale. Layer-wise scaling examines whether redistributing the same geometric intervention across UNet levels is sufficient. Timestep scaling tests stage placement directly, including variants that put high adapter strength in early, middle, late, or broader temporal regions. This design is intended to rule out the simple explanation that any guidance-like schedule or any stronger control scale would solve the problem.

All variants are evaluated using $\Delta\text{FG-SSIM}$ for shape gain and $\Delta\text{Lap Var}$ for texture detail change. Delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks. Importantly, the objective of this probe experiment is not to find the single highest structural score, but to identify a stable compromise strategy that avoids the trap of “higher structural metrics but flattened texture.” This criterion is crucial: if a schedule improves FG-SSIM by applying strong geometry residuals late but causes a clear drop in texture response, then it does not solve the adapter-specific conflict even though it appears favorable under a structure-only metric.

Table 2 summarizes representative scheduling variants on the 24-object probe set. C4 and other late-stage high-scale strategies obtain higher $\Delta\text{FG-SSIM}$, but they are accompanied by obvious decreases in Laplacian variance, indicating that their structural gains come at the cost of texture loss. This is the main reason a direct transfer of guidance scheduling intuition is insufficient: a schedule can make the condition stronger at apparently useful timesteps and still damage the texture signal that matters for 3D appearance. Uniform high-scale strategies show a similar problem. For example, $s = 2.50$ achieves $\Delta\text{FG-SSIM}$ of +0.078, but $\Delta\text{Lap Var}$ decreases to -0.0108. In contrast, C3 achieves $\Delta\text{FG-SSIM}$ of +0.084. Although it is slightly lower than some aggressive variants in structure gain, its Laplacian variance loss is only -0.0006, close to zero texture loss. Therefore, C3 is the only variant labeled Promising. We freeze this configuration before large-scale evaluation and do not tune it on the 300-object set.

The specific configuration of C3 uses the conservative scale $s = 1.25$ in the early and late stages, and the strong scale $s = 2.50$ in the middle geometry-refinement stage, i.e., C3 = (1.25, 2.50, 1.25). Its motivation follows the staged role of diffusion denoising. In the early stage, latent variables are still highly noisy, and strong geometric correction can interfere with global structure formation. In the middle stage, the signal be-

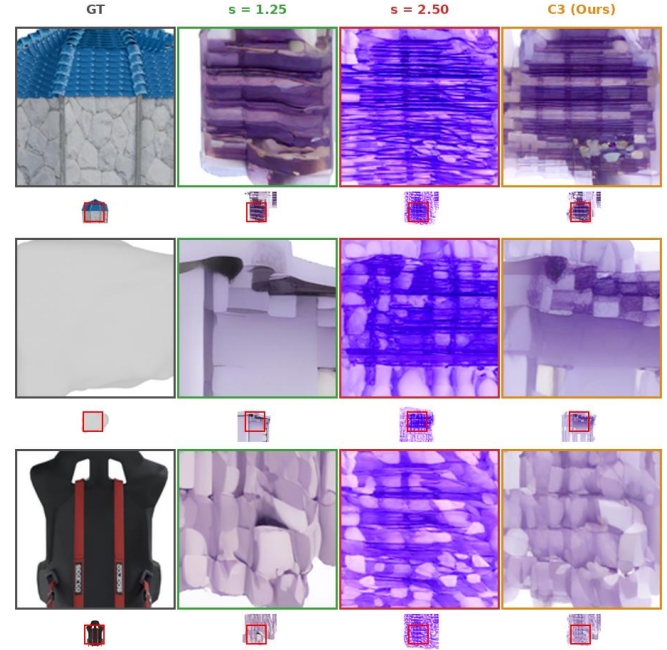


Fig. 6. Qualitative comparison between C3 and uniform adapter scaling. Large crops show local texture regions (thumbnails below indicate crop locations). Columns: GT (gray), $s = 1.25$ (green), $s = 2.50$ (red), and C3 (Ours) (orange). Compared with $s = 2.50$, C3 retains more local color variation and material texture while preserving stronger geometric correction than the conservative scale.

comes more stable, making it suitable to strengthen geometric constraints such as normals, depth maps, and foreground contours. In the late stage, generation mainly focuses on color, material, and fine texture synthesis, so adapter intervention should be reduced to preserve the texture generation space of the base diffusion model.

Figure 6 provides a qualitative comparison between C3 and uniform adapter scaling. The red-boxed zoom-in regions make the intended comparison visible: conservative scaling preserves more color variation but provides weaker structural correction, whereas aggressive scaling strengthens geometric constraints but flattens surface texture. C3 applies strong geometric correction in the middle stage and reduces adapter intervention in the late stage, thereby preserving more local texture than $s = 2.50$ while retaining stronger geometric correction than the conservative scale.

Figure 7 further shows the distribution of the 17 variants in the shape-texture space. Most variants with high shape gain are accompanied by large texture loss and fall into the Trap region, whereas C3 maintains a relatively high shape gain while keeping texture loss near zero. Thus, the value of C3 is not that it maximizes every metric, but that it avoids the trap of “higher structural scores but flattened texture,” resulting in a more stable shape-texture compromise.

Mechanistically, the advantage of C3 is not simply the result of hyperparameter tuning; it comes from the functional alignment between adapter correction and the diffusion process’s stage-dependent objective. A natural hypothesis might be that correction should be strongest where the correction-to-noise ra-

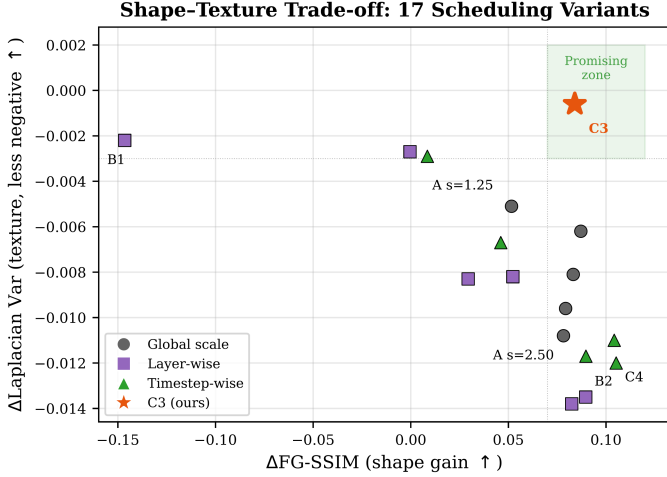


Fig. 7. Shape-texture Pareto trade-off among 17 variants. The horizontal axis is shape gain, where farther right is better; the vertical axis is the Laplacian-variance change, where higher (closer to zero) is better; therefore, the top-right region represents a more desirable compromise. C3 (star) lies in the Promising region, with high shape gain and nearly zero texture loss. Most high-shape-gain variants fall into the Trap region, where structural scores are obtained at the cost of large texture loss. Variants such as B1 have smaller texture degradation but almost no shape gain.

in Laplacian variance, making it a typical Trap variant where structural metrics improve while texture is flattened. Uniform high-scale variants similarly improve condition adherence but lose texture detail, showing that the issue is not solved by a stronger ControlNet-like scale. An aggressive C3 variant further increases the middle-stage strength but reduces signal fidelity, suggesting that even middle-stage correction has diminishing returns and can lead to over-constraint.

Table 3. Comparison of representative variants under extended texture metrics. All delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks. This table verifies that the advantage of C3 is not due to a single Laplacian variance metric.

Variant	Δ Lap Var	Δ RGB Std	Δ Grad	Δ HF Energy
C3	-0.001	-0.023	+0.142	+0.058
C4	-0.012	-0.032	+0.086	+0.062
A_s2.50	-0.011	-0.044	+0.054	+0.078
A_s2.00	-0.006	-0.040	+0.100	+0.070
A_s1.25	-0.005	-0.032	+0.104	+0.053

Table 3 compares representative variants under extended texture metrics. C3 has nearly zero loss in Laplacian variance and remains relatively stable in RGB standard deviation, gradient magnitude, and high-frequency energy. Compared with C4 and uniform high-scale strategies, C3 shows weaker texture degradation, indicating that its shape-texture balance is not an artifact of a single metric.

4.5. Large-scale Pooled Evaluation

Finally, as a transfer test rather than another search, we compare conservative uniform scaling ($s = 1.25$), aggressive uniform scaling ($s = 2.50$), and selected C3 (TCAS) on 300 objects. C3 is not searched again on the 300-object set; it directly uses the timestep schedule selected on the 24-object probe set to evaluate the transferability of the strategy to a larger object set. Because the 24-object probe is a subset of the 300-object pool, the main-table comparison is not probe-disjoint; a disjoint holdout re-verification is provided in Section 4.7.

As shown in Table 4, conservative uniform scaling $s = 1.25$ has lower FG-SSIM and Edge-SSIM, indicating insufficient geometric constraints. Aggressive uniform scaling $s = 2.50$ obtains the highest Edge-SSIM, suggesting that continuously strengthening adapter residuals helps edge and contour alignment. However, its PSNR is lower than that of C3, indicating that overly strong geometric intervention reduces overall signal fidelity. In contrast, C3 achieves an FG-SSIM of 0.476, which is comparable to $s = 2.50$, while increasing PSNR to 18.86 and slightly reducing FG-LPIPS. These results show that timestep-conditioned scaling preserves structural alignment while improving signal quality.

PSNR mainly reflects global pixel error and should not be directly equated with texture detail quality. To further verify texture preservation, we compute Laplacian variance, RGB standard deviation, and gradient magnitude on the same 300 objects to measure foreground high-frequency response, color variation amplitude, and local gradient strength, respectively. All results

tion is highest. However, under the Euler sigma schedule, this ratio increases monotonically throughout denoising (from approximately 8 at full noise to over 400 near completion), which would predict that late-stage correction is most effective—a prediction inconsistent with the scheduling-variant results. The correct explanation involves *functional alignment* rather than signal-to-noise ratio. The adapter correction is derived from geometric conditions (normals, depth, contours) and is therefore constructive only when the diffusion process is actively refining geometric structure. In the early stage ($\sigma > 5$), global structure has not yet emerged, so the correction has no stable target to reinforce and instead disrupts layout formation. In the middle stage ($\sigma \approx 5-1.2$), coarse structure is established and the denoiser is performing geometric refinement—the adapter correction direction aligns with this objective, making it maximally constructive. In the late stage ($\sigma < 1.2$), generation shifts to color, material, and fine texture synthesis; geometric correction is orthogonal to this objective and competes with the texture formation process. C3’s low-high-low schedule therefore allocates strong correction proportional to functional alignment, not to signal clarity. Notably, this allocation is the reverse of limited-interval CFG guidance [28]: under adapter residual injection, geometric correction must also be withdrawn near the end of sampling, because the late-stage risk is competition with texture synthesis rather than diversity loss. The schedule is tied to the denoising process’s functional role at each stage rather than to validation-set-specific tuning or a generic monotonic guidance rule.

This explanation is consistent with the scheduling-variant results. Early high-scale or early-and-late high-scale variants provide limited structural gain, indicating that early strong intervention is unstable. The late-stage high-scale configuration C4 obtains a high structural score but shows a significant decrease

Table 4. Large-scale pooled evaluation on the full 300-object evaluation pool (pooled statistics; the pool contains the 24 probe objects). Values are absolute metrics of generated outputs with respect to ground truth.

Method	FG-SSIM↑	Edge-SSIM↑	PSNR↑	FG-LPIPS↓
$s = 1.25$	0.430	0.513	17.95	0.174
$s = 2.50$	0.473	0.559	17.90	0.172
C3 (TCAS)	0.476	0.529	18.86	0.171

Table 5. Large-scale pooled texture-preservation evaluation on the full 300-object evaluation pool (pooled statistics; the pool contains the 24 probe objects). Higher texture metrics indicate better preservation of foreground color variation and high-frequency details. Absolute values are means over objects and views; the ratios in Table 6 are the mean over objects of each per-object ratio relative to the corresponding $s = 1.25$ statistic (equal object weighting).

Method	Lap Var↑	RGB Std↑	Grad Mag↑
$s = 1.25$	0.0151	0.0408	0.3258
$s = 2.50$	0.0095	0.0251	0.2616
C3 (TCAS)	0.0129	0.0377	0.2919

Table 6. Texture retention ratios and object-level stability of C3. Each ratio is the mean over objects of the per-object ratio of the corresponding foreground statistic to that of $s = 1.25$ (equal object weighting); object-level win rates for C3 over $s = 2.50$ are reported in the text.

Method	Lap Var Ratio↑	RGB Std Ratio↑	Grad Mag Ratio↑
$s = 1.25$	1.000	1.000	1.000
$s = 2.50$	0.678	0.643	0.807
C3 (TCAS)	0.835	0.970	0.883

use the same object list, random seed, 50 denoising steps, and adapter weights to ensure comparability.

Table 5 shows that although $s = 2.50$ achieves the highest Edge-SSIM, it has the lowest values across all three texture metrics, indicating that full high-scale scaling weakens color variation and high-frequency details. C3 has FG-SSIM comparable to $s = 2.50$ while substantially improving Laplacian variance, RGB standard deviation, and gradient magnitude, demonstrating a better balance between structural alignment and texture preservation.

As shown in Table 6, compared with conservative scaling $s = 1.25$, aggressive scaling $s = 2.50$ retains only 67.8% of Laplacian variance, 64.3% of RGB standard deviation, and 80.7% of gradient magnitude, indicating that full high-scale scaling substantially weakens foreground color variation and high-frequency details. In contrast, C3 retains 83.5%, 97.0%, and 88.3% of these metrics, respectively, and clearly outperforms $s = 2.50$ across all three texture measures. This shows that TCAS still incurs some texture reduction, but it substantially alleviates texture flattening compared with full high-scale scaling.

Object-level statistics further show that C3 outperforms $s = 2.50$ on 87.7%, 95.0%, and 83.0% of objects in Laplacian variance, RGB standard deviation, and gradient magnitude, respectively. The corresponding bootstrap 95% confidence intervals do not cross zero, indicating statistically stable texture-preservation advantages. C3 also outperforms $s = 2.50$ on

Table 7. CLIP-IQA perceptual validation on 50 objects from the evaluation pool. Scores are reported for foreground regions and full rendered views; $\pm$ denotes the standard deviation across the 50 objects. Higher is better.

Method	CLIP-IQA (FG)↑	CLIP-IQA (Full)↑	Win vs. $s = 2.50$
$s = 1.25$	0.4920 $\pm$ 0.0032	0.4918 $\pm$ 0.0030	98.0%
$s = 2.50$	0.4860 $\pm$ 0.0018	0.4857 $\pm$ 0.0017	–
C3 (TCAS)	0.4906 $\pm$ 0.0028	0.4903 $\pm$ 0.0025	94.0%

74.3% of objects in PSNR. By contrast, the confidence interval for the FG-SSIM difference includes zero, so these data do not establish a significant difference in foreground structural similarity between C3 and $s = 2.50$. Therefore, TCAS does not noticeably sacrifice structural alignment, while significantly reducing the texture degradation caused by full high-scale scaling.

In summary, the 300-object experiments demonstrate that adapter scaling affects both structural alignment and texture detail preservation. Full high-scale scaling strengthens edge constraints but is more likely to cause texture flattening. TCAS strengthens geometric correction in the middle stage and reduces adapter intervention in the late stage, thereby maintaining structural alignment while substantially reducing texture loss. It should be noted that C3 still has some texture decrease relative to $s = 1.25$; therefore, we do not claim that TCAS completely eliminates texture loss, but rather that it significantly reduces texture degradation compared with full high-scale scaling.

Perceptual validation with CLIP-IQA. To address the concern that proxy texture statistics do not directly measure perceptual quality, we additionally evaluate CLIP-IQA [39], which builds on CLIP image–text representations [40], on a 50-object subset of the evaluation pool as a complementary no-reference perceptual signal. CLIP-IQA is used as complementary perceptual evidence rather than a complete replacement for human preference evaluation.

Table 7 shows that C3 achieves a foreground CLIP-IQA score of 0.4906 versus 0.4860 for $s = 2.50$, scoring higher on 47 of the 50 objects (94.0%). The paired comparison uses a two-sided paired t -test over objects ($t(49) = 10.52$, $p \approx 3.6 \times 10^{-14}$), and the 95% confidence interval of the paired mean difference is constructed by object-level percentile bootstrap with 10,000 resamples, giving [0.0037, 0.0054], which excludes zero. The ordering $s = 1.25 > C3 > s = 2.50$ supports the diagnosis that aggressive scaling reduces perceptual quality, while TCAS recovers most of this loss with stronger geometry than conservative scaling.

Blinded preference study. To further examine whether the diagnostic texture differences are perceptually meaningful, we conducted a blinded three-alternative forced-choice (3AFC) preference study on 30 objects drawn from the evaluation pool. Twenty-four participants viewed, for each object and each of the three criteria (texture naturalness, shape consistency, overall quality), the anonymized outputs of conservative uniform scaling, aggressive uniform scaling, and C3 side by side; the left-to-right order of the three conditions was randomized independently per trial, and participants were not informed which

method produced which image or how many conditions existed. Instructions asked participants to select the best image for the stated criterion only. Each participant judged all 30 objects for all three criteria, yielding 720 valid first-choice decisions for each criterion. The study complements the proxy diagnostics by testing whether the observed texture and structure differences are reflected in human preference.

Table 8. Blinded three-alternative first-choice preference study. Percentages are computed over 720 valid decisions per criterion.

Method	Texture naturalness↑	Shape consistency↑	Overall quality↑
$s = 1.25$	332/720 (46.1%)	96/720 (13.3%)	176/720 (24.4%)
$s = 2.50$	104/720 (14.4%)	331/720 (46.0%)	126/720 (17.5%)
C3 (TCAS)	284/720 (39.4%)	293/720 (40.7%)	418/720 (58.1%)

The preference pattern in Table 8 follows the intended trade-off. Conservative scaling is most often selected for texture naturalness, while aggressive scaling is most often selected for shape consistency. C3 stays close to both single-scale baselines on their respective strengths and receives the highest overall preference, with 58.1% of all overall-quality votes. Thus, TCAS is not claimed to maximize every individual criterion; it provides a perceptually preferred balance between geometric adherence and texture preservation.

Because first-choice decisions are clustered within both participants and objects, we additionally report 95% confidence intervals obtained by a two-level cluster bootstrap (resampling participants and objects with replacement, 10,000 resamples). C3’s overall-quality share is 58.1% (95% CI [50.1%, 65.8%]), exceeding the conservative and aggressive baselines by +33.6 (CI [19.3, 47.2]) and +40.6 percentage points (CI [29.4, 51.8]); both differences exclude zero, so the overall-preference advantage of C3 is significant under cluster-aware inference. By contrast, the baselines’ single-criterion advantages are not significant (texture naturalness: $s = 1.25$ over C3 +6.7 points, CI [−7.9, 21.5]; shape consistency: $s = 2.50$ over C3 +5.3 points, CI [−6.7, 17.9]). Overall quality is therefore the only criterion with a significant preference, supporting the interpretation of TCAS as the perceptually preferred balance rather than a per-criterion maximum.

4.6. FAC Adaptive Correction Extension: A Controlled Re-examination

TCAS uses a fixed three-stage scale, which has the advantages of requiring no training, being simple to implement, and introducing low computational overhead. However, its residual scaling is still uniform across spatial positions and frequency components, lacking fine-grained adaptivity. To examine whether stage-wise adapter control can be extended to learned adaptive correction, we trained the FAC extension—LTAG for timestep gating, GSG for spatial gating, and FSC for frequency-selective correction on top of the TCAS temporal schedule. The base model, VAE, and GeoTex-Adapter remain frozen; only the three lightweight controllers are trainable, adding roughly 6×10^3 parameters. The controllers are trained with the same enhanced denoising objective as the base adapter—a latent noise-prediction MSE with $1.7\times$ foreground

and $1.3\times$ edge spatial reweighting plus a latent-SSIM term—using AdamW (peak learning rate 10^{-4} , 100 warm-up steps) for 2,000 steps on the adapter’s training pool, which is strictly disjoint from all evaluation objects, and all variants are evaluated on the strong-residual, per-layer-capped adapter instance of Section 4.7 under a strictly paired protocol (identical objects, seeds, and evaluation code).

In this controlled setting, no learned variant reached the training-free schedule. We tested seven configurations spanning the most favorable training conditions we could construct: joint training of all controllers; a two-stage scheme with the temporal gate warm-started at the exact C3 envelope and frozen while the spatial and frequency controllers train; an envelope penalty that constrains the gate to remain near C3 during joint training; a fidelity-weighted objective; and a gently scheduled variant with fourfold-reduced training. Their paired deficits relative to the TCAS baseline range from −1.1 to −2.9 dB foreground PSNR (FG-PSNR; win rates at most 16%), increasing monotonically with the amount of controller training. A warm-start control in which the gate is left untrained at the exact C3 envelope is statistically indistinguishable from TCAS (paired FG-PSNR $\Delta = -0.18$ dB on the 12-object control, 95% CI [−0.42, +0.05], crossing zero), validating the evaluation path. No configuration or hyperparameter was selected on any evaluation object; the complete dose–response study over all seven configurations is provided in the supplementary material.

For transparency, we note that an earlier version of this extension, evaluated on the main adapter under our initial protocol before the strictly paired and strictly disjoint training controls were adopted, had suggested a positive FAC gain. That preliminary comparison differed in both evaluation protocol and adapter instance, and it does not meet the controls we now consider necessary for a transfer claim; under the strictly paired, strictly disjoint protocol above, no trained configuration replicates the gain. We therefore report only the controlled re-examination and treat the earlier comparison as superseded.

The outcome delimits the scenario in which learned modulation affects the paper’s conclusions. Preserving the temporal envelope is necessary but not sufficient: with the envelope preserved and the controllers untrained, the extension neither helps nor harms, while every trained configuration degraded fidelity, indicating that the remaining damage is driven by the learned-modulation training signal itself, which trades foreground fidelity for denoising-objective loss. Learning a modulation that improves upon the C3 schedule therefore requires a training signal that does not trade away foreground fidelity (e.g., fidelity-weighted objectives, envelope-preserving constraints, or post-hoc rather than gradient-learned gates), which we identify as future work. With the tested lightweight controllers, the fixed schedule is the stronger default, and TCAS, which is training-free and plug-and-play, remains the main and sole method of this paper.

4.7. Adapter-Dependence of High-Scale Failure Modes

The preceding experiments demonstrate the texture-flattening failure mode under high adapter scaling on the studied adapter checkpoint. A natural question is whether

this failure mode is universal or specific to the adapter’s trained residual properties. We conduct additional analysis across adapter checkpoints with different residual magnitudes to characterize how the failure mode depends on adapter properties.

We find that the specific failure mode of aggressive adapter scaling is not universal. Across three adapter checkpoints spanning a spectrum of trained residual magnitudes, uniform high scale ($s = 2.50$) produced: (a) texture flattening when all layers are scaled without per-layer caps; (b) high-frequency artifact amplification when per-layer caps restrict the fine-texture layer to a low scale while coarse layers are boosted; or (c) no appreciable effect when the adapter’s residual magnitude is very small. A per-layer scale-cap ablation on the same checkpoint reproduced both (a) and (b), isolating the inference-time scale semantics as the determining factor for the failure *direction*.

A residual-magnitude sweep further shows that the intervention *strength* is monotonic in the trained residual magnitude: scaling the adapter’s output projection from $0.1\times$ to $3\times$ transitions the behavior from no-effect, to artifact amplification under high scale, to over-constraint even under conservative scale.

Moreover, a six-object stage ablation shows that even *which denoising stage is most sensitive to high scale* is adapter-dependent: on the artifact-prone adapter, early-stage high scale reproduced nearly all of the damage (FG-SSIM $\downarrow$ from 0.266 to 0.187) while late-stage high scale was nearly harmless (FG-SSIM 0.261), whereas on the paper’s main adapter the late stage was the primary source of texture loss.

Despite this variability, in every regime where scaling had a non-negligible effect, the temporal low-high-low schedule C3 yielded the best shape-texture balance. This indicates that TCAS’s value is structural rather than incidental: by relying on the diffusion process’s stage-dependent roles (global layout $\rightarrow$ geometry refinement $\rightarrow$ texture synthesis), it mitigates the harm of high-scale intervention regardless of the adapter’s specific failure mode. The failure mode (flatten vs. artifact vs. no-op), its strength, and its temporal location are all adapter-dependent; what remains stable in our experiments is that across the tested regimes the middle denoising stage consistently emerged as the optimal window for geometric correction, although whether this holds across adapter families remains an open question for future work.

Two further robustness checks were performed on the strong residual, per-layer-capped adapter instance described above. First, a boundary/peak sensitivity sweep (three high-scale windows $[0.25, 0.75]$, $[1/3, 2/3]$, $[0.4, 0.6] \times$ five peak scales from 2.00 to 3.00, fifteen candidates on the 24-object probe protocol) shows that the canonical middle-third window lies in the stable high-performance region: its 2.50 setting achieves 16.71 dB whole-image PSNR, the best setting in the same window (2.75) achieves 16.79 dB with worse texture diagnostics and lower FG-SSIM, and the broader and narrower windows reach at most 16.73 and 16.62 dB. C3 is therefore a robust middle-stage choice rather than a boundary-sensitive point estimate. Second, because the 24-object probe is part of the 300-object pool, transfer claims were re-verified on the disjoint 276-object holdout ($\text{obj}_{0024}-\text{obj}_{0299}$), summarized in Table 9: C3

Table 9. Scheduling transfer on the disjoint 276-object holdout ($\text{obj}_{0024}-\text{obj}_{0299}$; strong-residual, per-layer-capped adapter instance of Section 4.7). ΔPSNR (dB) is the paired C3-minus-competitor difference (positive favors C3); 95% CIs use object-level percentile bootstrap with 10,000 resamples. Absolute metrics are means over holdout objects and views.

Schedule	FG-SSIM $\uparrow$	PSNR $\uparrow$	ΔPSNR vs. C3 (95% CI)	C3 wins
Trapezoid	0.356	19.04	+0.258 [0.207, 0.308]	206/276
Gaussian peak	0.358	18.97	+0.324 [0.281, 0.367]	232/276
Linear warm-up	0.377	18.97	+0.323 [0.263, 0.386]	214/276
Cosine bump	0.330	18.39	+0.902 [0.824, 0.981]	253/276
C3 (TCAS)	0.376	19.29	– (reference)	–

improves PSNR over the strongest non-C3 probe candidates by +0.258 dB (95% CI [0.207, 0.308], 206/276 wins) over a trapezoid schedule and +0.324 dB ([0.281, 0.367], 232/276 wins) over a Gaussian-peak schedule, and over the reviewer-relevant generic schedules by +0.323 dB ([0.263, 0.386], 214/276 wins, FG-SSIM statistically tied) over linear warm-up and +0.902 dB ([0.824, 0.981], 253/276 wins, FG-SSIM +0.046) over the cosine bump. The holdout ordering matches the probe: warm-up approaches C3 in structure but loses in signal fidelity, and the smooth bump loses in both because its effective high-scale duration is shorter than the full middle third.

5. Limitations

This paper mainly focuses on inference-time adapter scaling and does not retrain the base multi-view diffusion model or the adapter. Therefore, TCAS can alleviate texture degradation under high scales—which may manifest as flattening or artifact amplification depending on the adapter’s residual properties—but it cannot fundamentally solve the limitations of the base model in invisible-region completion, complex material synthesis, and cross-view detail consistency.

Second, Laplacian variance, RGB standard deviation, and gradient magnitude are proxy metrics for texture degradation. They are effective for detecting high-frequency loss and surface smoothing, but they cannot fully replace human perceptual evaluation. For objects with strong reflection, transparency, thin structures, or highly stylized textures, discrepancies may exist between these metrics and subjective quality.

In addition, the current TCAS uses fixed stage boundaries and a fixed scale combination, $\text{C3} = (1.25, 2.50, 1.25)$. This setting is simple and stable, but it should be understood as a validated inference strategy for the studied geometry-adapter pipeline rather than a universally optimal schedule. As shown in Section 4.7, the failure mode of high-scale intervention is adapter-dependent, and even the most sensitive denoising stage differs across adapters; yet C3’s middle-stage concentration was the best-performing schedule among all tested variants in every regime examined, suggesting that its temporal structure is robust even when specific failure mechanisms vary. It has not yet been adapted to object complexity, material type, input reference image quality, or different sampler families, and the schedule has not yet been validated on a different geometry-conditioned multi-view diffusion backbone. Future work could study content-adaptive stage boundaries, SNR-aware scaling, and learned scale selection strategies.

Finally, our controlled re-examination of the learned FAC extension indicates that unconstrained lightweight gating can flatten the temporal envelope that makes TCAS effective; learned modulation is therefore promising only under envelope-preserving constraints, which we identify as a concrete direction for future work, while TCAS remains the main training-free method.

6. Conclusion

This paper presents a systematic experimental analysis of adapter scaling in multi-view diffusion texture generation. The experiments show that higher adapter scales continuously improve structural metrics such as FG-SSIM, but such improvement can mask texture quality degradation. In the 26-object texture audit, 92% of objects show texture flattening and high-frequency detail loss under $s = 2.50$. This reveals an adapter-specific temporal conflict that is not captured by simply treating the scale as a generic guidance strength.

To address this shape-texture trade-off, we propose Timestep-Conditioned Adapter Scaling (TCAS). The selected configuration, C3, applies strong adapter correction in the middle denoising stage and uses conservative scales in the early and late stages. The 24-object probe set is used only to select C3 from 17 scaling variants that include uniform, layer-wise, and temporal alternatives. With this schedule fixed, the 300-object evaluation pool further shows that C3 achieves FG-SSIM comparable to aggressive uniform scaling $s = 2.50$ while improving PSNR by 0.96 dB.

Therefore, the core contribution of this paper is not to claim that the generated results are visually close to the ground truth in all cases, nor to present TCAS as a universal replacement for all guidance schedules. Instead, the contribution is to reveal and validate a hidden shape-texture trade-off caused by geometry-adapter residual injection, and to show that a simple non-monotonic inference schedule can mitigate this trade-off better than fixed high-scale control and other tested scheduling variants. This conclusion suggests that, in the geometry-controlled multi-view pipeline studied here—and plausibly in similar geometry-conditioned texture pipelines—adapter strength is better treated as a stage-dependent inference control variable than as a single fixed hyperparameter.

As an additional check, a controlled re-examination of the learned-correction extension (FAC) under a strictly paired protocol showed that unconstrained lightweight gating does not preserve the schedule’s shape; the analysis delimits the scenario in which learned modulation helps—only under envelope-preserving constraints—and the training-free TCAS remains the main and sole method. Relative to the preliminary conference version [41], this article adds the two-stage epsilon-optimal selection rule behind TCAS and the strictly disjoint 276-object holdout evaluation, and the presentation has been rewritten accordingly.

Data availability

All data included in this study are available upon request by contact with the corresponding author.

Declaration of competing interests

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- [1] Liu R, Wu R, Van Hoorick B, et al. Zero-1-to-3: Zero-shot one image to 3D object. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [2] Shi R, Chen H, Zhang Z, et al. Zero123++: A single image to consistent multi-view diffusion base model. arXiv:2310.15110, 2023.
- [3] Liu Y, Lin C, Zeng Z, et al. SyncDreamer: Generating multiview-consistent images from a single-view image. arXiv:2309.03453, 2023.
- [4] Long X, Guo Y C, Lin C, et al. Wonder3D: Single image to 3D using cross-domain diffusion. arXiv:2310.15008, 2023.
- [5] Shi Y, Wang P, Ye J, et al. MVDream: Multi-view diffusion for 3D generation. *International Conference on Learning Representations*, 2024.
- [6] Wang P, et al. ImageDream: Image-prompt multi-view diffusion for 3D generation. arXiv:2312.02201, 2023.
- [7] Xu J, et al. InstantMesh: Efficient 3D mesh generation from a single image with sparse-view large reconstruction models. *Advances in Neural Information Processing Systems*, 2024.
- [8] Ke Q, et al. Era3D: High-resolution multiview diffusion using efficient row-wise attention. arXiv:2405.11616, 2024.
- [9] Chen D Z, et al. Text2Tex: Text-driven texture synthesis via diffusion models. arXiv preprint, 2023.
- [10] Richardson E, et al. TEXTure: Semantic texture transfer using diffusion models. arXiv preprint, 2023.
- [11] Poole B, Jain A, Barron J T, Mildenhall B. DreamFusion: Text-to-3D using 2D diffusion. *International Conference on Learning Representations*, 2023.
- [12] Chen R, Chen Y, Jiao N, Jia K. Fantasia3D: Disentangling geometry and appearance for high-quality text-to-3D content creation. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [13] Shao M, Xiong F, Sun Z, Xu M. MVPainter: Accurate and detailed 3D texture generation via multi-view diffusion with geometric control. arXiv:2505.12635, 2025.
- [14] Zeng X, Chen X, Qi Z, et al. Paint3D: Paint anything 3D with lighting-immersive texture generation. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024.
- [15] Cheng W, Mu J, Zeng X, et al. MVPaint: Synchronized multi-view diffusion for painting anything 3D. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025.
- [16] Zhao Z, Lai Z, Lin Q, et al. Hunyuan3D 2.0: Scaling diffusion models for high resolution textured 3D assets generation. arXiv:2501.12202, 2025.
- [17] Huang Z, et al. MV-Adapter: Multi-view consistent image generation made easy. arXiv:2412.03632, 2024.
- [18] Mou C, Wang X, Xie L, et al. T2I-Adapter: Learning adapters to dig out more controllable ability for text-to-image diffusion models. arXiv:2302.08453, 2023.
- [19] Zhang L, Rao A, Agrawala M. Adding conditional control to text-to-image diffusion models. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [20] Ye H, Zhang J, Liu S, Han X, Yang W. IP-Adapter: Text compatible image prompt adapter for text-to-image diffusion models. arXiv:2308.06721, 2023.
- [21] Hu E J, Shen Y, Wallis P, et al. LoRA: Low-rank adaptation of large language models. *International Conference on Learning Representations*, 2022.
- [22] Liu S Y, Wang C Y, Yin H, et al. DoRA: Weight-decomposed low-rank adaptation. arXiv:2402.09353, 2024.
- [23] Zhang Q, Zuo S, Liang C, et al. AdaLoRA: Adaptive budget allocation for parameter-efficient fine-tuning. *International Conference on Learning Representations*, 2023.
- [24] Ho J, Jain A, Abbeel P. Denoising diffusion probabilistic models. *Advances in Neural Information Processing Systems*, 2020.
- [25] Song J, Meng C, Ermon S. Denoising diffusion implicit models. *International Conference on Learning Representations*, 2021.

- 1155 [26] Ho J, Salimans T. Classifier-free diffusion guidance. *NeurIPS Workshop*,
1156 2022.
- 1157 [27] Castillo A, Legenstein R, et al. Adaptive guidance: Training-free accel-
1158 eration of conditional diffusion models. arXiv:2312.12487, 2023.
- 1159 [28] Kynkäänniemi T, Aittala M, Karras T, et al. Applying guidance in a lim-
1160 ited interval improves sample and distribution quality in diffusion models.
1161 *Advances in Neural Information Processing Systems*, 2024.
- 1162 [29] Rombach R, Blattmann A, Lorenz D, Esser P, Ommer B. High-
1163 resolution image synthesis with latent diffusion models. *Proceedings of*
1164 *the IEEE/CVF Conference on Computer Vision and Pattern Recognition*,
1165 2022.
- 1166 [30] Esser P, Kulal S, Blattmann A, et al. Scaling rectified flow transform-
1167 ers for high-resolution image synthesis. *International Conference on Ma-*
1168 *chine Learning*, 2024.
- 1169 [31] Black Forest Labs. FLUX: Flow matching for image generation. 2024.
- 1170 [32] Loshchilov I, Hutter F. Decoupled weight decay regularization. *Interna-*
1171 *tional Conference on Learning Representations*, 2019.
- 1172 [33] Cherti M, Beaumont R, Wightman R, et al. Reproducible scaling laws
1173 for contrastive language-image learning. *Proceedings of the IEEE/CVF*
1174 *Conference on Computer Vision and Pattern Recognition*, 2023.
- 1175 [34] Nichol A, Dhariwal P, Ramesh A, et al. GLIDE: Towards photorealistic
1176 image generation and editing with text-guided diffusion models. *Interna-*
1177 *tional Conference on Machine Learning*, 2022.
- 1178 [35] Saharia C, Chan W, Saxena S, et al. Photorealistic text-to-image diffusion
1179 models with deep language understanding. *Advances in Neural Informa-*
1180 *tion Processing Systems*, 2022.
- 1181 [36] Peebles W, Xie S. Scalable diffusion models with transformers. *Pro-*
1182 *ceedings of the IEEE/CVF International Conference on Computer Vision*,
1183 2023.
- 1184 [37] Wang Z, Bovik A C, Sheikh H R, Simoncelli E P. Image quality assess-
1185 ment: From error visibility to structural similarity. *IEEE Transactions on*
1186 *Image Processing*, 2004, 13(4): 600–612.
- 1187 [38] Zhang R, Isola P, Efros A A, Shechtman E, Wang O. The unreasonable
1188 effectiveness of deep features as a perceptual metric. *Proceedings of*
1189 *the IEEE/CVF Conference on Computer Vision and Pattern Recognition*,
1190 2018.
- 1191 [39] Wang J, Chan K C K, Loy C C. Exploring CLIP for assessing the look
1192 and feel of images. *Proceedings of the AAAI Conference on Artificial In-*
1193 *telligence*, 2023.
- 1194 [40] Radford A, Kim J W, Hallacy C, et al. Learning transferable visual models
1195 from natural language supervision. *International Conference on Machine*
1196 *Learning*, 2021.
- 1197 [41] Anonymous. Adapter scaling trade-off and timestep-conditioned schedul-
1198 ing in multi-view diffusion texture generation. Submission #75 of
1199 CAD/Graphics 2026, 2026.



Contents lists available at ScienceDirect

Computers & Graphics

journal homepage: www.elsevier.com/locate/cag

Timestep-Conditioned Adapter Scaling Trade-off and Timestep-Conditioned Scheduling in for Multi-view Diffusion Texture Generation

ARTICLE INFO

Keywords: multi-view diffusion model, 3D texture generation, adapter scaling, timestep-conditioned scaling, shape-texture trade-off, geometric control, texture quality assessment

ABSTRACT

Multi-view diffusion models have become an important approach to pipelines for 3D texture generation, where adapter modules are commonly used to asset texturing commonly inject geometric conditions such as normals, such as normal and depth maps to improve cross-view consistency and geometric alignment. However, the adapter scaling strength during inference is often selected empirically, and its influence on shape fidelity and texture detail remains insufficiently analyzed. This paper systematically studies adapter scaling in geometry-controlled multi-view texture generation. We find that a larger adapter scale can improve, through adapter modules, and the adapter scale at inference time is usually chosen empirically, although the generated views are later baked into the final mesh texture. We show that a single uniform scale is a blunt control: on the studied adapter, aggressive uniform scaling improves structural metrics such as foreground structural similarity (FG-SSIM, but it may also suppress) but suppresses the texture synthesis capability of the base diffusion model, leading to weakened color variation, model, causing flattened surfaces, reduced color variation, and loss of high-frequency details. This observation indicates that adapter scaling is not merely a structure-enhancement parameter, but a key control variable that governs the balance between shape consistency and texture preservation. Rather than treating this as a generic guidance-scheduling problem, we We further identify an adapter-specific temporal conflict: geometric residuals injected into intermediate features are most useful for mid-stage structure refinement, whereas excessive strong residual injection in the early or late stages can respectively disturb disturbs global formation or suppress suppresses texture synthesis. To mitigate this conflict, we propose We introduce a measurable stage-utility analysis with structural guardrails and, extending our preliminary conference version, derive Timestep-Conditioned Adapter Scaling (TCAS), a training-free inference strategy low-high-low schedule that concentrates strong geometric correction in the middle denoising stage and uses conservative scales in the early and late stages. The selected otherwise. The schedule C3 is chosen only on = (1.25, 2.50, 1.25) is selected using only a 24-object probe set by analyzing from 17 scaling variants and is then transferred unchanged to a 300-object validation set, where no parameter search is performed. Experiments show that TCAS maintains shape fidelity close then evaluated unchanged, without further search, on the strictly disjoint 276-object holdout. TCAS achieves FG-SSIM comparable to aggressive uniform scaling while achieving better signal fidelity and more stable texture preservation improving the peak signal-to-noise ratio (PSNR) by 0.96 dB, retaining substantially more texture, and receiving higher preference in a blinded human study. These results suggest that, in adapter-augmented multi-view diffusion pipelines, adapter strength should be treated treating adapter strength as a stage-dependent inference control variable rather than a fixed hyperparameter. TCAS requires no retraining, introduces negligible computational overhead, and can be used as a plug-and-play strategy for geometry-controlled, at least for adapter-conditioned multi-view texture generation tasks.

1. Introduction

Recent advances in single-image 3D generation have substantially improved the recovery of geometry, multi-view consistency, and sparse-view reconstruction [1, 2, 3, 4, 5, 6, 7, 8]. As geometric generation models become increasingly mature, generating high-quality textures on an existing 3D shape has become a key factor affecting the realism and usability of 3D content. For an object whose geometry has already been determined, the final visual quality depends not only on whether the shape is complete, but also on whether the texture is faithful to the reference image, aligned with the 3D surface, and rich in local details.

Existing multi-view texture generation methods usually generate RGB images from multiple target views using 2D image diffusion models, and then map the generated images back to the 3D surface through projection or texture baking [9, 10, 11, 12]. This route benefits from the generative capability of image diffusion models, but it still faces challenges in reference appearance alignment, geometry-texture consistency, and local texture detail preservation. Geometry-controlled multi-view diffusion methods represented by MVPainter introduce geometric conditions such as normals and depth maps to improve the alignment between generated textures and the underlying 3D surface, demonstrating the importance of explicit geometric control for 3D texture generation [13].

However, introducing geometric conditions is not only a question of whether a control signal should be used, but also a question of how strongly it should be applied. In adapter-augmented diffusion pipelines, geometric conditions are usually injected into the model through an adapter or control branch, and their influence is regulated by a scaling factor. In practice, this factor is often set empirically: a small scale may lead to insufficient geometric constraints, whereas a larger scale is usually expected to improve structural consistency.

In multi-view texture generation, however, stronger adapter scaling is not necessarily better. Texture generation requires not only contours and structures to be consistent with geometry, but also surface color variations, material details, and high-frequency patterns to be preserved. Overly strong geometric control may force the model to follow normal, depth, or edge conditions too aggressively, thereby suppressing the intrinsic texture synthesis capability of the base diffusion model. In this case, some structural metrics may still improve, while the visual result suffers from texture flattening, reduced color variation, and detail loss.

Therefore, adapter scaling in geometry-controlled multi-view diffusion deserves further analysis. Compared with prior work that mainly studies how to build texture generation pipelines, how to introduce geometric conditions, and how to improve overall generation quality, adapter strength is a fine-grained inference-time control problem. It directly affects the balance between shape consistency and texture detail, and is an easily overlooked factor in multi-view texture generation quality.

This problem is related to, but not solved by, existing guidance scheduling strategies. CFG scheduling changes the extrapolation between conditional and unconditional predictions,

while a geometry adapter injects residuals into intermediate representations. Generic ControlNet or adapter scale scheduling similarly treats condition strength mainly as a condition-adherence knob. In texture generation, however, the key question is not only how strongly to follow the geometry, but also when geometric residuals should dominate and when they should recede so that the base model can synthesize color, material, and high-frequency texture. Simple monotonic schedules such as linear or cosine decay do not explicitly address this non-monotonic requirement. [Even the recent finding that classifier-free guidance is most useful only in a limited noise interval \[28\] does not answer this question: it identifies where conditioning helps for CFG, but not which stages of a geometry-conditioned texture pipeline require strong geometric residuals, where the late-stage risk is texture suppression rather than diversity loss.](#)

The goal of this paper is not to propose a new full texture generation system, but to analyze and improve inference-time adapter scaling within a fixed geometry-controlled multi-view diffusion pipeline.

The main contributions of this paper are as follows:

(1) We systematically diagnose the shape-texture trade-off caused by adapter scaling in multi-view diffusion texture generation, showing that higher scales can improve structural metrics while simultaneously causing texture degradation whose specific form (flattening, artifact amplification, or no effect) depends on the adapter’s residual magnitude and scale semantics.

(2) We identify an adapter-specific temporal conflict between geometric residual injection and texture formation, and propose Timestep-Conditioned Adapter Scaling (TCAS), which concentrates strong geometric correction in the middle denoising stage while using conservative scales in the early and late stages.

(3) Through uniform scale sweeps, texture audits, a 24-object probe analysis of 17 uniform, layer-wise, and temporal scaling variants, and a 300-object [validation without re-searching the schedule evaluation pool without any further schedule search](#), we show why fixed high scales and simple stage transfers of guidance scheduling are insufficient for the shape-texture trade-off.

(4) We further provide a large-scale texture preservation analysis on the 300-object [validation set evaluation pool](#), showing that TCAS substantially reduces texture flattening compared with full high-scale scaling: C3 outperforms $s = 2.50$ on 87.7%, 95.0%, and 83.0% of objects in Laplacian variance, RGB standard deviation, and gradient magnitude, respectively, while the 95% confidence interval for the FG-SSIM difference crosses zero, indicating no significant difference in structural similarity.

[A preliminary version of this study was submitted to CAD/Graphics 2026 \(Paper 75\) \[41\]. This article extends that submission substantially: \(i\) the TCAS schedule is now grounded in an explicit two-stage epsilon-optimal selection rule \(Proposition 1\) with assumptions and proofs; \(ii\) the empirical protocol now separates a strictly disjoint 276-object holdout from the 24-object probe set, and C3 is evaluated unchanged on this holdout, with pooled 300-object statistics reported alongside; and \(iii\) the presentation, including the abstract, introduction, and conclusions, is substantially](#)

rewritten to state these extensions.

2. Related Work

2.1. 3D Texture Generation and Multi-view Diffusion

Single-image 3D generation is often decomposed into geometry generation and texture generation. In recent years, single-image-to-3D, multi-view diffusion, and sparse-view reconstruction methods have made notable progress in structural stability, shape completeness, and cross-category generalization [1, 2, 3, 4, 5, 6, 7, 8]. Nevertheless, high-quality texture generation remains a key bottleneck for the realism and usability of 3D content. Existing texture generation methods usually rely on 2D diffusion models to synthesize RGB images from multiple views, and then project or bake these images onto the 3D surface [9, 10, 11, 12]. While this strategy inherits the strong generative capability of image diffusion models, it still suffers from reference appearance misalignment, geometry-texture inconsistency, and insufficient local texture detail.

To address these issues, methods such as Paint3D, MVPaint, Hunyuan3D 2.0, and MVPainter formulate 3D texture generation as a geometry-controlled multi-view diffusion task, generating multi-view images under geometric control and baking them into UV textures [14, 15, 16, 13]. MV-Adapter further shows that adapter-style multi-view control can enhance cross-view consistency without fully retraining the base model [17]. By injecting geometric information such as normals and depth maps into the diffusion model as conditional signals, the generated results better follow the 3D surface structure and remain consistent across views. Unlike prior methods that focus mainly on multi-view image generation or general 3D reconstruction, these works emphasize precise alignment between texture and geometry as well as local detail recovery, significantly improving 3D texture generation quality. However, they mainly answer how to introduce geometric conditions and how to construct a texture generation pipeline, while the influence of geometric control strength at inference time on shape and texture quality remains underexplored.

2.2. Adapter-augmented Diffusion Models and Geometric Control

Adapter modules have become an important mechanism for introducing additional conditions into diffusion models. ControlNet injects T2I-Adapter and ControlNet inject spatial conditions such as edges, depth maps, and normals into a pre-trained diffusion model through a parallel branch, lightweight parallel branches with a controllable scaling factor [18, 19]. IP-Adapter introduces image prompts through decoupled attention [20]. LoRA and its variants implement lightweight model adaptation through low-rank residual updates [21, 22, 23]. Although these methods differ in architecture, they generally include some form of scaling factor that controls the influence of the external condition or adapter residual on the base model.

In practice, the adapter scale is often treated as an empirical hyperparameter. A larger scale usually improves condition adherence, for example by better following normals, depth

maps, or reference images. In texture generation tasks, however, overly strong conditional constraints may weaken the base diffusion model's ability to synthesize color, material, and high-frequency details. Adapter scaling is therefore not a simple matter of increasing the strength as much as possible; it involves a balance between geometric constraints and texture fidelity. This paper focuses on exactly this inference-time control problem: given a fixed adapter structure and fixed geometric conditions, how should the adapter strength be set or scheduled to preserve both shape consistency and texture detail?

2.3. Diffusion Guidance Scheduling and Timestep Control

The denoising process of diffusion models is highly stage-dependent. Early steps mainly determine global layout and coarse structure, middle steps refine shape and semantic structure, and late steps are more responsible for color, texture, and high-frequency details [24, 25]. Based on this observation, many guidance scheduling strategies have been explored in both research and practice. For example, classifier-free guidance scales may be adjusted linearly, with cosine schedules, or dynamically to mitigate oversaturation, detail loss, or reduced diversity caused by overly strong guidance [26, 27]. In addition, the development of latent diffusion, high-resolution diffusion, and Transformer-based diffusion models further shows the close relationship among generation quality, noise schedules, conditional injection, and network architecture [29, 30, 31, 32, 33, 34, 35, 36].

These methods all exploit the staged nature of denoising to regulate conditional strength. Notably, Kynkäänniemi et al. show that classifier-free guidance is harmful at high noise levels, largely unnecessary at low noise levels, and beneficial mainly in a middle interval, motivating limited-interval guidance [28]; mid-stage concentration of conditioning strength therefore has a close precedent in CFG scheduling. However, different control signals act through different mechanisms. CFG scheduling adjusts the weight between conditional and unconditional predictions, mainly affecting the balance among semantic control, diversity, and visual fidelity. By contrast, the scale of a geometric adapter acts directly on intermediate features or residual branches, controlling how strongly geometric conditions intervene in the generation process. TCAS differs from limited-interval guidance in both mechanism and target: it scales adapter feature residuals rather than score extrapolation, raises the middle scale above a conservative baseline instead of switching guidance on and off, and addresses the shape-texture trade-off of geometry-conditioned texture generation, where late-stage over-control suppresses the synthesis of color and high-frequency texture. ControlNet-style scale control is closer in spirit, but it is still usually interpreted as a condition-adherence strength; directly applying a larger, smaller, or smoothly decayed control scale does not specify which denoising stage should receive strong geometric residuals for texture generation.

This distinction matters because the desired schedule for geometry-controlled texture generation is not necessarily monotonic. A monotonic decay or warm-up can reduce over-control in one part of the trajectory, but it cannot simultaneously

avoid unstable early residuals, strengthen the middle stage where geometry refinement is most useful, and weaken late residuals that compete with color and high-frequency texture formation. Thus, timestep-conditioned scheduling of adapter strength cannot be treated as a direct transfer of CFG scheduling or generic ControlNet scale scheduling; it requires a dedicated analysis of how geometric residual injection interacts with texture synthesis.

3. Method

3.1. Task Definition and Base Pipeline

This paper builds on the MVPainter-style geometry-controlled multi-view texture generation framework [13] and studies how the inference-time strength of geometric condition injection affects the generated results. Figure 1 illustrates the overall pipeline: the adapter injects geometric residuals into UNet features, TCAS adjusts their strength across denoising stages, and the final multi-view outputs are projected and baked into a textured 3D mesh. Given a single reference image and the corresponding 3D geometry, the base pipeline first generates RGB texture images from six target views and then obtains a textured mesh through projection or texture baking. We do not modify the base UNet, VAE, or pretrained adapter weights. Instead, the adapter scaling factor is treated as the key inference-time control variable.

During multi-view diffusion, the 3D geometry is rendered into normal maps, depth maps, and foreground masks, denoted as:

$$\mathbf{G} = \{G_{\text{normal}}, G_{\text{depth}}, G_{\text{mask}}\}. \quad (1)$$

The geometric adapter maps these conditions to a residual correction term and injects it into the intermediate hidden states of the UNet. For the t -th denoising step, the adapter injection can be written as:

$$\mathbf{h}'_t = \mathbf{h}_t + s(p_t) \cdot A_\phi(\mathbf{h}_t, \mathbf{G}), \quad (2)$$

where $\mathbf{h}_t$ and $\mathbf{h}'_t$ denote the hidden states before and after injection, p_t denotes the sampling progress, and $s(p_t)$ is the adapter scaling strength at the current denoising stage. This formulation highlights a key difference from CFG-style guidance: changing $s(p_t)$ does not reweight two predicted scores, but changes the magnitude of a geometry-conditioned residual added to the feature stream. A larger s usually enhances geometric condition adherence. However, if strong residuals are continuously applied in the late denoising stage, they may suppress the synthesis of color, material, and high-frequency details by the base diffusion model. This paper therefore studies how to schedule s during denoising to balance shape consistency and texture detail preservation.

3.2. Shape-Texture Diagnostic Metrics

The influence of adapter scaling on generated results cannot be evaluated by a single structural metric. We divide evaluation metrics into three groups. The first group consists of shape and structure metrics, including FG-SSIM, Edge-SSIM, and

Crop-SSIM, which measure consistency with ground-truth renderings in the foreground, edge regions, and local foreground crops based on the structural similarity index [37]. The second group contains signal fidelity and perceptual similarity metrics, including PSNR and LPIPS the learned perceptual image patch similarity [38], which reflect pixel-level error and differences in deep feature space. The third group consists of texture diagnostic metrics, including Laplacian variance, RGB standard deviation, and gradient magnitude, which are used to detect weakened color variation, surface smoothing, and high-frequency detail loss.

Taking Laplacian variance as an example, the foreground texture response is defined as:

$$M_{\text{tex}} = \text{Var}(\text{Lap}(I_{\text{out}} \odot G_{\text{mask}})), \quad (3)$$

where Lap denotes the Laplacian filter, G_{mask} denotes the foreground mask, and Var denotes spatial variance. A larger M_{tex} usually corresponds to richer local high-frequency variation. If structural metrics improve while Laplacian variance, RGB standard deviation, or gradient magnitude decreases, the improvement may mainly come from contour smoothing or boundary convergence rather than true texture quality improvement.

3.3. Timestep-Conditioned Adapter Scaling

The diffusion denoising process is stage-dependent: early steps mainly establish the global layout and coarse contours; middle steps refine geometric structure and cross-view alignment; late steps are more responsible for color, material, and local texture synthesis. Based on this observation, we propose Timestep-Conditioned Adapter Scaling (TCAS), which replaces a globally fixed adapter scale with a stage-dependent scale function. TCAS is not intended as a generic smooth guidance schedule. Its low-high-low form encodes the adapter-specific hypothesis that geometry residuals should be strongest only after coarse structure becomes stable and before late texture synthesis dominates.

To avoid ambiguity caused by different raw timestep directions in different schedulers, we use sampling progress p to represent the denoising process, where $p = 0$ denotes the start from noise and $p = 1$ denotes the end of sampling close to the final image state. TCAS divides denoising into early, middle, and late stages:

$$s(p) = \begin{cases} s_e, & 0 \leq p < 1/3 \\ s_m, & 1/3 \leq p < 2/3 \\ s_l, & 2/3 \leq p \leq 1 \end{cases}. \quad (4)$$

The selected C3 configuration used in this paper is:

$$(s_e, s_m, s_l) = (1.25, 2.50, 1.25). \quad (5)$$

This design follows three principles. First, the early stage uses a conservative scale to avoid disrupting global structure formation with strong geometric residuals. Second, the middle stage uses a higher scale to strengthen geometric constraints from normals, depth maps, and foreground contours. Third, the late stage reduces the scale again to prevent geometric

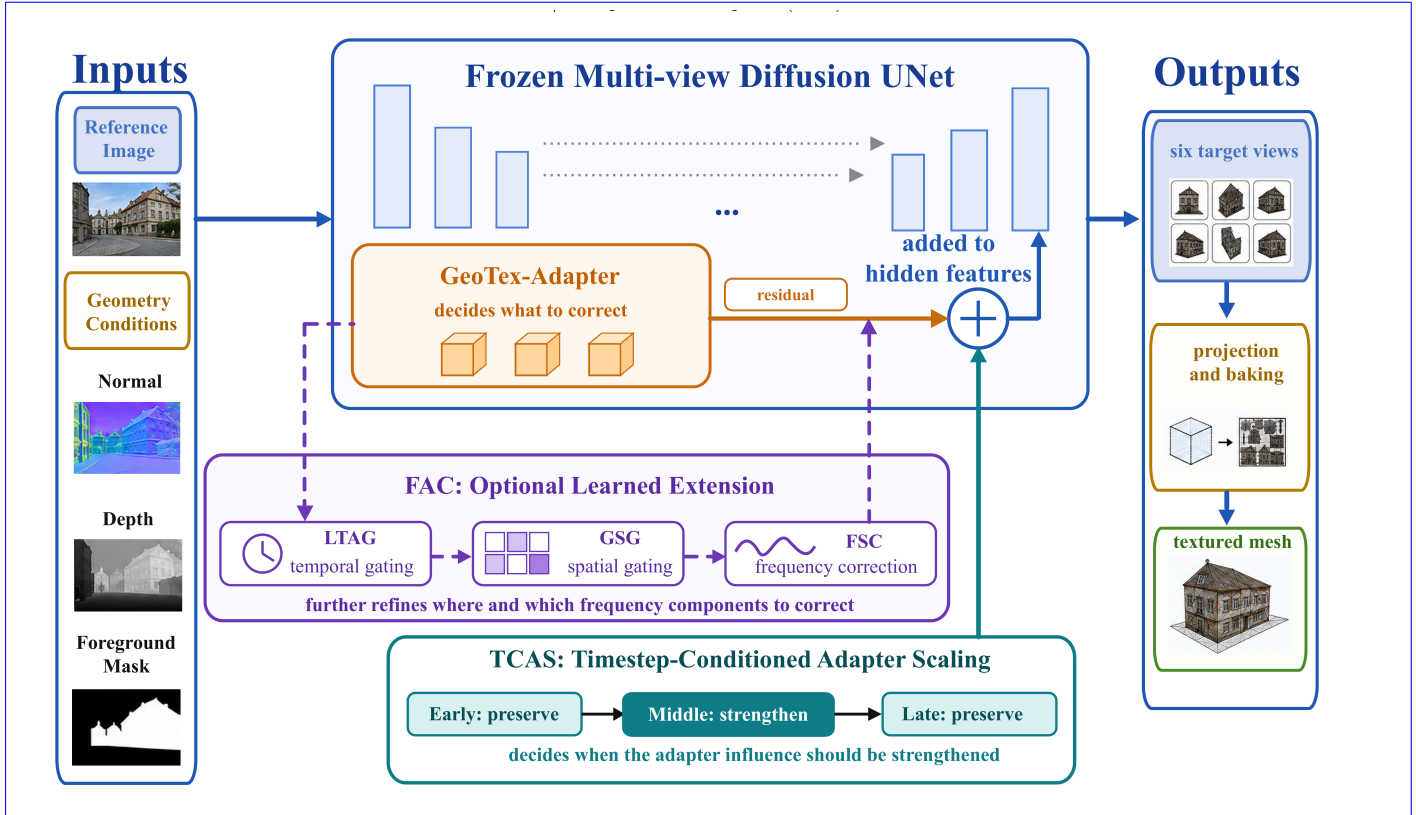


Fig. 1. Method overview. GeoTex-Adapter generates geometric residuals and injects them into UNet features. TCAS dynamically adjusts the residual strength according to denoising stages to balance geometric consistency and texture fidelity. FAC is an optional learned extension module that further refines residual modulation along temporal, spatial, and frequency dimensions. The final multi-view outputs are projected and baked into a textured 3D mesh.

residuals from suppressing color variation, material detail, and high-frequency texture synthesis. This non-monotonic schedule is therefore different from simply decaying or increasing the adapter strength across all timesteps. TCAS introduces new parameters and does not modify the base model or adapter weights; it only replaces the scaling factor during inference, so its computational overhead is negligible.

Why mid-stage concentration is selected: the CAI model. The low-high-low form is not assumed but derived from a measurable Correction-Alignment-Interference (CAI) stage-utility model; we state the selection rule formally. Let $Q(s_e, s_m, s_l)$ denote a fidelity objective (PSNR here), let L denote the fixed-low schedule, let R denote the texture-deviation risk, given by the artifact-sensitive foreground texture diagnostics of Section 3.2 (Laplacian variance, RGB standard deviation, and gradient magnitude), and let $z_k \in \{0, 1\}$ indicate whether the high scale is assigned to stage $k \in \{e, m, l\}$. Risk is compared by a non-worsening (Pareto) rule rather than a weighted scalarization: one assignment has lower risk than another only if it is no worse on every diagnostic and strictly better on at least one, so no artificial weights are introduced.

Proposition 1 (Guardrailed ϵ -optimal selection). Suppose (i) the stage-utility model $Q(s_e, s_m, s_l) = Q(L) + \sum_k U_k z_k$, where $U_k = Q(\text{high scale only in } k) - Q(L)$ is the measured finite-difference utility of stage k , and (ii) per-stage guardrails

under which stage k is admissible for the high scale only if its intervention does not reduce FG-SSIM by more than τ nor raise the texture-deviation risk beyond a factor ρ relative to L . Selection proceeds in two stages. First, maximize fidelity over the admissible schedules $\mathcal{F}$: the fidelity-optimal assignment is $z_k^{\text{fid}} = \mathbf{1}[U_k > 0 \text{ and } k \text{ admissible}]$, with value $Q_{\max} = \max_{z \in \mathcal{F}} Q(z)$. Second, restrict attention to the ϵ -equivalent set $\mathcal{F}_\epsilon = \{z \in \mathcal{F} : Q(z) \geq Q_{\max} - \epsilon\}$ for a small fidelity-equivalence margin $\epsilon > 0$, and select $z^* = \arg \min_{z \in \mathcal{F}_\epsilon} R(z)$. Then: an inadmissible stage is fixed at the conservative scale; any admissible stage whose estimated utility alone exceeds ϵ must retain the high scale; and a stage whose estimated utility satisfies $0 < U_k < \epsilon$, with a structurally insignificant change, is fidelity-equivalent under either assignment, so the risk-dominant conservative scale is selected. Measured confidence intervals serve as auxiliary uncertainty information and do not enter the membership condition of $\mathcal{F}_\epsilon$.

Proof. Under (i), for any $z \in \mathcal{F}$, $Q(z) = Q_{\max} - \sum_k z_k^{\text{fid}} U_k (1 - z_k)$, so $z \in \mathcal{F}_\epsilon$ exactly when the total positive utility dropped by reassigning high-scale stages to the conservative scale does not exceed ϵ . Condition (ii) fixes $z_k = 0$ for inadmissible stages and leaves the admissible stages independent, so each stage can be examined separately. A stage with $U_k > \epsilon$ cannot be dropped from the fidelity optimum without leaving $\mathcal{F}_\epsilon$, hence $z_k^* = 1$. A stage with estimated utility $0 < U_k < \epsilon$

contributes at most ϵ when dropped, so both assignments lie in $\mathcal{F}_\epsilon$; within $\mathcal{F}_\epsilon$ the second selection stage minimizes texture-deviation risk, and for such a stage the structural change is insignificant while the conservative scale strictly reduces the risk, so $z_k^* = 0$. $\square$

Remark 1. The utilities are measured finite differences on a 24-object stage ablation of the strong-residual, per-layer-capped adapter instance (regime (b) of Section 4.7), where per-stage effects are most visible: $U_e = -0.788$ dB (95% CI $[-1.420, -0.156]$) with a guardrail violation (FG-SSIM -0.105 , CI $[-0.141, -0.069]$; foreground Laplacian variance $3.85\times$ fixed-low), $U_m = +0.574$ dB $[0.391, 0.756]$, and $U_l = +0.077$ dB $[0.006, 0.149]$ with a structurally insignificant FG-SSIM change ($+0.001$, CI $[-0.002, 0.003]$). Proposition 1 selects exactly the conservative-high-conservative assignment C3: the early stage is inadmissible, the middle stage must retain the high scale because its utility alone ($+0.574$ dB) exceeds any meaningful equivalence margin such as $\epsilon = 0.1$ dB, and the late stage has estimated utility $U_l = 0.077 < \epsilon = 0.1$ dB while its FG-SSIM change is statistically insignificant, so removing the late high-scale intervention remains within the ϵ -equivalent fidelity set and reduces texture risk; the risk-dominant conservative scale is therefore selected. The same conservative-high-conservative assignment is independently selected by the main adapter’s 17-variant probe (Table 2); the utilities above explain, rather than determine, that selection, and Remark 2 delimits the conditional scope of this explanation.

Remark 2. Additivity is an approximation: stage effects interact, and the complete C3 schedule is therefore validated directly (Secs. 4.4–4.7). Changing the adapter, its residual magnitude, or the scale semantics changes the measured U_k and requires re-estimation. Proposition 1 thus provides a conditional decision rule within the measured adapter regime—explaining why the mid-stage assignment follows from data rather than from a hand-tuned rule—and not a universal guarantee.

3.4. GeoTex-Adapter and FAC Adaptive Extension

GeoTex-Adapter, TCAS, and FAC correspond to three complementary dimensions of adapter control. GeoTex-Adapter determines what geometric residual correction should be injected. TCAS determines when the residual should be strengthened or weakened along the denoising-time dimension. FAC further modulates the residual in a fine-grained manner along spatial positions and frequency components.

GeoTex-Adapter is used as a fixed geometric residual backbone. It receives a 5-channel geometric input consisting of a 3-channel normal map, a 1-channel depth map, and a 1-channel foreground mask. A multi-scale geometric encoder produces a feature pyramid, and residual corrections are injected into multiple resolution levels of the UNet. TCAS acts on the global temporal scale of these residuals to control the influence of geometric conditions at different denoising stages without changing the adapter architecture.

To further examine whether stage-wise adapter control can be extended to learned adaptive correction, we also conduct experiments with Full Adaptive Correction (FAC). FAC contains three lightweight modules: LTAG learns timestep-dependent gating, GSG generates spatial gates from geometric features, and FSC performs frequency-selective correction on adapter residuals. Unlike fixed TCAS, FAC finely modulates adapter residuals in the temporal, spatial, and frequency domains. In the extension experiments, FAC uses TCAS as the base temporal schedule and further adds GSG and FSC for spatial and frequency correction.

It should be emphasized that FAC requires learning a small number of additional parameters. Therefore, TCAS, which requires no training, remains the main method in this paper. FAC is used only as a learned adaptive extension to show that stage-wise adapter control can be generalized to finer-grained adaptive correction; Section 4.6 reports a controlled re-examination that delimits when learned modulation can be expected to help.

4. Experiments

4.1. Experimental Setup

4.1.1. Experimental protocol and comparisons

Experiments are conducted using an MVPainter-style geometry-controlled multi-view diffusion pipeline. Each object contains a single reference image and corresponding 3D geometry. During preprocessing, the 3D geometry is rendered into target-view normal maps, depth maps, foreground masks, and ground-truth RGB images. The model generates six target views at a time, and all comparisons with ground-truth renderings are performed under unified views, resolution, and foreground masks.

Except for the FAC extension experiment, all scaling experiments keep the object list, reference image, target views, random seed, base UNet, VAE, adapter weights, and number of denoising steps fixed; only the adapter scale or schedule is changed. The number of sampling steps is 50. C3 is selected using only a 24-object probe set; the same schedule is then frozen and applied to the 300-object validation set evaluation pool, where no parameter search is performed. This probe-to-validation probe-to-pool protocol isolates the effect of adapter scaling from changes in model architecture, training data, sampling budget, or validation-set evaluation-set tuning.

Accordingly, the comparisons in this paper are comparisons among inference-time adapter scaling strategies under the same base pipeline, rather than a system-level benchmark among different texture generation architectures. Uniform adapter scales serve as the primary deployment baselines because they correspond to the most direct way of choosing a single fixed adapter strength at inference time. The probe variants further test whether the trade-off can be resolved by simple alternatives such as globally high scales, layer-wise redistribution, or moving high adapter strength to early, late, or multiple denoising stages. TCAS changes only how this strength is scheduled across denoising stages.

4.1.2. Evaluation sets and metrics

We use four evaluation sets: (1) a 50-object scale-sweep set for analyzing the overall trend of structural metrics under 13 uniform scales; (2) a 26-object texture audit set for comparing texture degradation under $s = 1.25$, $s = 2.25$, and $s = 2.50$; (3) a 24-object probe set for evaluating 17 uniform, layer-wise, and timestep-conditioned scheduling variants and selecting C3; and (4) a 300-object validation set evaluation pool, comprising the 24-object probe and a 276-object held-out subset (detailed below), for testing the selected C3 schedule, uniform baselines, and the FAC extension without re-searching TCAS any further schedule search.

Evaluation metrics are divided into three categories: shape and structure metrics (FG-SSIM, Edge-SSIM, and Crop-SSIM), signal and perceptual metrics (PSNR and LPIPS), and texture diagnostic metrics (Laplacian variance, RGB standard deviation, and gradient magnitude). All metrics are first computed over six target views and then averaged over views and objects. For texture-related conclusions, we report means, object-level win rates, and significance tests to avoid judging generation quality based on a single structural score.

The FAC extension uses the same object list and evaluation protocol as the 300-object validation evaluation pool, and its lightweight modules are trained only on the adapter's training pool, which is disjoint from all evaluation objects. TCAS is used as the main baseline, while LTAG, LTAG+GSG, and Full FAC are evaluated as ablation variants. Full FAC adds GSG and FSC on top of the TCAS temporal schedule under the same paired protocol. The base model and original adapter remain frozen, and only lightweight adaptive correction parameters are learned to verify the extensibility of the TCAS idea toward learned spatial and frequency correction.

4.1.3. Implementation and dataset details

All objects are drawn from the Objaverse 3D asset collection: ground-truth multi-view images are rendered offline with Blender (Cycles engine, 17 views at 512×512 , white background), and six target views (front, front-right, right, back, left, front-left) are used throughout the paper. The adapter's training pool contains 1,118 rendered objects and the evaluation pools described above are drawn independently; we verified that the training and evaluation identifier sets intersect in zero objects, so no evaluation object is seen during adapter training. Within the 300-object evaluation pool, the 24-object probe set corresponds to the first 24 identifiers (obj₀₀₀₀–obj₀₀₂₃) and the remaining 276 identifiers (obj₀₀₂₄–obj₀₂₉₉) form a holdout that is strictly disjoint from the probe. Section 4.7 reports transfer statistics on this disjoint holdout for the strong-residual, per-layer-capped adapter instance, in addition to the full-pool tables. The 50-object scale-sweep set comprises the first 50 objects of the pool (obj₀₀₀₀–obj₀₀₄₉), and the 26-object audit set is a purposive subset of these 50 objects, selected to span the observed range of per-object Δ FG-SSIM behavior for manual inspection; all evaluation sets are subsets of the 300-object pool, and no training object appears in any of them.

The base pipeline is an MVPainter-style geometry-controlled multi-view diffusion model built on a joint six-view

Table 1. Uniform adapter scale sweep results.

Scale	Δ FG-SSIM $\uparrow$	POS	Δ Crop-SSIM $\uparrow$	Δ PSNR $\uparrow$
0.75	−0.013	20/50	+0.113	7.53
0.90	+0.024	30/50	+0.137	8.32
1.00	+0.047	34/50	+0.147	8.79
1.10	+0.070	36/50	+0.159	9.08
1.15	+0.071	36/50	+0.157	9.25
1.25	+0.088	37/50	+0.161	9.37
1.35	+0.100	39/50	+0.163	9.63
1.50	+0.113	40/50	+0.163	9.76
1.60	+0.120	42/50	+0.166	9.83
1.75	+0.127	43/50	+0.173	9.97
2.00	+0.134	44/50	+0.169	9.96
2.25	+0.142	43/50	+0.175	9.91
2.50	+0.145	44/50	+0.165	9.91

latent UNet, used frozen together with its VAE. The pipeline is reference-image-conditioned; no text prompts are used. The GeoTex-Adapter takes a five-channel geometric input (3-channel normal map, 1-channel depth map, 1-channel foreground mask), produces a multi-scale residual pyramid, and injects corrections into multiple UNet resolution levels; for the adapter studied in the main tables, the requested scale is applied multiplicatively at every injected layer. Inference uses the Euler discrete scheduler with 50 denoising steps and a fixed random seed (42) shared by all schedules within an experiment, so all variants share the same initial latents; the model generates six views per object.

FG-SSIM, Edge-SSIM (edge masks derived from depth/normal discontinuities), PSNR, and LPIPS (AlexNet backbone) are computed on foreground-masked regions after background normalization; the texture diagnostics (foreground Laplacian variance, RGB standard deviation, gradient magnitude) are computed on foreground pixels and compared against the same ground-truth renderings under identical views and masks. The adapter checkpoint used for all tables is the GeoTex-Adapter trained on the 1,118-object training pool described above; the checkpoint and evaluation code will be made available upon reasonable request, and a consolidated reproducibility table (data subsets, checkpoint identifiers, scheduler, seed, and metric implementations) is provided in the supplementary material.

Statistical reporting. Object-level paired comparisons report two-sided paired tests and 95% confidence intervals constructed by percentile bootstrap over objects with 10,000 resamples. Where a mean is accompanied by $\pm$, the quantity is the standard deviation across objects. Preference-study intervals add a participant-level bootstrap level (Section 4.5).

4.2. Shape-Texture Trade-off of Adapter Scaling

Table 1 reports the results of a 13-scale uniform adapter sweep on 50 objects.

As the scale increases from $s = 0.75$ to $s = 2.50$, Δ FG-SSIM rises from −0.013 to +0.145, and the number of objects with positive improvement increases from 20/50 to 44/50. This indicates that stronger adapter residuals indeed improve

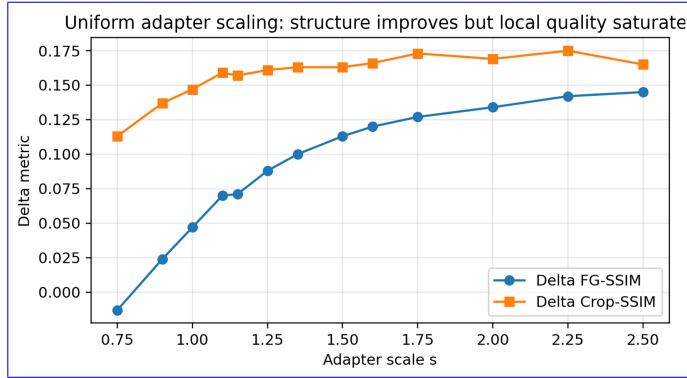


Fig. 2. Structural metric changes under uniform adapter scaling. The curves show that FG-SSIM keeps increasing with adapter scale, while Crop-SSIM saturates and slightly decreases at high scales. Stronger geometric control therefore mainly improves structural alignment, but does not necessarily keep improving local foreground quality.

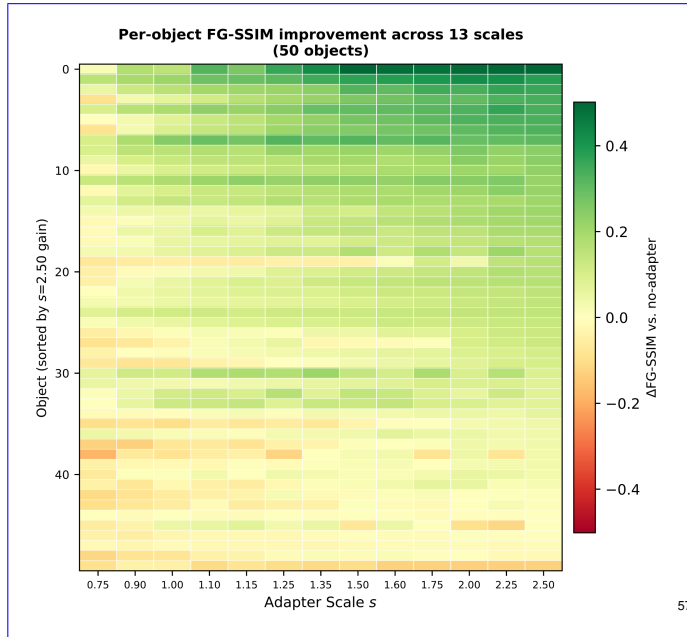


Fig. 3. Δ FG-SSIM heatmap for 50 objects under 13 adapter scales. Most objects obtain higher structural gains as the scale increases, but there are clear object-level differences.

the model’s adherence to geometric conditions such as normals, depth maps, and foreground contours. Figure 2 visualizes this trend: FG-SSIM keeps increasing with adapter scale, while Crop-SSIM saturates and slightly decreases at high scales.

Overall, the FG-SSIM improvement is stable, but the marginal benefit becomes smaller in the high-scale region. For example, increasing the scale from $s = 2.25$ to $s = 2.50$ yields only a limited FG-SSIM gain, while Crop-SSIM already decreases. This suggests that the nature of the high-scale benefit may change: the gain comes more from contour smoothing and foreground alignment than from preservation of local texture details. Figure 3 shows the per-object Δ FG-SSIM heatmap, confirming that most objects gain higher structural scores as the scale increases, but with clear object-level differences.

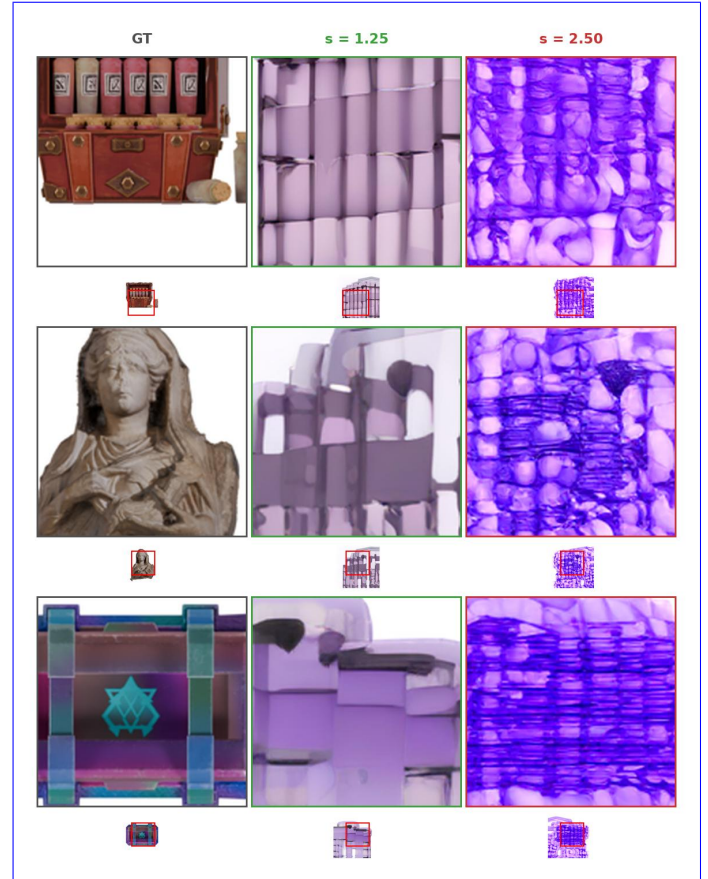


Fig. 4. Texture degradation under different adapter scales. Each row shows one object; large crops highlight local texture regions (thumbnails below indicate crop locations). Green borders denote conservative scaling $s = 1.25$; red borders denote aggressive scaling $s = 2.50$. Within each row, increasing the adapter scale causes progressive loss of color variation and high-frequency detail: surfaces become more uniform and color-saturated, indicating that stronger geometric correction suppresses the base model’s texture synthesis capability.

4.3. Texture Audit: High Scale Causes Texture Flattening

To determine whether the FG-SSIM gain at high scales reflects better visual quality, we further conduct a texture audit on 26 objects, comparing texture metrics and foreground shape changes for $s = 2.50$ relative to $s = 1.25$. Figure 4 should be read as a local texture comparison rather than as a claim that any method fully matches the ground truth: the key evidence is the progressive loss of color variation, material marks, and high-frequency patterns inside the marked regions as the scale increases. The conservative scale $s = 1.25$ better preserves color variation and local texture, while $s = 2.50$ more easily produces uniform and smooth surfaces.

The results show that 24 out of 26 objects (92%) exhibit a pattern of “texture loss without true shape gain.” Only two objects show comparable texture quality, and no object shows a clear texture improvement from the high scale. Here, “true shape gain” is not equivalent to an increase in FG-SSIM. It refers to whether the high scale brings substantive improvement in effective foreground area, contour structure, or geometric detail compared with the conservative scale. If the metric improvement mainly comes from smoothed foreground

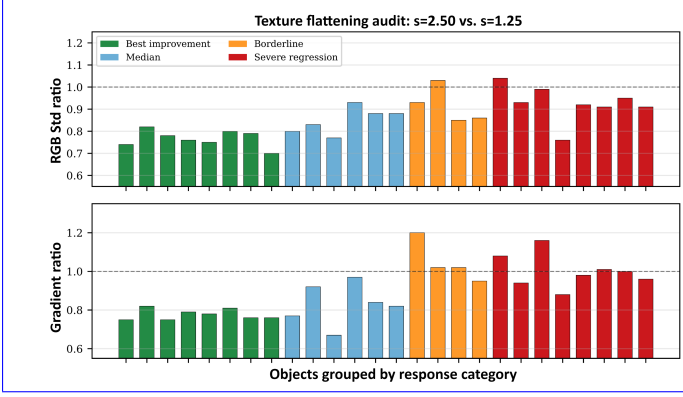


Table 2. Shape-texture trade-off on the 24-object probe set. Delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks; $\Delta\text{Lap Var}$ closer to 0 indicates smaller texture loss. Eight representative variants of the 17 evaluated are shown; the complete set is visualized in Fig. 7.

Variant	Category	$\Delta\text{FG-SSIM}\uparrow$	$\Delta\text{Lap Var} \rightarrow 0$	Assessment
C4	Late-stage high	0.105	-0.0120	Trap
C2	Timestep sched.	0.104	-0.0110	Trap
B2	Layer-wise sched.	0.090	-0.0135	Trap
A.s2.00	Uniform	0.087	-0.0062	Trap
C3 (TCAS)	Mid-stage high	0.084	-0.0006	Promising
A.s2.25	Uniform	0.079	-0.0096	Trap
A.s2.50	Uniform	0.078	-0.0108	Trap
B6	Layer-wise sched.	0.000	-0.0027	OK

Fig. 5. Texture flattening at $s = 2.50$. Top: RGB standard deviation ratio on 26 objects ($s = 2.50 / s = 1.25$). Bottom: gradient magnitude ratio. Values below 1.0 indicate texture loss. Even the four eight best-improvement objects (green) show 24.18% to 30% texture loss despite positive FG-SSIM gains.

boundaries or averaged contour errors without visible geometric improvement, it is categorized as having no true shape gain. Therefore, although a high adapter scale can improve structural metrics, such improvement does not necessarily indicate better visual shape or texture quality. Figure 5 further quantifies this texture loss.

For multi-view texture generation, overly strong geometric control can suppress the color and detail synthesis capability of the base diffusion model during late denoising steps, making surfaces more uniform. Therefore, scale selection should not rely only on standard metrics such as FG-SSIM or PSNR, but should also incorporate texture-sensitive diagnostics.

4.4. Timestep-Conditioned Adapter Scaling: Shape-Texture Balance of C3

Based on the texture audit, we do not pursue higher adapter scales throughout the entire denoising process. Instead, we further explore how different scaling strategies balance shape gain and texture loss. We construct 17 adapter scaling variants and evaluate them on the 24-object probe set. To avoid turning the 300-object validation evaluation pool into a hyperparameter search, the schedule selected in this probe stage is frozen before large-scale evaluation. These variants include three categories: uniform scaling baselines, layer-wise scaling strategies, and timestep-conditioned scaling strategies. Uniform scaling tests the effect of globally strengthening adapter influence and serves as the closest counterpart to using a single ControlNet style condition scale. Layer-wise scaling examines whether redistributing the same geometric intervention across UNet levels is sufficient. Timestep scaling tests stage placement directly, including variants that put high adapter strength in early, middle, late, or broader temporal regions. This design is intended to rule out the simple explanation that any guidance-like schedule or any stronger control scale would solve the problem.

All variants are evaluated using $\Delta\text{FG-SSIM}$ for shape gain and $\Delta\text{Lap Var}$ for texture detail change. Delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks. Importantly, the objective of this probe experiment is not to find the

single highest structural score, but to identify a stable compromise strategy that avoids the trap of “higher structural metrics but flattened texture.” This criterion is crucial: if a schedule improves FG-SSIM by applying strong geometry residuals late but causes a clear drop in texture response, then it does not solve the adapter-specific conflict even though it appears favorable under a structure-only metric.

Table 2 summarizes representative scheduling variants on the 24-object probe set. C4 and other late-stage high-scale strategies obtain higher $\Delta\text{FG-SSIM}$, but they are accompanied by obvious decreases in Laplacian variance, indicating that their structural gains come at the cost of texture loss. This is the main reason a direct transfer of guidance scheduling intuition is insufficient: a schedule can make the condition stronger at apparently useful timesteps and still damage the texture signal that matters for 3D appearance. Uniform high-scale strategies show a similar problem. For example, $s = 2.50$ achieves $\Delta\text{FG-SSIM}$ of +0.078, but $\Delta\text{Lap Var}$ decreases to -0.0108. In contrast, C3 achieves $\Delta\text{FG-SSIM}$ of +0.084. Although it is slightly lower than some aggressive variants in structure gain, its Laplacian variance loss is only -0.0006, close to zero texture loss. Therefore, C3 is the only variant labeled Promising. We freeze this configuration before large-scale validation evaluation and do not tune it on the 300-object set.

The specific configuration of C3 uses the conservative scale $s = 1.25$ in the early and late stages, and the strong scale $s = 2.50$ in the middle geometry-refinement stage, i.e., $C3 = (1.25, 2.50, 1.25)$. Its motivation follows the staged role of diffusion denoising. In the early stage, latent variables are still highly noisy, and strong geometric correction can interfere with global structure formation. In the middle stage, the signal becomes more stable, making it suitable to strengthen geometric constraints such as normals, depth maps, and foreground contours. In the late stage, generation mainly focuses on color, material, and fine texture synthesis, so adapter intervention should be reduced to preserve the texture generation space of the base diffusion model.

Figure 6 provides a qualitative comparison between C3 and uniform adapter scaling. The red-boxed zoom-in regions make the intended comparison visible: conservative scaling preserves more color variation but provides weaker structural correction, whereas aggressive scaling strengthens geometric constraints but flattens surface texture. C3 applies strong geometric correc-

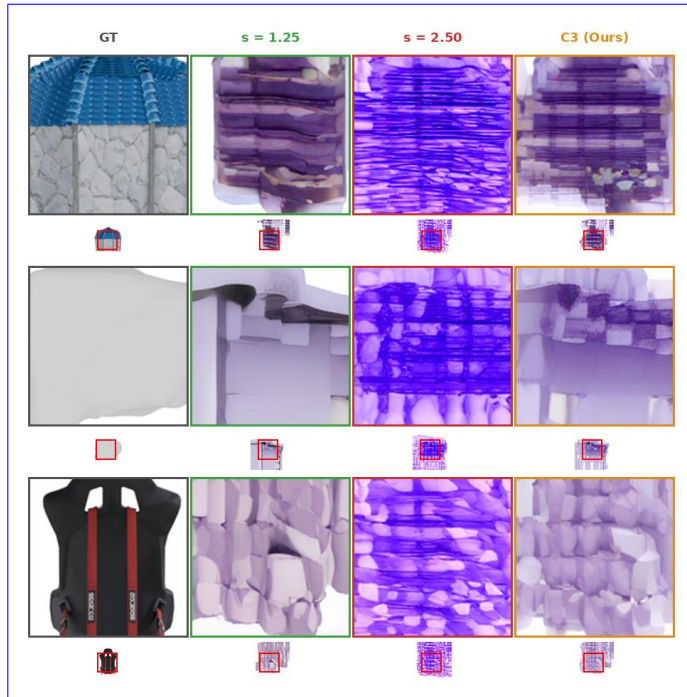


Fig. 6. Qualitative comparison between C3 and uniform adapter scaling. Large crops show local texture regions (thumbnails below indicate crop locations). Columns: GT (gray), $s = 1.25$ (green), $s = 2.50$ (red), and C3 (orange). Compared with $s = 2.50$, C3 retains more local color variation and material texture while preserving stronger geometric correction than the conservative scale.

tion in the middle stage and reduces adapter intervention in the late stage, thereby preserving more local texture than $s = 2.50$ while retaining stronger geometric correction than the conservative scale.

Figure 7 further shows the distribution of the 17 variants in the shape-texture space. Most variants with high shape gain are accompanied by large texture loss and fall into the Trap region, whereas C3 maintains a relatively high shape gain while keeping texture loss near zero. Thus, the value of C3 is not that it maximizes every metric, but that it avoids the trap of “higher structural scores but flattened texture,” resulting in a more stable shape-texture compromise.

Mechanistically, the advantage of C3 is not simply the result of hyperparameter tuning; it comes from the functional alignment between adapter correction and the diffusion process’s stage-dependent objective. A natural hypothesis might be that correction should be strongest where the correction-to-noise ratio is highest. However, under the Euler sigma schedule, this ratio increases monotonically throughout denoising (from approximately 8 at full noise to over 400 near completion), which would predict that late-stage correction is most effective—a prediction inconsistent with the scheduling-variant results. The correct explanation involves *functional alignment* rather than signal-to-noise ratio. The adapter correction is derived from geometric conditions (normals, depth, contours) and is therefore constructive only when the diffusion process is actively refining geometric structure. In the early stage ($\sigma > 5$), global structure has not yet emerged, so the correction has no stable target to

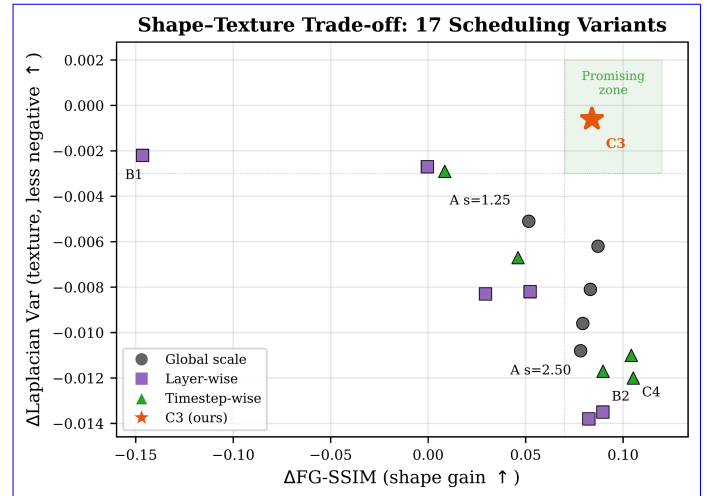


Fig. 7. Shape-texture Pareto trade-off among 17 variants. The horizontal axis is shape gain, where farther right is better; the vertical axis is the Laplacian-variance change, where higher (closer to zero) is better; therefore, the bottom-right top-right region represents a more desirable compromise. C3 (star) lies in the Promising region, with high shape gain and nearly zero texture loss. Most high-shape-gain variants fall into the Trap region, where structural scores are obtained at the cost of large texture loss. Variants such as B6 B1 have smaller texture degradation but almost no shape gain.

reinforce and instead disrupts layout formation. In the middle stage ($\sigma \approx 5-1.2$), coarse structure is established and the denoiser is performing geometric refinement—the adapter correction direction aligns with this objective, making it maximally constructive. In the late stage ($\sigma < 1.2$), generation shifts to color, material, and fine texture synthesis; geometric correction is orthogonal to this objective and competes with the texture formation process. C3’s low-high-low schedule therefore allocates strong correction proportional to functional alignment, not to signal clarity. Notably, this allocation is the reverse of limited-interval CFG guidance [28]: under adapter residual injection, geometric correction must also be withdrawn near the end of sampling, because the late-stage risk is competition with texture synthesis rather than diversity loss. The schedule is tied to the denoising process’s functional role at each stage rather than to validation-set-specific tuning or a generic monotonic guidance rule.

This explanation is consistent with the scheduling-variant results. Early high-scale or early-and-late high-scale variants provide limited structural gain, indicating that early strong intervention is unstable. The late-stage high-scale configuration C4 obtains a high structural score but shows a significant decrease in Laplacian variance, making it a typical Trap variant where structural metrics improve while texture is flattened. Uniform high-scale variants similarly improve condition adherence but lose texture detail, showing that the issue is not solved by a stronger ControlNet-like scale. An aggressive C3 variant further increases the middle-stage strength but reduces signal fidelity, suggesting that even middle-stage correction has diminishing returns and can lead to over-constraint.

Table 3 compares representative variants under extended texture metrics. C3 has nearly zero loss in Laplacian variance

Table 3. Comparison of representative variants under extended texture metrics. All delta texture metrics are computed relative to the corresponding ground-truth foreground renderings under the same views and masks. This table verifies that the advantage of C3 is not due to a single Laplacian variance metric.

Variant	Δ Lap Var	Δ RGB Std	Δ Grad	Δ HF Energy
C3	-0.001	-0.023	+0.142	+0.058
C4	-0.012	-0.032	+0.086	+0.062
A.s2.50	-0.011	-0.044	+0.054	+0.078
A.s2.00	-0.006	-0.040	+0.100	+0.070
A.s1.25	-0.005	-0.032	+0.104	+0.053

and remains relatively stable in RGB standard deviation, gradient magnitude, and high-frequency energy. Compared with C4 and uniform high-scale strategies, C3 shows weaker texture degradation, indicating that its shape-texture balance is not an artifact of a single metric.

4.5. Large-scale Validation Pooled Evaluation

Finally, as a transfer test rather than another search, we compare conservative uniform scaling ($s = 1.25$), aggressive uniform scaling ($s = 2.50$), and selected C3 (TCAS) on 300 objects. C3 is not re-searched searched again on the 300-object set; it directly uses the timestep schedule selected on the 24-object probe set to evaluate the transferability of the strategy to a larger object set. Because the 24-object probe is a subset of the 300-object pool, the main-table comparison is not probe-disjoint; a disjoint holdout re-verification is provided in Section 4.7.

As shown in Table 4, conservative uniform scaling $s = 1.25$ has lower FG-SSIM and Edge-SSIM, indicating insufficient geometric constraints. Aggressive uniform scaling $s = 2.50$ obtains the highest Edge-SSIM, suggesting that continuously strengthening adapter residuals helps edge and contour alignment. However, its PSNR is lower than that of C3, indicating that overly strong geometric intervention reduces overall signal fidelity. In contrast, C3 achieves an FG-SSIM of 0.476, which is comparable to $s = 2.50$, while increasing PSNR to 18.86 and slightly reducing FG-LPIPS. These results show that timestep-conditioned scaling preserves structural alignment while improving signal quality.

PSNR mainly reflects global pixel error and should not be directly equated with texture detail quality. To further verify texture preservation, we compute Laplacian variance, RGB standard deviation, and gradient magnitude on the same 300 objects to measure foreground high-frequency response, color variation amplitude, and local gradient strength, respectively. All results use the same object list, random seed, 50 denoising steps, and adapter weights to ensure comparability.

Table 5 shows that although $s = 2.50$ achieves the highest Edge-SSIM, it has the lowest values across all three texture metrics, indicating that full high-scale scaling weakens color variation and high-frequency details. C3 has FG-SSIM comparable to $s = 2.50$ while substantially improving Laplacian variance, RGB standard deviation, and gradient magnitude, demonstrating a better balance between structural alignment and texture preservation.

Table 4. Large-scale validation pooled evaluation on 300 the full 300-object evaluation pool (pooled statistics; the pool contains the 24 probe objects). Values are absolute metrics of generated outputs with respect to ground truth.

Method	FG-SSIM $\uparrow$	Edge-SSIM $\uparrow$	PSNR $\uparrow$	FG-LPIPS $\downarrow$
$s = 1.25$	0.430	0.513	17.95	0.174
$s = 2.50$	0.473	0.559	17.90	0.172
C3 (TCAS)	0.476	0.529	18.86	0.171

Table 5. Large-scale texture preservation validation pooled texture-preservation evaluation on 300 the full 300-object evaluation pool (pooled statistics; the pool contains the 24 probe objects). Higher texture metrics indicate better preservation of foreground color variation and high-frequency details. Absolute values are means over objects and views; the ratios in Table 6 are the mean over objects of each per-object ratio relative to the corresponding $s = 1.25$ statistic (equal object weighting).

Method	Lap Var $\uparrow$	RGB Std $\uparrow$	Grad Mag $\uparrow$
$s = 1.25$	0.0151	0.0408	0.3258
$s = 2.50$	0.0095	0.0251	0.2616
C3 (TCAS)	0.0129	0.0377	0.2919

Table 6. Texture retention ratios and object-level stability of C3. Texture ratios are measured relative to $s = 1.25$. Each ratio is the mean over objects of the per-object ratio of the corresponding foreground statistic to that of $s = 1.25$ (equal object weighting); object-level win rates and confidence intervals for C3 over $s = 2.50$ are reported in the text.

Method	Lap Var Ratio $\uparrow$	RGB Std Ratio $\uparrow$	Grad Mag Ratio $\uparrow$
$s = 1.25$	1.000	1.000	1.000
$s = 2.50$	0.678	0.643	0.807
C3 (TCAS)	0.835	0.970	0.883

As shown in Table 6, compared with conservative scaling $s = 1.25$, aggressive scaling $s = 2.50$ retains only 67.8% of Laplacian variance, 64.3% of RGB standard deviation, and 80.7% of gradient magnitude, indicating that full high-scale scaling substantially weakens foreground color variation and high-frequency details. In contrast, C3 retains 83.5%, 97.0%, and 88.3% of these metrics, respectively, and clearly outperforms $s = 2.50$ across all three texture measures. This shows that TCAS still incurs some texture reduction, but it substantially alleviates texture flattening compared with full high-scale scaling.

Object-level statistics further show that C3 outperforms $s = 2.50$ on 87.7%, 95.0%, and 83.0% of objects in Laplacian variance, RGB standard deviation, and gradient magnitude, respectively. The corresponding bootstrap 95% confidence intervals do not cross zero, indicating statistically stable texture-preservation advantages. C3 also outperforms $s = 2.50$ on 74.3% of objects in PSNR. By contrast, the confidence interval for the FG-SSIM crosses zero, indicating no difference includes zero, so these data do not establish a significant difference in foreground structural similarity between C3 and $s = 2.50$. Therefore, TCAS does not noticeably sacrifice structural alignment, while significantly reducing the texture degradation caused by full high-scale scaling.

In summary, the 300-object experiments demonstrate that

Table 7. CLIP-IQA perceptual validation on 50 objects from the evaluation pool. Scores are reported for foreground regions and full rendered views; $\pm$ denotes the standard deviation across the 50 objects. Higher is better.

Method	CLIP-IQA (FG) $\uparrow$	CLIP-IQA (Full) $\uparrow$	Win vs. $s = 2.50$
$s = 1.25$	0.4920 $\pm$ 0.0032	0.4918 $\pm$ 0.0030	98.0%
$s = 2.50$	0.4860 $\pm$ 0.0018	0.4857 $\pm$ 0.0017	—
C3 (TCAS)	0.4906 $\pm$ 0.0028	0.4903 $\pm$ 0.0025	94.0%

Table 8. Blinded three-alternative first-choice preference study. Percentages are computed over 720 valid decisions per criterion.

Method	Texture naturalness $\uparrow$	Shape consistency $\uparrow$	Overall quality $\uparrow$
$s = 1.25$	332/720 (46.1%)	96/720 (13.3%)	176/720 (24.4%)
$s = 2.50$	104/720 (14.4%)	331/720 (46.0%)	126/720 (17.5%)
C3 (TCAS)	284/720 (39.4%)	293/720 (40.7%)	418/720 (58.1%)

adapter scaling affects both structural alignment and texture detail preservation. Full high-scale scaling strengthens edge constraints but is more likely to cause texture flattening. TCAS strengthens geometric correction in the middle stage and reduces adapter intervention in the late stage, thereby maintaining structural alignment while substantially reducing texture loss. It should be noted that C3 still has some texture decrease relative to $s = 1.25$; therefore, we do not claim that TCAS completely eliminates texture loss, but rather that it significantly reduces texture degradation compared with full high-scale scaling.

Perceptual validation with CLIP-IQA. To address the concern that proxy texture statistics do not directly measure perceptual quality, we additionally evaluate CLIP-IQA [39], which builds on CLIP image–text representations [40], on a 50-object subset of the evaluation pool as a complementary no-reference perceptual signal. CLIP-IQA is used as complementary perceptual evidence rather than a complete replacement for human preference evaluation.

Table 7 shows that C3 achieves a foreground CLIP-IQA score of 0.4906 versus 0.4860 for $s = 2.50$, scoring higher on 47 of the 50 objects (94.0%). The paired comparison uses a two-sided paired t -test over objects ($t(49) = 10.52$, $p \approx 3.6 \times 10^{-14}$), and the 95% confidence interval of the paired mean difference is constructed by object-level percentile bootstrap with 10,000 resamples, giving [0.0037, 0.0054], which excludes zero. The ordering $s = 1.25 > C3 > s = 2.50$ supports the diagnosis that aggressive scaling reduces perceptual quality, while TCAS recovers most of this loss with stronger geometry than conservative scaling.

Blinded preference study. To further examine whether the diagnostic texture differences are perceptually meaningful, we conducted a blinded three-alternative forced-choice (3AFC) preference study on 30 objects drawn from the evaluation pool. Twenty-four participants viewed, for each object and each of the three criteria (texture naturalness, shape consistency, overall quality), the anonymized outputs of conservative uniform scaling, aggressive uniform scaling, and C3 side by side; the left-to-right order of the three conditions was randomized independently per trial, and participants were not informed which method produced which image or how many conditions existed. Instructions asked participants to select the best image for the stated criterion only. Each participant judged all 30 objects for all three criteria, yielding 720 valid first-choice decisions for each criterion. The study complements the proxy diagnostics by testing whether the observed texture and structure differences are reflected in human preference.

The preference pattern in Table 8 follows the intended trade-off. Conservative scaling is most often selected for texture naturalness, while aggressive scaling is most often selected for shape consistency. C3 stays close to both single-scale baselines on their respective strengths and receives the highest overall preference, with 58.1% of all overall-quality votes. Thus, TCAS is not claimed to maximize every individual criterion; it provides a perceptually preferred balance between geometric adherence and texture preservation.

Because first-choice decisions are clustered within both participants and objects, we additionally report 95% confidence intervals obtained by a two-level cluster bootstrap (resampling participants and objects with replacement, 10,000 resamples). C3’s overall-quality share is 58.1% (95% CI [50.1%, 65.8%]), exceeding the conservative and aggressive baselines by +33.6 (CI [19.3, 47.2]) and +40.6 percentage points (CI [29.4, 51.8]); both differences exclude zero, so the overall-preference advantage of C3 is significant under cluster-aware inference. By contrast, the baselines’ single-criterion advantages are not significant (texture naturalness: $s = 1.25$ over C3 +6.7 points, CI [−7.9, 21.5]; shape consistency: $s = 2.50$ over C3 +5.3 points, CI [−6.7, 17.9]). Overall quality is therefore the only criterion with a significant preference, supporting the interpretation of TCAS as the perceptually preferred balance rather than a per-criterion maximum.

4.6. FAC Adaptive Correction Extension: A Controlled Re-examination

TCAS uses a fixed three-stage scale, which has the advantages of requiring no training, being simple to implement, and introducing low computational overhead. However, its residual scaling is still uniform across spatial positions and frequency components, lacking fine-grained adaptivity. To verify whether stage-wise adapter control can be further extended, we evaluate FAC adaptive correction on the 300-object validation set. FAC does not modify the base multi-view diffusion model, VAE, or original GeoTex-Adapter weights. Instead, it introduces lightweight modules on top of the TCAS temporal schedule: LTAG extended to learned adaptive correction, we trained the FAC extension—LTAG for timestep gating, GSG for spatial gating, and FSC for frequency-selective correction. Because FAC learns a small number of additional parameters, it is treated only as an extension experiment, while the main method remains the training-free TCAS on top of the TCAS temporal schedule. The base model, VAE, and GeoTex-Adapter remain frozen; only the three lightweight controllers are trainable, adding roughly 6×10^3 parameters. The controllers are trained with the same enhanced denoising objective as the base adapter—a latent noise-prediction MSE with $1.7\times$ fore-

ground and $1.3\times$ edge spatial reweighting plus a latent-SSIM term—using AdamW (peak learning rate 10^{-4} , 100 warm-up steps) for 2,000 steps on the adapter’s training pool, which is strictly disjoint from all evaluation objects, and all variants are evaluated on the strong-residual, per-layer-capped adapter instance of Section 4.7 under a strictly paired protocol (identical objects, seeds, and evaluation code).

Ablation results of the FAC adaptive correction extension on the 300-object validation set. Full FAC adds spatial gating and frequency-selective correction on top of the TCAS temporal schedule.

Table 7 reports the controlled ablation results. The TCAS baseline already achieves strong performance. LTAG only performs worse than TCAS on all metrics, suggesting that learned temporal gating alone cannot stably replace the fixed three-stage schedule. LTAG+GSG improves SSIM to 0.8794, but its PSNR. In this controlled setting, no learned variant reached the training-free schedule. We tested seven configurations spanning the most favorable training conditions we could construct: joint training of all controllers; a two-stage scheme with the temporal gate warm-started at the exact C3 envelope and frozen while the spatial and frequency controllers train; an envelope penalty that constrains the gate to remain near C3 during joint training; a fidelity-weighted objective; and a gently scheduled variant with fourfold-reduced training. Their paired deficits relative to the TCAS baseline range from -1.1 to -2.9 dB foreground PSNR (FG-PSNR, and FG-SSIM remain lower than TCAS, showing that spatial gating alone is insufficient to improve foreground quality. Full FAC, which adds spatial gating and frequency-selective correction on top of TCAS, achieves the strongest overall performance among these ablations: PSNR increases from 18.86 to 19.28, SSIM remains comparable at 0.8793, ; win rates at most 16%), increasing monotonically with the amount of controller training. A warm-start control in which the gate is left untrained at the exact C3 envelope is statistically indistinguishable from TCAS (paired FG-PSNR increases from 11.66 to 11.77, and FG-SSIM increases from 0.4755 to 0.4830 $\Delta = -0.18$ dB on the 12-object control, 95% CI $[-0.42, +0.05]$, crossing zero), validating the evaluation path. No configuration or hyperparameter was selected on any evaluation object; the complete dose–response study over all seven configurations is provided in the supplementary material.

Object-level statistics further show that Full FAC outperforms TCAS on 81.3% and 72.0% of objects in PSNR and FG-SSIM, respectively, and paired significance tests for both metrics are significant ($p < 0.0001$). This indicates that the gains of FAC are stable across most objects rather than being driven by a small number of samples. For transparency, we note that an earlier version of this extension, evaluated on the main adapter under our initial protocol before the strictly paired and strictly disjoint training controls were adopted, had suggested a positive FAC gain. That preliminary comparison differed in both evaluation protocol and adapter instance, and it does not meet the controls we now consider necessary for a transfer claim; under the strictly paired, strictly disjoint protocol above, no trained configuration replicates the gain. We therefore report only the controlled re-examination and treat the earlier comparison as superseded.

Therefore, FAC does not change the main conclusion of this paper. TCAS remains the main method because it The outcome delimits the scenario in which learned modulation affects the paper’s conclusions. Pre

serving the temporal envelope is necessary but not sufficient: with the envelope preserved and the controllers untrained, the extension neither helps nor harms, while every trained configuration degraded fidelity, indicating that the remaining damage is driven by the learned-modulation training signal itself, which trades foreground fidelity for denoising-objective loss. Learning a modulation that improves upon the C3 schedule therefore requires a training signal that does not trade away foreground fidelity (e.g., fidelity-weighted objectives, envelope-preserving constraints, or post-hoc rather than gradient-learned gates), which we identify as future work. With the tested lightweight controllers, the fixed schedule is the stronger default, and TCAS, which is training-free and plug-and-play. FAC serves as an extension experiment, showing that stage-wise adapter control can be further generalized to lightweight learned spatial and frequency adaptive correction, remains the main and sole method of this paper.

4.7. Adapter-Dependence of High-Scale Failure Modes

The preceding experiments demonstrate the texture-flattening failure mode under high adapter scaling on the studied adapter checkpoint. A natural question is whether this failure mode is universal or specific to the adapter’s trained residual properties. We conduct additional analysis across adapter checkpoints with different residual magnitudes to characterize how the failure mode depends on adapter properties.

We find that the specific failure mode of aggressive adapter scaling is not universal. Across three adapter checkpoints spanning a spectrum of trained residual magnitudes, uniform high scale ($s = 2.50$) produced: (a) texture flattening when all layers are scaled without per-layer caps; (b) high-frequency artifact amplification when per-layer caps restrict the fine-texture layer to a low scale while coarse layers are boosted; or (c) no appreciable effect when the adapter’s residual magnitude is very small. A per-layer scale-cap ablation on the same checkpoint reproduced both (a) and (b), isolating the inference-time scale semantics as the determining factor for the failure *direction*.

A residual-magnitude sweep further shows that the intervention *strength* is monotonic in the trained residual magnitude: scaling the adapter’s output projection from $0.1\times$ to $3\times$ transitions the behavior from no-effect, to artifact amplification under high scale, to over-constraint even under conservative scale.

Moreover, a *six-object* stage ablation shows that even *which denoising stage is most sensitive to high scale* is adapter-dependent: on the artifact-prone adapter, early-stage high scale reproduced nearly all of the damage (FG-SSIM $\downarrow$ from 0.266 to 0.187) while late-stage high scale was nearly harmless (FG-SSIM 0.261), whereas on the paper’s main adapter the late stage was the primary source of texture loss.

Despite this variability, in every regime where scaling had a non-negligible effect, the temporal low-high-low schedule C3 yielded the best shape-texture balance. This indicates that TCAS’s value is structural rather than incidental: by relying on the diffusion process’s stage-dependent roles (global layout $\rightarrow$ geometry refinement $\rightarrow$ texture synthesis), it mitigates the harm of high-scale intervention regardless of the adapter’s specific

Table 9. Scheduling transfer on the disjoint 276-object holdout (obj₀₀₂₄–obj₀₂₉₉; strong-residual, per-layer-capped adapter instance of Section 4.7). Δ PSNR (dB) is the paired C3-minus-competitor difference (positive favors C3); 95% CIs use object-level percentile bootstrap with 10,000 resamples. Absolute metrics are means over holdout objects and views.

Schedule	FG-SSIM $\uparrow$	PSNR $\uparrow$	Δ PSNR vs. C3 (95% CI)	C3 wins
Trapezoid	0.356	19.04	+0.258 [0.207, 0.308]	206/276
Gaussian peak	0.358	18.97	+0.324 [0.281, 0.367]	232/276
Linear warm-up	0.377	18.97	+0.323 [0.263, 0.386]	214/276
Cosine bump	0.330	18.39	+0.902 [0.824, 0.981]	253/276
C3 (TCAS)	0.376	19.29	– (reference)	–

failure mode. The failure mode (flatten vs. artifact vs. no-op) its strength, and its temporal location are all adapter-dependent but what remains stable in our experiments is that across the tested regimes the middle denoising stage being consistently emerged as the optimal window for geometric correction appears to be a property of the diffusion process itself. , although whether this holds across adapter families remains an open question for future work.

Two further robustness checks were performed on the strong-residual, per-layer-capped adapter instance described above. First, a boundary/peak sensitivity sweep (three high-scale windows [0.25, 0.75], [1/3, 2/3], [0.4, 0.6] $\times$ five peak scales from 2.00 to 3.00, fifteen candidates on the 24-object probe protocol) shows that the canonical middle-third window lies in the stable high-performance region: its 2.50 setting achieves 16.71 dB whole-image PSNR, the best setting in the same window (2.75) achieves 16.79 dB with worse texture diagnostics and lower FG-SSIM, and the broader and narrower windows reach at most 16.73 and 16.62 dB. C3 is therefore a robust middle-stage choice rather than a boundary-sensitive point estimate. Second, because the 24-object probe is part of the 300-object pool, transfer claims were re-verified on the disjoint 276-object holdout (obj₀₀₂₄–obj₀₂₉₉), summarized in Table 9: C3 improves PSNR over the strongest non-C3 probe candidates by +0.258 dB (95% CI [0.207, 0.308], 206/276 wins) over a trapezoid schedule and +0.324 dB ([0.281, 0.367], 232/276 wins) over a Gaussian-peak schedule, and over the reviewer-relevant generic schedules by +0.323 dB ([0.263, 0.386], 214/276 wins, FG-SSIM statistically tied) over linear warm-up and +0.902 dB ([0.824, 0.981], 253/276 wins, FG-SSIM +0.046) over the cosine bump. The holdout ordering matches the probe: warm-up approaches C3 in structure but loses in signal fidelity, and the smooth bump loses in both because its effective high-scale duration is shorter than the full middle third.

5. Limitations

This paper mainly focuses on inference-time adapter scaling and does not retrain the base multi-view diffusion model or the adapter. Therefore, TCAS can alleviate texture degradation under high scales—which may manifest as flattening or artifact amplification depending on the adapter’s residual properties—but it cannot fundamentally solve the limitations of the base

model in invisible-region completion, complex material synthesis, and cross-view detail consistency.

Second, Laplacian variance, RGB standard deviation, and gradient magnitude are proxy metrics for texture degradation. They are effective for detecting high-frequency loss and surface smoothing, but they cannot fully replace human perceptual evaluation. For objects with strong reflection, transparency, thin structures, or highly stylized textures, discrepancies may exist between these metrics and subjective quality.

In addition, the current TCAS uses fixed stage boundaries and a fixed scale combination, C3 = (1.25, 2.50, 1.25). This setting is simple and stable, but it should be understood as a validated inference strategy for the studied geometry-adapter pipeline rather than a universally optimal schedule. As shown in Section 4.7, the failure mode of high-scale intervention is adapter-dependent, and even the most sensitive denoising stage differs across adapters; yet C3’s middle-stage concentration remains optimal in all tested regimes was the best-performing schedule among all tested variants in every regime examined, suggesting that its temporal structure is robust even when specific failure mechanisms vary. It has not yet been adapted to object complexity, material type, input reference image quality, or different sampler families, and the schedule has not yet been validated on a different geometry-conditioned multi-view diffusion backbone. Future work could study content-adaptive stage boundaries, SNR-aware scaling, and learned scale selection strategies.

Finally, although the FAC extension demonstrates the potential of learned spatial and frequency correction, it requires additional training of a small number of parameters and therefore cannot replace our controlled re-examination of the learned FAC extension indicates that unconstrained lightweight gating can flatten the temporal envelope that makes TCAS effective; learned modulation is therefore promising only under envelope-preserving constraints, which we identify as a concrete direction for future work, while TCAS remains the main training-free property of TCAS. We treat FAC as an extension validation rather than the main method.

6. Conclusion

This paper presents a systematic experimental analysis of adapter scaling in multi-view diffusion texture generation. The experiments show that higher adapter scales continuously improve structural metrics such as FG-SSIM, but such improvement can mask texture quality degradation. In the 26-object texture audit, 92% of objects show texture flattening and high-frequency detail loss under $s = 2.50$. This reveals an adapter-specific temporal conflict that is not captured by simply treating the scale as a generic guidance strength.

To address this shape-texture trade-off, we propose Timestep-Conditioned Adapter Scaling (TCAS). The selected configuration, C3, applies strong adapter correction in the middle denoising stage and uses conservative scales in the early and late stages. The 24-object probe set is used only to select C3 from 17 scaling variants that include uniform, layer-wise, and temporal alternatives. With this schedule fixed, the 300-object validation evaluation pool further shows that C3 achieves FG-SSIM com-

parable to aggressive uniform scaling $s = 2.50$ while improving PSNR by 0.96 dB.

Therefore, the core contribution of this paper is not to claim that the generated results are visually close to the ground truth in all cases, nor to present TCAS as a universal replacement for all guidance schedules. Instead, the contribution is to reveal and validate a hidden shape-texture trade-off caused by geometry-adaptor residual injection, and to show that a simple non-monotonic inference schedule can mitigate this trade-off better than fixed high-scale control and other tested scheduling variants. This conclusion suggests that, in the geometry-controlled multi-view diffusion models, adapter strength should be studied here—and plausibly in similar geometry-conditioned texture pipelines—adapter strength is better treated as a stage-dependent inference control variable rather than as a single fixed hyperparameter.

The FAC extension further demonstrates that As an additional check, a controlled re-examination of the learned-correction extension (FAC) under a strictly paired protocol showed that unconstrained lightweight gating does not preserve the schedule's shape; the analysis delimits the scenario in which learned modulation helps—only under envelope-preserving constraints—and the stage-wise adapter control idea can not only be used as a fixed inference schedule, but can also be generalized to lightweight learned spatial and frequency adaptive correction, providing a direction for future content-adaptive texture generation. Training-free TCAS remains the main and sole method. Relative to the preliminary conference version [41], this article adds the two-stage epsilon-optimal selection rule behind TCAS and the strictly disjoint 276-object holdout evaluation, and the presentation has been rewritten accordingly.

Data availability

All data included in this study are available upon request by contact with the corresponding author.

Declaration of competing interests

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References


- [1] Liu R, Wu R, Van Hoorick B, et al. Zero-1-to-3: Zero-shot one image to 3D object. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [2] Shi R, Chen H, Zhang Z, et al. Zero123++: A single image to consistent multi-view diffusion base model. arXiv:2310.15110, 2023.
- [3] Liu Y, Lin C, Zeng Z, et al. SyncDreamer: Generating multiview consistent images from a single-view image. arXiv:2309.03453, 2023.
- [4] Long X, Guo Y C, Lin C, et al. Wonder3D: Single image to 3D using cross-domain diffusion. arXiv:2310.15008, 2023.
- [5] Shi Y, Wang P, Ye J, et al. MVDream: Multi-view diffusion for 3D generation. *International Conference on Learning Representations*, 2024.
- [6] Wang P, et al. ImageDream: Image-prompt multi-view diffusion for 3D generation. arXiv:2312.02201, 2023.
- [7] Xu J, et al. InstantMesh: Efficient 3D mesh generation from a single image with sparse-view large reconstruction models. *Advances in Neural Information Processing Systems*, 2024.

- [8] Ke Q, et al. Era3D: High-resolution multiview diffusion using efficient row-wise attention. arXiv:2405.11616, 2024.
- Shao M, Xiong F, Sun Z, Xu M. MVPainter: Accurate and detailed 3D texture generation via multi-view diffusion with geometric control. arXiv:2505.12635, 2025.
- Huang Z, et al. MV-Adapter: Multi-view consistent image generation made easy. arXiv:2412.03632, 2024.
- [9] Chen D Z, et al. Text2Tex: Text-driven texture synthesis via diffusion models. arXiv preprint, 2023.
- [10] Richardson E, et al. TEXTure: Semantic texture transfer using diffusion models. arXiv preprint, 2023.
- [11] Poole B, Jain A, Barron J T, Mildenhall B. DreamFusion: Text-to-3D using 2D diffusion. *International Conference on Learning Representations*, 2023.
- [12] Chen R, Chen Y, Jiao N, Jia K. Fantasia3D: Disentangling geometry and appearance for high-quality text-to-3D content creation. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [13] Shao M, Xiong F, Sun Z, Xu M. MVPainter: Accurate and detailed 3D texture generation via multi-view diffusion with geometric control. arXiv:2505.12635, 2025.
- [14] Zeng X, Chen X, Qi Z, et al. Paint3D: Paint anything 3D with lighting-immersive texture generation. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024.
- [15] Cheng W, Mu J, Zeng X, et al. MVPaint: Synchronized multi-view diffusion for painting anything 3D. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025.
- [16] Zhao Z, Lai Z, Lin Q, et al. Hunyuan3D 2.0: Scaling diffusion models for high resolution textured 3D assets generation. arXiv:2501.12202, 2025.
- [17] Huang Z, et al. MV-Adapter: Multi-view consistent image generation made easy. arXiv:2412.03632, 2024.
- [18] Mou C, Wang X, Xie L, et al. T2I-Adapter: Learning adapters to dig out more controllable ability for text-to-image diffusion models. arXiv:2302.08453, 2023.
- [19] Zhang L, Rao A, Agrawala M. Adding conditional control to text-to-image diffusion models. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [20] Ye H, Zhang J, Liu S, Han X, Yang W. IP-Adapter: Text compatible image prompt adapter for text-to-image diffusion models. arXiv:2308.06721, 2023.
- [21] Hu E J, Shen Y, Wallis P, et al. LoRA: Low-rank adaptation of large language models. *International Conference on Learning Representations*, 2022.
- [22] Liu S Y, Wang C Y, Yin H, et al. DoRA: Weight-decomposed low-rank adaptation. arXiv:2402.09353, 2024.
- [23] Zhang Q, Zuo S, Liang C, et al. AdaLoRA: Adaptive budget allocation for parameter-efficient fine-tuning. *International Conference on Learning Representations*, 2023.
- [24] Ho J, Jain A, Abbeel P. Denoising diffusion probabilistic models. *Advances in Neural Information Processing Systems*, 2020.
- [25] Song J, Meng C, Ermon S. Denoising diffusion implicit models. *International Conference on Learning Representations*, 2021.
- [26] Ho J, Salimans T. Classifier-free diffusion guidance. *NeurIPS Workshop*, 2022.
- [27] Castillo A, Legenstein R, et al. Adaptive guidance: Training-free acceleration of conditional diffusion models. arXiv:2312.12487, 2023.
- Wang Z, Bovik A C, Sheikh H R, Simoncelli E P. Image quality assessment: From error visibility to structural similarity. *IEEE Transactions on Image Processing*, 2004, 13(4): 600–612.
- Zhang R, Isola P, Efros A A, Shechtman E, Wang O. The unreasonable effectiveness of deep features as a perceptual metric. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2018.
- Radford A, Kim J W, Hallacy C, et al. Learning transferable visual models from natural language supervision. *International Conference on Machine Learning*, 2021.
- Oquab M, Darcet T, Moutakanni
- [28] Kynkäänniemi T, Aittala M, Karras T, et al. DINOv2: Learning robust visual features without supervision. Applying guidance in a limited interval improves sample and distribution quality in diffusion models. *Transactions on Machine Learning Research* Advances in Neural Information Processing Systems, 2024.
- [29] Rombach R, Blattmann A, Lorenz D, Esser P, Ommer B. High-

- resolution image synthesis with latent diffusion models. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022.
- [30] Esser P, Kulal S, Blattmann A, et al. Scaling rectified flow transformers for high-resolution image synthesis. *International Conference on Machine Learning*, 2024.
- [31] Black Forest Labs. FLUX: Flow matching for image generation. 2024.
- [32] Loshchilov I, Hutter F. Decoupled weight decay regularization. *International Conference on Learning Representations*, 2019.
- [33] Cherti M, Beaumont R, Wightman R, et al. Reproducible scaling laws for contrastive language-image learning. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023.
- [34] Nichol A, Dhariwal P, Ramesh A, et al. GLIDE: Towards photorealistic image generation and editing with text-guided diffusion models. *International Conference on Machine Learning*, 2022.
- [35] Saharia C, Chan W, Saxena S, et al. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in Neural Information Processing Systems*, 2022.
- [36] Peebles W, Xie S. Scalable diffusion models with transformers. *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- [37] Wang Z, Bovik A C, Sheikh H R, Simoncelli E P. Image quality assessment: From error visibility to structural similarity. *IEEE Transactions on Image Processing*, 2004, 13(4): 600–612.
- [38] Zhang R, Isola P, Efros A A, Shechtman E, Wang O. The unreasonable effectiveness of deep features as a perceptual metric. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2018.
- [39] Wang J, Chan K C K, Loy C C. Exploring CLIP for assessing the look and feel of images. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2023.
- [40] Radford A, Kim J W, Hallacy C, et al. Learning transferable visual models from natural language supervision. *International Conference on Machine Learning*, 2021.
- [41] Anonymous. Adapter scaling trade-off and timestep-conditioned scheduling in multi-view diffusion texture generation. Submission #75 of CAD/Graphics 2026, 2026.

Highlights


- Uniform adapter scaling trades structure against texture in multi-view diffusion
- Stage utilities show early harm, mid-stage benefit, late neutrality of geometry
- TCAS is a training-free low-high-low schedule selected on a small probe set
- Transfer to 300 objects, no further search: +0.96 dB PSNR, more texture kept
- Blinded readers prefer TCAS overall; cluster bootstrap confirms significance

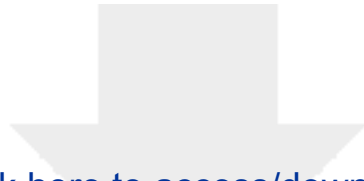


[Click here to access/download](#)

Supplementary material

Supplementary material 0907.pdf




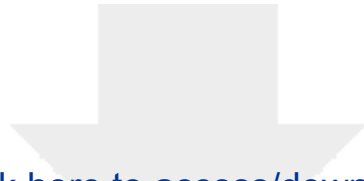

[Click here to access/download](#)

Supplementary material

Original conference paper 0907.pdf



Timestep-Conditioned Adapter Scaling for Multi-view Diffusion Texture Generation

Xueyuan Che^a, Libo Sun^{a,*}

^aSchool of Instrument Science and Engineering, Southeast University, No. 2 Sipailou, Xuanwu District, Nanjing, 210096, Jiangsu, China

Acknowledgements

This work was supported by the Key R&D Program of Jiangsu Province under Grant BE2023010-3, the Basic Research Program of Jiangsu under Grant BK20253037, the Advanced Technology Research and Development Program of Jiangsu under Grant BF2025018, and the Modern Agricultural Machinery Equipment and Technology Promotion Project of Jiangsu under Grant NJ2025-10.

*Corresponding author.

Email address: sunlibo@seu.edu.cn (Libo Sun)