



XAMPP Apache + MariaDB + PHP + Perl

What is XAMPP?

XAMPP is the most popular PHP development environment

XAMPP is a completely free, easy to install Apache distribution containing MariaDB, PHP, and Perl. The XAMPP open source package has been set up to be incredibly easy to install and to use.



Download

[Click here for other versions](#)



XAMPP for **Windows**

v5.6.30 (PHP 5.6.30)



XAMPP for **Linux**

v5.6.30 (PHP 5.6.30)



XAMPP for **OS X**

v5.6.30 (PHP 5.6.30)

Setup - XAMPP



Welcome to the XAMPP Setup Wizard.



< Back

Next >

Cancel



Select Components

Select the components you want to install; clear the components you do not want to install. Click Next when you are ready to continue.

- Server
 - Apache
 - MySQL
 - FileZilla FTP Server
 - Mercury Mail Server
 - Tomcat
- Program Languages
 - PHP
 - Perl
- Program Languages
 - phpMyAdmin
 - Webalizer
 - Fake Sendmail

Installation folder

Please, choose a folder to install XAMPP

Select a folder C:\xampp





Bitnami for XAMPP



Bitnami for XAMPP provides free installers that can install Drupal, Joomla!, WordPress and many other popular open source apps on top of your existing XAMPP installation.

<https://bitnami.com/xampp>

Learn more about Bitnami for XAMPP


Welcome to XAMPP!



XAMPP is an easy to install Apache distribution containing MySQL, PHP and Perl

Installing

Unpacking files





Completing the XAMPP Setup Wizard

Setup has finished installing XAMPP on your computer.

Do you want to start the Control Panel now?




< Back

Finish

Cancel









XAMPP Control Panel v3.2.1



Modules

Service	Module	PID(s)	Port(s)	Actions			
	Apache	1544	80, 443	Stop	Admin	Config	Logs
	MySQL	1756	3306	Stop	Admin	Config	Logs
	FileZilla			Start	Admin	Config	Logs
	Mercury			Start	Admin	Config	Logs
	Tomcat			Start	Admin	Config	Logs



```

11:33:35 AM [main] Running with Administrator rights - good!
11:33:35 AM [main] XAMPP Installation Directory: "c:\xampp\
11:33:35 AM [main] Checking for prerequisites
11:33:37 AM [main] All prerequisites found
11:33:37 AM [main] Initializing Modules
11:33:37 AM [Apache] XAMPP Apache Service is already running on port 80
11:33:37 AM [Apache] XAMPP Apache Service is already running on port 443
11:33:37 AM [mysql] XAMPP MySQL Service is already running on port 3306
11:33:37 AM [main] Starting Check-Timer
11:33:37 AM [main] Control Panel Ready
  
```

✓ Today (1)

 python-3.11.3-amd64

26/04/2023 18:57

Application

24.753 KB

✓ Last week (3)

 RIRIN HARIYANTI_KAJIAN

19/04/2023 22:36

Microsoft Word D...

21 KB

 PPT kelompok 7_PPh pasal 22,23 dan 24

18/04/2023 10:26

PDF File

18.283 KB

 Kelompok 1_Study Kasus Persediaan_Per...

18/04/2023 10:09

Microsoft Excel W...

30 KB

✓ Earlier this month (1)

 Let's Make fruits pudding (2)

15/04/2023 22:37

MP4 File

48.293 KB

✓ Earlier this year (10)



python
for
windows

Install Python 3.11.3 (64-bit)

Select Install Now to install Python with default settings, or choose Customize to enable or disable features.



[Install Now](#)

C:\Users\ASUS\AppData\Local\Programs\Python\Python311

Includes IDLE, pip and documentation
Creates shortcuts and file associations



[Customize installation](#)

Choose location and features

Use admin privileges when installing py.exe

Add python.exe to PATH

[Cancel](#)

Install Python 3.11.3 (64-bit)

Select Install Now to install Python with default settings, or choose Customize to enable or disable features.



Install Now

C:\Users\ASUS\AppData\Local\Programs\Python\Python311

Includes IDLE, pip and documentation
Creates shortcuts and file associations

Customize installation

Choose location and features

python
for
windows

Use admin privileges when installing py.exe

Add python.exe to PATH

Cancel



python
for
windows

Optional Features

Documentation

Installs the Python documentation files.

pip

Installs pip, which can download and install other Python packages.

tcl/tk and IDLE

Installs tkinter and the IDLE development environment.

Python test suite

Installs the standard library test suite.

py launcher for all users (requires admin privileges)

Installs the global 'py' launcher to make it easier to start Python.

Back

Next

Cancel



python
for
windows

Advanced Options

- Install Python 3.11 for all users
- Associate files with Python (requires the 'py' launcher)
- Create shortcuts for installed applications
- Add Python to environment variables
- Precompile standard library
- Download debugging symbols
- Download debug binaries (requires VS 2017 or later)

Customize install location

C:\Users\ASUS\AppData\Local\Programs\Python\Python3

[Browse](#)

[Back](#)

 [Install](#)

[Cancel](#)



python
for
windows

10/01/2023 10:13

Advanced Options

- Install Python 3.11 for all users
- Associate files with Python (requires the 'py' launcher)
- Create shortcuts for installed applications
- Add Python to environment variables
- Precompile standard library
- Download debugging symbols
- Download debug binaries (requires VS 2017 or later)

Customize install location

C:\python

Browse

Back

 Install

Cancel

PDF File

123 KB

Setup Progress



Installing:

Precompiling standard library



python
for
windows

Cancel

Setup was successful

New to Python? Start with the [online tutorial](#) and [documentation](#). At your terminal, type "py" to launch Python, or search for Python in your Start menu.



See [what's new](#) in this release, or find more info about [using Python on Windows](#).



Disable path length limit

Changes your machine configuration to allow programs, including Python, to bypass the 260 character "MAX_PATH" limitation.

python
for
windows

[Close](#)

Semua

Gambar

Video

Buku

Berita

Lainnya

Alat

SafeSearch aktif

Sekitar 532.000.000 hasil (0,35 detik)



visualstudio.com

<https://code.visualstudio.com> · Terjemahkan halaman ini

:

Visual Studio Code - Code Editing. Redefined

Visual Studio Code is a code editor redefined and optimized for building and debugging modern web and cloud applications. Visual Studio Code is free and ...

Download

Visual Studio Code is free and available on your favorite ...

Docs

[Download](#) - [IntelliSense](#) - [Introductory Videos](#) - [Overview](#)

Set up VS Code

[Windows](#) - [Linux](#) - [System Requirements](#) - ...

Learn

[Setup](#) - [NASA Lessons](#) - [Coding Packs](#) - [Extensions](#) - [Customize](#)

Waiting for cache...



Gambar lainnya

Visual Studio Code



Perangkat lunak

Visual Studio Code adalah perangkat lunak penyunting kode-sumber buatan Microsoft untuk Linux, macOS, dan Windows. Visual Studio Code menyediakan fitur seperti penyorotan sintaksis, penyelesaian kode, kutipan kode, merefaktor kode, pengawakutuan, dan Git. [Wikipedia](#)

► Join us for [VS Code Day](#) on April 26th! 🎉

Code editing. Redefined.


Free. Built on open source. Runs everywhere.

[Download for Windows](#)

Stable Build

Web, Insiders edition, or other platforms

By using VS Code, you agree to its
[license](#) and [privacy statement](#).

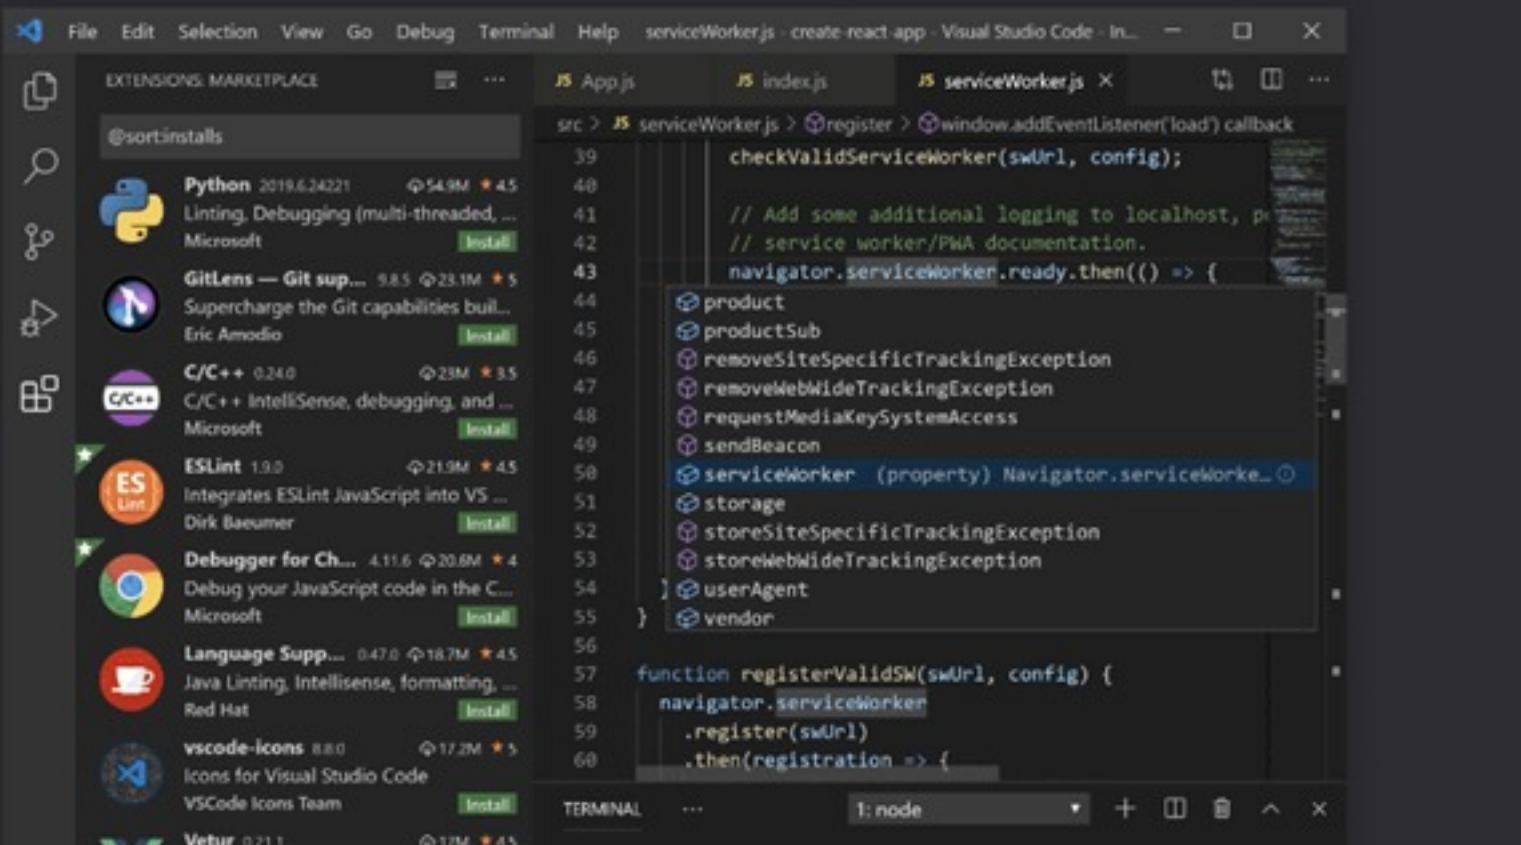

The screenshot shows the Visual Studio Code interface. On the left, there's a sidebar titled "EXTENSIONS MARKETPLACE" listing various extensions like Python, GitLens, C/C++, ESLint, Debugger for Chrome, Language Support for Java, vscode-icons, and Vetur. The main area is a code editor with three tabs: "App.js", "index.js", and "serviceWorker.js". The "serviceWorker.js" tab is active, displaying code related to service workers. A tooltip is visible over the "serviceWorker" property in the code, showing a list of properties and methods such as "product", "productSub", "removeSiteSpecificTrackingException", "removeWebWideTrackingException", "requestMediaKeySystemAccess", "sendBeacon", "storage", "storeSiteSpecificTrackingException", "storeWebWideTrackingException", "userAgent", and "vendor". The bottom of the screen shows the "TERMINAL" tab with the command "node" entered.

```
serviceWorker.js - create-react-app - Visual Studio Code - In... ━ □ ×
File Edit Selection View Go Debug Terminal Help serviceWorker.js · create-react-app · Visual Studio Code - In... ━ □ ×
EXTENSIONS MARKETPLACE ... JS App.js JS index.js JS serviceWorker.js × ━ □ ...
@sortinstalls
Python 2019.6.2421 54.9M ★ 4.5
Linting, Debugging (multi-threaded, ...
Microsoft Install
GitLens — Git sup... 5.8.5 23.1M ★ 5
Supercharge the Git capabilities built...
Eric Amadio Install
C/C++ 0.24.0 23M ★ 3.5
C/C++ IntelliSense, debugging, and ...
Microsoft Install
ESLint 1.9.0 21.9M ★ 4.5
Integrates ESLint JavaScript into VS ...
Dirk Baeumer Install
Debugger for Ch... 4.11.6 20.8M ★ 4
Debug your JavaScript code in the C...
Microsoft Install
Language Supp... 0.47.0 18.7M ★ 4.5
Java Linting, Intellisense, formatting, ...
Red Hat Install
vscode-icons 8.8.0 17.2M ★ 5
Icons for Visual Studio Code
VSCode Icons Team Install
Vetur 0.21.1 17M ★ 4.5
src > JS serviceWorker.js > register > window.addEventListener('load') callback
checkValidServiceWorker(swUrl, config);
// Add some additional logging to localhost, p...
// service worker/PWA documentation.
navigator.serviceWorker.ready.then(() => {
  product
  productSub
  removeSiteSpecificTrackingException
  removeWebWideTrackingException
  requestMediaKeySystemAccess
  sendBeacon
  serviceWorker (property) Navigator.serviceWorke...
  storage
  storeSiteSpecificTrackingException
  storeWebWideTrackingException
} userAgent
vendor
function registerValidSW(swUrl, config) {
  navigator.serviceWorker
    .register(swUrl)
    .then(registration => {
      ...
    })
}

```

Join us for [VS Code Day](#) on April 26th! 🎉



Overview

[SETUP](#)[GET STARTED](#)[USER GUIDE](#)[SOURCE CONTROL](#)[TERMINAL](#)[LANGUAGES](#)[NODEJS /
JAVASCRIPT](#)[TYPESCRIPT](#)[PYTHON](#)[JAVA](#)[C++](#)[DOCKER](#)

Thanks for downloading VS Code for Windows!

Download not starting? Try this [direct download link](#).

Please take a few seconds and help us improve ... [click to take survey](#).

Getting Started

Visual Studio Code is a lightweight but powerful source code editor which runs on your desktop and is available for Windows, macOS and Linux. It comes with built-in support for JavaScript, TypeScript and Node.js and has a rich ecosystem of extensions for other languages and runtimes (such as C++, C#, Java, Python, PHP, Go, .NET). Begin your journey with VS Code with these [introductory videos](#).

Visual Studio Code in Action

```
4  var server = express();  
5  server.use(bodyParser.json());
```

GETTING STARTED

[VS Code in Action](#)[Top Extensions](#)[First Steps](#)[Keyboard Shortcuts](#)[Downloads](#)[Privacy](#) [Tweet this link](#) [Subscribe](#) [Ask questions](#) [Follow @code](#) [Request features](#) [Report issues](#) [Watch videos](#)

Today (2)

 python-3.11.3-amd64	26/04/2023 18:57	Application	24.753 KB
 VSCodeUserSetup-x64-1.77.3	26/04/2023 19:26	Application	86.960 KB



License Agreement

Please read the following important information before continuing.

Please read the following License Agreement. You must accept the terms of this agreement before continuing with the installation.

This license applies to the Visual Studio Code product. Source Code for Visual Studio Code is available at <https://github.com/Microsoft/vscode> under the MIT license agreement at

<https://github.com/microsoft/vscode/blob/main/LICENSE.txt>. Additional license information can be found in our FAQ at <https://code.visualstudio.com/docs/supporting/faq>.

MICROSOFT SOFTWARE LICENSE TERMS

MICROSOFT VISUAL STUDIO CODE

- I accept the agreement
 I do not accept the agreement

Next >

Cancel



Select Destination Location

Where should Visual Studio Code be installed?



Setup will install Visual Studio Code into the following folder.

To continue, click Next. If you would like to select a different folder, click Browse.

C:\Microsoft VS Code

Browse...

At least 333,6 MB of free disk space is required.

< Back

Next >

Cancel



Select Start Menu Folder

Where should Setup place the program's shortcuts?



Setup will create the program's shortcuts in the following Start Menu folder.

To continue, click Next. If you would like to select a different folder, click Browse.

Visual Studio Code

Browse...

Don't create a Start Menu folder

< Back

Next >

Cancel



Select Additional Tasks

Which additional tasks should be performed?

Select the additional tasks you would like Setup to perform while installing Visual Studio Code, then click Next.

Additional icons:

- Create a desktop icon

Other:

- Add "Open with Code" action to Windows Explorer file context menu
- Add "Open with Code" action to Windows Explorer directory context menu
- Register Code as an editor for supported file types
- Add to PATH (requires shell restart)

< Back

Next >

Cancel



Ready to Install

Setup is now ready to begin installing Visual Studio Code on your computer.

Click **Install** to continue with the installation, or click **Back** if you want to review or change any settings.

Destination location:

C:\Microsoft VS Code

Start Menu folder:

Visual Studio Code

Additional tasks:

Additional icons:

Create a desktop icon

Other:

Add "Open with Code" action to Windows Explorer file context menu

Add "Open with Code" action to Windows Explorer directory context menu

Register Code as an editor for supported file types

Add to PATH (requires shell restart)



< Back

Install

Cancel

Completing the Visual Studio Code Setup Wizard

Setup has finished installing Visual Studio Code on your computer. The application may be launched by selecting the installed shortcuts.

Click Finish to exit Setup.

Launch Visual Studio Code



Finish



File Edit Selection View Go Run Terminal



New Text File Ctrl+N



New File... Ctrl+Alt+Windows+N



New Window Ctrl+Shift+N



Open File... Ctrl+O



Open Folder... Ctrl+K Ctrl+O




Open Workspace from File...




Open Recent >



Add Folder to Workspace...



Save Workspace As...



Duplicate Workspace



Save Ctrl+S



Save As... Ctrl+Shift+S



Save All Ctrl+K S



Share >



Auto Save



Preferences >



Revert File




Close Editor Ctrl+F4




Close Window Alt+F4



Exit

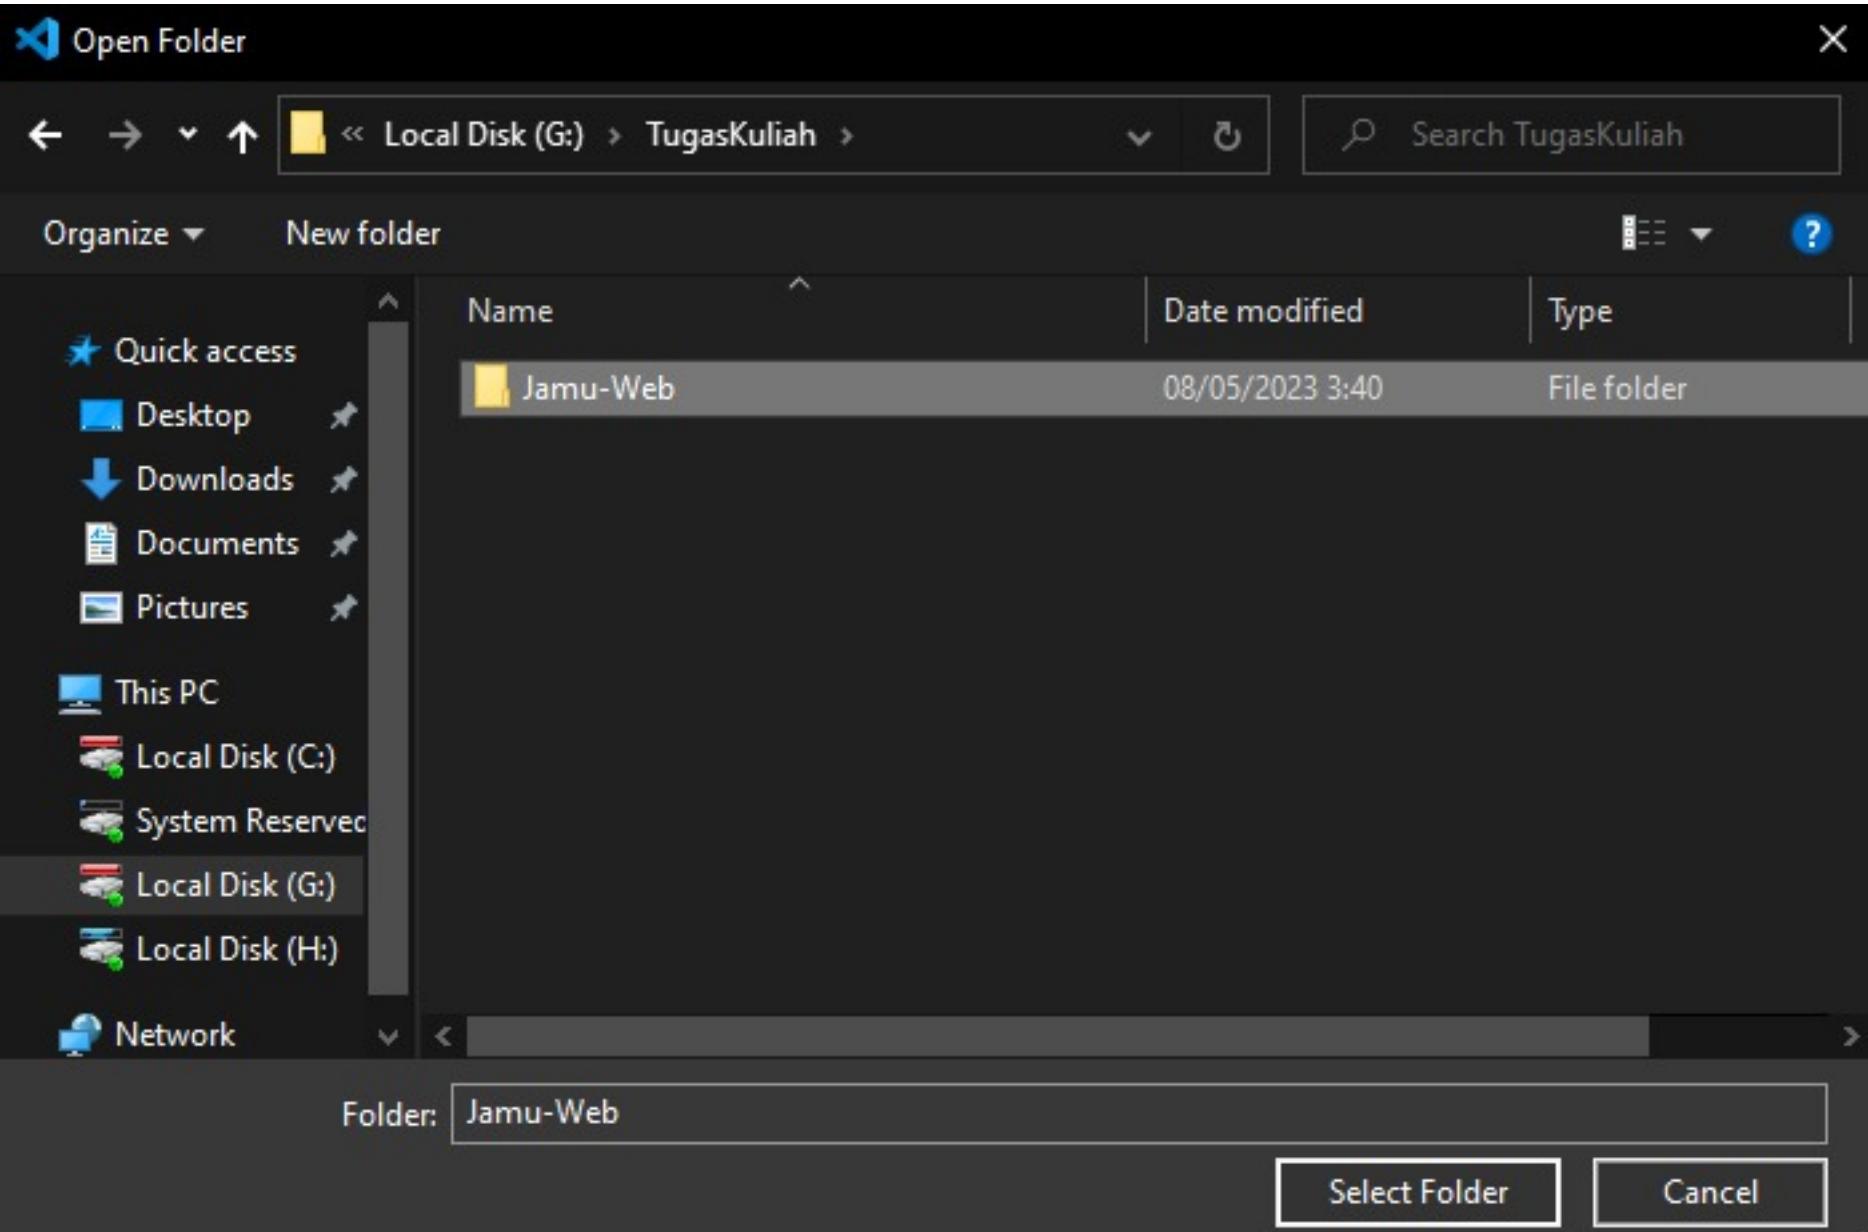


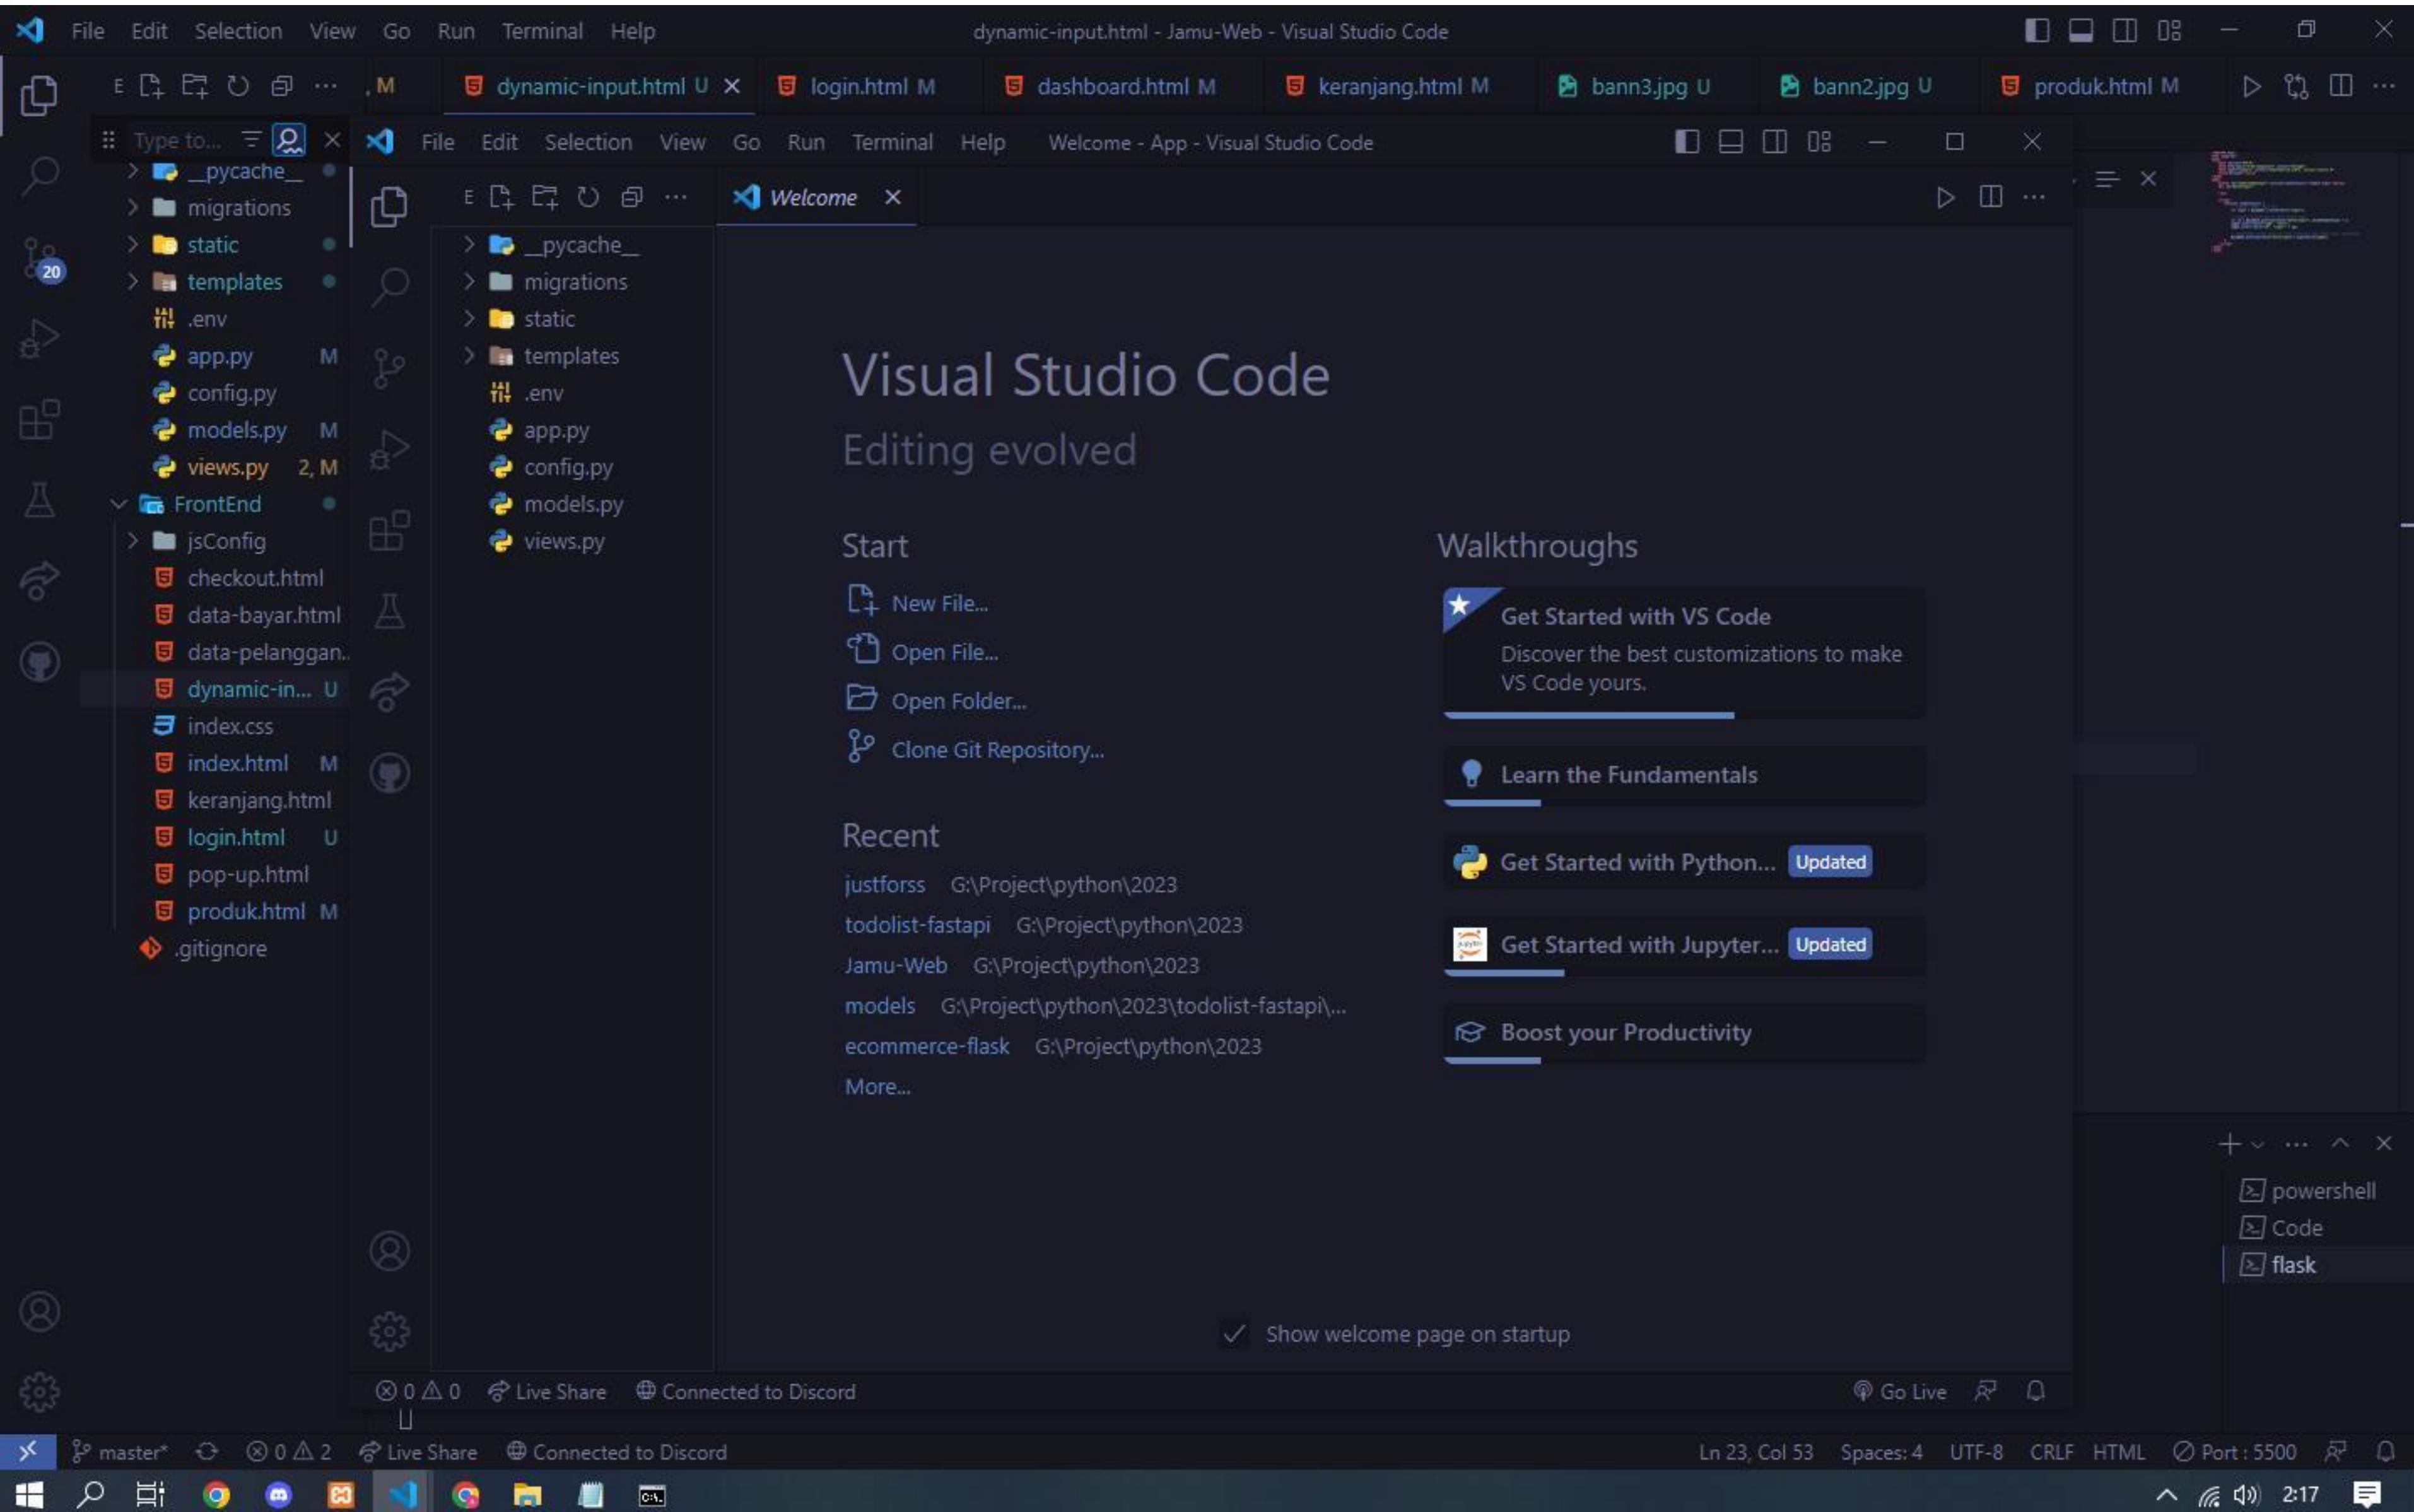

 E D+ ⌂ ⌂ ⌂ ⌂ ...
> _pycache_
> migrations
> static
templates < login.html < html < body < nav.bg-blue-500.py-4 < div.container.mx-auto.flex.justify-between.items-center.px-4 < ul.flex < li
checkout.html
dashboard.html
form.html
keranjang.html
login.html
product.html
trasaction.html
.env
app.py
config.py
models.py
views.py

login.html ×

```
templates> login.html > html > body > nav.bg-blue-500.py-4 > div.container.mx-auto.flex.justify-between.items-center.px-4 > ul.flex > li  
1  <!DOCTYPE html>  
2  <html lang="en">  
3  <head>  
4    <meta charset="UTF-8">  
5    <meta http-equiv="X-UA-Compatible" content="IE=edge">  
6    <meta name="viewport" content="width=device-width, initial-scale=1.0">  
7    <title>Document</title>  
8    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/tailwindcss/2.2.19/tailwind.min.css">  
9    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-KfQjzIuvcxG3c1zW0lbgqF99IvEg6Rt7AJwJZDdQDyvKJZo" crossorigin="anonymous"/>  
10   </head>  
11   <body>  
12  
13     </!-- Navbar -->  
14     <nav class="bg-blue-500 py-4">  
15       <div class="container mx-auto flex justify-between items-center px-4">  
16         <a href="#" class="text-white font-bold text-xl">JamuDotWeb</a>  
17         <ul class="flex">  
18           <li>  
19             <a href="/" class="text-white px-4 hover:text-gray-200">Home</a>  
20           </li>  
21           <li>  
22             <a href="#product" class="text-white px-4 hover:text-gray-200">Product</a>  
23           </li>  
24           <li>  
25             <a href="#contact" class="text-white px-4 hover:text-gray-200">Contact Us</a>  
26           </li>  
27           <li>  
28             <a href="/keranjang" class="text-white px-4 hover:text-gray-200">Keranjang</a>  
29           </li>  
30         </ul>  
31       </div>  
32     </nav>  
33  
34     <div class="container">  
35       <div class="row justify-content-center mt-5">  
36         <div class="col-md-6">  
37           <div class="card">  
38             <div class="card-header">  
39               <h3 class="text-center">Login</h3>  
40             </div>
```



E D+ E+ ⌂ ⌂ ...

login.html ×

> __pycache__
> migrations
> static> templates
 checkout.html
 dashboard.html
 form.html
 keranjang.html
 login.html
 product.html
 trasaction.html

.env

app.py

config.py

models.py

views.py




```
templates> login.html > html > body > nav.bg-blue-500.py-4 > div.container.mx-auto.flex.justify-between.items-center.px-4 > ul.flex > li
27       <li>
28         <a href="/keranjang" class="text-white px-4 hover:text-gray-200">Keranjang</a>
29       </li>
30     </ul>
31   </div>
32 </nav>

33   <div class="container">
34     <div class="row justify-content-center mt-5">
35       <div class="col-md-6">
36         <div class="card">
37           <div class="card-header">
38             <h3 class="text-center">Login</h3>
39           </div>
40           <div class="card-body">
41             <form method="POST">
42               <div class="form-group">
43                 <label for="email">Email Address</label>
44                 <input type="text" class="form-control" name="email" id="emailForm" aria-describedby="emailHelp" placeholder="masukkan email anda" required>
45               </div>
46               <div class="form-group">
47                 <label for="password">Password</label>
48                 <input type="password" class="form-control" name="pwd" id="passwordForm" placeholder="password" required>
49               </div>
50               <div class="pt-2">
51                 <button type="submit" class="btn btn-primary btn-block">Login</button>
52               </div>
53             </form>
54           </div>
55         </div>
56       </div>
57     </div>
58   </div>
59 </div>

60 </body>
61 </html>
```




```
product.html <--> templates > product.html > html > body
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta http-equiv="X-UA-Compatible" content="IE=edge">
6      <meta name="viewport" content="width=device-width, initial-scale=1.0">
7      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.4.0/css/all.min.css">
8      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/tailwindcss/2.2.19/tailwind.min.css">
9      <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-KfQj14
```

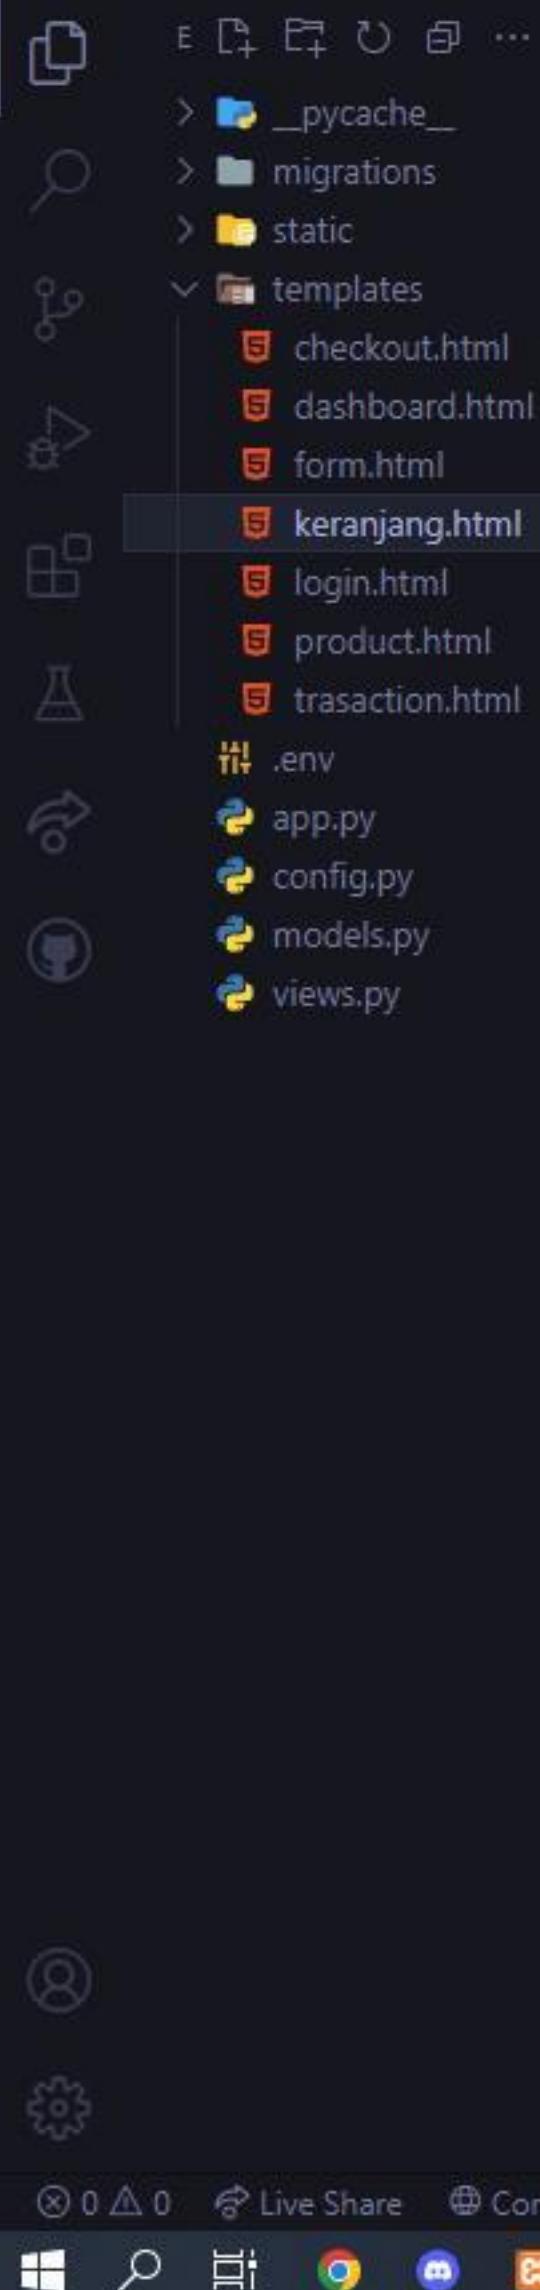

keranjang.html ×


templates > keranjang.html > ...


```
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta http-equiv="X-UA-Compatible" content="IE=edge">
6      <meta name="viewport" content="width=device-width, initial-scale=1.0">
7      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.4.0/css/all.min.css">
8      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/tailwindcss/2.2.19/tailwind.min.css">
9      <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-KI
10     <title>Document</title>
11     <script src=".//jsConfig/fetch.js"></script>
12 </head>
13 <body>
14     <!-- Navbar -->
15     <nav class="bg-blue-500 py-4">
16         <div class="container mx-auto flex justify-between items-center px-4">
17             <a href="#" class="text-white font-bold text-xl">JamuDotWeb</a>
18             <ul class="flex">
19                 <li>
20                     <a href="/" class="text-white px-4 hover:text-gray-200">Home</a>
21                 </li>
22                 <li>
23                     <a href="#product" class="text-white px-4 hover:text-gray-200">Product</a>
24                 </li>
25                 <li>
26                     <a href="#contact" class="text-white px-4 hover:text-gray-200">Contact Us</a>
27                 </li>
28                 <li>
29                     <a href="/keranjang" class="text-white px-4 hover:text-gray-200">Keranjang</a>
30                 </li>
31                 <li>
32                     <a href="/login" class="text-white px-4 hover:text-gray-200">Keranjang</a>
33                 </li>
34             </ul>
35         </div>
36     </nav>
37
38     <div class="container mx-auto mt-10">
39         <h1 class="text-3xl font-bold mb-6">Keranjang</h1>
40         <div class="flex justify-end mb-4">
```

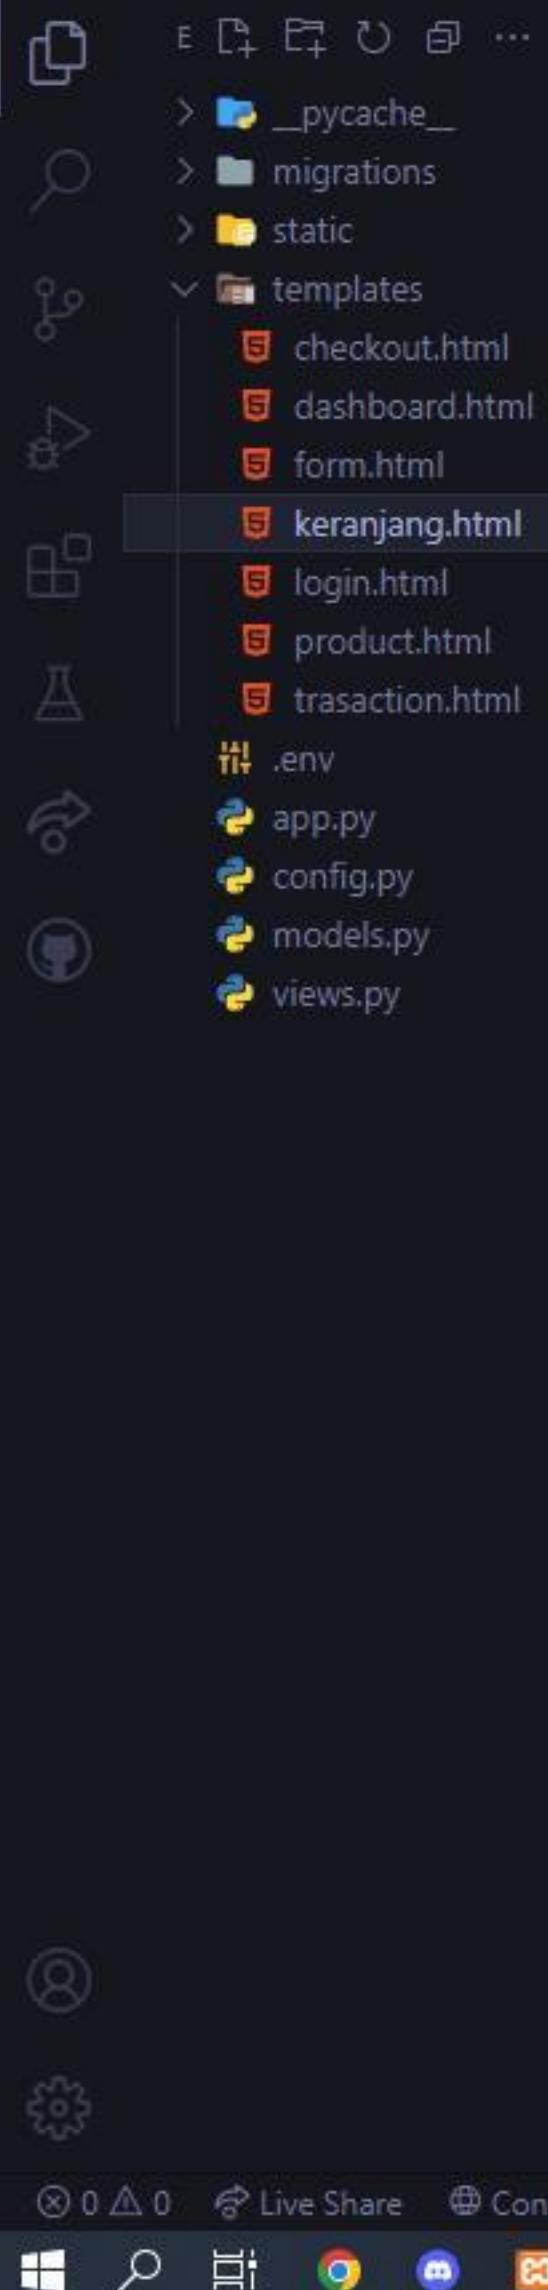

keranjang.html ×

```
templates > keranjang.html > ...
35     </div>
36     </nav>
37
38     <div class="container mx-auto mt-10">
39         <h1 class="text-3xl font-bold mb-6">Keranjang</h1>
40         <div class="flex justify-end mb-4">
41             <button id="add-item-btn" class="px-4 py-2 bg-green-500 text-white rounded-md hover:bg-green-600 focus:outline-none">Tambah Produk</button>
42         </div>
43         <table class="min-w-max w-full table-auto">
44             <thead>
45                 <tr class="bg-gray-100 text-gray-600 uppercase text-sm leading-normal">
46                     <th class="py-3 px-6 text-left"></th>
47                     <th class="py-3 px-6 text-left">Nama Produk</th>
48                     <th class="py-3 px-6 text-center">Jumlah</th>
49                     <th class="py-3 px-6 text-center">Harga</th>
50                     <th class="py-3 px-6 text-center">Total Harga</th>
51                     <th class="py-3 px-6 text-center"></th>
52                 </tr>
53             </thead>
54             <tbody class="text-gray-600 text-sm font-light">
55                 {% for item in items %}
56                     <tr class="border-b border-gray-100 hover:bg-gray-100">
57                         <td class="py-3 px-6 text-left whitespace nowrap">
58                             <div class="flex w-$10">
59                                 
60                             </div>
61                         </td>
62                         <td class="py-3 px-6 text-left">{{ item.title }}</td>
63                         <td class="py-3 px-6 text-center">
64                             <div class="flex justify-content-center items-center">
65                                 <div class="flex items-center">
66                                     <button onclick="updateTotal('-', '{{ item.id }}')" type="button" class="bg-gray-200 hover:bg-gray-300 px-2 py-1 border rounded">-
67                                     <span id="product-qty-{{ item.id }}" class="px-4 py-2 bg-gray-200 text-gray-800 font-bold">{{ item.jumlah }}
68                                     <button onclick="updateTotal('+', '{{ item.id }}')" type="button" class="bg-gray-200 hover:bg-gray-300 px-2 py-1 border rounded">+
69                                 </div>
70                             </div>
71                         </td>
72                         <td id="harga-{{ item.id }}" class="py-3 px-6 text-center">
73                             {{ item.harga }}
74                         </td>
75                     </tr>
76                 {% endfor %}
77             </tbody>
78         </table>
79     </div>
80 
```

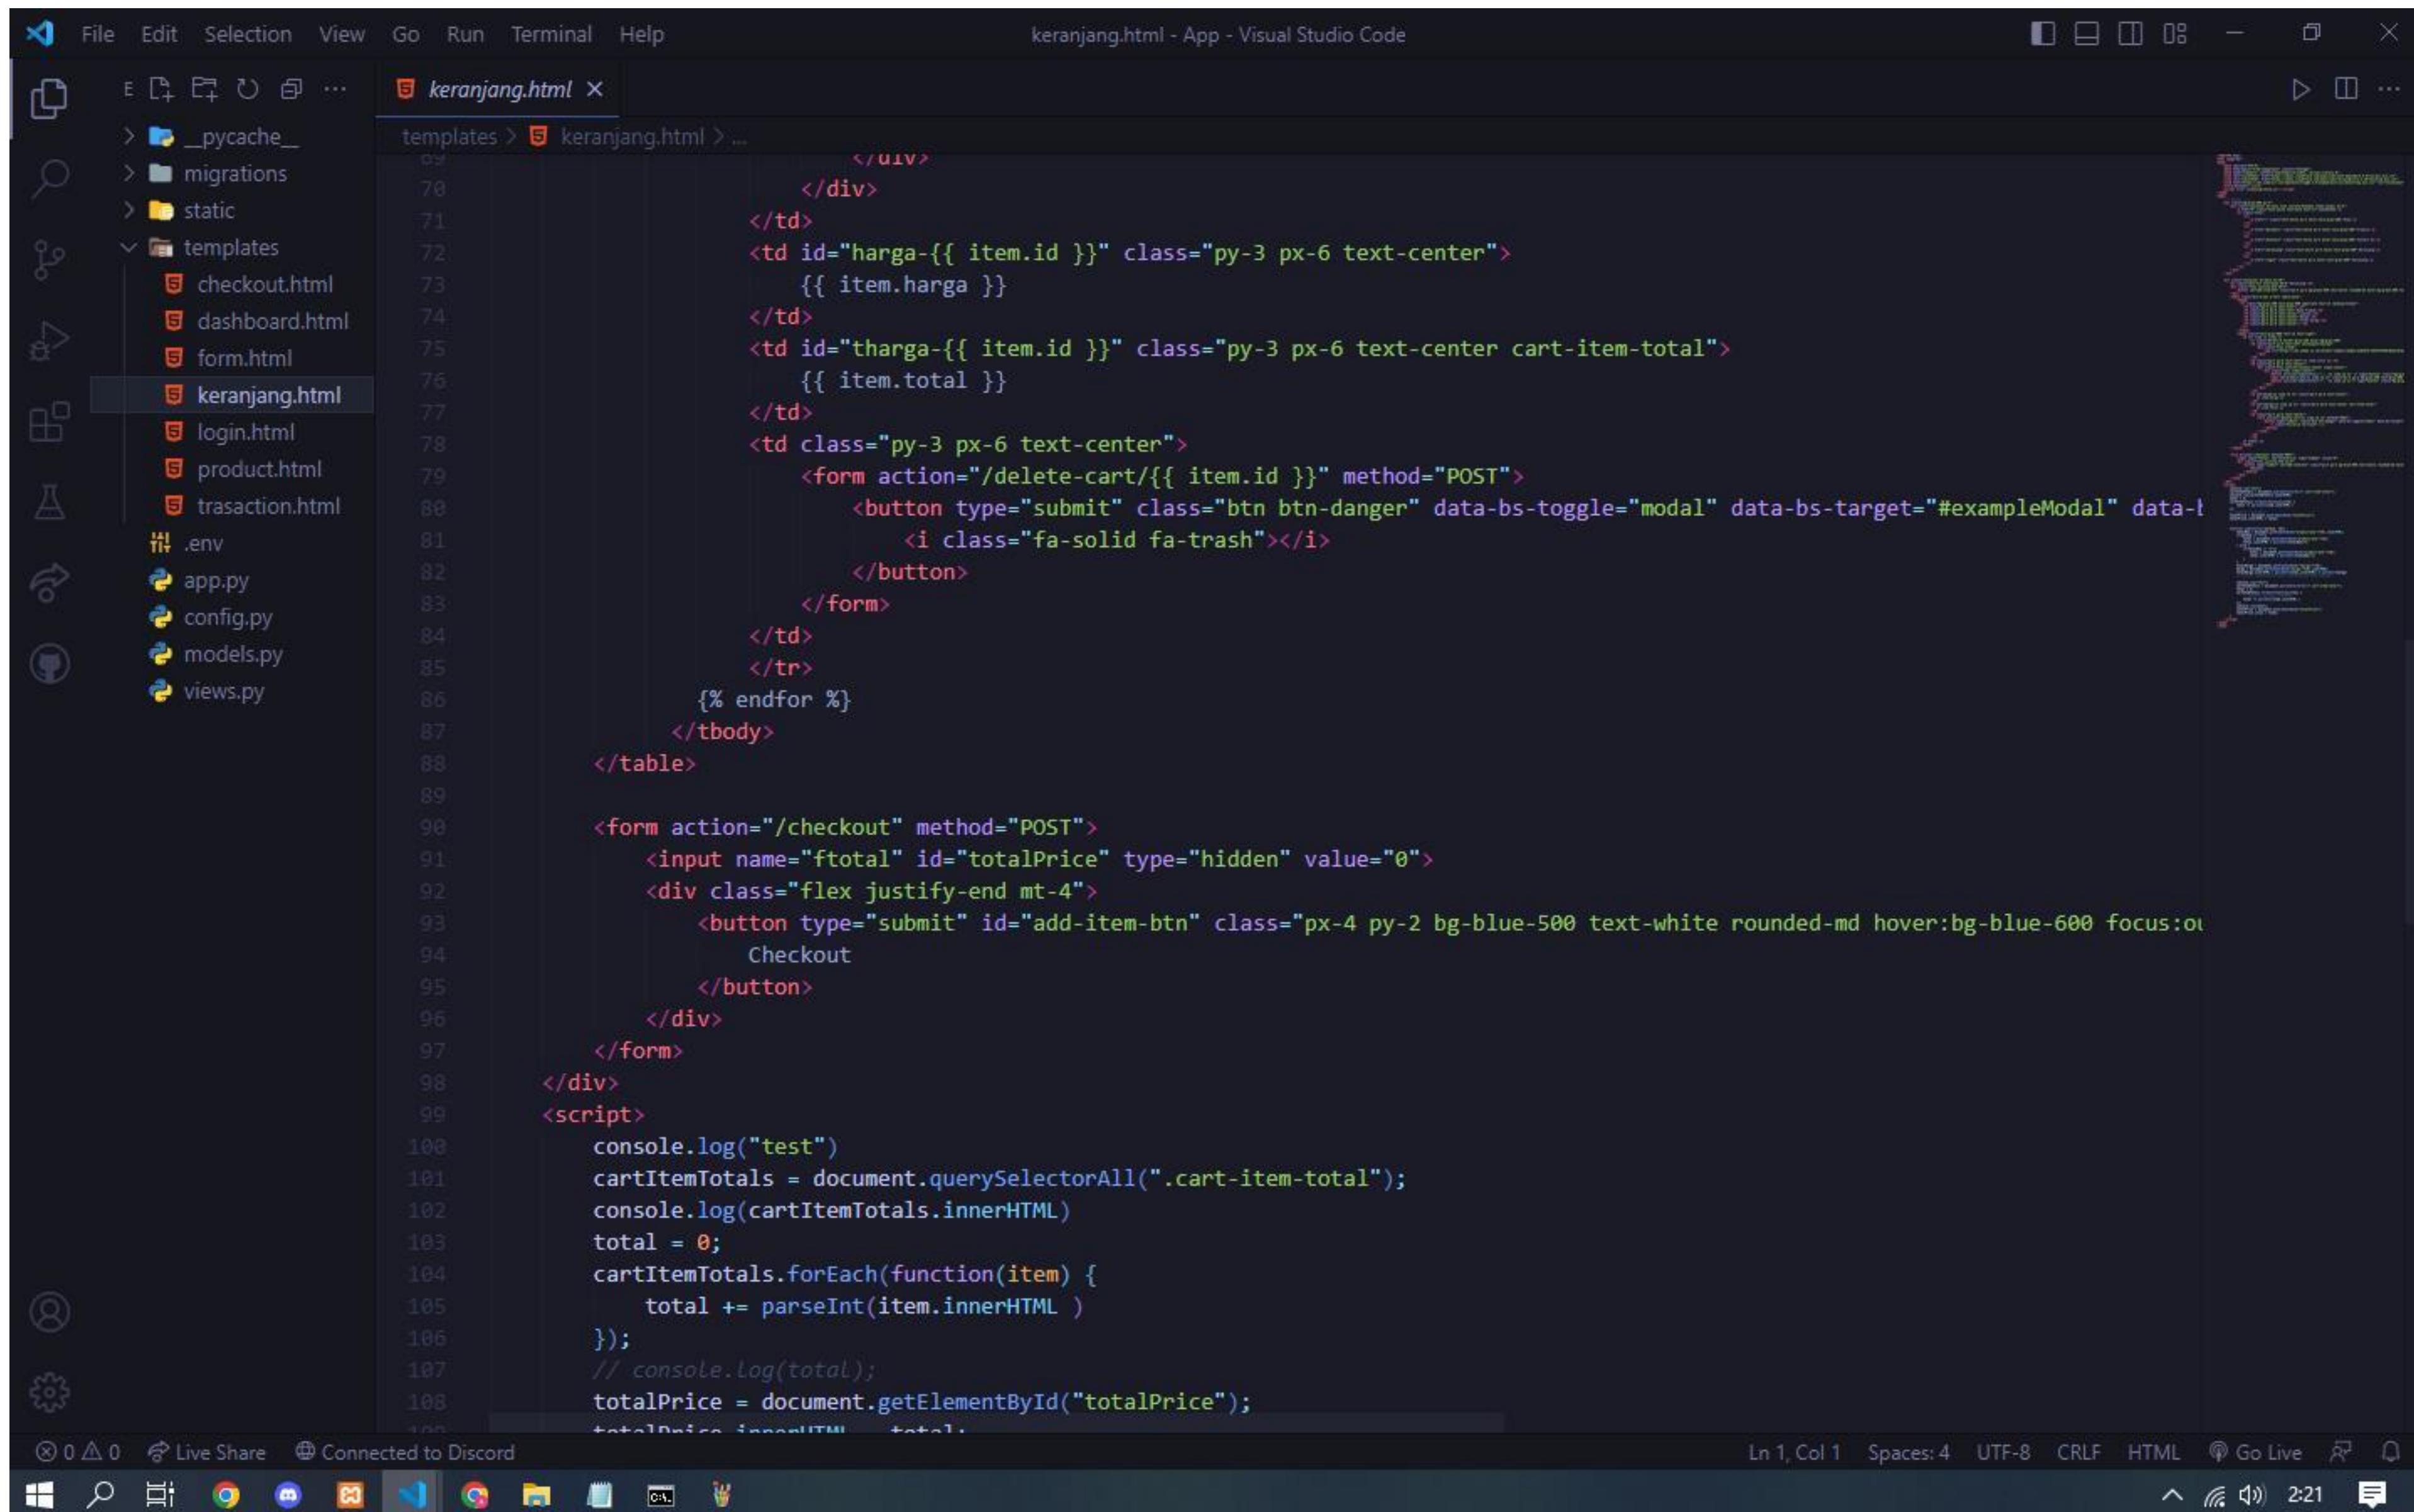



> __pycache__
> migrations
> static
templates > keranjang.html > ...
checkout.html
dashboard.html
form.html
keranjang.html
login.html
product.html
trasaction.html
.env
app.py
config.py
models.py
views.py


keranjang.html ×

```
98     </div>
99     <script>
100       console.log("test")
101       cartItemTotals = document.querySelectorAll(".cart-item-total");
102       console.log(cartItemTotals.innerHTML)
103       total = 0;
104       cartItemTotals.forEach(function(item) {
105         total += parseInt(item.innerHTML)
106       });
107       // console.log(total);
108       totalPrice = document.getElementById("totalPrice");
109       totalPrice.innerHTML = total;

110
111   function updateTotal(method, ID){
112     totalNow = document.getElementById("product-qty-"+ID).innerHTML;
113     if(method == "+"){
114       total = document.getElementById("product-qty-"+ID);
115       total.innerHTML = parseInt(totalNow)+1;
116     } else {
117       if(totalNow != "1"){
118         total = document.getElementById("product-qty-"+ID);
119         total.innerHTML = parseInt(totalNow)-1;
120       }
121     }
122     totalHarga = document.getElementById("tharga-"+ID);
123     harga = document.getElementById("harga-"+ID).innerHTML;
124     totalHarga.innerHTML = parseInt(total.innerHTML) * parseInt(harga)
125     // console.log(parseInt(total.innerHTML),parseInt(harga))

126     console.log("test")
127     cartItemTotals = document.querySelectorAll(".cart-item-total");
128     total = 0;
129     cartItemTotals.forEach(function(item) {
130       // console.log(item.innerHTML)
131       total += parseInt(item.innerHTML)
132     });
133     console.log(total);
134     totalPrice = document.getElementById("totalPrice");
135     totalPrice.value = total;
```




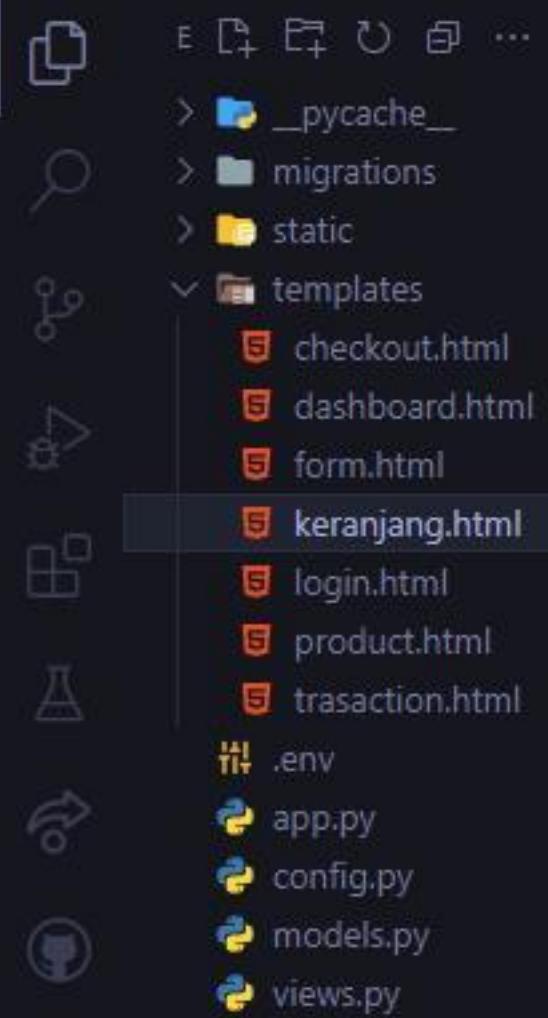

keranjang.html ×

```
templates > keranjang.html > ...
111
112     function updateTotal(method, ID){
113         totalNow = document.getElementById("product-qty-"+ID).innerHTML;
114         if(method == "+"){
115             total = document.getElementById("product-qty-"+ID);
116             total.innerHTML = parseInt(totalNow)+1;
117         } else {
118             if(totalNow != "1"){
119                 total = document.getElementById("product-qty-"+ID);
120                 total.innerHTML = parseInt(totalNow)-1;
121             }
122         }
123         totalHarga = document.getElementById("tharga-"+ID);
124         harga = document.getElementById("harga-"+ID).innerHTML;
125         totalHarga.innerHTML = parseInt(total.innerHTML) * parseInt(harga)
126         // console.log(parseInt(total.innerHTML),parseInt(harga))
127
128         console.log("test")
129         cartItemTotals = document.querySelectorAll(".cart-item-total");
130         total = 0;
131         cartItemTotals.forEach(function(item) {
132             // console.log(item.innerHTML)
133             total += parseInt(item.innerHTML )
134         });
135         console.log(total);
136         totalPrice = document.getElementById("totalPrice");
137         totalPrice.value = total;
138     }
139     </script>
140 </body>
141 </html>
```







checkout.html


templates > checkout.html > ...

```
1  <!DOCTYPE html>
2  <html lang="en">
3    <head>
4      <meta charset="UTF-8" />
5      <meta http-equiv="X-UA-Compatible" content="IE=edge" />
6      <meta name="viewport" content="width=device-width, initial-scale=1.0" />
7      <link
8        rel="stylesheet"
9        href="https://cdnjs.cloudflare.com/ajax/libs/tailwindcss/2.2.19/tailwind.min.css"
10       />
11      <link
12        rel="stylesheet"
13        href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.4.0/css/all.min.css"
14       />
15      <link
16        href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/css/bootstrap.min.css"
17        rel="stylesheet"
18        integrity="sha384-KK94CHFLLe+nY2dmCWGMq91rCGa5gtU4mk92HdvYe+M/SXH301p5ILy+dN9+nJOZ"
19        crossorigin="anonymous"
20       />
21      <title>keranjang</title>
22      <script src="https://cdnjs.cloudflare.com/ajax/libs/twitter-bootstrap/5.0.1/js/bootstrap.min.js"></script>
23    </head>
24
25    <body>
26      <form action="/checkout/success", method="POST">
27
28        <div class="text-left">
29          <div class="row gy-0 pt-5 justify-content-center">
30            <div class="col-6">
31              <div class="relative g-2 pl-4 pt-3 border bg-white">
32                <a href="/keranjang" class="inline-block"
33                  ><i class="fas fa-arrow-left"></i>
34                </a>
35                <p class="inline-block pl-2">Detail Pembayaran</p>
36              </div>
37            </div>
38            <div class="col-3">
39              <div class="p-3 border bg-white">Total</div>
40            </div>
41          </div>
42        </div>
43      </form>
44    </body>
45  </html>
```



Live Share






checkout.html

templates > checkout.html > html > body > form > div.text-left > div.row.gy-0.pt-5.justify-center > div.col-3 > div.p-3.border.bg-white

```
35      <p class="inline-block pl-2">Detail Pembayaran</p>
36      </div>
37    </div>
38    <div class="col-3">
39      <div class="p-3 border bg-white">Total</div>
40    </div>
41    <div class="col-6">
42      <div class="p-3 border bg-white">
43        <div class="mb-3">
44          <label for="exampleInputEmail1" class="form-label">
45            Nama Pelanggan</label>
46          <br>
47          <input
48            name="fname"
49            type="text"
50            class="form-control"
51            id="exampleInputNama"
52            aria-describedby="emailHelp"
53            required
54          />
55        </div>
56        <div class="mb-3">
57          <label for="exampleInputPassword1" class="form-label">
58            Alamat</label>
59          <br>
60          <input
61            name="faddress"
62            type="text"
63            class="form-control"
64            id="exampleInputPassword1"
65            required
66          />
67        </div>
68        <div class="mb-3">
69          <label for="exampleInputPassword1" class="form-label">
70            No Hp</label>
71          <br>
72          <input
73            name="fphone"
74            type="text"
```



checkout.html

> __pycache__

> migrations

> static

> templates

checkout.html

dashboard.html

form.html

keranjang.html

login.html

product.html

trasaction.html

.env

app.py


config.py

models.py

views.py




```
templates> checkout.html > html > body > form > div.text-left > div.row.gy-0.pt-5.justify-center > div.col-6 > div.p-3.border.bg-white > div.mb-3 > input#exampleInputPassword1
          <label for="exampleInputPassword1" class="form-label">
            No Hp</label>
          <
          <input
            name="fphone"
            type="text"
            class="form-control"
            id="exampleInputPassword1"
            required
          />
        </div>
      </div>
    <div class="col-3">
      <div class="p-3 border bg-white">
        <div class="mb-2">
          <div class="flex justify-between">
            <p>Produk</p>
            <p>{{ '{:,}.'.format(total) }}</p>
          </div>
          <div class="flex justify-between">
            <p>Pengiriman</p>
            <p>Gratis</p>
          </div>
        </div>
        <hr class="hr" />
        <div>
          <div class="flex justify-between">
            <p class="mb-0 text-bold">
              Total Bayar <br />
              (Termasuk PPN)
            </p>
            <p>Rp. {{ '{:,}.'.format(total) }}</p>
          </div>
        </div>
        <div class="relative pt-2">
          <input
            name="ftotal"
            type="hidden"
            class="form-control"
          />
        </div>
      </div>
    </div>
```




checkout.html

```
templates> checkout.html > html > body > form > div.text-left > div.row.gy-0.pt-5.justify-center > div.col-3 > div.p-3.border.bg-white > div.relative.pt-2 > input.form-control  
104 <div class="relative pt-2">  
105 <input  
106     name="ftotal" |  
107     type="hidden" |  
108     class="form-control" |  
109     value="{{ total }}" |  
110   />  
111 <!-- POp2 -->  
112 <button type="button" class="btn btn-primary w-full" data-toggle="modal" data-target="#myModal">  
113   Checkout  
114 </button>  
115 <!-- Popup -->  
116 <div class="modal" id="myModal" tabindex="-1" role="dialog" aria-labelledby="exampleModalLabel" aria-hidden="true" data-bs-backdrop="static" data-bs-keyboard="false" style="display: none;>  
117   <div class="modal-dialog" role="document">  
118     <div class="modal-content">  
119       <div class="modal-header">  
120         <h5 class="modal-title">Status</h5>  
121       </div>  
122       <div class="modal-body">  
123         <p>Pembayaran Sukses</p>  
124       </div>  
125       <div class="modal-footer">  
126         <button type="submit" class="btn btn-secondary">Close</button>  
127       </div>  
128     </div>  
129   </div>  
130 </div>  
131 </div>  
132 </div>  
133 </div>  
134 </div>  
135 </div>  
136 </div>  
137 </div>  
138 </div>  
139 </div>  
140 </div>  
141 <script src="https://code.jquery.com/jquery-3.3.1.slim.min.js"></script>  
142 <script src="https://stackpath.bootstrapcdn.com/bootstrap/4.3.1/js/bootstrap.min.js"></script>
```

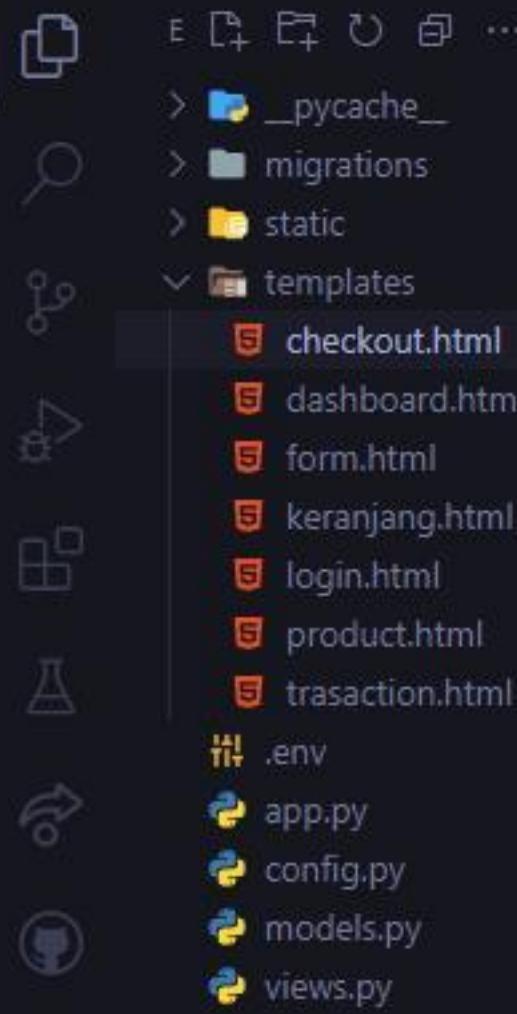


checkout.html

```
templates> checkout.html> html> body> form> div.text-left> div.row.gy-0.pt-5.justify-center> div.col-3> div.p-3.border.bg-white> div.relative.pt-2> input.form-control
119
120    <div class="modal" role="document" >
121        <div class="modal-content">
122            <div class="modal-header">
123                <h5 class="modal-title">Status</h5>
124            </div>
125            <div class="modal-body">
126                <p>Pembayaran Sukses</p>
127            </div>
128            <div class="modal-footer">
129                <button type="submit" class="btn btn-secondary">Close</button>
130            </div>
131        </div>
132    </div>
133    </div>
134
135    </div>
136
137    </div>
138 </div>
139 </div>
140 </div>
141
142    <script src="https://code.jquery.com/jquery-3.3.1.slim.min.js"></script>
143 <script src="https://stackpath.bootstrapcdn.com/bootstrap/4.3.1/js/bootstrap.min.js"></script>
144
145
146    </form>
147 </body>
148 </html>
149
```

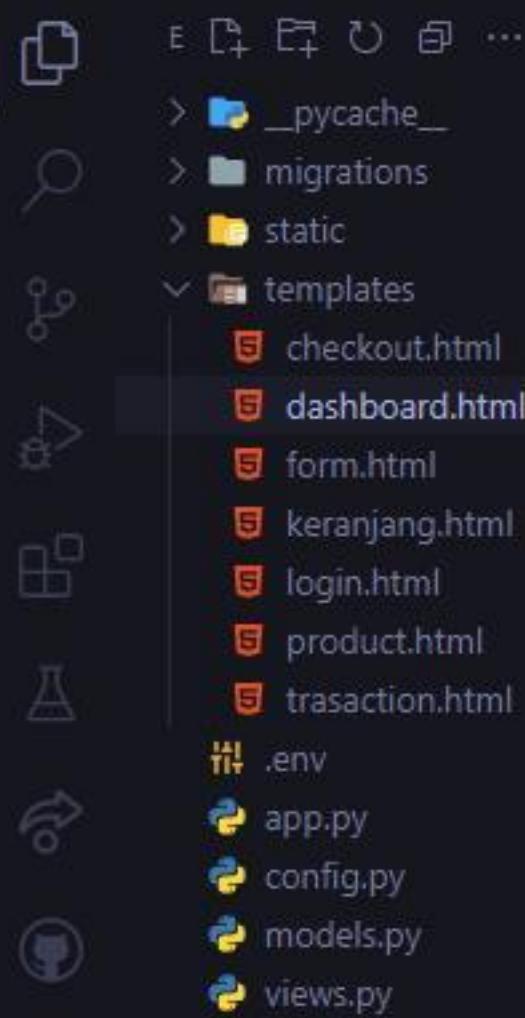

dashboard.html x


```
templates > dashboard.html > html > body > nav.bg-blue-500.py-4 > div.container.mx-auto.flex.justify-between.items-center.px-4 > ul.flex > li > a.text-white.px-4.hover:text-gray-200
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>Dashboard</title>
7      <!-- Mengimpor Tailwind CSS dari CDN -->
8      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/tailwindcss/2.2.19/tailwind.min.css">
9      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.4.0/css/all.min.css">
10     <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-KI
11     <script src="./jsConfig/pop-up.js"></script>
12     <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.11.7/dist/umd/popper.min.js" integrity="sha384-zYPOMqe
13     <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/js/bootstrap.min.js" integrity="sha384-Y4oOpW3duJdCWv5ly8SCFY
14     </head>
15  <body>
16      <!-- Navbar -->
17      <nav class="bg-blue-500 py-4">
18          <div class="container mx-auto flex justify-between items-center px-4">
19              <a href="/" class="text-white font-bold text-xl">JamuDotWeb</a>
20              <ul class="flex">
21                  <li>
22                      <a href="/dashboard" class="text-white px-4 hover:text-gray-200">Dashboard</a>
23                  </li>
24                  <li>
25                      <a href="/transaction" class="text-white px-4 hover:text-gray-200">Transaction</a>
26                  </li>
27                  <li>
28                      <a href="/logout" class="text-white px-4 hover:text-gray-200">LogOut</a>
29                  </li>
30                  <li>
31                      <a href="" class="text-white px-4 hover:text-gray-200"></a>
32                  </li>
33              </ul>
34          </div>
35      </nav>
36
37      <!-- Layout grid -->
38      <div class="flex justify-between w-full gap-4 p-4">
39          <!-- Isian profil -->
40          <div class="inset-y-0 right-10 right bg-gray-100 p-4">
```



E D + C ⌂ ⌂ ...


dashboard.html X

```
templates: > dashboard.html > html > body > nav.bg-blue-500.py-4 > div.container.mx-auto.flex.justify-between.items-center.px-4 > ul.flex
35   </nav>
36
37   <!-- Layout grid -->
38   <div class="flex justify-between w-full gap-4 p-4">
39     <!-- Isian profil -->
40     <div class="inset-y-0 right-10 right bg-gray-100 p-4">
41       <h2 class="text-lg font-bold mb-4">Info</h2>
42       <p class="mb-2"><strong>Welcomeback </strong>Admin</p>
43       <br><br>
44       <p><b>HPP Sekarang: </b>{{ hpp }}</p>
45       <button class="bg-blue-500 text-white mx-0 px-20 py-1 px-20 px-20 w-full rounded-full my-1" style="float: left; margin-right: 10px;">Logout>
```

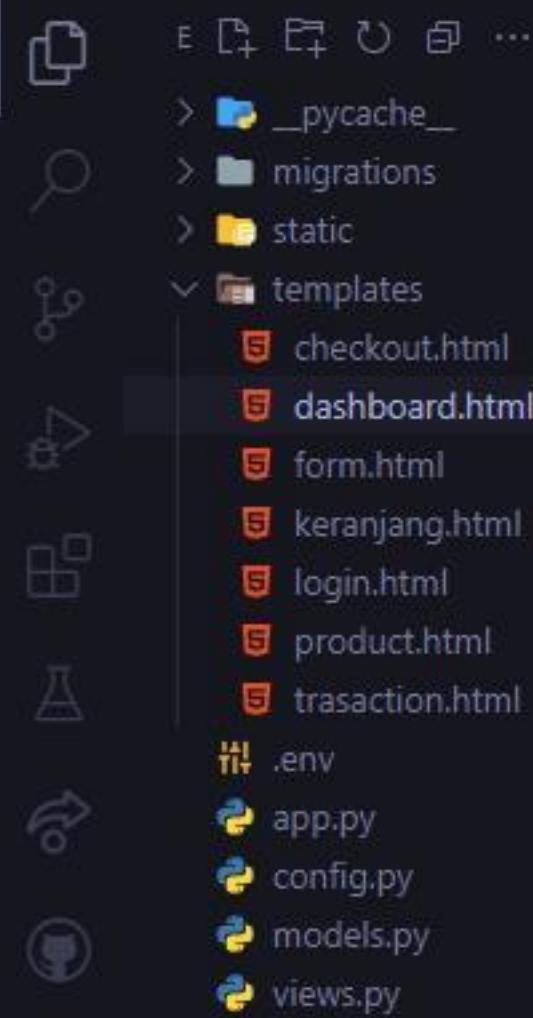
A vertical sidebar containing various icons for file operations like Open, Save, Find, and Settings.

dashboard.html X

```
templates: > dashboard.html > html > body > div.flex.justify-between.w-full.gap-4.p-4 > div.bg-white.shadow-md.w-full.rounded.my-0 > table.min-w-max.w-full.table-auto > tbody.text-gray-900 > tr > td > div > label for="message-text" class="col-form-label">Description</label>
104 <div class="mb-3 form-outline">
105   <label class="form-label" for="form2">Harga Modal</label>
106   <input name="fmodal" value="{{ product.price1 }}" id="postfix" type="number" id="form2" class="form-control" />
107 </div>
108 <div class="mb-3 form-outline">
109   <label class="form-label" for="form2">Harga Jual</label>
110   <input name="fjual" value="{{ product.price2 }}" id="postfix" type="number" id="form2" class="form-control" />
111 </div>
112 <div class="mb-3 form-outline">
113   <label class="form-label" for="typeNumber">Stock</label>
114   <input name="fstock" value="{{ product.stock }}" type="number" id="typeNumber" class="form-control" />
115 </div>
116 <div class="modal-footer">
117   <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Batal</button>
118   <button type="submit" class="btn btn-primary">Simpan</button>
119 </div>
120 </div>
121 </div>
122 <% endfor %>
123 </tbody>
124 </table>
125 <!-- <button type="button" class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#pop-add-product" data-bs-whatever="Add Product" -->
126 </button> -->
127
128 <div class="modal fade" id="pop-add-product" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
129   <div class="modal-dialog">
130     <div class="modal-content">
131       <div class="modal-header">
132         <h1 class="modal-title fs-5" id="exampleModalLabel">Tambah Product</h1>
133         <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
134       </div>
135       <form action="/dashboard/add-product" method="POST" enctype="multipart/form-data">
136         <div class="modal-body">
```



dashboard.html X

```
templates: > dashboard.html > html > body > div.flex.justify-between.w-full.gap-4.p-4 > div.bg-white.shadow-md.w-full.rounded.my-0 > table.min-w-max.w-full.table-auto > tbody.text-gray-900 > tr > td > form > button > /button> -->  
133  
134  
135 <div class="modal fade" id="pop-add-product" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">  
136   <div class="modal-dialog">  
137     <div class="modal-content">  
138       <div class="modal-header">  
139         <h1 class="modal-title fs-5" id="exampleModalLabel">Tambah Product</h1>  
140         <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>  
141       </div>  
142       <form action="/dashboard/add-product" method="POST" enctype="multipart/form-data">  
143         <div class="modal-body">  
144           <div class="mb-3">  
145             <label for="recipient-name" class="col-form-label">Image</label>  
146             <input name="fimg" class="form-control" type="file" id="formFile">  
147           </div>  
148           <div class="mb-3">  
149             <label for="message-text" class="col-form-label">Title</label>  
150             <input name="ftitle" type="text" class="form-control" id="recipient-name">  
151           </div>  
152           <div class="mb-3">  
153             <label for="message-text" class="col-form-label">Description</label>  
154             <textarea name="fdesc" class="form-control" id="message-text"></textarea>  
155           </div>  
156           <div class="mb-3 form-outline">  
157             <label class="form-label" for="form2">Harga Modal</label>  
158             <input name="fmodal" value="{{_hpp}}" id="postfix" type="number" id="form2" class="form-control" />  
159           </div>  
160           <div class="mb-3 form-outline">  
161             <label class="form-label" for="form2">Harga Jual</label>  
162             <input name="fjual" id="postfix" type="number" id="form2" class="form-control" />  
163           </div>  
164           <div class="mb-3 form-outline">  
165             <label class="form-label" for="typeNumber">Stock</label>  
166             <input name="fstock" value="50" type="number" id="typeNumber" class="form-control" />  
167           </div>  
168           </div>  
169           </div>  
170         </div>  
171         <div class="modal-footer">  
172           <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Batal</button>
```

```
dashboard.html >

templates > dashboard.html > html > body > div.flex-justify-between.w-full.gap-4.p-4 > div.bg-white.shadow-md.w-full.rounded.my-0 > table.min-w-n

167         <label class="form-label" for="typeNumber">Stock</label>
168         <input name="fstock" value="50" type="number" id="typeNumber" class="form-control" />
169     </div>
170 </div>
171 <div class="modal-footer">
172     <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Batal</button>
173     <button type="submit" class="btn btn-primary">Simpan</button>
174 </div>
175 </form>
176 </div>
177 </div>
178 </div>
179
180 <!--Modal2-->
181 <div class="modal fade" id="exampleModal2" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
182     <div class="modal-dialog">
183         <div class="modal-content">
184             <div class="modal-header">
185                 <h1 class="modal-title fs-5" id="exampleModalLabel">Tambah HPP</h1>
186                 <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
187             </div>
188             <div class="modal-body">
189                 <form action="dashboard/add-hpp" method="POST">
190                     <div class="mb-3">
191                         <label for="recipient-name" class="col-form-label">Biaya Produksi</label>
192                         <input name="bp" type="number" class="form-control" id="inputProduksi">
193                     </div>
194                     <div class="mb-3">
195                         <label for="message-text" class="col-form-label">Biaya Operasional</label>
196                         <input name="bo" type="number" class="form-control" id="inputOperasional">
197                     </div>
198                     <div class="mb-3">
199                         <label for="message-text" class="col-form-label">Biaya Pengemasan</label>
200                         <input name="bpeng" type="number" class="form-control" id="inputPengemasan">
201                     </div>
202                     <div class="mb-3 form-outline">
203                         <label class="form-label" for="typeNumber">Jumlah</label>
204                         <input name="jmlh" type="number" id="typeNumber" class="form-control" />
205                     </div>
206                 </div>
```


E ...

dashboard.html X

```
    > .pycache_
    > migrations
    > static
    < templates
        checkout.html
        dashboard.html
        form.html
        keranjang.html
        login.html
        product.html
        trasaction.html
    .env
    app.py
    config.py
    models.py
    views.py
```

```
    <div>
        <div>
            <div>
                <input name="jmlh" type="number" id="typeNumber" class="form-control" />
            </div>
        </div>
        <div class="modal-footer">
            <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Batal</button>
            <button type="submit" class="btn btn-primary" id="popup1">Simpan</button>
        </div>
    </div>
    <div>
        <div class="relative float-right">
            <div class="pr-20 justify-center">
                <button type="button" class="border rounded-full bg-blue-500 text-zinc-50" data-bs-toggle="modal" data-bs-target="#exampleModal2">
                    Tambah Pesanan
                </button>
            </div>
        </div>
        <input type="hidden" value="{{ hpp }}"/>
    </div>
</body>
</html>
```







E D+ E+ ⌂ ⌂ ...

trasaction.html ×

templates > trasaction.html > ...

```
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta http-equiv="X-UA-Compatible" content="IE=edge">
6      <meta name="viewport" content="width=device-width, initial-scale=1.0">
7      <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0-alpha3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-KI"
8      <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/tailwindcss/2.2.19/tailwind.min.css">
9      <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.11.7/dist/umd/popper.min.js" integrity="sha384-zYPOMqe1DAVkJiLqWBUTct
10
11     <title>Document</title>
12 </head>
13 <body>
14
15     <nav class="bg-blue-500 py-4">
16         <div class="container mx-auto flex justify-between items-center px-4">
17             <a href="#" class="text-white font-bold text-xl">JamuDotWeb</a>
18             <ul class="flex">
19                 <li>
20                     <a href="/dashboard" class="text-white px-4 hover:text-gray-200">Dashboard</a>
21                 </li>
22                 <li>
23                     <a href="/transaction" class="text-white px-4 hover:text-gray-200">Transaction</a>
24                 </li>
25                 <li>
26                     <a href="/logout" class="text-white px-4 hover:text-gray-200">LogOut</a>
27                 </li>
28                 <li>
29                     <a href="" class="text-white px-4 hover:text-gray-200"></a>
30                 </li>
31             </ul>
32         </div>
33     </nav>
34
35     <div class="col-span-4 bg-gray-100 p-4 justify-center">
36         <h2 class="text-lg font-bold mb-4 text-center">Data Pembayaran</h2>
37         <div class="flex overflow-auto">
38             <table class="table-auto mx-auto w-full sm:w-3/4 md:w-4/5 lg:w-3/4 xl:w-4/5">
39                 <thead>
40                     <tr>
```





E D+ E+ ⌂ ⌂ ...

trasaction.html ×

> __pycache__

> migrations

> static

> templates

checkout.html

dashboard.html

form.html

keranjang.html

login.html

product.html

trasaction.html

.env

app.py


config.py

models.py

views.py




```
templates> ⌂ trasaction.html > ...
35     <div class="col-span-4 bg-gray-100 p-4 justify-center">
36         <h2 class="text-lg font-bold mb-4 text-center">Data Pembayaran</h2>
37         <div class="flex overflow-auto">
38             <table class="table-auto mx-auto w-full sm:w-3/4 md:w-4/5 lg:w-3/4 xl:w-4/5">
39                 <thead>
40                     <tr>
41                         <th class="px-4 py-2">#</th>
42                         <th class="px-4 py-2">Tanggal</th>
43                         <th class="px-4 py-2">Nama</th>
44                         <th class="px-4 py-2">Alamat</th>
45                         <th class="px-4 py-2">Nomor HP</th>
46                         <th class="px-4 py-2">Total</th>
47                         <th class="px-4 py-2">Details</th>
48                     </tr>
49                 </thead>
50                 <tbody>
51                     {% for transaction in transactions %}
52                     <tr>
53                         <td class="border px-4 py-2">{{ transaction.id }}</td>
54                         <td class="border px-4 py-2">{{ transaction.createdAt }}</td>
55                         <td class="border px-4 py-2">{{ transaction.name }}</td>
56                         <td class="border px-4 py-2">{{ transaction.address }}</td>
57                         <td class="border px-4 py-2">{{ transaction.phone }}</td>
58                         <td class="border px-4 py-2">Rp. {{ "{:,}".format(transaction.total) }}</td>
59                         <td class="border px-4 py-2">
60                             <button type="button" class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#pop-show-order-{{ transaction.id }}"
61                                 <i class="fa-regular fa-pen-to-square"></i>
62                             </button>
63                         </td>
64                     </tr>
65                     {% endfor %}
66
67                     <tr>
68                         <td class="border px-4 py-2">1</td>
69                         <td class="border px-4 py-2">1 Mei 2023</td>
70                         <td class="border px-4 py-2">Kulo Sinten</td>
71                         <td class="border px-4 py-2">Jl. Jalan Raya no.0</td>
72                         <td class="border px-4 py-2">0821214162343</td>
73                         <td class="border px-4 py-2">Rp 100.000</td>
74                         <td class="border px-4 py-2"><button>show</button></td>
```

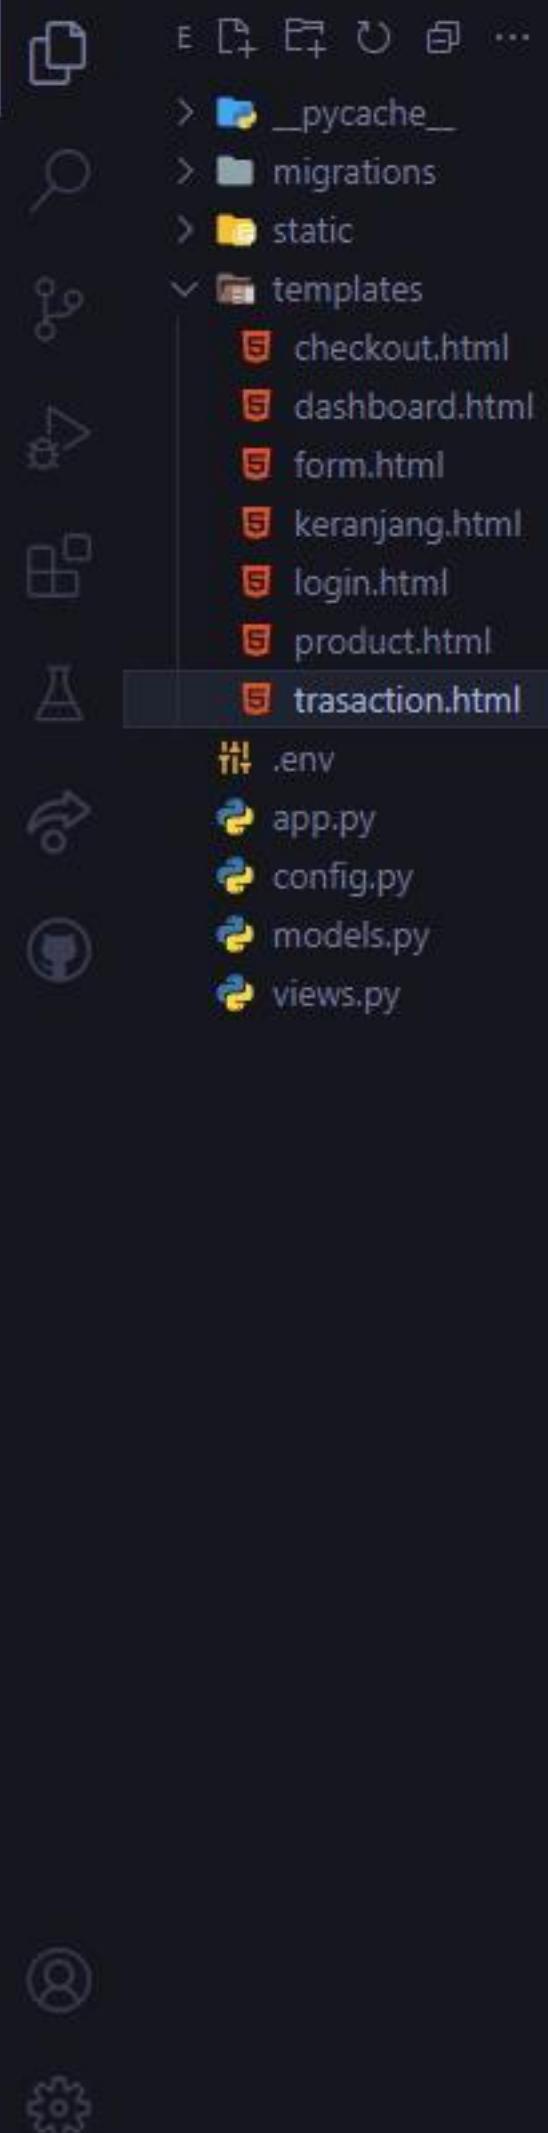

trasaction.html ×

templates > trasaction.html > ...

```
67             <tr>
68                 <td class="border px-4 py-2">1</td>
69                 <td class="border px-4 py-2">1 Mei 2023</td>
70                 <td class="border px-4 py-2">Kulo Sinten</td>
71                 <td class="border px-4 py-2">Jl. Jalan Raya no.0</td>
72                 <td class="border px-4 py-2">0821214162343</td>
73                 <td class="border px-4 py-2">Rp 100.000</td>
74                 <td class="border px-4 py-2"><button>show</button></td>
75             </tr>
76             <tr>
77                 <td class="border px-4 py-2">1</td>
78                 <td class="border px-4 py-2">1 Mei 2023</td>
79                 <td class="border px-4 py-2">Kulo Sinten</td>
80                 <td class="border px-4 py-2">Jl. Jalan Raya no.0</td>
81                 <td class="border px-4 py-2">0821214162343</td>
82                 <td class="border px-4 py-2">Rp 100.000</td>
83                 <td class="border px-4 py-2"><button>show</button></td>
84             </tr>
85         </tbody>
86     </table>
87
88     {% for transaction in transactions %}
89         <div class="modal fade" id="pop-show-order-{{ transaction.id }}" tabindex="-1" aria-labelledby="exampleModalLabel" aria-
90             <div class="modal-dialog modal-lg">
91                 <div class="modal-content">
92                     <div class="modal-header">
93                         <h1 class="modal-title fs-5" id="exampleModalLabel">Detail Order Masuk</h1>
94                         <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
95                     </div>
96                     <form action="/dashboard/add-product" method="POST" enctype="multipart/form-data" >
97                         <div class="modal-body">
98                             <table class="table-auto ">
99                                 <thead>
100                                     <tr>
101                                         <th class="px-4 py-2">Nama Produk</th>
102                                         <th class="px-4 py-2">Harga Modal</th>
103                                         <th class="px-4 py-2">Harga Jual</th>
104                                         <th class="px-4 py-2">Jumlah</th>
105                                         <th class="px-4 py-2">Total Harga</th>
106                                         <th class="px-4 py-2">Untung</th>
```




trasaction.html ×


templates > trasaction.html > ...

```
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
```

Nama Produk	Harga Modal	Harga Jual	Jumlah	Total Harga	Untung
transaction_item.title	Rp. {{ transaction_item.price1 }}	Rp. {{ transaction_item.price2 }}	transaction_item.jumlah	Rp. {{ transaction_item.total }}	Rp. {{ transaction_item.keuntungan }}

Close



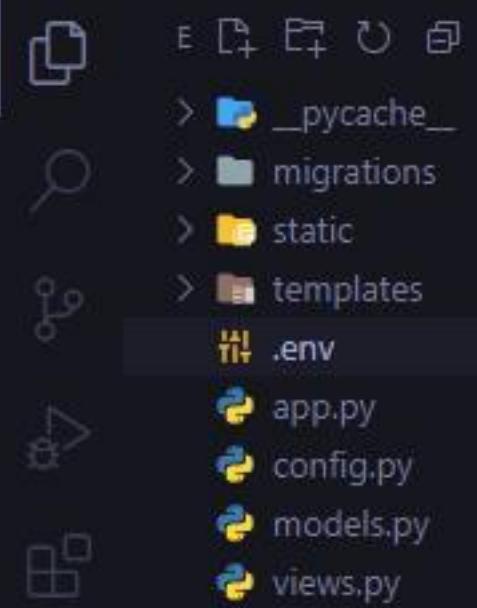


.env


.env

```
1 MYSQL_HOST = localhost
2 MYSQL_PORT = 3306
3 MYSQL_USER = root
4 MYSQL_PASSWORD =
5 MYSQL_DBNAME = toko
6
7
8 SECRET_KEY = '_5#y2L\"F4Q8z\\n\\xec]/'
```



▶ ⌂ ⌂ ⌂

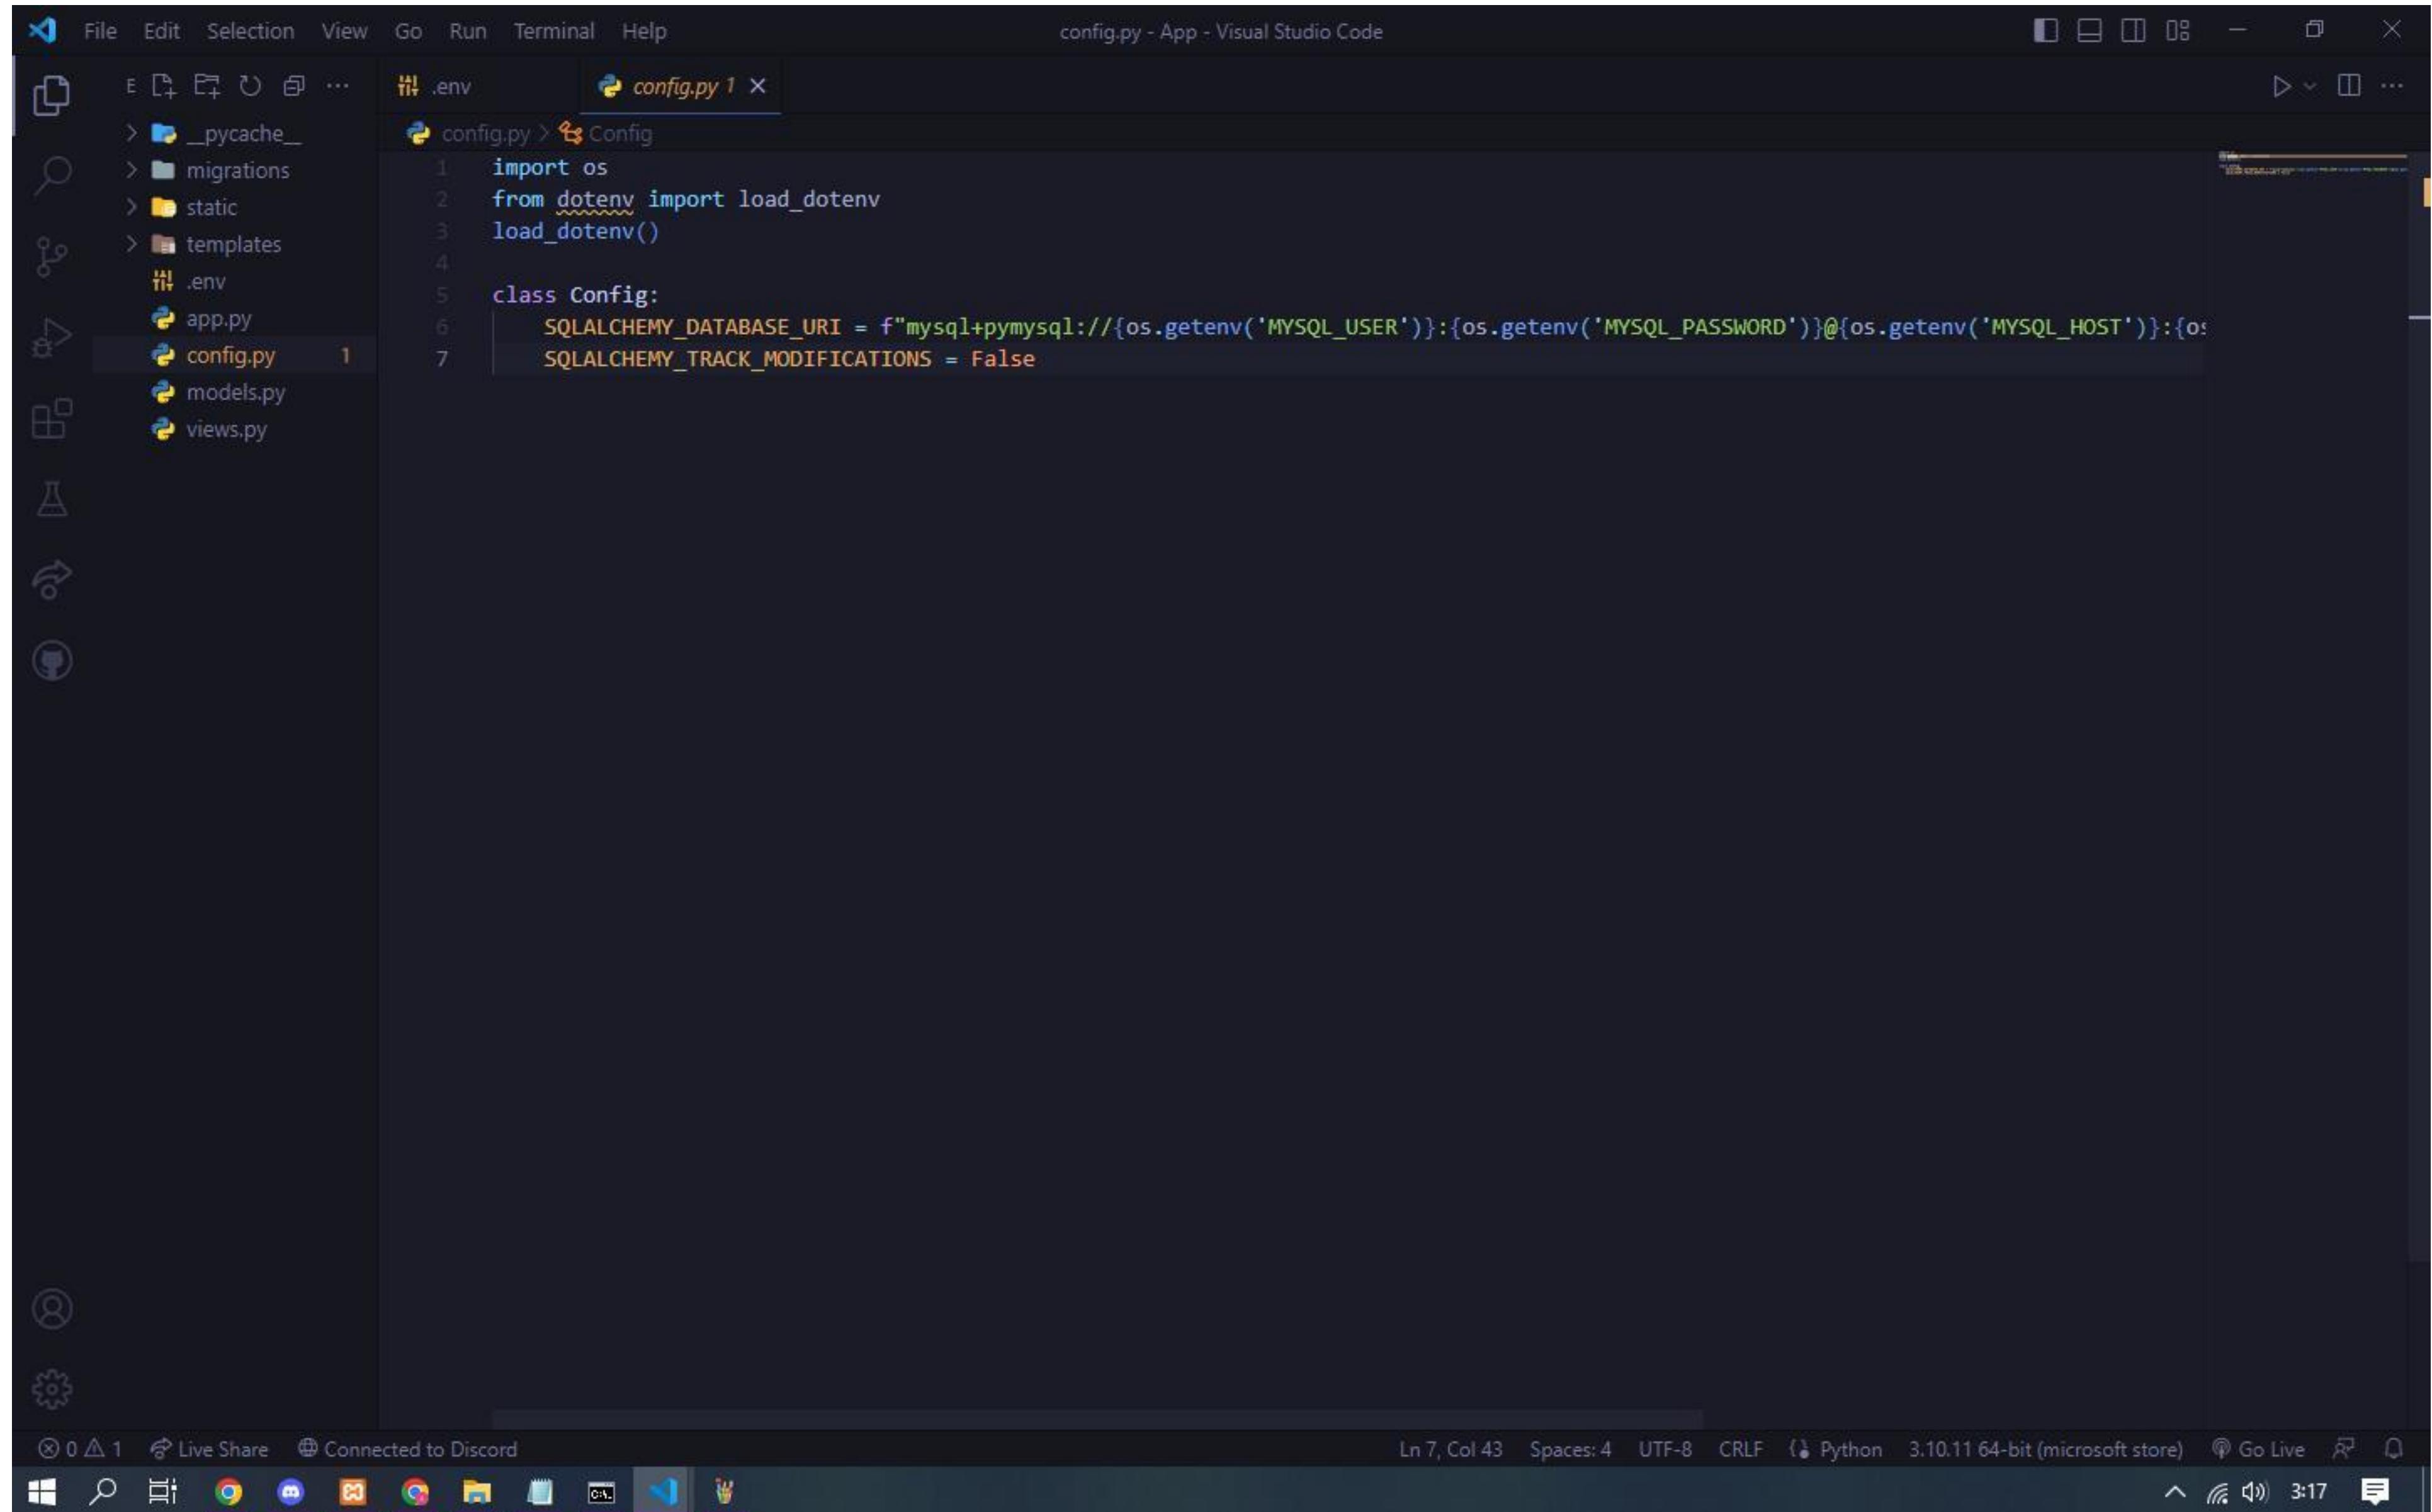



.env

models.py 3




> __pycache__



> migrations



> static



> templates



.env



app.py



config.py




models.py 3



views.py



```
1  from sqlalchemy import Boolean, Column, ForeignKey, Integer, String
2  from sqlalchemy.orm import relationship
3  from flask_sqlalchemy import SQLAlchemy
4  import time
5  from app import db
6
7  class Product(db.Model):
8      id = db.Column(db.Integer, primary_key=True, index=True)
9      title = db.Column(db.String(100))
10     image = db.Column(db.String(200))
11     price1 = db.Column(db.Integer)
12     price2 = db.Column(db.Integer)
13     desc = db.Column(db.String(100))
14     stock = db.Column(db.Integer)
15     createdAt = db.Column(db.Integer, default=time.time()) # unix time format
16     updatedAt = db.Column(db.Integer, default=time.time()) # unix time format
17
18
19 class Order(db.Model):
20     id = db.Column(db.Integer, primary_key=True, index=True)
21     name = db.Column(db.String(100))
22     address = db.Column(db.String(200))
23     phone = db.Column(db.Integer)
24     total = db.Column(db.Integer)
25     createdAt = db.Column(db.Integer, default=time.time()) # unix time format
26     order_items = db.relationship('OrderItem', backref='order')
27
28
29 class OrderItem(db.Model):
30     id = db.Column(db.Integer, primary_key=True, index=True)
31     product_id = db.Column(db.Integer)
32     title = db.Column(db.String(100))
33     price1 = db.Column(db.Integer)
34     price2 = db.Column(db.Integer)
35     jumlah = db.Column(db.Integer)
36     total = db.Column(db.Integer, default=price2*jumlah)
37     keuntungan = db.Column(db.Integer, default=price2*jumlah-price1*jumlah)
38     order_id = db.Column(db.Integer, db.ForeignKey('order.id'), nullable=False)
```



.env

app.py > ...

pycache

migrations

static

templates

.env

app.py

config.py

models.py


views.py



models.py 3

app.py 4 ×

```
1 from flask import Flask
2 from config import Config
3 from flask_sqlalchemy import SQLAlchemy
4 from dotenv import load_dotenv
5 import os
6
7 app = Flask(__name__)
8 app.config.from_object(Config)
9 from flask_migrate import Migrate
10 from config import Config
11
12 db = SQLAlchemy(app)
13 migrate = Migrate(app, db)
14
15 app.secret_key = os.getenv('SECRET_KEY')
16 app.config['UPLOAD_FOLDER'] = 'image'
17
18 from views import *
```

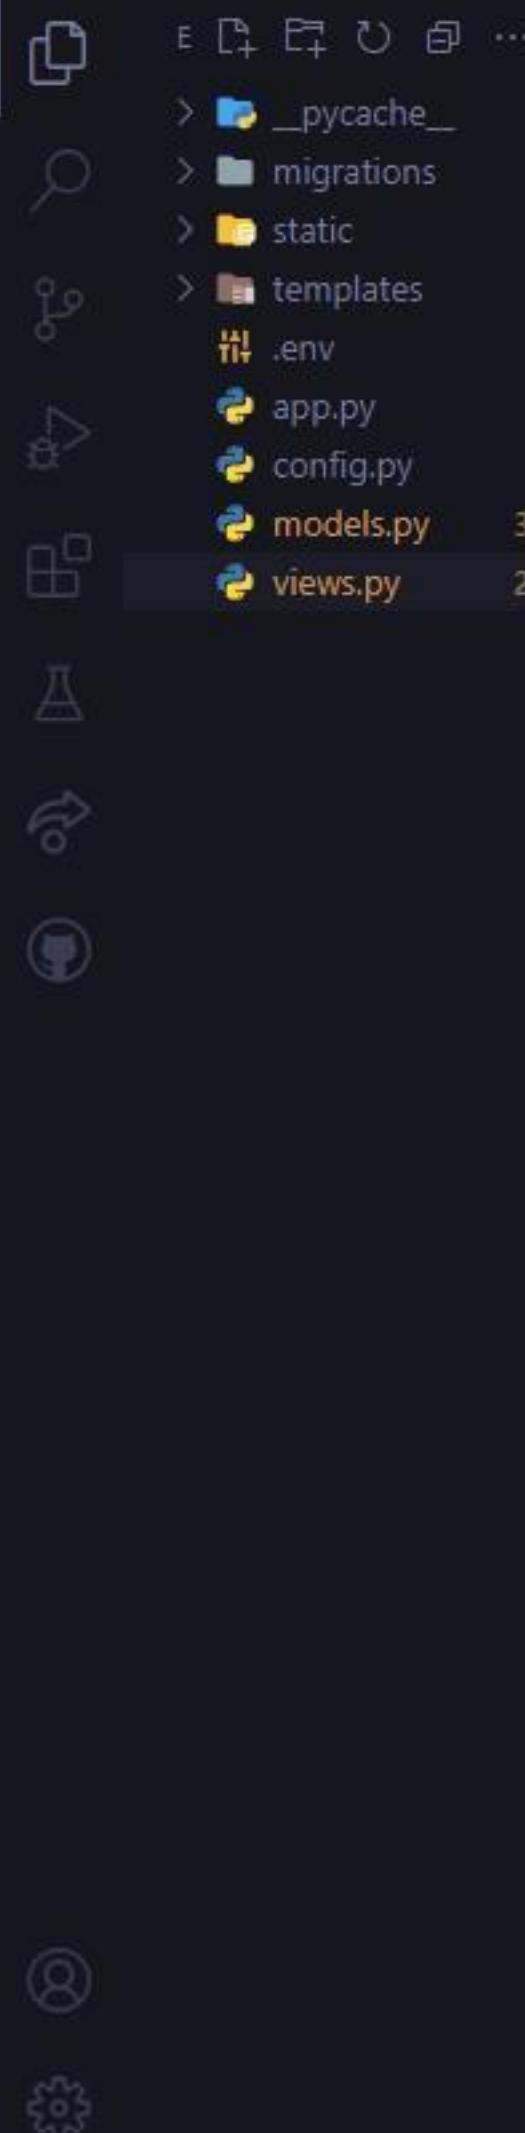

.env models.py 3 views.py 2

```
1 from app import app, db
2 from models import product as ProductModels, Order as OrderModels, OrderItem as OrderItemModels
3 from flask import render_template, request, session, redirect, abort, url_for, render_template
4 import time, os, random
5 from pytz import timezone
6 from datetime import datetime
7 from werkzeug.utils import secure_filename


8
9 @app.before_request
10 def before_request():
11     session.setdefault('user', None)
12     session.setdefault('hpp', 0)

13
14
15 # Product routes -----
16
17 @app.route("/")
18 def show_all_product():
19     db_items = db.session.query(ProductModels).all()
20     return render_template('product.html', products=db_items)

21
22 @app.route("/product/<int:post_id>")
23 def show_product_by_id(post_id):
24     return f'Post {post_id}'

25
26
27 # Admin Routes -----
28
29 @app.route("/login", methods=['GET', 'POST'])
30 def admin_login_form():
31     if request.method == 'POST':
32         email = request.form['email']
33         pwd = request.form['pwd']
34         if email == 'admin' and pwd == 'admin':
35             session['user'] = 'admin'
36             print("login sucess")
37             return redirect(url_for('admin_dashboard'))
38     return render_template('login.html')

39
40
```



.env

views.py > ...

pycache

migrations

static

templates

.env

app.py

config.py


models.py 3

views.py 2

models.py 3

views.py 2 ×

```
35         session['user'] = 'admin'
36         print("login sucess")
37         return redirect(url_for('admin_dashboard'))
38     return render_template('login.html')
39
40
41 @app.route("/logout")
42 def admin_logout():
43     session.pop('user', None)
44     return redirect(url_for('show_all_product'))
45
46
47 @app.route("/dashboard")
48 def admin_dashboard():
49     if session['user'] != 'admin':
50         return redirect(url_for('admin_login_form'))
51
52     db_items = db.session.query(ProductModels).all()
53
54     return render_template('dashboard.html', products=db_items, hpp=session['hpp'])
55
56 @app.route("/dashboard/add-hpp", methods=['POST'])
57 def admin_dashboard_add_hpp():
58     if session['user'] != 'admin':
59         return redirect(url_for('admin_login_form'))
60
61     biayaBahanPokok = request.form['bp'] # Biaya Bahan pokok
62     biayaOperasional = request.form['bo'] # Biaya Operasional
63     biayaPengemasan = request.form['bpeng'] # Biaya Pengemasan
64     jumlahProduct = request.form['jmlh']
65     totalBiaya = int(int(biayaBahanPokok) + int(biayaOperasional) + int(biayaPengemasan)) / int(jumlahProduct)
66     print(totalBiaya)
67     session['hpp'] = totalBiaya
68
69     return redirect(url_for('admin_dashboard'))
70
71 @app.route("/dashboard/add-product", methods=["POST"])
72 def admin_dashboard_add_product():
73     if session['user'] != 'admin':
74         return redirect(url_for('admin_login_form'))
```



.env

models.py 3

views.py 2



views.py > admin_dashboard_add_hpp



```
71 @app.route("/dashboard/add-product", methods=["POST"])
72 def admin_dashboard_add_product():
73     if session['user'] != 'admin':
74         return redirect(url_for('admin_login_form'))
75
76     f = request.files['fimg']
77     filename = secure_filename(f.filename)
78     f.save(os.path.join('static', 'upload', 'images', filename))
```



```
80
81
82     title = request.form['ftitle']
83     hModal = request.form['fmodal']
84     hJual = request.form['fjual']
85     desc = request.form['fdesc']
86     stock = request.form['fstock']
```



```
87     db_item = ProductModels(
88         title=title,
89         image=filename,
90         price1=hModal,
91         price2=hJual,
92         desc=desc,
93         stock=stock,
94     )
95     db.session.add(db_item)
96     db.session.commit()
97     db.session.refresh(db_item)
```




```
98     return redirect(url_for('admin_dashboard'))
99
100
101
102 @app.route("/dashboard/edit-product<int:product_id>", methods=["POST"])
103 def admin_dashboard_edit_product(product_id):
```



```
104     if session['user'] != 'admin':
105         return redirect(url_for('admin_login_form'))
```



```
106
107     db_item = db.session.query(ProductModels).filter(ProductModels.id == product_id).first()
108     if db_item is None:
109         raise "<p>Error Product Not Found</p>"
```




.env

models.py 3

views.py 2



```
views.py > admin_dashboard_add_hpp
102 @app.route("/dashboard/edit-product/<int:product_id>", methods=["POST"])
103 def admin_dashboard_edit_product(product_id):
104     if session['user'] != 'admin':
105         return redirect(url_for('admin_login_form'))
106
107     db_item = db.session.query(ProductModels).filter(ProductModels.id == product_id).first()
108     if db_item is None:
109         raise "<p>Error Product Not Found</p>"
110
111     f = request.files['fimg']
112     filename = secure_filename(f.filename)
113     print(filename)
114     if filename != "":
115         f.save(os.path.join('static', 'upload', 'images', filename))
116         db_item.image = filename
117
118     db_item.title = request.form['ftitle']
119     db_item.price1 = request.form['fmodal']
120     db_item.price2 = request.form['fjual']
121     db_item.desc = request.form['fdesc']
122     db_item.stock = request.form['fstock']
123     db_item.updateAt = time.time()
124     db.session.commit()
125     db.session.refresh(db_item)
126     return redirect(url_for('admin_dashboard'))
127
128
129 @app.route("/dashboard/delete-product/<int:product_id>", methods=["POST"])
130 def admin_dashboard_delete_product(product_id):
131     db_item = db.session.query(ProductModels).filter(ProductModels.id == product_id).first()
132     if db_item is None:
133         return f"<p>Item not found with id {product_id}</p>"
134     db.session.delete(db_item)
135     db.session.commit()
136     return redirect(url_for('admin_dashboard'))
137
138
139
140 # CART ROUTES =====
141
```



.env

models.py 3

views.py 2



views.py > admin_dashboard_add_hpp

```
128
129     @app.route("/dashboard/delete-product/<int:product_id>", methods=["POST"])
130     def admin_dashboard_delete_product(product_id):
131         db_item = db.session.query(ProductModels).filter(ProductModels.id == product_id).first()
132         if db_item is None:
133             return f"<p>Item not found with id {product_id}</p>"
134         db.session.delete(db_item)
135         db.session.commit()
136         return redirect(url_for('admin_dashboard'))
137
138
139
140 # CART ROUTES =====
141
142 @app.route("/keranjang")
143 def cart():
144
145     items = session.get('keranjang', [])
146     total = 0
147     return render_template('keranjang.html', items=items)
148
149 @app.route("/add-to-cart", methods=["POST"])
150 def add_to_cart():
151     cart = session.get('keranjang', [])
152     cart.append({
153         "id": request.form['fid'],
154         "title": request.form['ftitle'],
155         "jumlah": request.form['fjumlah'],
156         "harga": request.form['fharga'],
157         "total": int(request.form['fjumlah']) * int(request.form['fharga']),
158     })
159     session['keranjang'] = cart
160     print(session['keranjang'])
161     return redirect(url_for('show_all_product'))
162
163 @app.route("/delete-cart-all/")
164 def delete_cart_all():
165     session.pop('keranjang', None)
166     return redirect(url_for('show_all_product'))
```



static

templates

.env


app.py


config.py

models.py 3

views.py 2



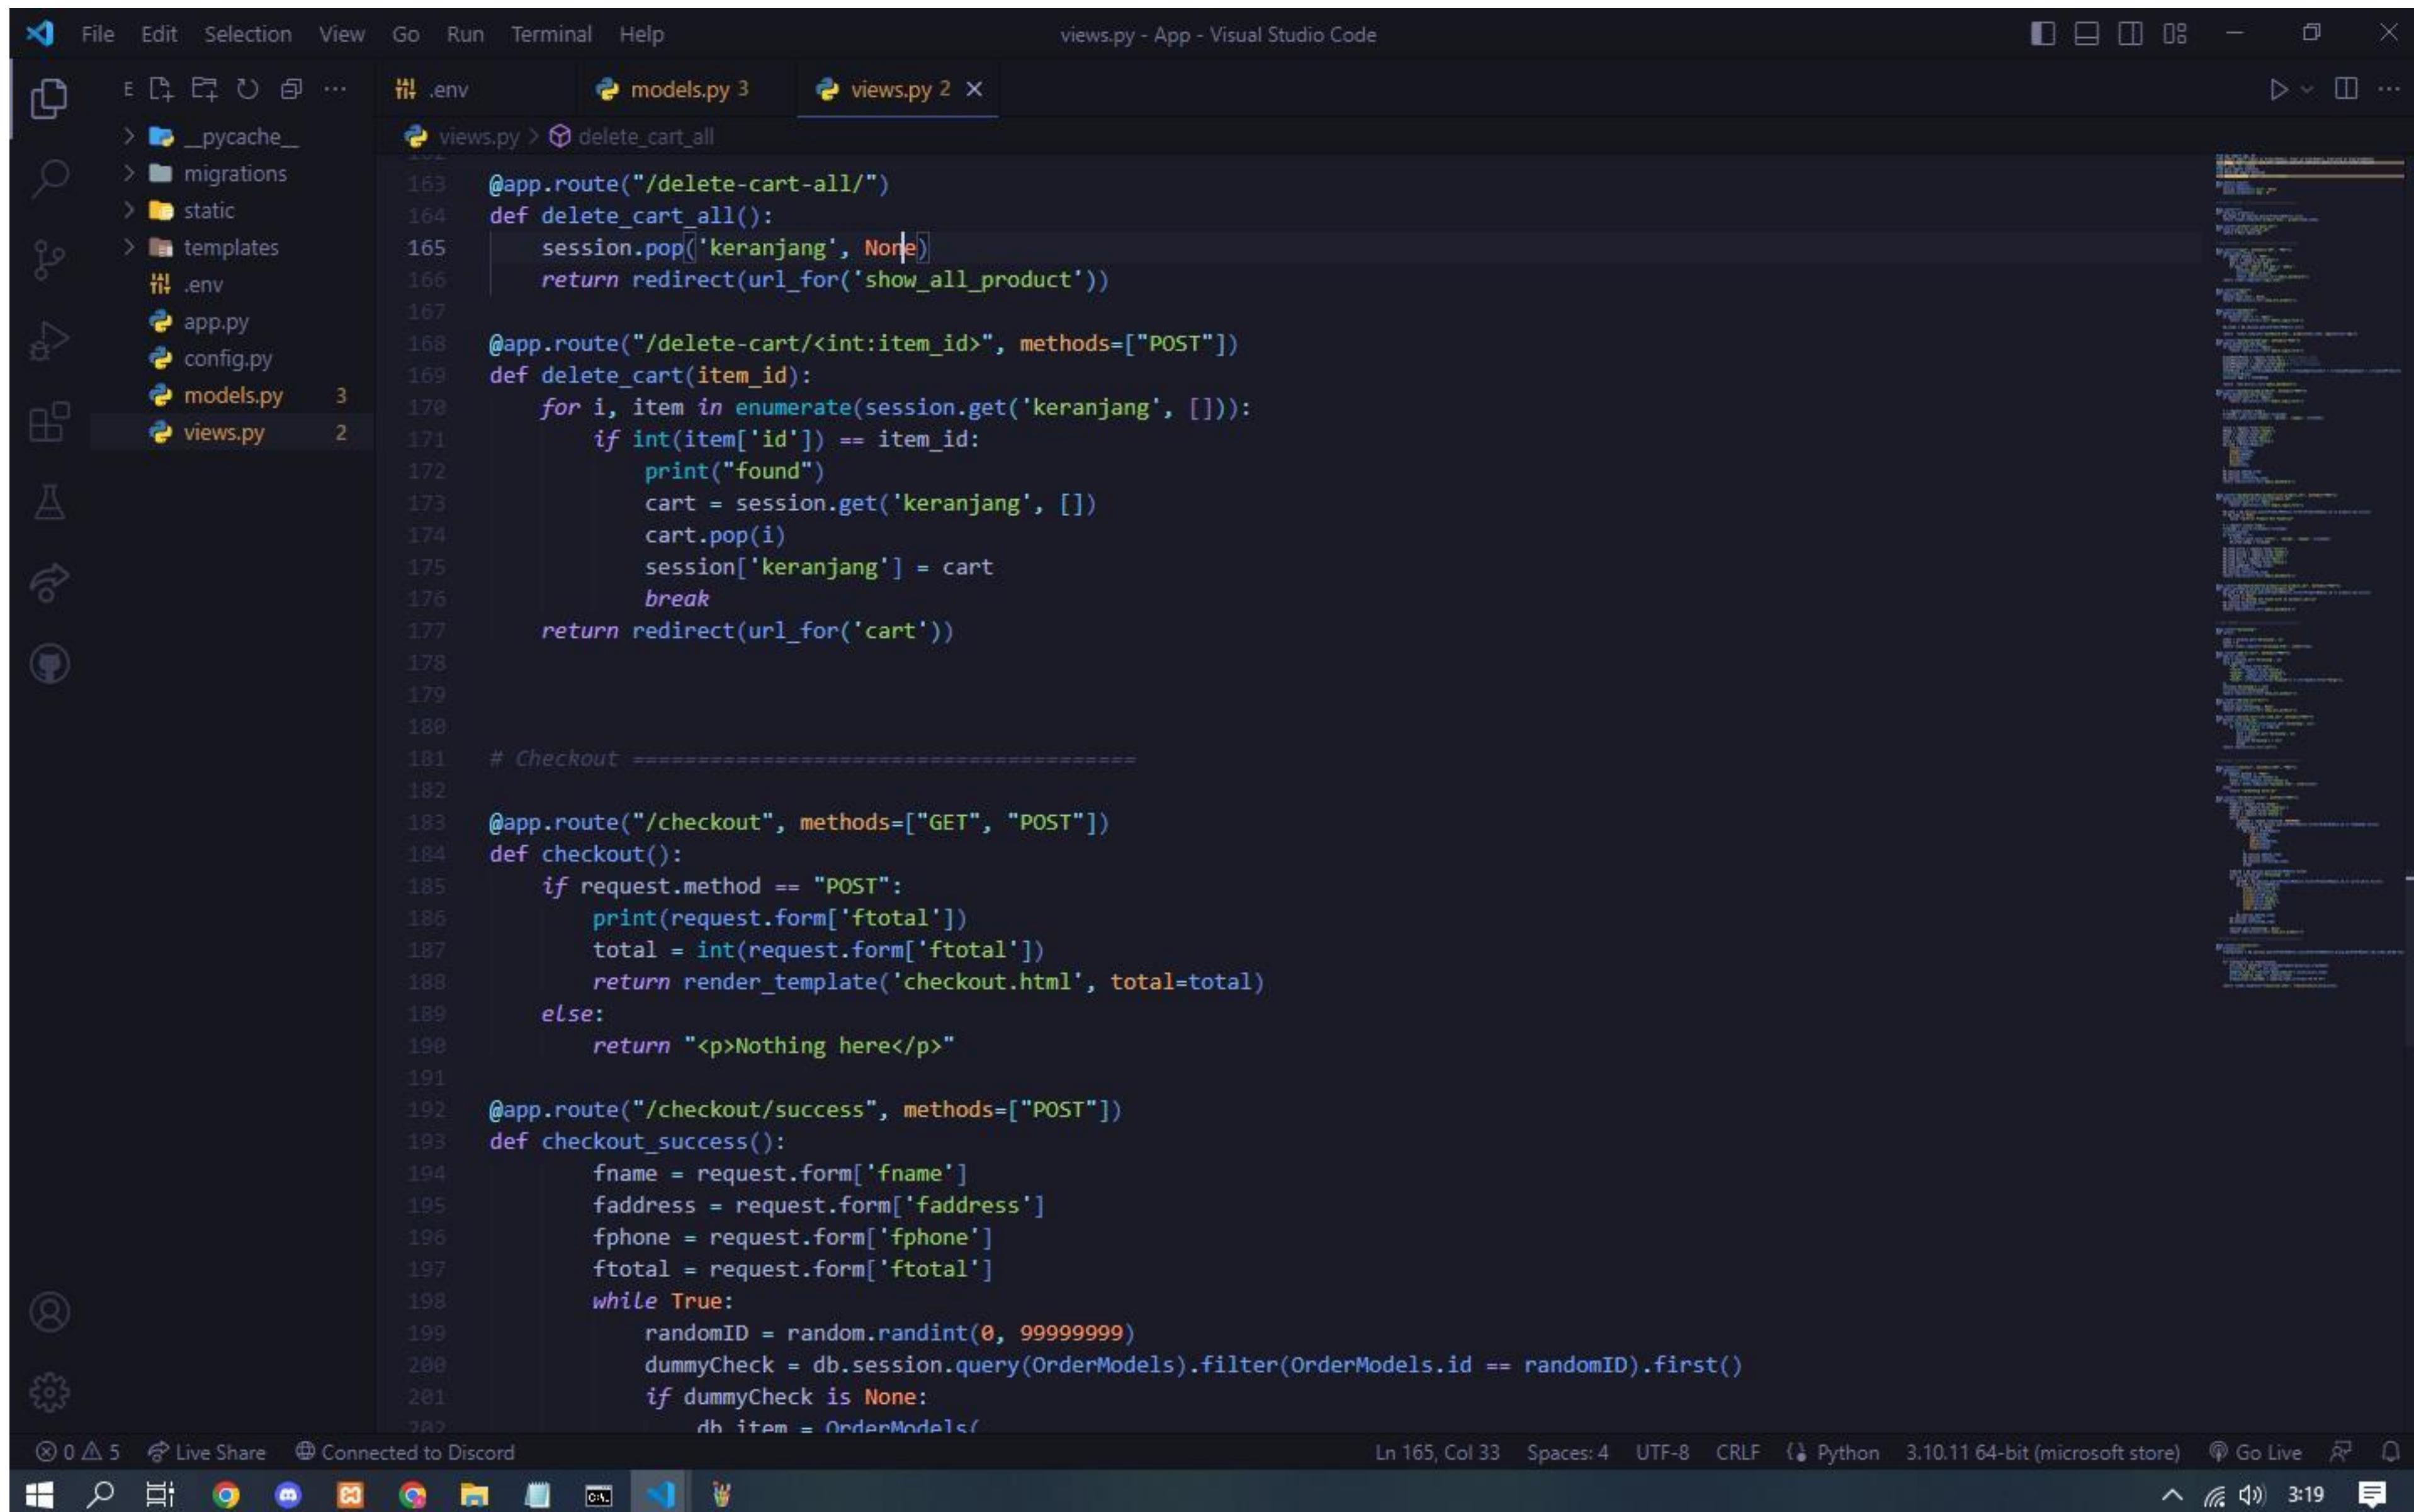





.env

views.py > checkout_success

```
192 @app.route("/checkout/success", methods=["POST"])
193 def checkout_success():
194     fname = request.form['fname']
195     faddress = request.form['faddress']
196     fphone = request.form['fphone']
197     ftotal = request.form['ftotal']
198     while True:
199         randomID = random.randint(0, 99999999)
200         dummyCheck = db.session.query(OrderModels).filter(OrderModels.id == randomID).first()
201         if dummyCheck is None:
202             db_item = OrderModels(
203                 id=randomID,
204                 name=fname,
205                 address=faddress,
206                 phone=fphone,
207                 total=ftotal
208             )
209             db.session.add(db_item)
210             db.session.commit()
211             db.session.refresh(db_item)
212             break
213
214     orderId = db.session.query(OrderModels).filter
215     carts = session.get('keranjang', [])
216     for cart in carts:
217         cartDB = db.session.query(ProductModels).filter(ProductModels.id == cart['id']).first()
218         db_item = OrderItemModels(
219             product_id=cart['id'],
220             title=c (variable) cart: Any
221             price1=
222             price2=cart['harga'],
223             jumlah=cart['jumlah'],
224             total=cart['total'],
225             order_id=randomID
226         )
227         db.session.add(db_item)
228         db.session.commit()
229         db.session.refresh(db_item)
230
231 session.pop('keranjang', None)
```











.env

models.py 3

views.py 2



```
223     jumlah=cart['jumlah'],
224     total=cart['total'],
225     order_id=randomID
226     )
227     db.session.add(db_item)
228     db.session.commit()
229     db.session.refresh(db_item)
230
231     session.pop('keranjang', None)
232     return redirect(url_for('show_all_product'))
233
234 # Transaction -----
235
236 @app.route("/transaction")
237 def transaction():
238     transactions = db.session.query(OrderModels).join(OrderItemModels).group_by(OrderModels.id).order_by(db.func.count().desc()).all()
239
240     # convert time
241     for transaction in transactions:
242         utc_time = datetime.utcnow.timestamp(transaction.createdAt)
243         print("utc time: ", utc_time)
244         jakarta_time = timezone('Asia/Jakarta').localize(utc_time)
245         print("jakarta time: ", jakarta_time)
246         tra (import) render_template: Any me.strftime('%d %b %Y')
247
248     return render_template("trasaction.html", transactions=transactions)
249
250
```



```
PS D:\App> py -m pip install flask python-dotenv flask_sqlalchemy flask_migrate pymysql pytz
```










XAMPP Control Panel v3.3.0 [Compiled: Apr 6th 2021]



XAMPP Control Panel v3.3.0



Service	Module	PID(s)	Port(s)	Actions			
	Apache	8596 11436	80, 443	Stop	Admin	Config	Logs
	MySQL	2060	3306	Stop	Admin	Config	Logs
	FileZilla			Start	Admin	Config	Logs
	Mercury			Start	Admin	Config	Logs
	Tomcat			Start	Admin	Config	Logs

```
11:27:59 [main]      All prerequisites found
11:27:59 [main]      Initializing Modules
11:27:59 [main]      Starting Check-Timer
11:27:59 [main]      Control Panel Ready
11:28:02 [mysql]     Attempting to start MySQL app...
11:28:02 [mysql]     Status change detected: running
13:16:15 [Apache]    Attempting to start Apache app...
13:16:16 [Apache]    Status change detected: running
```

```
PS G:\Project\python\2023\Jamu-Web\App> flask db migrate
INFO [alembic.runtime.migration] Context impl MySQLImpl.
INFO [alembic.runtime.migration] Will assume non-transactional DDL.
INFO [alembic.autogenerate.compare] Detected removed index 'ix_user_id' on 'user'
INFO [alembic.autogenerate.compare] Detected removed table 'user'
Generating G:\Project\python\2023\Jamu-Web\App\migrations\versions\ae0afc2c83e_.py ... done
PS G:\Project\python\2023\Jamu-Web\App> flask db upgrade
INFO [alembic.runtime.migration] Context impl MySQLImpl.
INFO [alembic.runtime.migration] Will assume non-transactional DDL.
INFO [alembic.runtime.migration] Running upgrade 65b22cb45e7e -> ae0afc2c83e, empty message
PS G:\Project\python\2023\Jamu-Web\App>
```

```
PS G:\Project\python\2023\Jamu-Web\App> flask --app app run
```

- * Serving Flask app 'app'
- * Debug mode: off

```
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
```

- * Running on http://127.0.0.1:5000

```
Press CTRL+C to quit
```

The screenshot displays two instances of the Visual Studio Code (VS Code) interface, both titled "views.py - App - Visual Studio Code".

Top Instance (Foreground):

- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Editor:** Shows code in "views.py" with line numbers 223 to 227. The code includes:

```
jumlah=cart['jumlah'],
total=cart['total'],
order_id=randomID
)
db.session.add(db_item)
```
- Left Sidebar:** Shows project structure with folders: __pycache__, migrations, static, templates, and .env. The "static" folder is currently selected.
- Bottom Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.

Bottom Instance (Background):

- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Editor:** Shows a terminal window with the command "PS G:\Project\python\2023\Jamu-Web\App> flask db migrate" entered.
- Left Sidebar:** Shows project structure with files: app.py, config.py, models.py (3), and views.py (2). The "models.py" file is currently selected.
- Bottom Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.

```
PS G:\Project\python\2023\Jamu-Web\App> flask db init  
localhost
```

```
Error: Directory migrations already exists and is not empty
```

```
PS G:\Project\python\2023\Jamu-Web\App> flask db migrate  
localhost
```

```
INFO [alembic.runtime.migration] Context impl MySQLImpl.
```

```
INFO [alembic.runtime.migration] Will assume non-transactional DDL.
```

```
INFO [alembic.env] No changes in schema detected.
```

```
PS G:\Project\python\2023\Jamu-Web\App> flask db upgrade  
localhost
```

```
INFO [alembic.runtime.migration] Context impl MySQLImpl.
```

```
INFO [alembic.runtime.migration] Will assume non-transactional DDL.
```

```
PS G:\Project\python\2023\Jamu-Web\App> █
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

COMMANDS

```
PS G:\Project\python\2023\Jamu-Web\App> flask --app app run
localhost
 * Serving Flask app 'app'
 * Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
 * Running on http://127.0.0.1:5000
Press CTRL+C to quit
```

Host, run, and code Python in the cloud! +

www.pythonanywhere.com

SPEEDTEST (3) Facebook Netflix Blogger Search Console - H... Erai-raws | Your first... PuyaSubs! | Para los... 5. Waits — Selenium python - How to ge... Other bookmarks

We use cookies to provide social media features and to analyse our traffic. We also share information about your use of our site with our social media and analytics partners. [Details here.](#)

Send feedback Forums Help Blog Pricing & signup Log in

 pythonanywhere by ANACONDA.


Host, run, and code Python in the cloud!

Get started for free. Our basic plan gives you access to machines with a full Python environment already installed. You can develop and host your website or any other code directly from your browser without having to install software or manage your own server.

Need more power? Upgraded plans start at \$5/month.

[Start running Python online in less than a minute! »](#)

[Watch our one-minute video »](#)

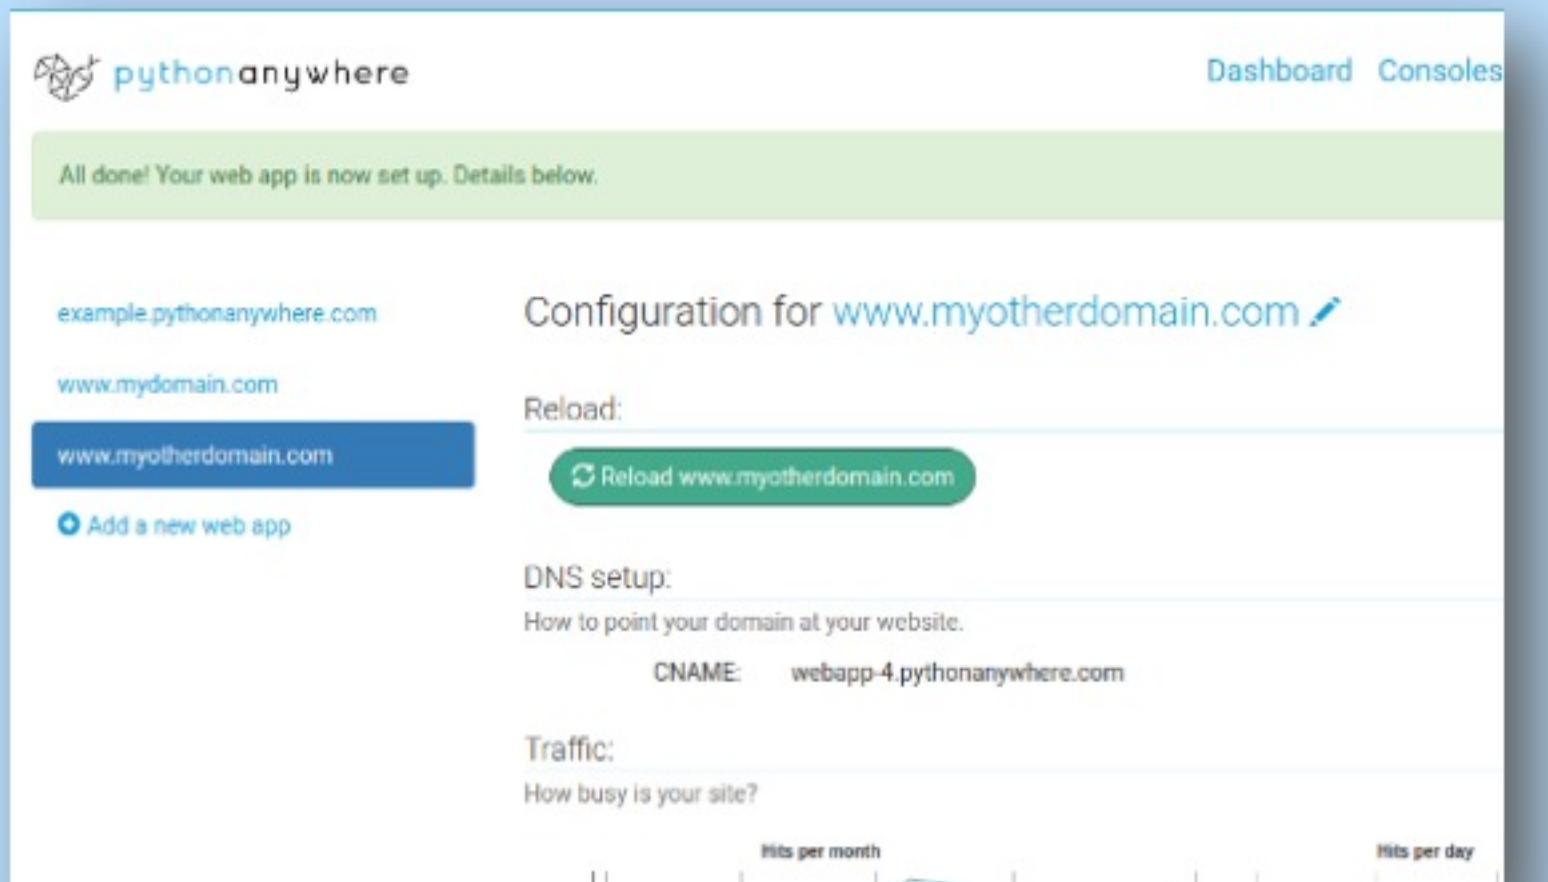

All done! Your web app is now set up. Details below.

example.pythonanywhere.com
www.mydomain.com
www.myotherdomain.com
[Add a new web app](#)

Configuration for [www.myotherdomain.com](#) 

Reload: Reload [www.myotherdomain.com](#)

DNS setup:
How to point your domain at your website.
CNAME: webapp-4.pythonanywhere.com

Traffic:
How busy is your site?

Hits per month  Hits per day

Plans and pricing : PythonAnywh OnPaste - Online Screenshot and +

www.pythonanywhere.com/pricing/ ↗ ☆ CRX W ↘ python - How to ge... Other bookmarks

SPEEDTEST (3) Facebook Netflix Blogger Search Console - H... Erai-raws | Your first... PuyaSubs! | Para los... 5. Waits — Selenium python - How to ge... Other bookmarks

Send feedback Forums Help Blog Pricing & signup Log in



Plans and pricing

Beginner: Free!

A limited account with one web app at `your-username.pythonanywhere.com`, restricted outbound Internet access from your apps, low CPU/bandwidth, no IPython/Jupyter notebook support.
It works and it's a great way to get started!

[Create a Beginner account](#)

Education accounts

Are you a teacher looking for a place your students can code Python? You're not alone. Click through to find out more about our [Education beta](#).

All of our paid plans come with a no-quibble 30-day money-back guarantee – you're billed monthly and you can cancel at any time. The minimum contract length is just one month. You get unrestricted Internet access from your applications, unlimited in-browser Python, Bash and database consoles, and full SSH access to your account. All accounts (including free ones) have screen-sharing with other PythonAnywhere accounts, and free SSL support (though you'll need to get a certificate for your own domains).

Hacker

\$5/month

Web dev

\$12/month

Startup

\$99/month

Custom

\$5 to \$500/month



by ANACONDA.

Create your account

Username: jamuweb

Email: pakaiemailmu@gmail.com

Password:

Password (again):

I agree to the [Terms and Conditions](#) and the [Privacy and Cookies Policy](#),
and confirm that I am at least 13 years old.

Register

We [Register](#) it to spam or pass your details on to anyone else.



Dashboard Consoles Files Web Tasks Databases

Warning You have not confirmed your email address yet. This means that you will not be able to reset your password if you lose it. If you cannot find your confirmation email anymore, send yourself a new one [here](#).

Dashboard

Welcome, jamuwebxds

CPU Usage: 0% used – 0.00s of 100s. Resets in 23 hours, 59 minutes [More Info](#)

Upgrade Account

File storage: 0% full – 48.0 KB of your 512.0 MB quota [More Info](#)

Recent Consoles

You have no recent consoles.

New console:

\$ Bash

>>> Python ▾

[More...](#)

Recent
Files

You have no recently edited files.

+ Open another file

Browse files


Recent Notebooks


Your account does not support Jupyter Notebooks. [Upgrade your account](#) to get access!

All
Web apps

You don't have any web apps.

Open Web tab

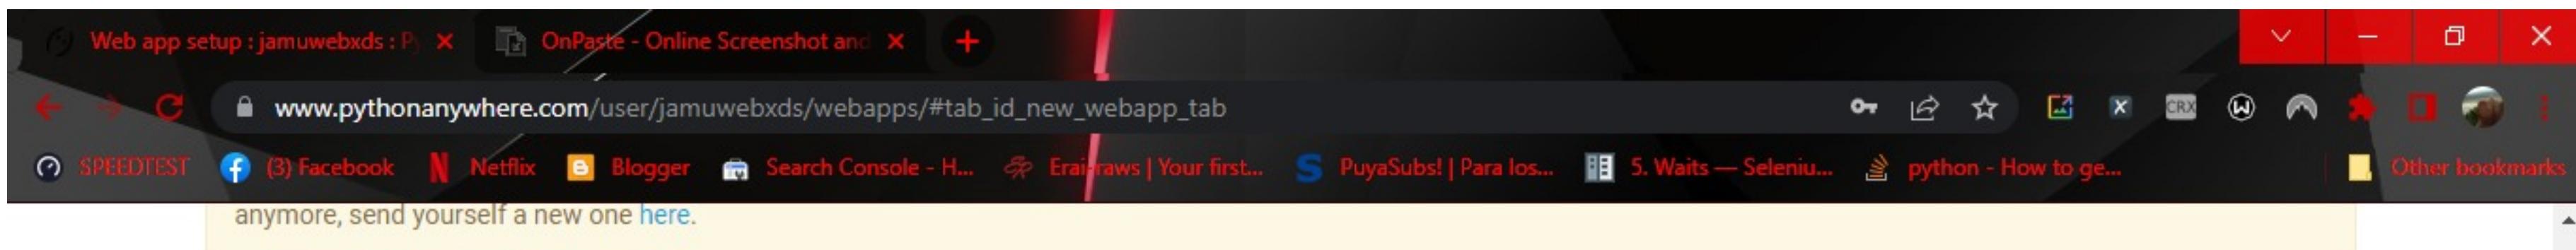

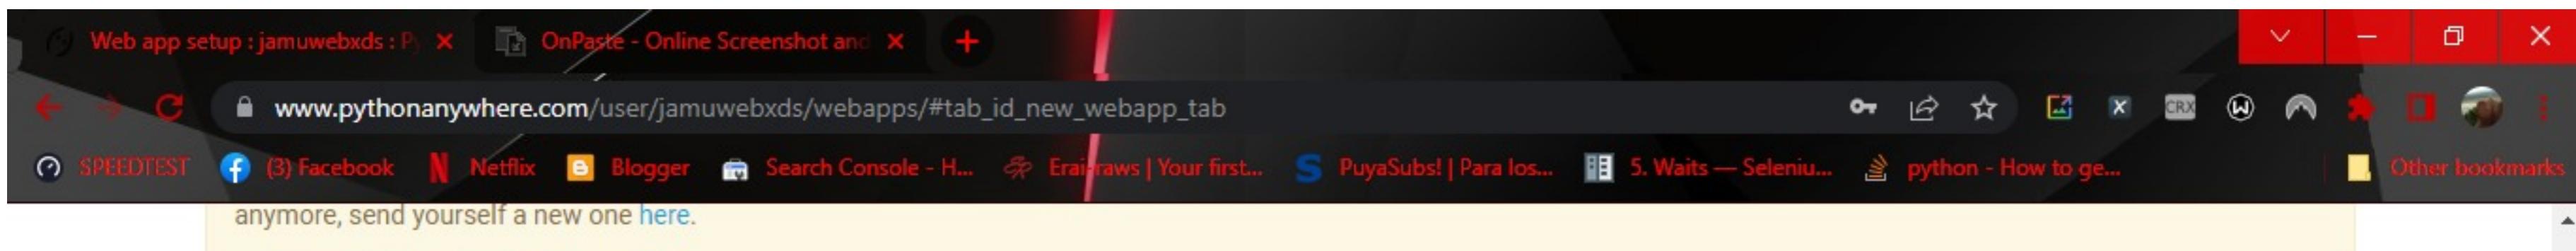

+ Add a new web app

Create new web app

Select a Python Web framework

...or select "Manual configuration" if you want detailed control.

- » Django
- » web2py
- » **Flask**
- » Bottle
- » Manual configuration (including virtualenvs)

What other frameworks should we have here? Send us some feedback using the link at the top of the page!

Cancel

« Back

Next »

OnPaste.2023050...png

OnPaste.2023050...png

OnPaste.2023050...png

OnPaste.2023050...png

OnPaste.2023050...png

Show all

Web app setup : jamuwebxds : P X OnPaste - Online Screenshot and +

www.pythonanywhere.com/user/jamuwebxds/webapps/#tab_id_new_webapp_tab

SPEEDTEST (3) Facebook Netflix Blogger Search Console - H... Eraisraws | Your first... S PuyaSubs! | Para los... 5. Waits — Selenium python - How to ge... Other bookmarks

anymore, send yourself a new one [here](#).

+ Add a new web app

Create new web app

Select a Python version

- » [Python 3.7 \(Flask 2.1.2\)](#)
- » [Python 3.8 \(Flask 2.1.2\)](#)
- » [Python 3.9 \(Flask 2.1.2\)](#)
- » [Python 3.10 \(Flask 2.1.2\)](#)

Note: If you'd like to use a different version of Flask to the default version, you can use a virtualenv for your web app. There are [instructions here](#).

[Cancel](#) [« Back](#) [Next »](#)

[+ Add a new web app](#)

Create new web app

Quickstart new Flask project

Enter a path for a Python file you wish to use to hold your Flask app. If this file already exists, its contents will be overwritten with the new app.

Path



[Cancel](#) [« Back](#) [Next »](#)



Dashboard Consoles Files Web Tasks Databases

All done! Your web app is now set up. Details below.

X

Warning You have not confirmed your email address yet. This means that you will not be able to reset your password if you lose it. If you cannot find your confirmation email anymore, send yourself a new one [here](#).

jamuwebxds.pythonanywhere.com

+ Add a new web app

Configuration for jamuwebxds.pythonanywhere.com

Reload:

⟳ Reload jamuwebxds.pythonanywhere.com

Best before date:

We're happy to host your free website – and keep it free – for as long as you want to keep it running, but you'll need to log in at least once every three months and click the "Run until 3 months from today" button below. We'll send you an email a week before the site is disabled so that you don't forget to do that. [See here for more details](#).

Send feedback Forums Help Blog Account Log out



by ANACONDA.

Dashboard Consoles **Files** Web Tasks Databases

Warning You have not confirmed your email address yet. This means that you will not be able to reset your password if you lose it. If you cannot find your confirmation email anymore, send yourself a new one [here](#).

/home/ jamuwebxds

[Open Bash console here](#)

0% full – 76.0 KB of your 512.0 MB quota [More Info](#)

Directories

Enter new directory name

New directory

.local/
mysite/



Files

Enter new file name, eg hello.py

New file

	.bashrc				2023-05-09 02:47	560 bytes
	.gitconfig				2023-05-09 02:47	266 bytes
	.profile				2023-05-09 02:47	79 bytes
	.pythonstartup.py				2023-05-09 02:47	77 bytes
	.vimrc				2023-05-09 02:47	4.6 KB
	README.txt				2023-05-09 02:47	232 bytes

Upload a file

100MiB maximum size



by ANACONDA.

Dashboard Consoles Files Web Tasks Databases

/home/jamuwebxds/ mysite

Open Bash console here

0% full – 76.0 KB of your 512.0 MB quota

Directories

Enter new directory name

New directory

__pycache__



Files

Enter new file name, eg hello.py


New file

flask_app.py

2023-05-09 02:50 186 bytes

Upload a file

100MiB maximum size

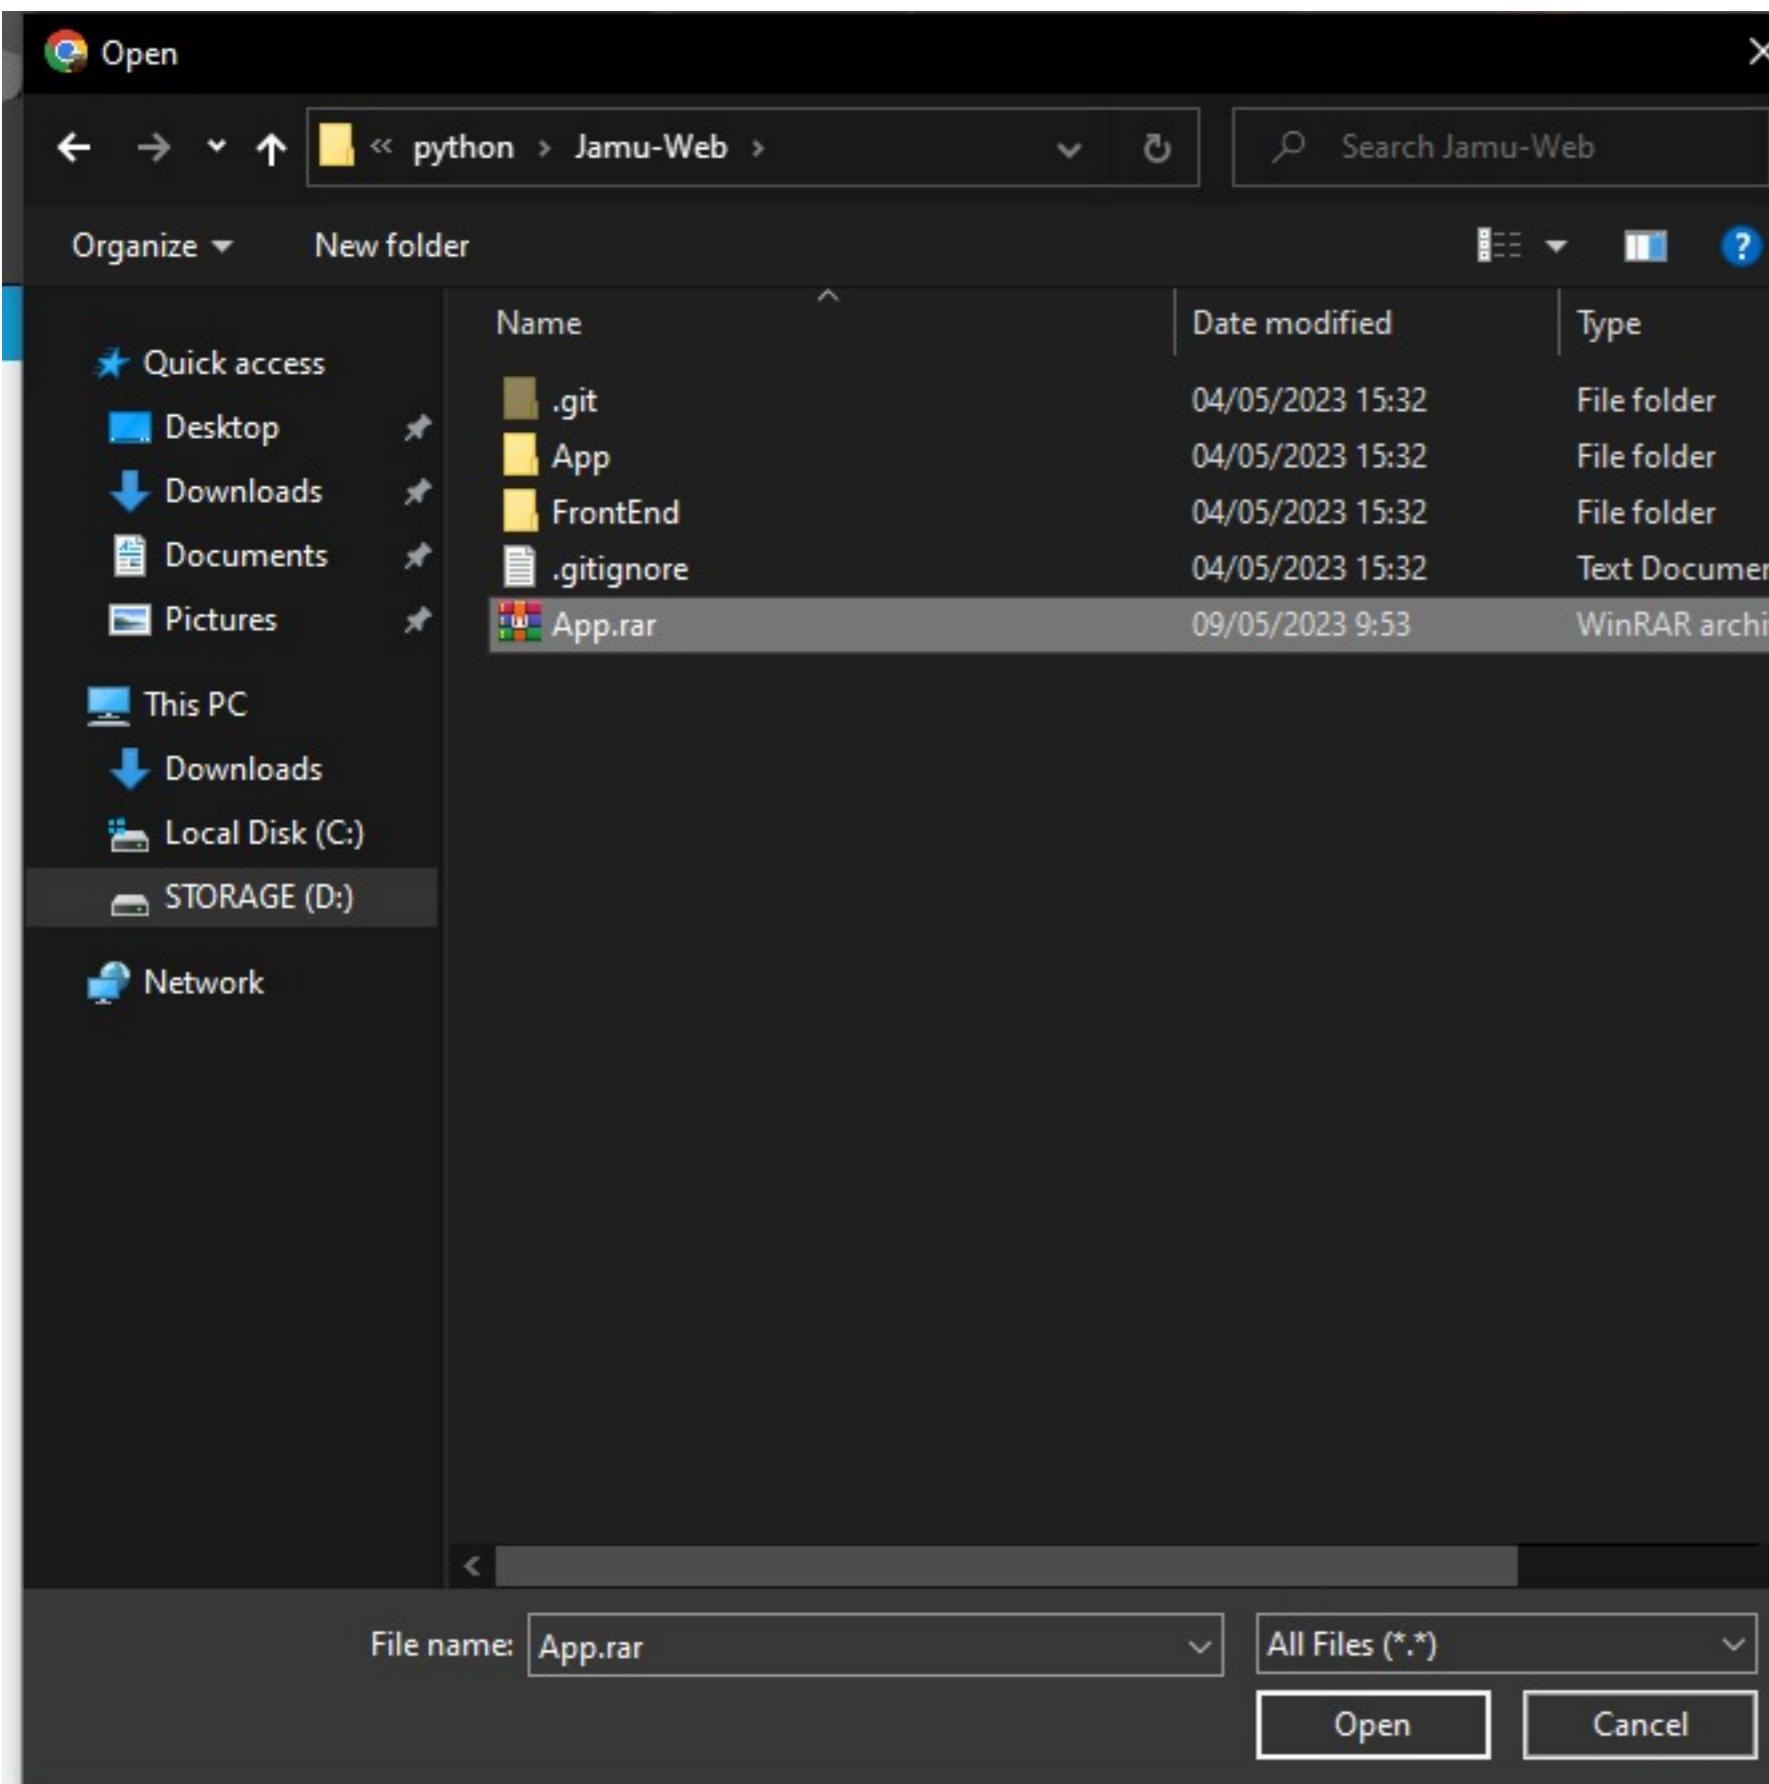

S PuyaSubs! | Para los... 5. Waits — Selenium... python - How to ge... Other bookmarks

Send feedback Forums Help Blog Account Log out

Dashboard Consoles Files Web Tasks Databases

able to reset your password if you lose it. If you cannot find your confirmation email


Open Bash console here 0% full – 76.0 KB of your 512.0 MB quota More Info

hello.py

New file

2023-05-09 02:50 186 bytes

here LLP – Terms – Privacy & Cookies

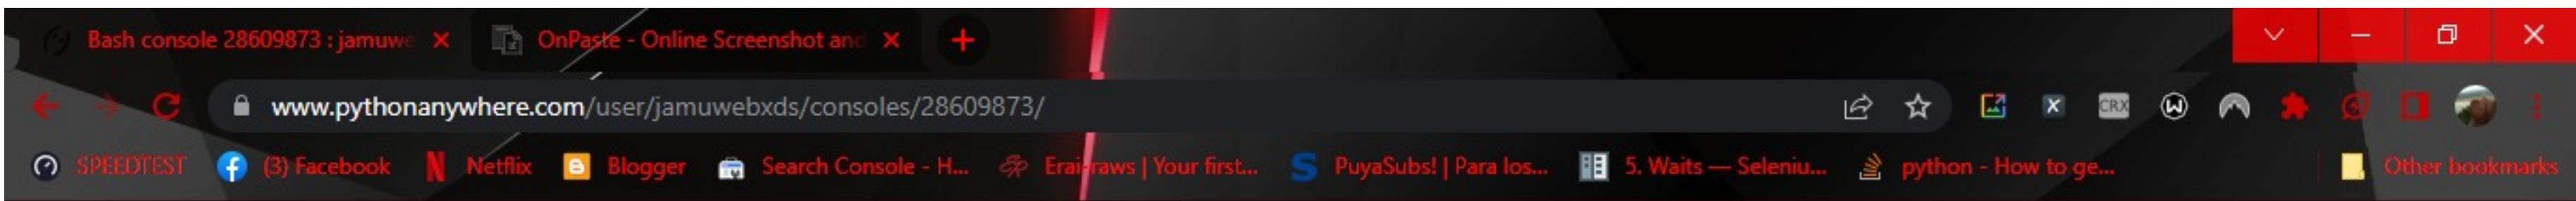

Bash console 28609873

03:03 ~/mysite \$ unrar x App.rar

+1 Share with others



Dashboard Consoles Files Web Tasks **Databases**

Warning You have not confirmed your email address yet. This means that you will not be able to reset your password if you lose it. If you cannot find your confirmation email anymore, send yourself a new one [here](#).

MySQL

Postgres

Initialize MySQL

Let's get started! The first thing to do is to initialize a MySQL server:

Enter a new password in the form below, and note it down: you'll need it to access the databases once you've created them. You will only need to do this once.

New password:

Confirm password:

.....|

Initialize MySQL

This should be different to your main PythonAnywhere password, because it is likely to appear in plain text in any web applications you write.

MySQL

MySQL settings

Postgres

Connecting:

Use these settings in your web applications.

database host address:

jamuwebxds.mysql.pythonanywhere-services.com

username:

jamuwebxds

Your databases:

Click a database's name to start a MySQL console logged in to it.


Name _____

amuwebxds\$default

Create a database

Your database names always start with your username + "\$". There's no need to type that prefix in below, though: PythonAnywhere will automatically add it.

Database name:

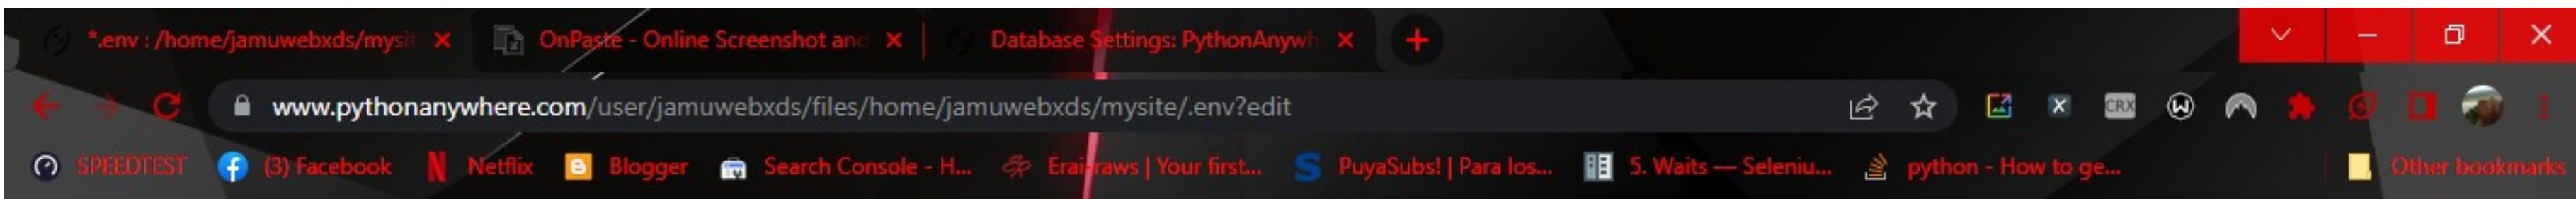

```
1 MYSQL_HOST = jamuwebxds.mysql.pythonanywhere-services.com
2 MYSQL_PORT = 3306
3 MYSQL_USER = jamuwebxds
4 MYSQL_PASSWORD = 12345678;
5 MYSQL_DBNAME = jamuwebxds$default
6
7
8 SECRET_KEY = '_5#y2L"F4Q8z\n\xec']/'
```


Keyboard shortcuts: Normal ▾

Share

Save

Save as...



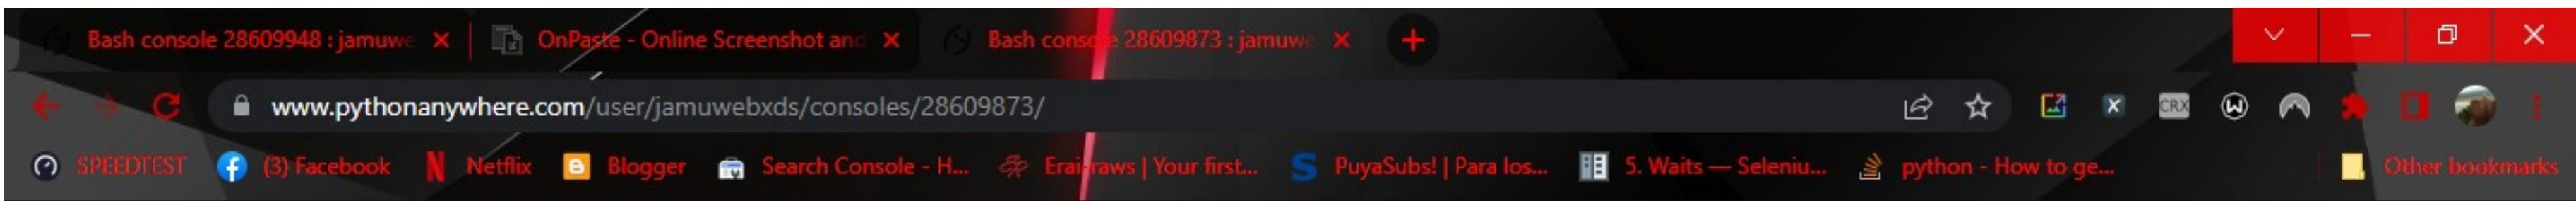

Bash console 28609873

03:21 ~/mysite \$ pip install python-dotenv flask_migrate

+1 Share with others

Bash console 28609948 : jamuwe

OnPaste - Online Screenshot and X



 www.pythontanywhere.com/user/jamuwebxds/consoles/28609873/



SPEEDTEST (3) Facebook



Bash console 28609873



```
03:21 ~/mysite $ pip install python-dotenv flask_migrate
Defaulting to user installation because normal site-packages is not writeable
Looking in links: /usr/share/pip-wheels
Requirement already satisfied: python-dotenv in /home/jamuwebxds/.local/lib/python3.10/site-packages (1.0.0)
Requirement already satisfied: flask_migrate in /home/jamuwebxds/.local/lib/python3.10/site-packages (4.0.4)
Requirement already satisfied: Flask-SQLAlchemy>=1.0 in /usr/local/lib/python3.10/site-packages (from flask_migrate) (2.5.1)
Requirement already satisfied: Flask>=0.9 in /usr/local/lib/python3.10/site-packages (from flask_migrate) (2.1.2)
Requirement already satisfied: alembic>=1.9.0 in /home/jamuwebxds/.local/lib/python3.10/site-packages (from flask_migrate) (1.10.4)
Requirement already satisfied: Mako in /usr/local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (1.2.0)
Requirement already satisfied: typing-extensions>=4 in /home/jamuwebxds/.local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (4.5.0)
Requirement already satisfied: SQLAlchemy>=1.3.0 in /usr/local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (1.4.36)
Requirement already satisfied: click>=8.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (8.0.3)
Requirement already satisfied: Jinja2>=3.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (3.1.2)
Requirement already satisfied: Werkzeug>=2.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (2.1.2)
Requirement already satisfied: itsdangerous>=2.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (2.1.2)
Requirement already satisfied: MarkupSafe>=2.0 in /usr/local/lib/python3.10/site-packages (from Jinja2>=3.0->Flask>=0.9->flask_migrate) (2.1.1)
Requirement already satisfied: greenlet!=0.4.17 in /usr/local/lib/python3.10/site-packages (from SQLAlchemy>=1.3.0->alembic>=1.9.0->flask_migrate) (1.1.2)
```

03:25 ~/mysite \$

```
03:25 ~mysite $ flask db init
```

Bash console 28609948 : jamuwe

OnPaste - Online Screenshot and X



 www.pythontanywhere.com/user/jamuwebxds/consoles/28609873/



SPEEDTEST

 (3) Facebook  Netflix

 (3) Facebook Netflix Blogger Search Console - H... EraIraws | Your first... PuyaSubs! | Para los... 5. Waits — Selenium... python - How to ge... Other bookmarks

Bash console 28609873

 Share with others

三

```
03:21 ~/mysite $ pip install python-dotenv flask_migrate
Defaulting to user installation because normal site-packages is not writeable
Looking in links: /usr/share/pip-wheels
Requirement already satisfied: python-dotenv in /home/jamuwebxds/.local/lib/python3.10/site-packages (1.0.0)
Requirement already satisfied: flask_migrate in /home/jamuwebxds/.local/lib/python3.10/site-packages (4.0.4)
Requirement already satisfied: Flask-SQLAlchemy>=1.0 in /usr/local/lib/python3.10/site-packages (from flask_migrate) (2.5.1)
Requirement already satisfied: Flask>=0.9 in /usr/local/lib/python3.10/site-packages (from flask_migrate) (2.1.2)
Requirement already satisfied: alembic>=1.9.0 in /home/jamuwebxds/.local/lib/python3.10/site-packages (from flask_migrate) (1.10.4)
Requirement already satisfied: Mako in /usr/local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (1.2.0)
Requirement already satisfied: typing-extensions>=4 in /home/jamuwebxds/.local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (4.5.0)
Requirement already satisfied: SQLAlchemy>=1.3.0 in /usr/local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (1.4.36)
Requirement already satisfied: click>=8.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (8.0.3)
Requirement already satisfied: Jinja2>=3.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (3.1.2)
Requirement already satisfied: Werkzeug>=2.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (2.1.2)
Requirement already satisfied: itsdangerous>=2.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (2.1.2)
Requirement already satisfied: MarkupSafe>=2.0 in /usr/local/lib/python3.10/site-packages (from Jinja2>=3.0->Flask>=0.9->flask_migrate) (2.1.1)
Requirement already satisfied: greenlet!=0.4.17 in /usr/local/lib/python3.10/site-packages (from SQLAlchemy>=1.3.0->alembic>=1.9.0->flask_migrate) (1.1.2)
```

03:25 ~/mysite \$

```
03:25 ~mysite $ flask db init
```

jamuwebxds.mysql.pythonanywhere-services.com

```
Creating directory /home/jamuwebxds/mysite/migrations ... done
```

```
Creating directory /home/jamuwebxds/mysite/migrations/versions ... done
```


```
Generating /home/jamuwebxds/mysite/migrations/script.py.mako ... done
```

```
Generating /home/jamuwebxds/mysite/migrations/README ... done
```

```
Generating /home/jamuwebxds/mysite/migrations/env.py ... done  
Generating /home/jamuwebxds/mysite/migrations/empty_migrations.py ... done
```

Generating /home/jamuwebxds/mysite/migrations/alembic.ini ... done
Please edit configuration/connection/logging settings in '/home/jamuwebxds/mysite/migrations/alembic.ini' before proceeding.

Please edit configuration/connect
03:25 ~mysite \$ flask db migrate

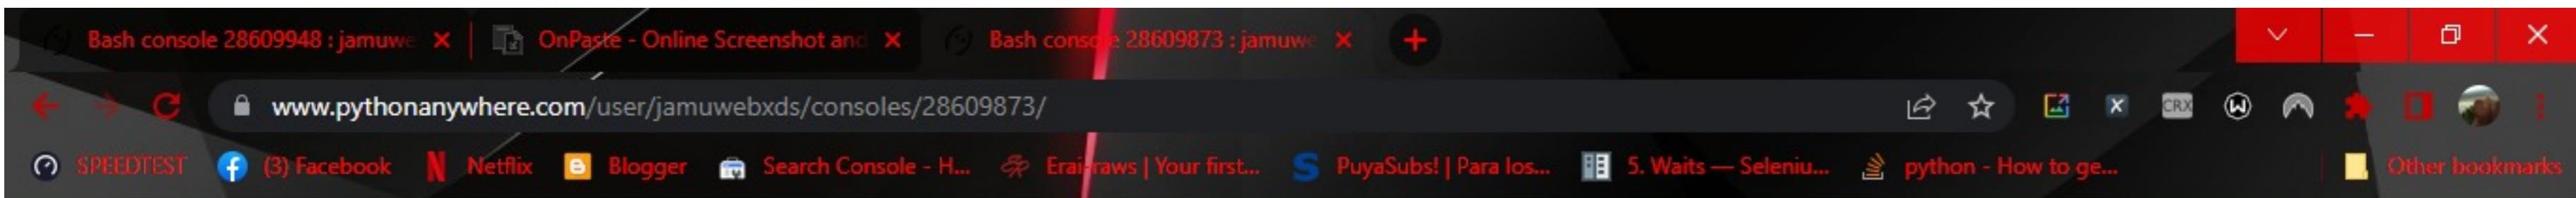

Bash console 28609873

```
03:26 ~/mysite $  
03:26 ~/mysite $  
03:26 ~/mysite $  
03:26 ~/mysite $  
03:26 ~/mysite $ pip install python-dotenv flask_migrate pymysql  
Defaulting to user installation because normal site-packages is not writeable  
Looking in links: /usr/share/pip-wheels  
Requirement already satisfied: python-dotenv in /home/jamuwebxds/.local/lib/python3.10/site-packages (1.0.0)  
Requirement already satisfied: flask_migrate in /home/jamuwebxds/.local/lib/python3.10/site-packages (4.0.4)  
Collecting pymysql  
  Downloading PyMySQL-1.0.3-py3-none-any.whl (43 kB)          43.7/43.7 kB 419.7 kB/s eta 0:00:00  
Requirement already satisfied: Flask-SQLAlchemy>=1.0 in /usr/local/lib/python3.10/site-packages (from flask_migrate) (2.5.1)  
Requirement already satisfied: alembic>=1.9.0 in /home/jamuwebxds/.local/lib/python3.10/site-packages (from flask_migrate) (1.10.4)  
Requirement already satisfied: Flask>=0.9 in /usr/local/lib/python3.10/site-packages (from flask_migrate) (2.1.2)  
Requirement already satisfied: typing-extensions>=4 in /home/jamuwebxds/.local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (4.5.0)  
Requirement already satisfied: Mako in /usr/local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (1.2.0)  
Requirement already satisfied: SQLAlchemy>=1.3.0 in /usr/local/lib/python3.10/site-packages (from alembic>=1.9.0->flask_migrate) (1.4.36)  
Requirement already satisfied: Werkzeug>=2.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (2.1.2)  
Requirement already satisfied: Jinja2>=3.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (3.1.2)  
Requirement already satisfied: itsdangerous>=2.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (2.1.2)  
Requirement already satisfied: click>=8.0 in /usr/local/lib/python3.10/site-packages (from Flask>=0.9->flask_migrate) (8.0.3)  
Requirement already satisfied: MarkupSafe>=2.0 in /usr/local/lib/python3.10/site-packages (from Jinja2>=3.0->Flask>=0.9->flask_migrate) (2.1.1)  
Requirement already satisfied: greenlet!=0.4.17 in /usr/local/lib/python3.10/site-packages (from SQLAlchemy>=1.3.0->alembic>=1.9.0->flask_migrate) (1.1.2)  
  
Installing collected packages: pymysql  
Successfully installed pymysql-1.0.3  
03:27 ~/mysite $  
03:27 ~/mysite $  
03:27 ~/mysite $  
03:27 ~/mysite $ pip install python-dotenv flask_migrate pymysql
```

03:27 ~mysite \$

03:27 ~mysite \$

03:27 ~mysite \$ flask db migrate

03:28 ~mysite \$

03:28 ~mysite \$ flask db upgrade



Dashboard Consoles Files Web Tasks Databases

Warning You have not confirmed your email address yet. This means that you will not be able to reset your password if you lose it. If you cannot find your confirmation email anymore, send yourself a new one [here](#).

jamuwebxds.pythonanywhere.com

+ Add a new web app

Configuration for jamuwebxds.pythonanywhere.com

Reload:

Reload jamuwebxds.pythonanywhere.com



Best before date:

We're happy to host your free website -- and keep it free -- for as long as you want to keep it running, but you'll need to log in at least once every three months and click the "Run until 3 months from today" button below. We'll send you an email a week before the site is disabled so that you don't forget to do that. [See here for more details](#).

This site will be disabled on **Wednesday 09 August 2023**

Run until 3 months from today