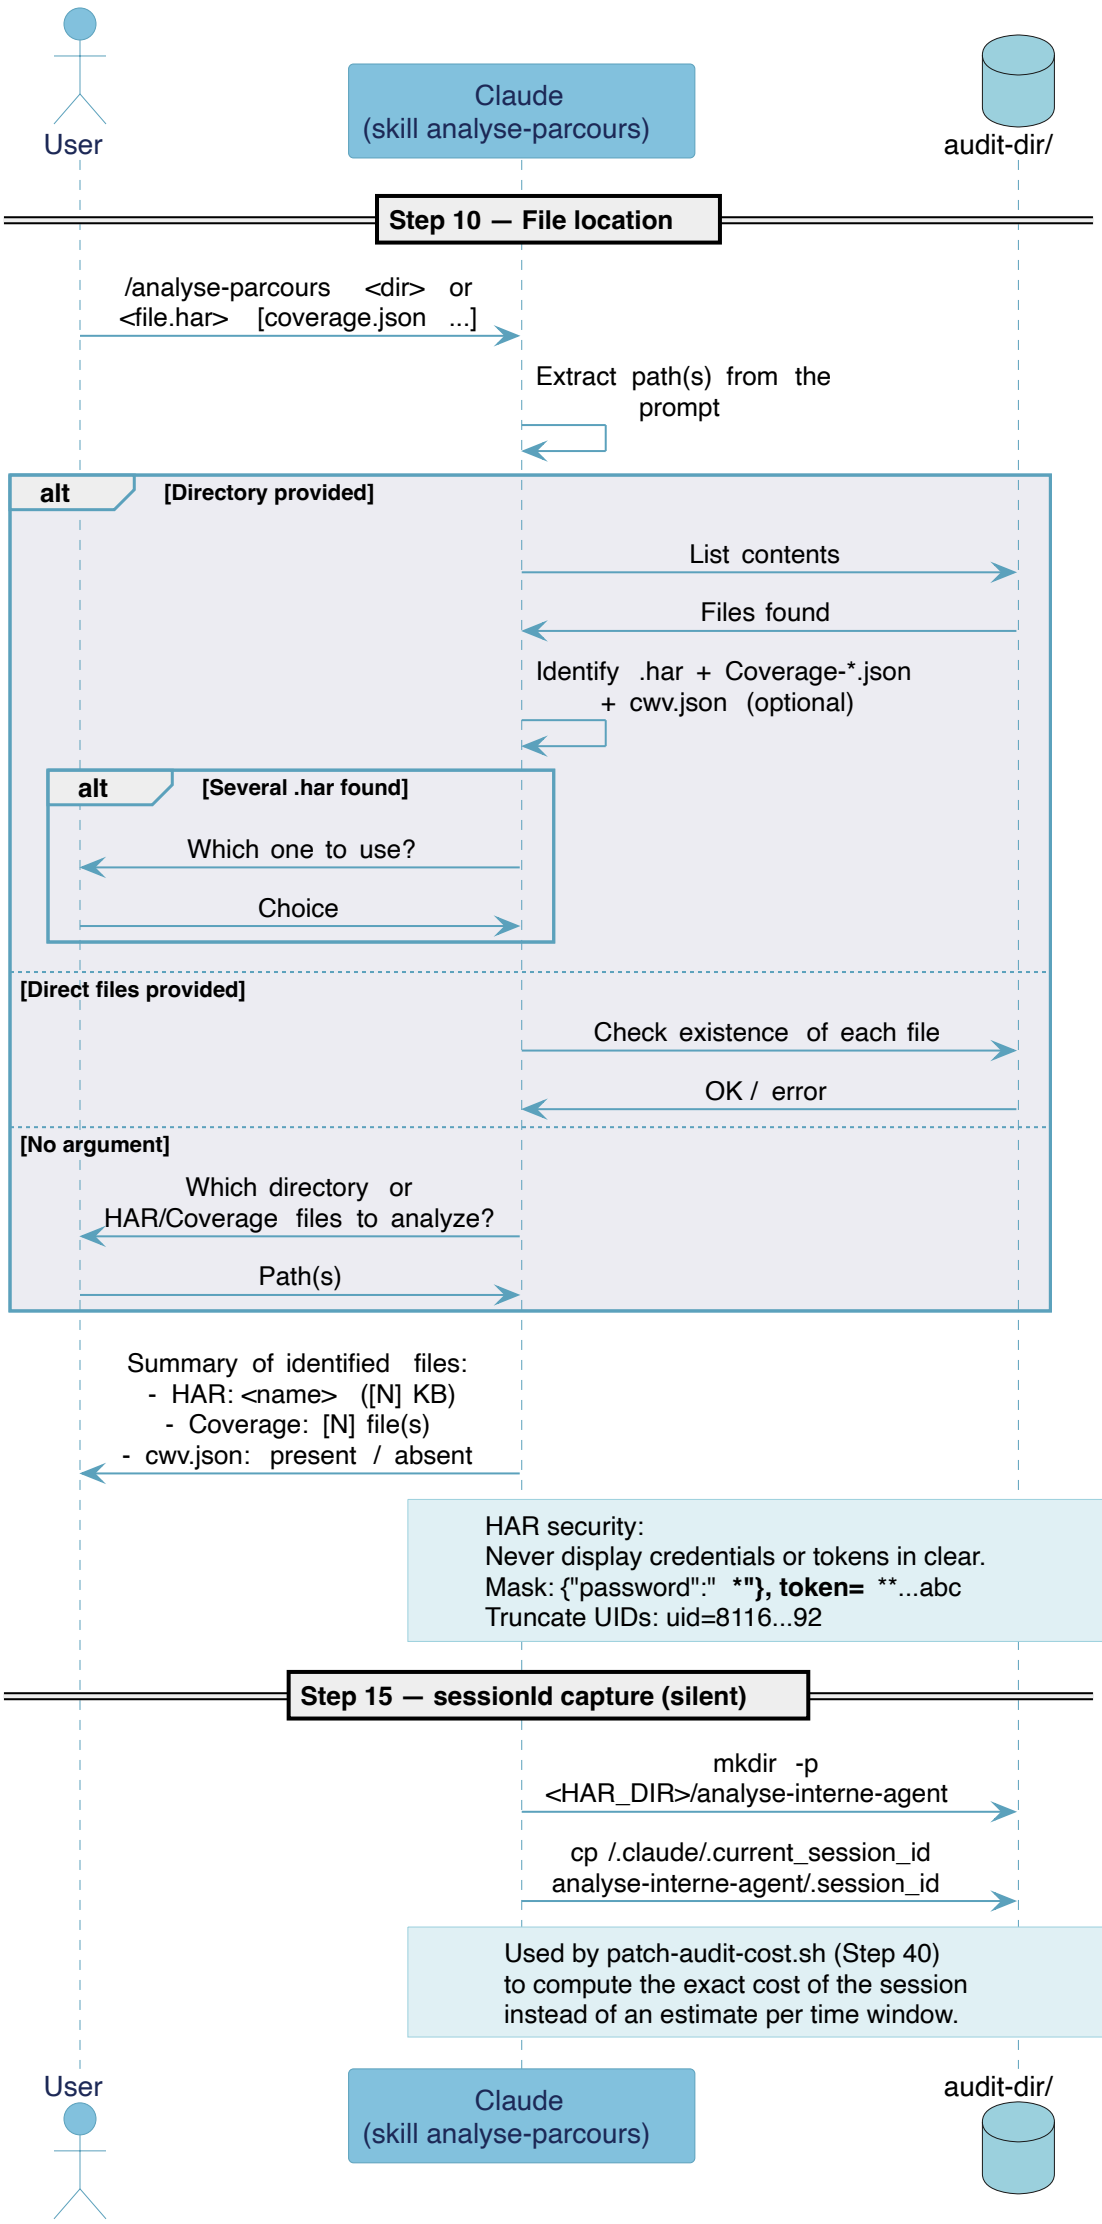
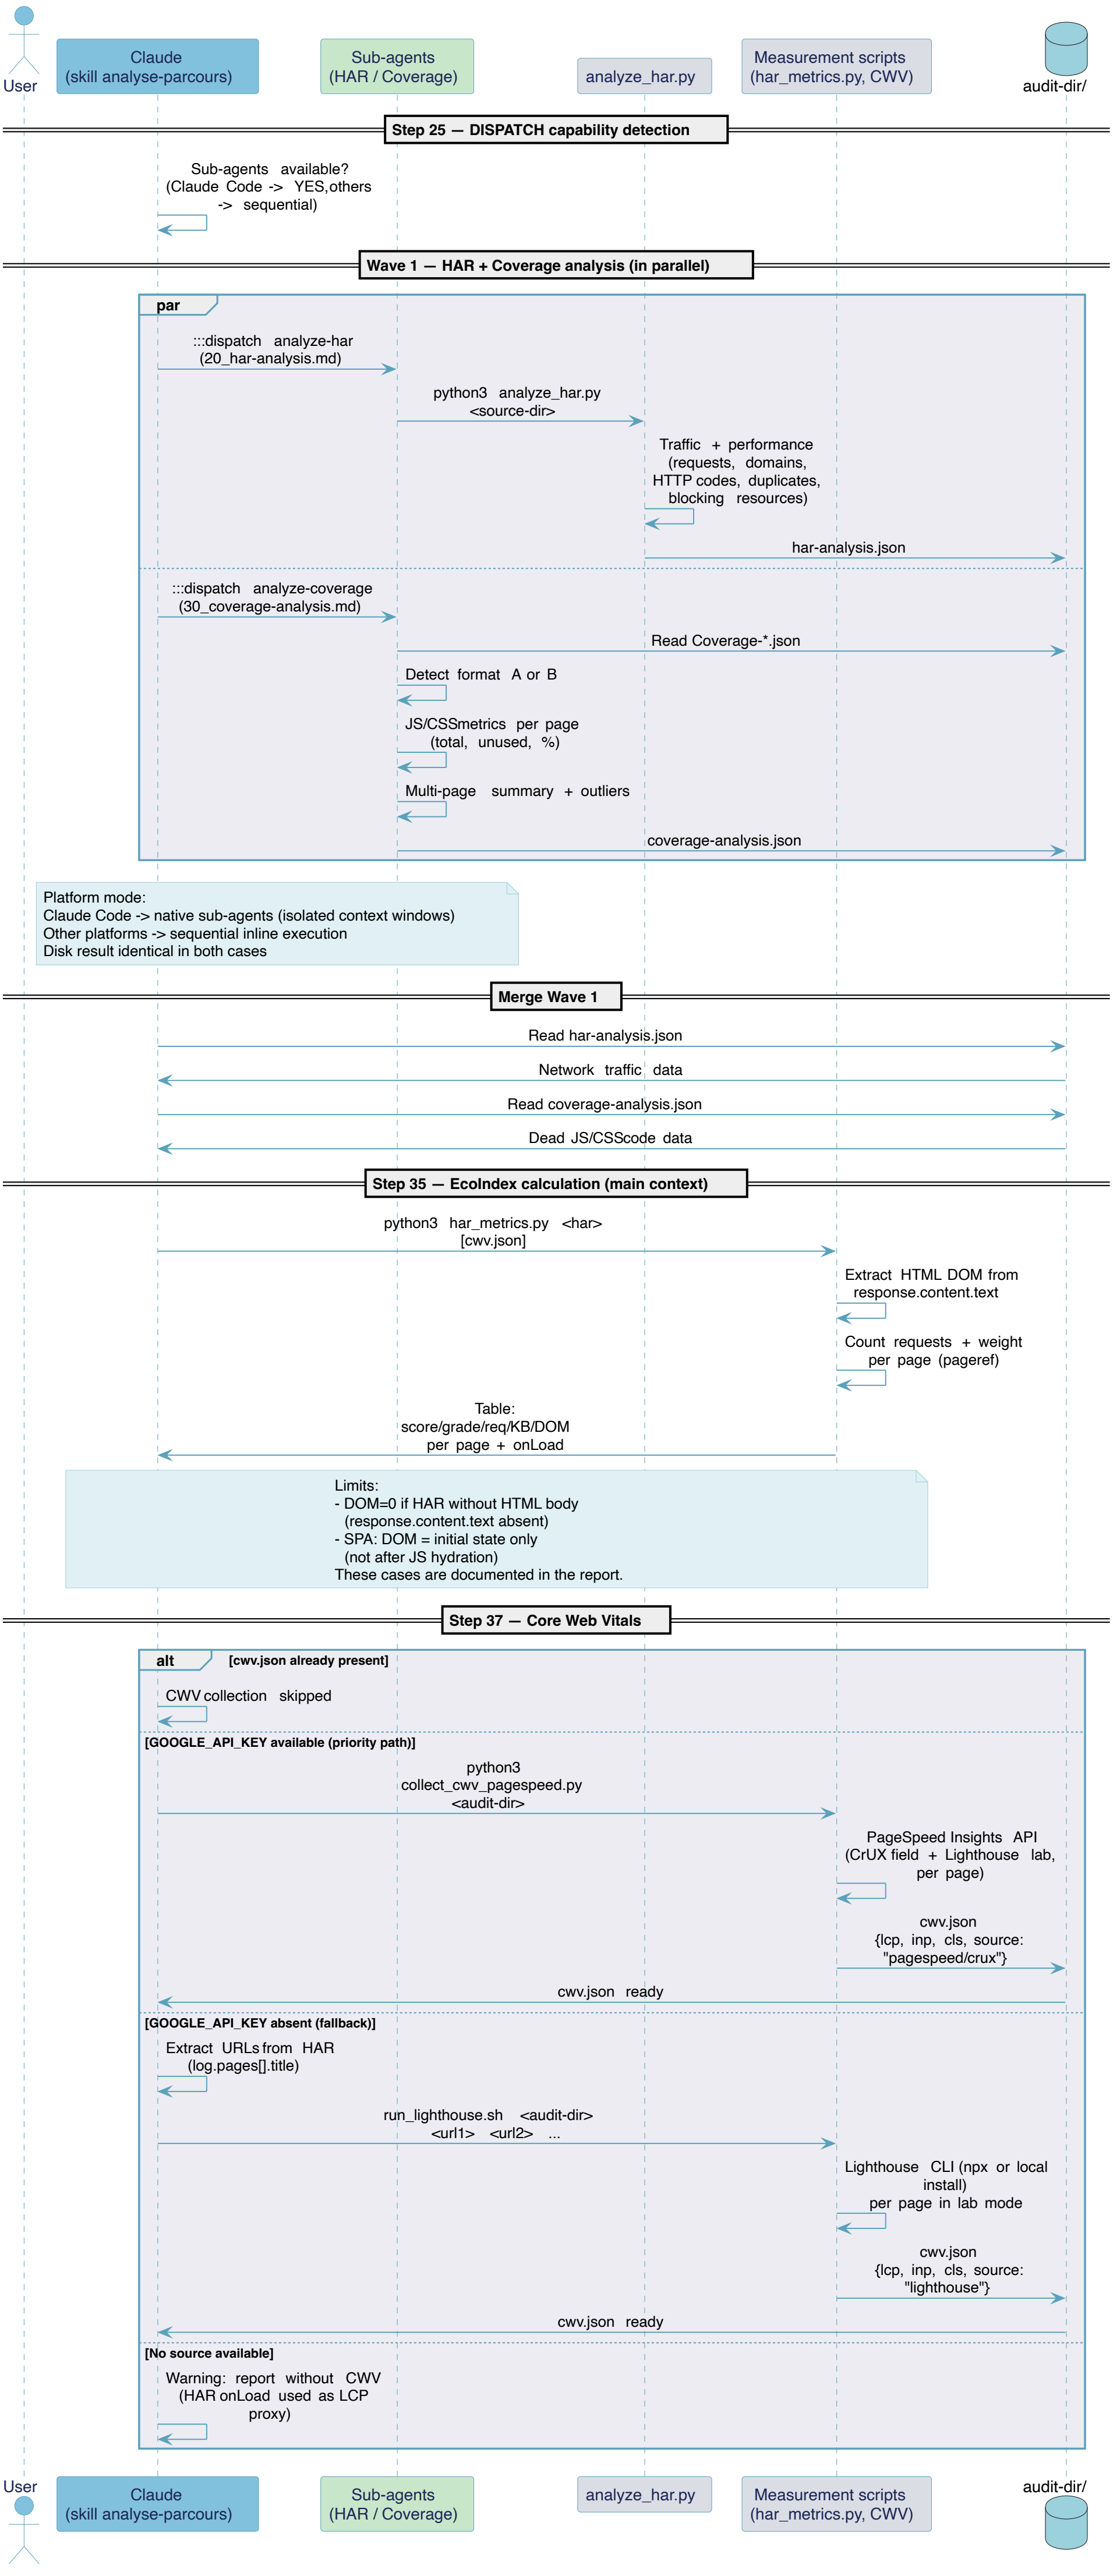
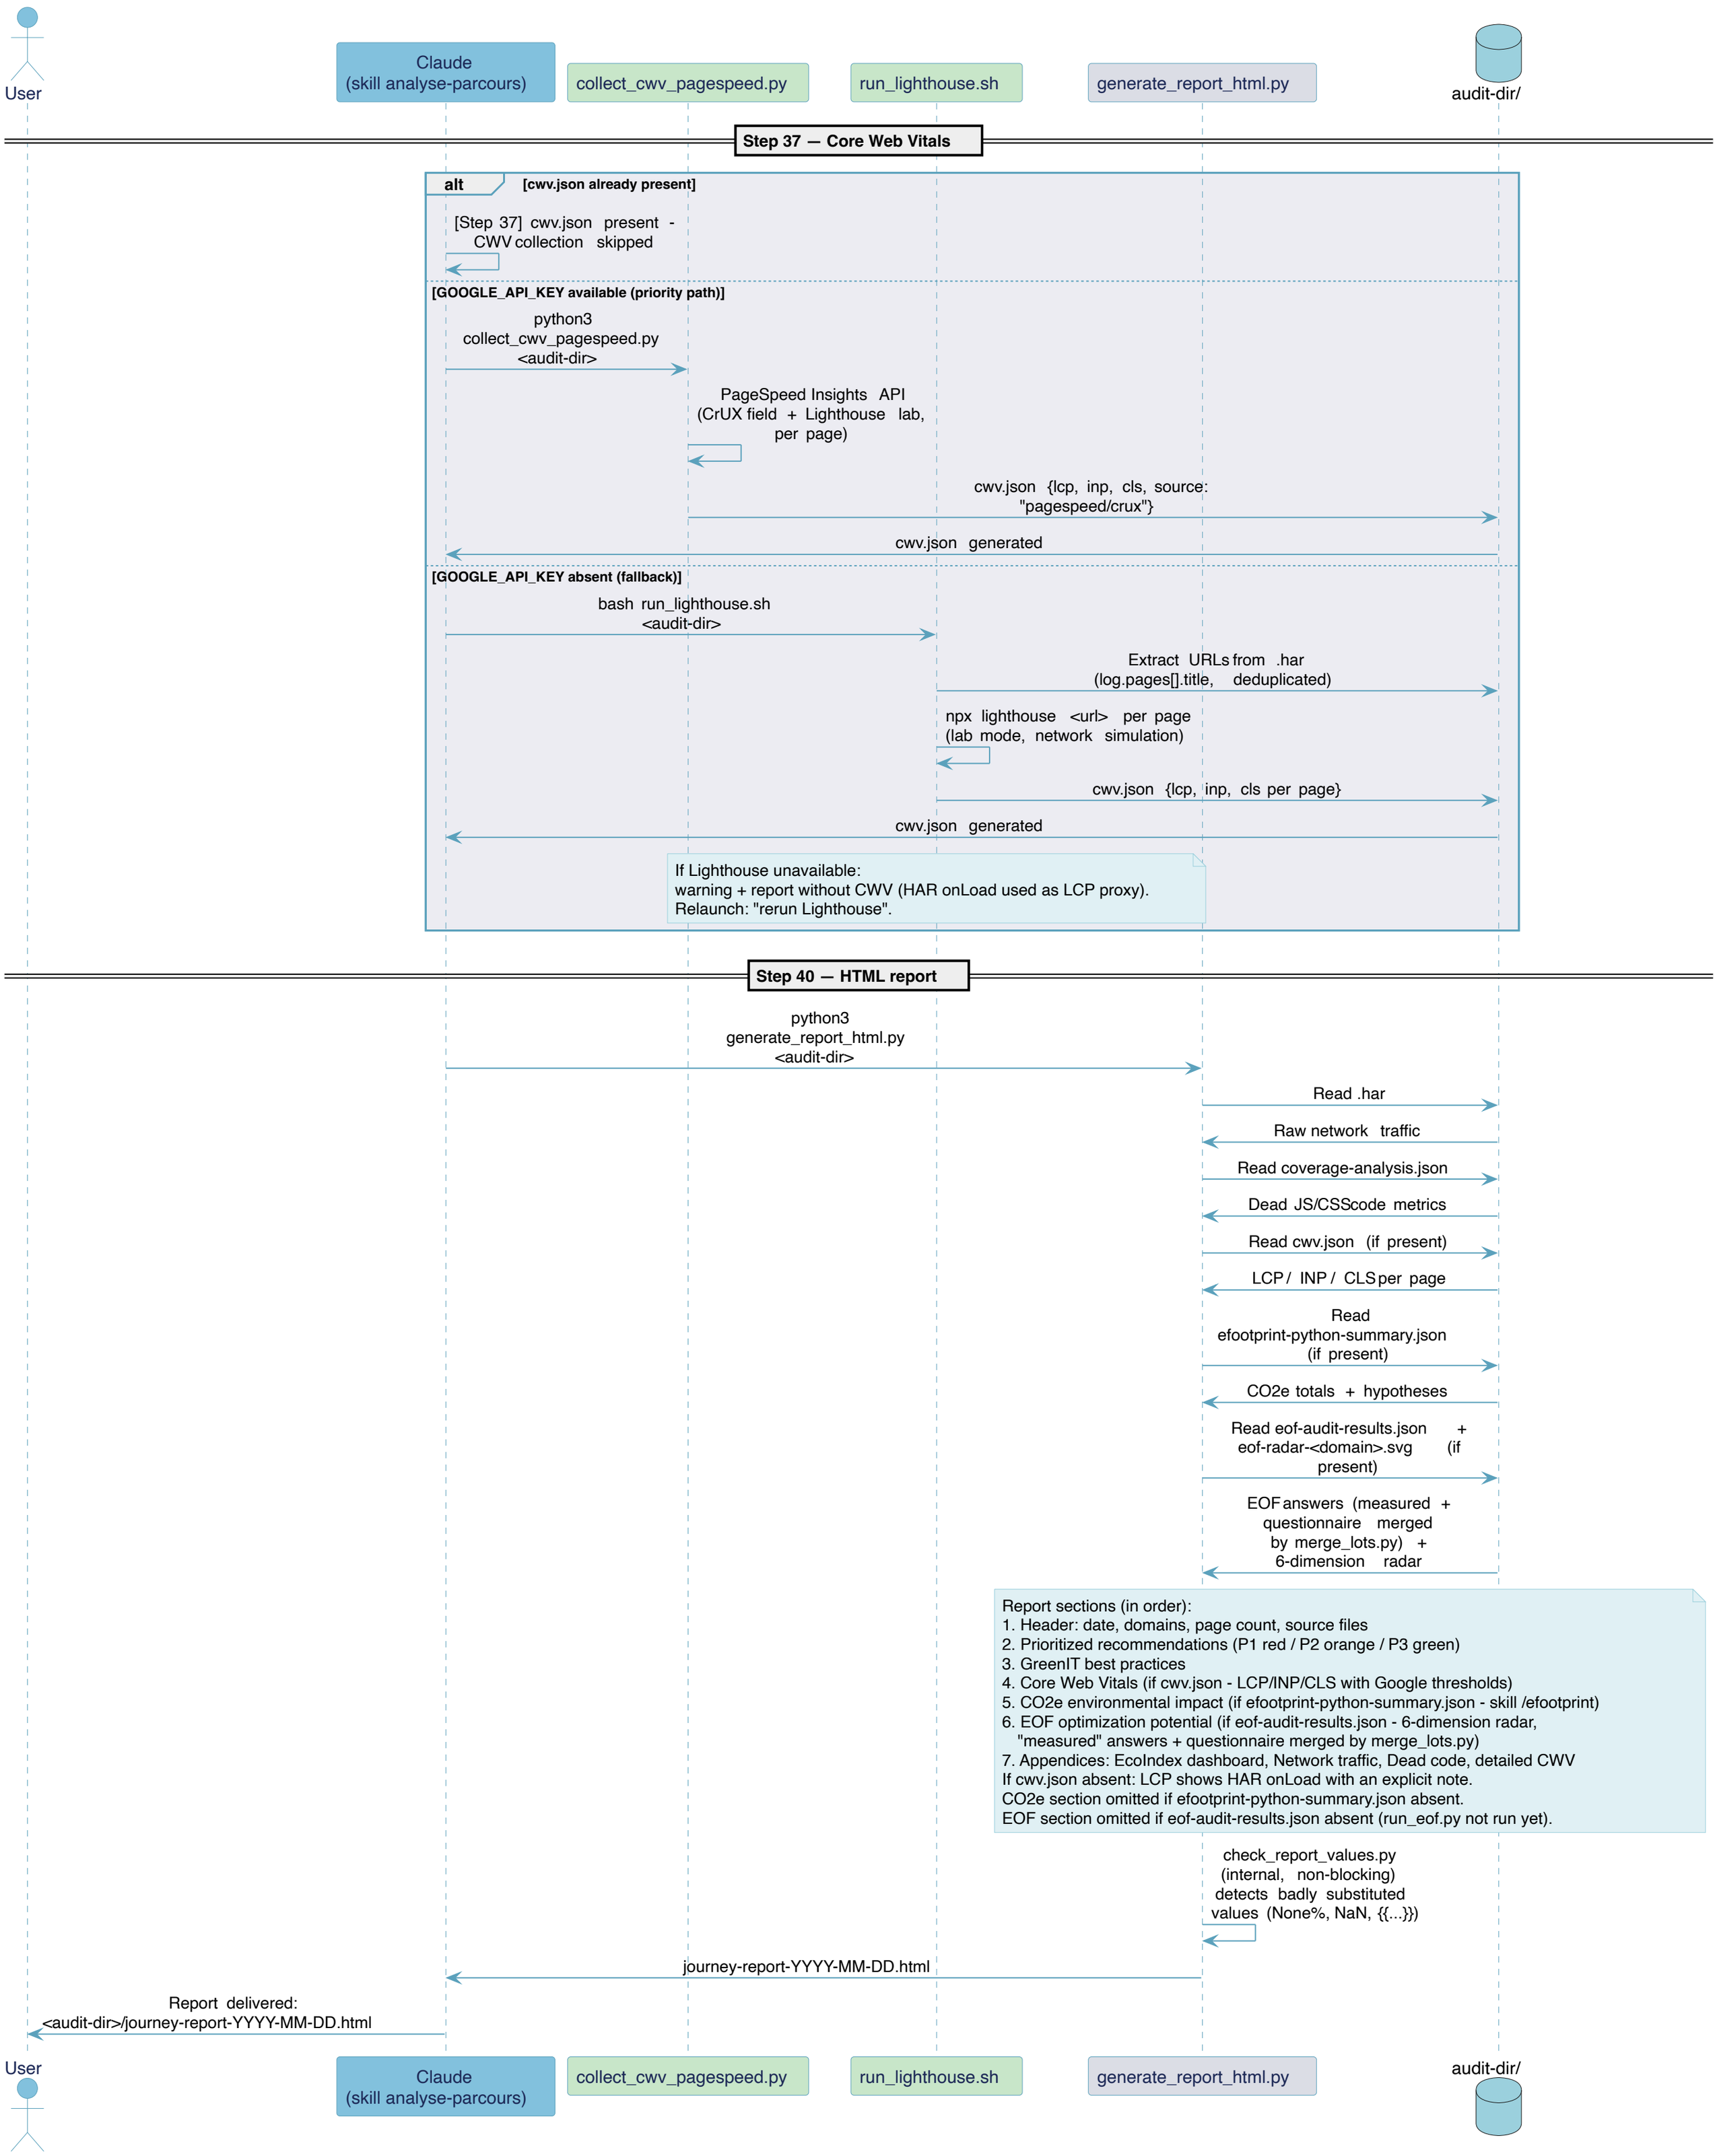

User
Claude
(skill analyse-parcours)
audit-dir/
Step 10 — File location
/analyse-parcours <dir> or
<file.har> [coverage.json ...]
Extract path(s) from the
prompt
alt
[Directory provided]
List contents
Files found
Identify .har + Coverage-*.json
+ cwv.json (optional)
alt
[Several .har found]
Which one to use?
Choice
[Direct files provided]
Check existence of each file
OK / error
[No argument]
Which directory or
HAR/Coverage files to analyze?
Path(s)
Summary of identified files:
- HAR: <name> ([N] KB)
- Coverage: [N] file(s)
- cwv.json: present / absent
HAR security:
Never display credentials or tokens in clear.
Mask: {"password":" *"}, token= **...abc
Truncate UIDs: uid=8116...92
Step 15 — sessionId capture (silent)
mkdir -p
<HAR_DIR>/analyse-interne-agent
cp /.claude/.current_session_id
analyse-interne-agent/.session_id
Used by patch-audit-cost.sh (Step 40)
to compute the exact cost of the session
instead of an estimate per time window.
User
Claude
(skill analyse-parcours)
audit-dir/

Web journey analysis workflow — Page 25 : DISPATCH + EcoIndex



Web journey analysis workflow — Page 3/5 : Core Web Vitals + HTML report



Web journey analysis workflow — Page 4/5 : e-footprint collection (optional)

User
Claude (skill /efootprint)
collect_env_data.py
API SimilarWeb (similarweb_api.py)
API ipinfo.io
CrUX Data
detect_tech.py
audit-dir/

OPTIONAL step — launched if the user invokes /efootprint after a journey analysis report. Goal: enrich the HTML report with a CO2e section (manufacturing + energy). Every produced value is a HYPOTHETICAL ESTIMATE (recalled at startup, on each parameter, in the results). A single command: collect_env_data.py itself calls SimilarWeb and detect_tech.

Step 10 — source_dir location

/efootprint <source_dir>

Resolve source_dir (argument, journey context, .har visible, or request)

Check presence of .har or env-data.json

Step 20 — env-data.json collection

alt [env-data.json absent, or refresh option]

python3 collect_env_data.py <source_dir>

[1/3] Read .har

requests, weight, duration, main server IP

Weight per type + third-party share (direct HAR measurement)

[2/3] CrUX (form_factors)

desktop / mobile / tablet mix

SYMMETRICAL CrUX correction (Chrome only):
- tablet attached to mobile
- mobile re-inflated by the absence of iOS, desktop by the absence of macOS/Safari, then renormalization

Default if CrUX absent: 60 % mobile / 40 % desktop

[3/3] GET /json/<IP>

country, org, carbon intensity

Provider detected from org:
aws / gcp / azure / scaleway / ovh
Default if ipinfo fails: country FR

detect_from_har(.har)

tech stack (CDN, host, web server, framework, analytics...)

alt [Audience or traffic block missing (no manual audience input)]

GET data.similarweb.com/api/v1/data?domain=<domain>

TopCountryShares + EstimatedMonthlyVisits

Country mix -> weighs iOS/macOS
Monthly visits -> annualized

[API blocked (captcha / WAF) or domain not tracked]

Fallback: assisted retrieval (Step 20d)
- dictated in chat, or screenshot dropped

Last resort: default FR 100 % + 100 000 visits/year

env-data.json (schema_version 1.5) {job, server, device_mix, network_mix, audience, traffic, tech_stack}

[Existing cache (refresh option not passed)]

Re-read existing env-data.json

Previous data (unchanged)

Collection summary:
- page weight + third-party share
- country / provider + carbon intensity
- device mix (corrected iOS/macOS)
- country mix + traffic (SimilarWeb)
- detected tech stack

Source priority (country mix AND traffic):
1. Client analytics (options audience / visits)
2. Internal SimilarWeb API (main path, automatic)
3. Assisted retrieval (captcha / WAF)
4. Default FR 100 % + 100 000 visits/year (with warning)

Rest of the calculation: page 5/5.

User
Claude (skill /efootprint)
collect_env_data.py
API SimilarWeb (similarweb_api.py)
API ipinfo.io
CrUX Data
detect_tech.py
audit-dir/

Web journey analysis workflow — Page 5/5 : e-footprint calculation + report (optional)

