
EOF questionnaire - Page 1/3 : what the audit launches on its own

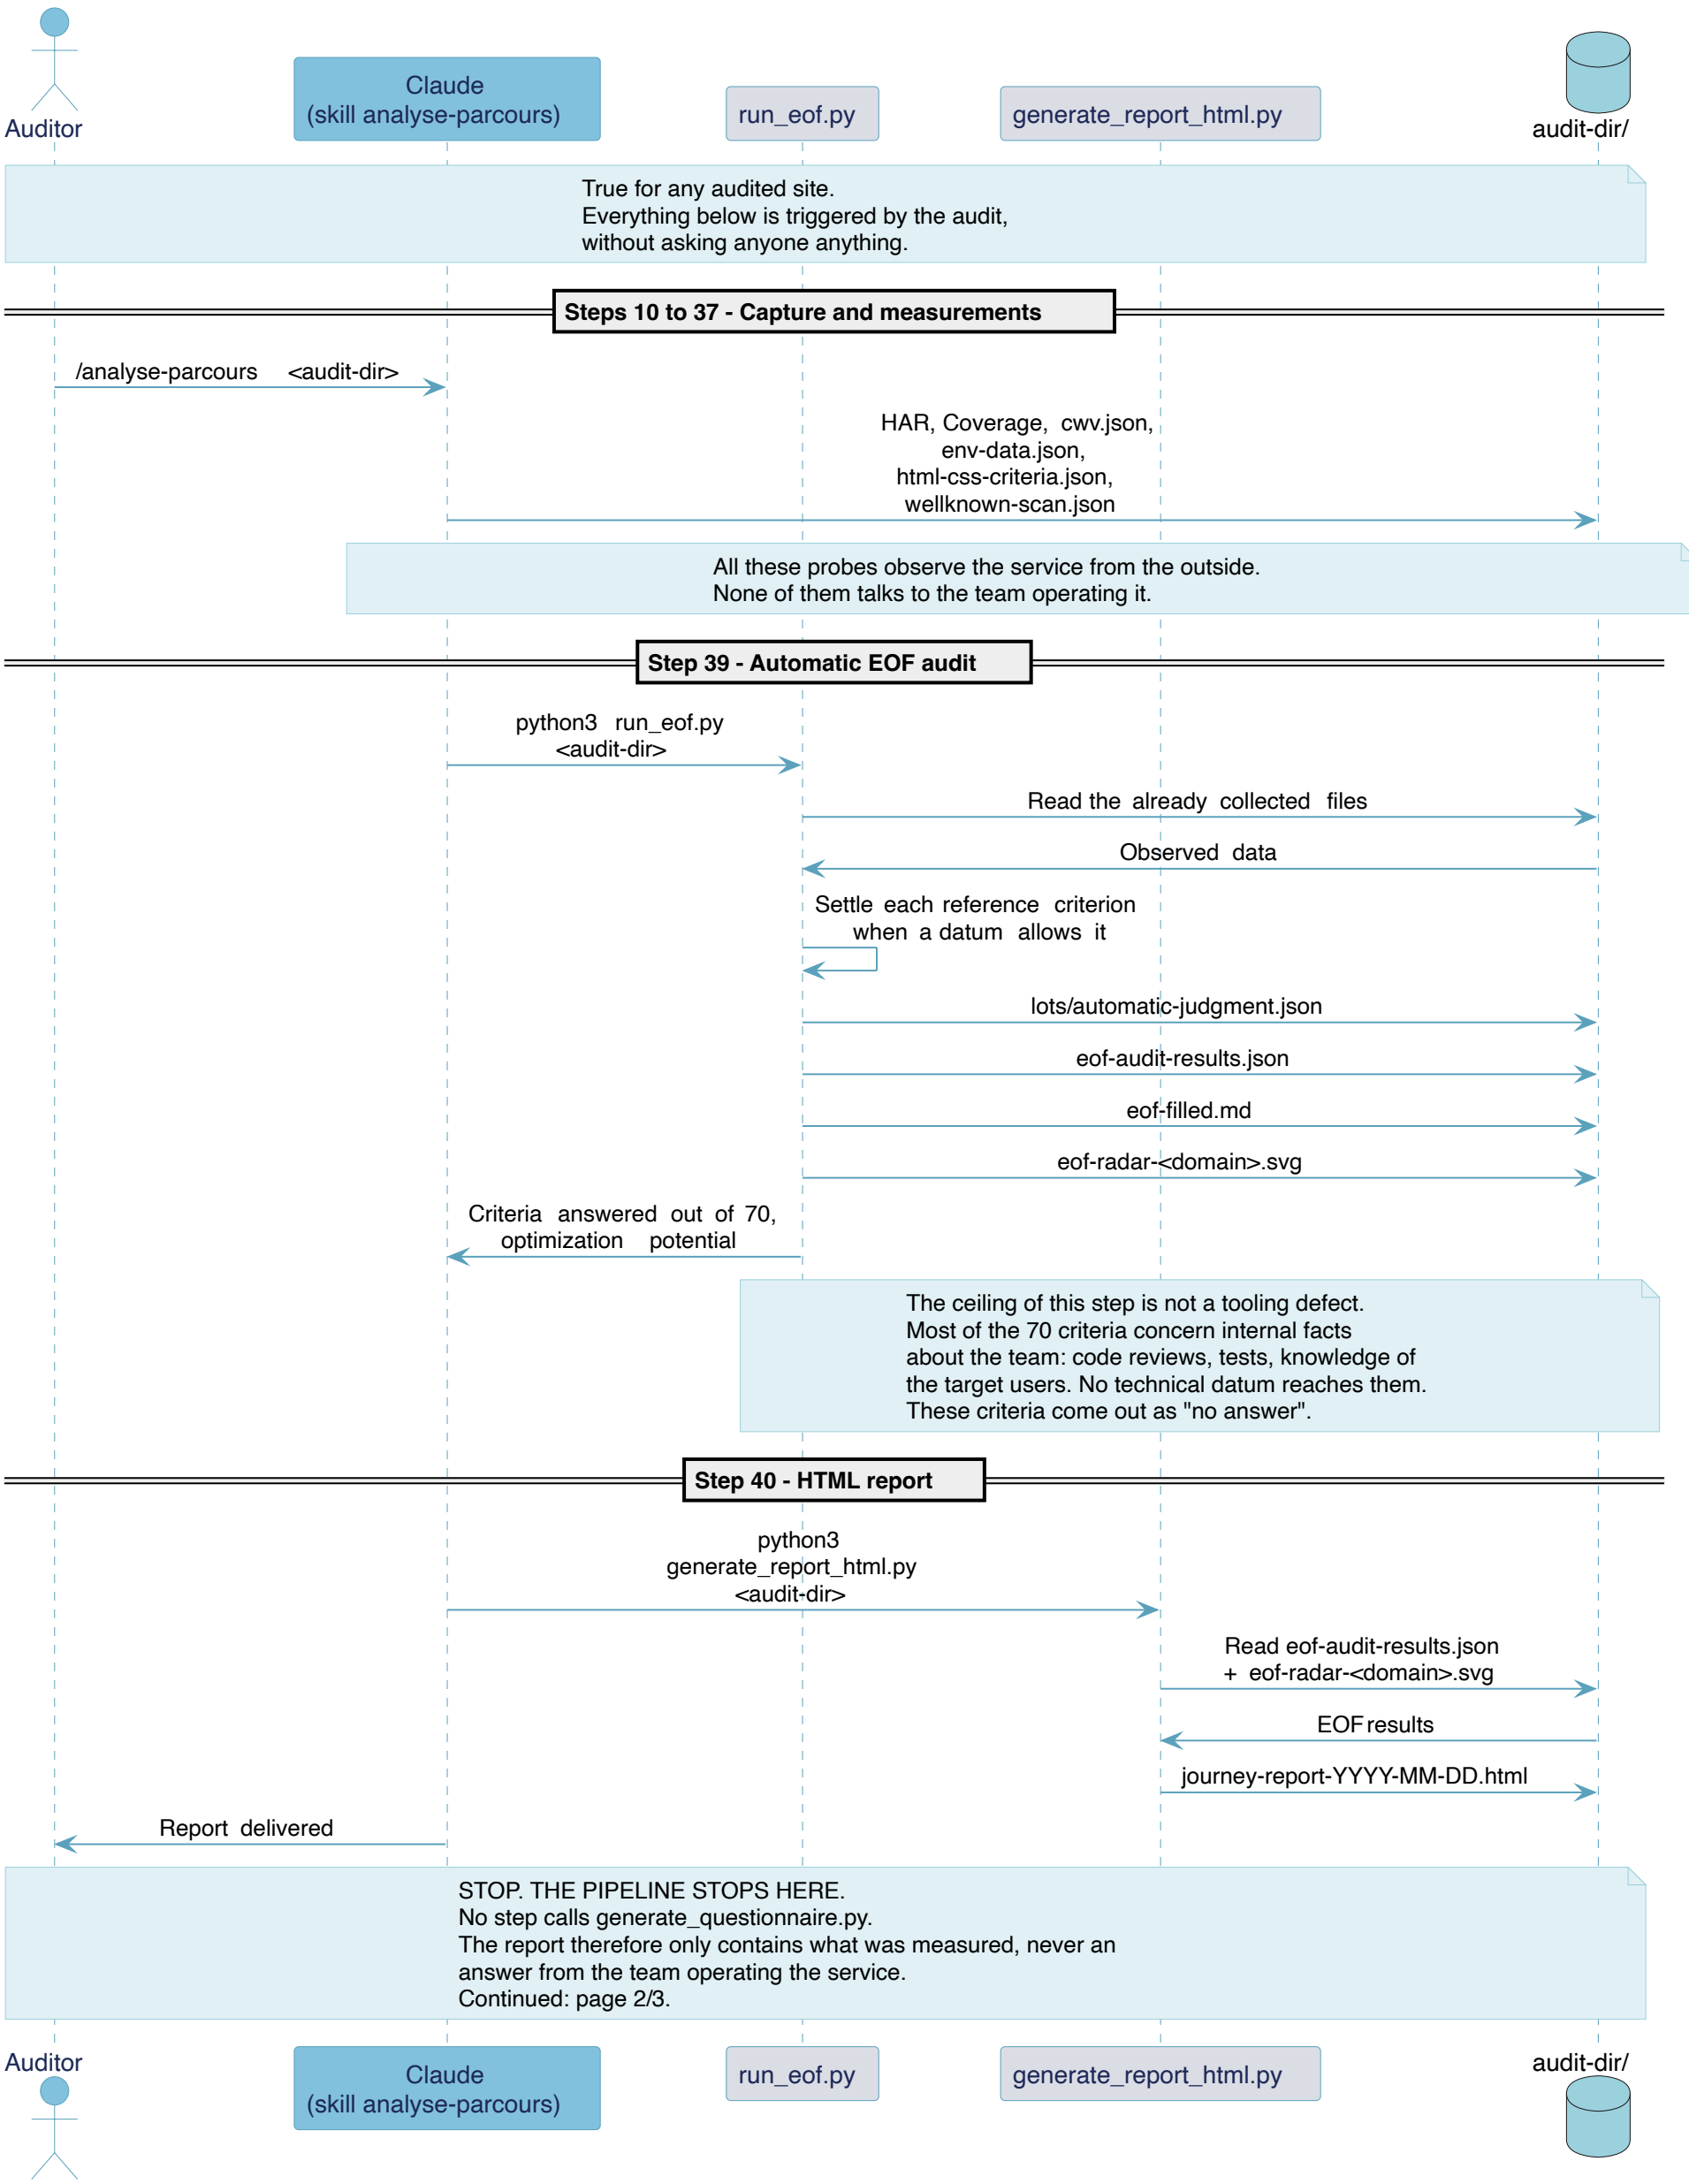

EOF questionnaire - Page 2/3 : generate and send, outside the pipeline

Auditor

Claude
(skill analyse-parcours)

generate_questionnaire.py

Audited service team

audit-dir/

WARNING. NOTHING ON THIS PAGE IS AUTOMATIC.
No audit step calls this script: it is a
command to type, after reading the page 1/3 report.

Generate the questionnaire

Request the questionnaire

python3
generate_questionnaire.py
<audit-dir>

Read eof-audit-results.json

Criteria already settled by measurement

Keep only the criteria without an answer,
and those answered "to be assessed"

Sort by decreasing yield:
multi-criterion questions first

questionnaire-eof.md
(62 questions at most)

The real count is lower:
a well-measured site gets about 55

ONE SINGLE file. The split into two, product and technical, was removed: it routed nothing.
3 recipients out of 4 received questions in BOTH files.

Each question says in its title who to ask:
the product manager, the development team,
the person operating the infrastructure, the one
managing the data. It is an indication, not a filing plan: roles depend too much on each client.

The order follows the yield: a client who stops
halfway has covered the maximum number of criteria
for the effort provided. The yield is calculated over
the REMAINING criteria, so a block whose measurement
already settled part of it drops back on its own.

Format: Markdown checkboxes, with hidden
markers in HTML comments so that the read-back does
not depend on the layout.
An "I don't know" box is always offered, and
it never produces an answer.

File path

Send, wait, receive

Transmit the file

WAITING. The delay is asynchronous and not tooling-backed.
Nothing in the code sets a deadline, reminds
the contact, or tracks who answered what.
The transport is free: email, shared drive,
whatever the client accepts.

Tick the boxes,
each the questions that concern them

Send back the filled-in file

Put the filled-in file back
in the audit directory

The file must come back under its original name, in the audit directory: that is where the read-back looks for it.

If it does not come back, the read-back says so: it sets a read_error state that the probe health check catches. A questionnaire never returned therefore no longer looks like an empty returned questionnaire.
Continued: page 3/3.

Auditor

Claude
(skill analyse-parcours)

generate_questionnaire.py

Audited service team

audit-dir/

EOF questionnaire - Page 3/3 : read back, merge, redo the report

