

## 1. Setting Up Bootstrap 5


### Exercise 1.1:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport"
    content="width=device-width, initial-scale=1.0">
  <title>Bootstrap CDN Assignment</title>
  <!-- Bootstrap 5 CDN Link -->
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.7/dist/css/bootstrap.min.css"
    rel="stylesheet">
</head>
<body class="bg-info-subtle">
  <div class="container py-5">
    <div class="text-center">
      <h1 class="display-4 text-primary fw-bold">
        Bootstrap 5 CDN Setup
      </h1>
      <p class="lead text-dark mt-3">
        This webpage is created using Bootstrap CDN.
      </p>
      <button class="btn btn-primary btn-lg mt-3">
        Click Here
      </button>
    </div>
    <div class="row mt-5">
      <div class="col-md-4">
        <div class="card shadow">
          <div class="card-body">
            <h3 class="text-danger">
              HTML
            </h3>
            <p>
              Structure of webpage
            </p>
          </div>
        </div>
      </div>
      <div class="col-md-4 mt-4 mt-md-0">
        <div class="card shadow">
          <div class="card-body">
            <h3 class="text-success">
              CSS
            </h3>
            <p>
```

```

        Styling and formatting
    </p>
</div>
</div>
</div>
<div class="col-md-4 mt-4 mt-md-0">
    <div class="card shadow">
        <div class="card-body">
            <h3 class="text-warning">
                Bootstrap
            </h3>
            <p>
                Responsive framework
            </p>
        </div>
    </div>
</div>
</div>
</div>
<!-- Bootstrap JS -->
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.7/dist/js/bootstrap.bundle.min.js"></script>
</body>
</html>

```

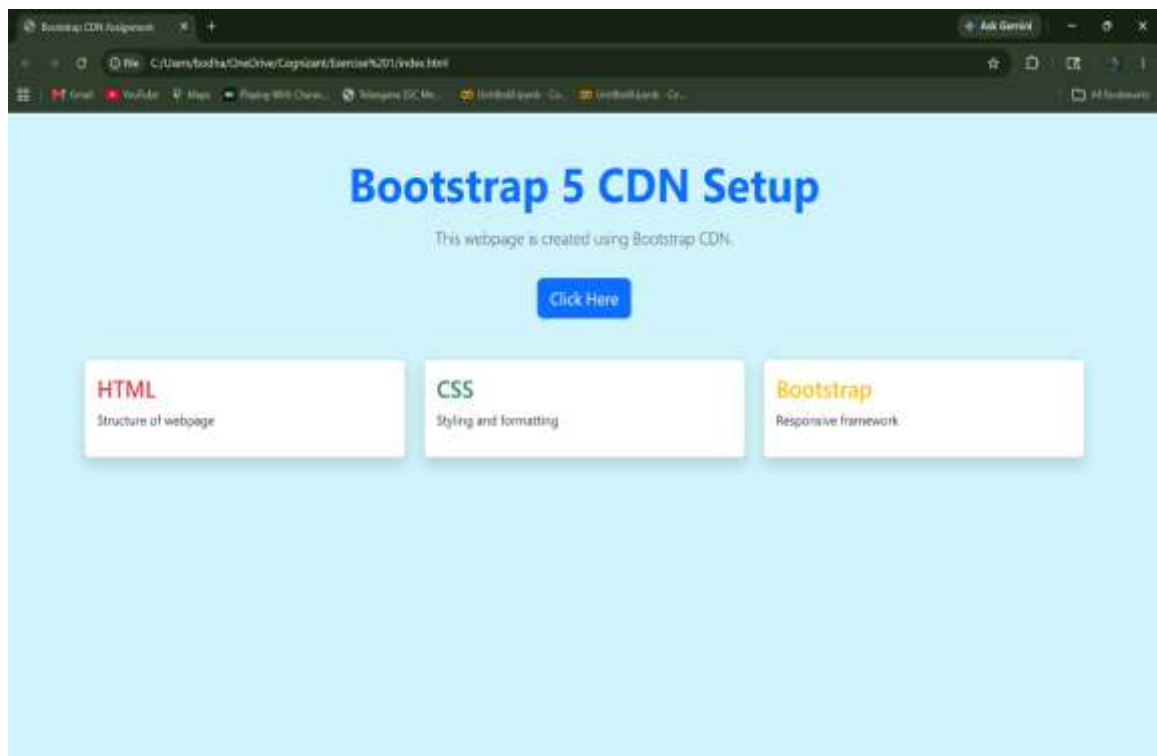

## Exercise 1.2 — Bootstrap Using Downloaded Files

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport"
    content="width=device-width, initial-scale=1.0">
  <title>Bootstrap Local Files Assignment</title>
  <!-- Local Bootstrap CSS -->
  <link rel="stylesheet"
    href="css/bootstrap.min.css">
  <style>
    body{
      background-color: #f0f8ff;
    }
    .main-box{
      background: white;
      border-radius: 20px;
      padding: 50px;
    }
  </style>
</head>
<body>
  <div class="container py-5">
    <div class="main-box shadow-lg">
      <div class="text-center">
        <h1 class="text-primary fw-bold">
          Bootstrap Local Setup
        </h1>
        <p class="fs-5 mt-3">
          Using downloaded Bootstrap files
        </p>
        <button class="btn btn-success btn-lg mt-3">
          Start Learning
        </button>
      </div>
    <div class="row mt-5">
      <div class="col-lg-6">
        <div class="alert alert-warning">
          <h4>
            Offline Support
          </h4>
          <p>
            Bootstrap works without internet.
          </p>
        </div>
      </div>
    </div>
  </div>
</body>
```

```

</div>
<div class="col-lg-6">
  <div class="alert alert-info">
    <h4>
      Fast Performance
    </h4>
    <p>
      Local files load quickly.
    </p>
  </div>
</div>
</div>
</div>
<!-- Local Bootstrap JS -->
<script src="js/bootstrap.bundle.min.js"></script>
</body>
</html>

```

