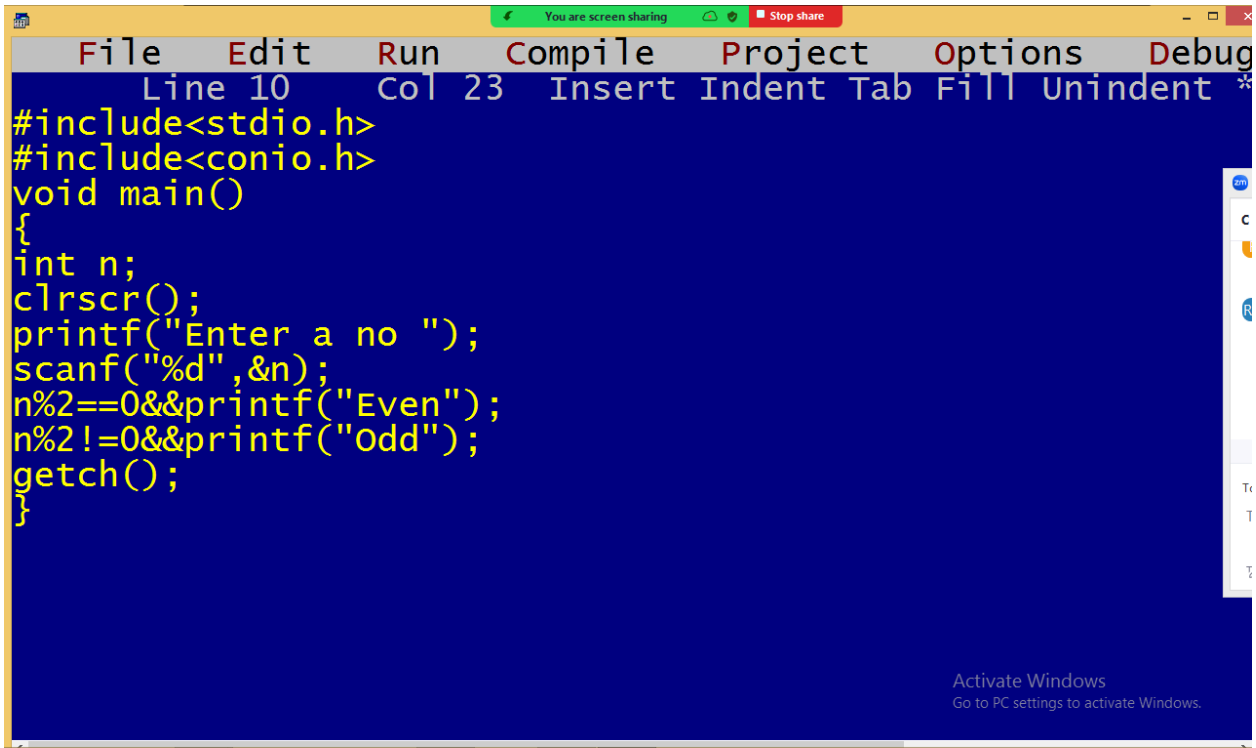
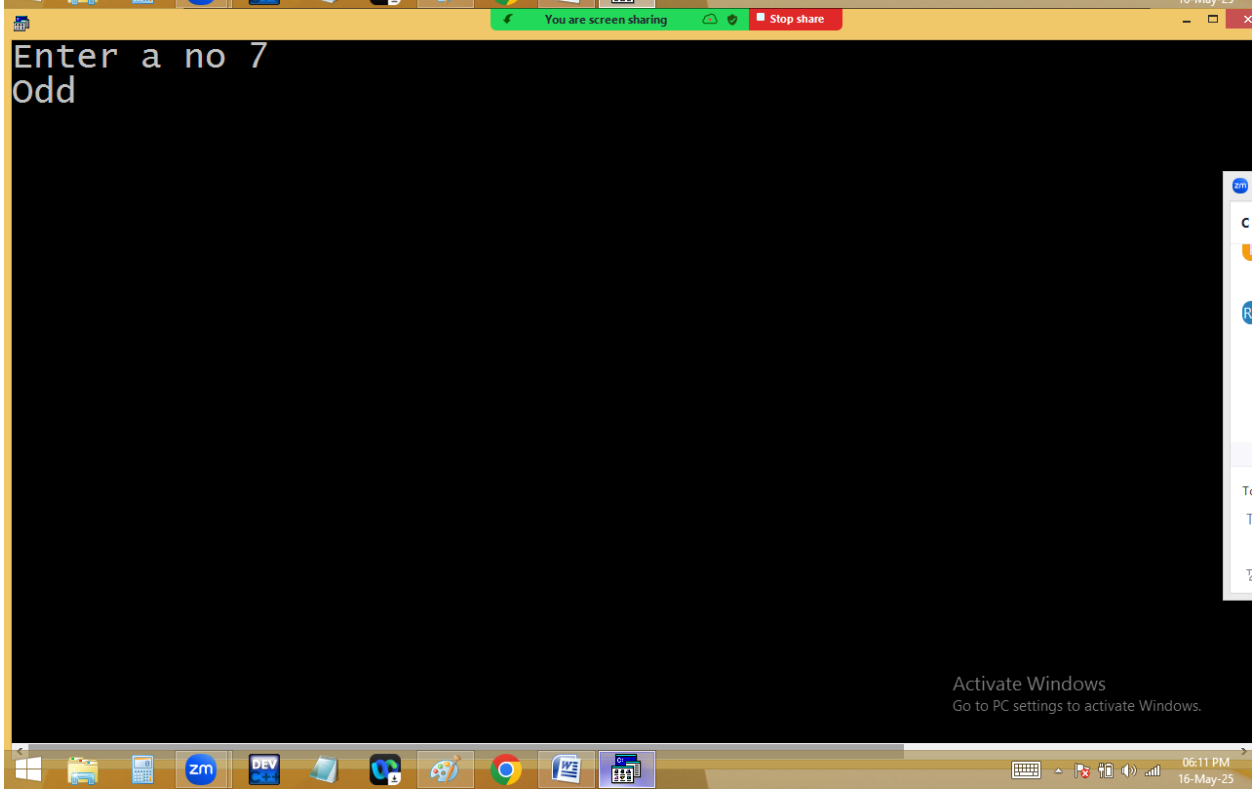
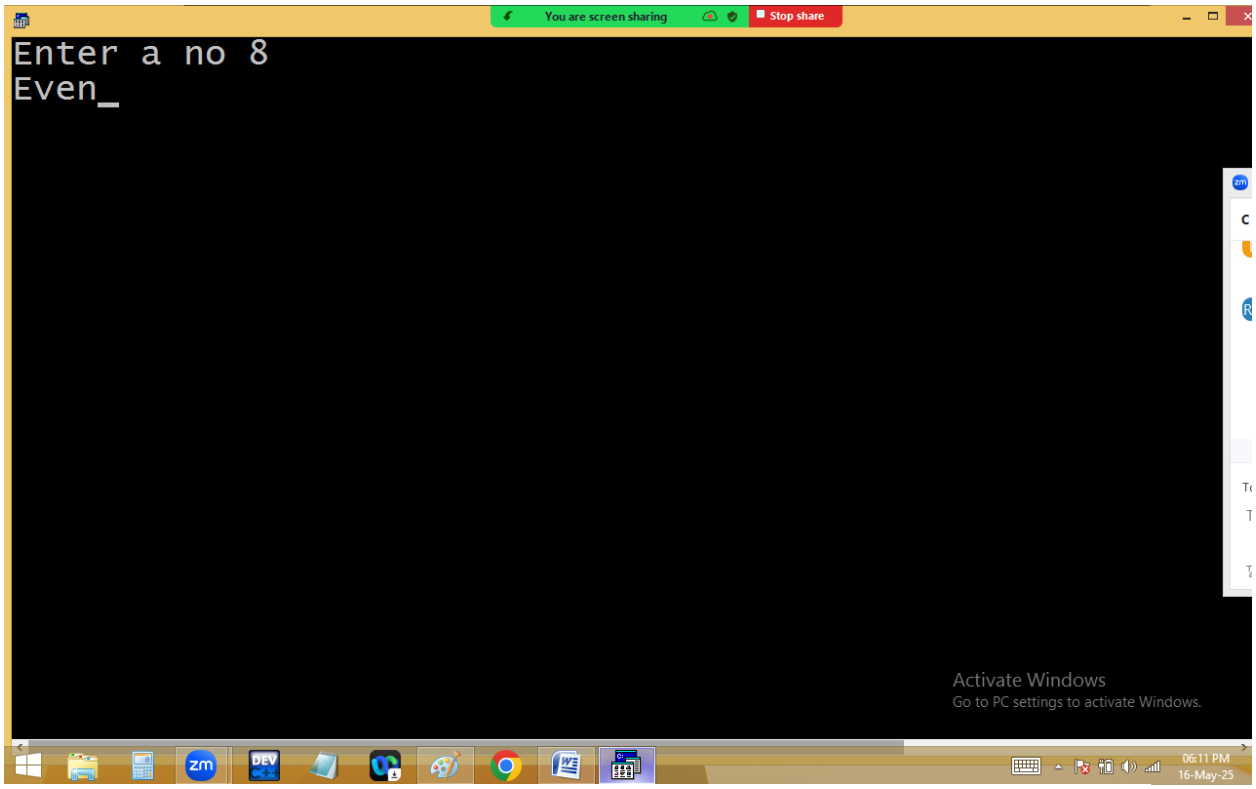
Write a c program to find even/odd without using if..else or ternary operator?



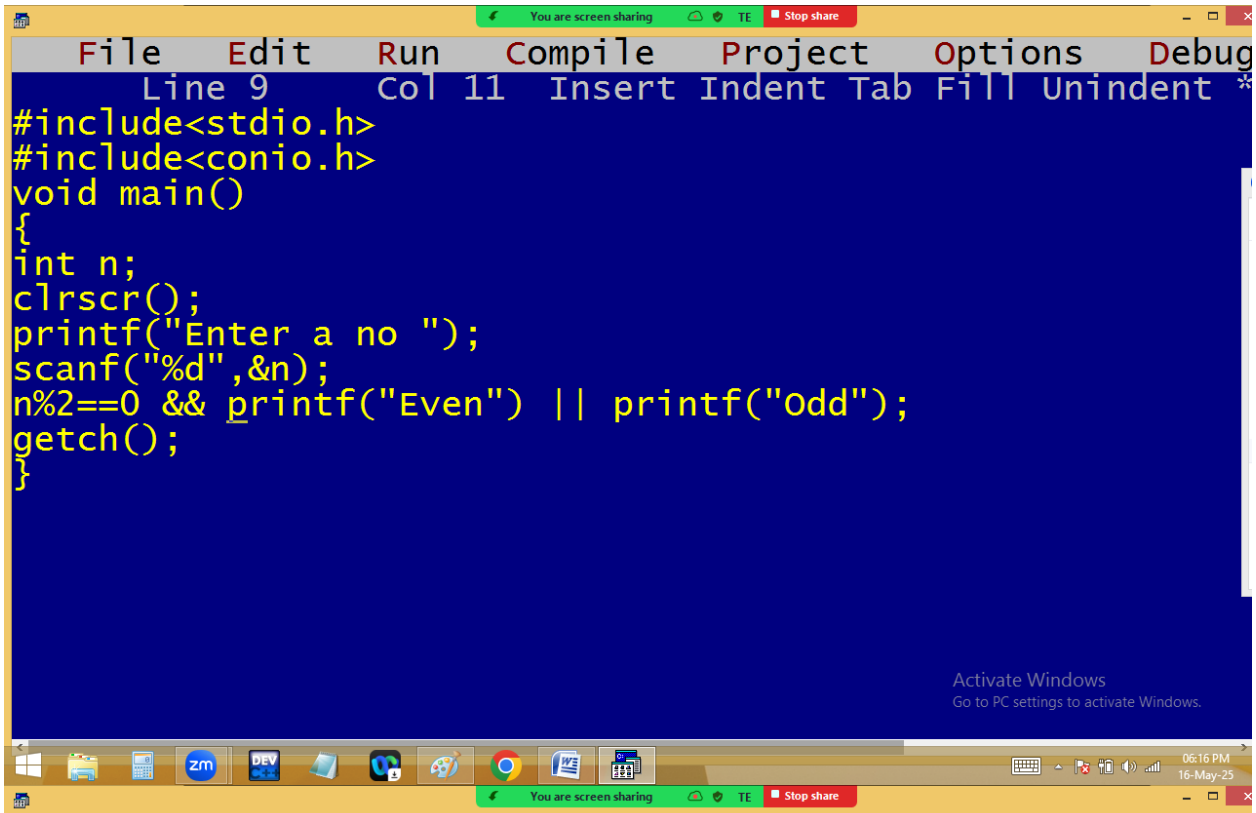


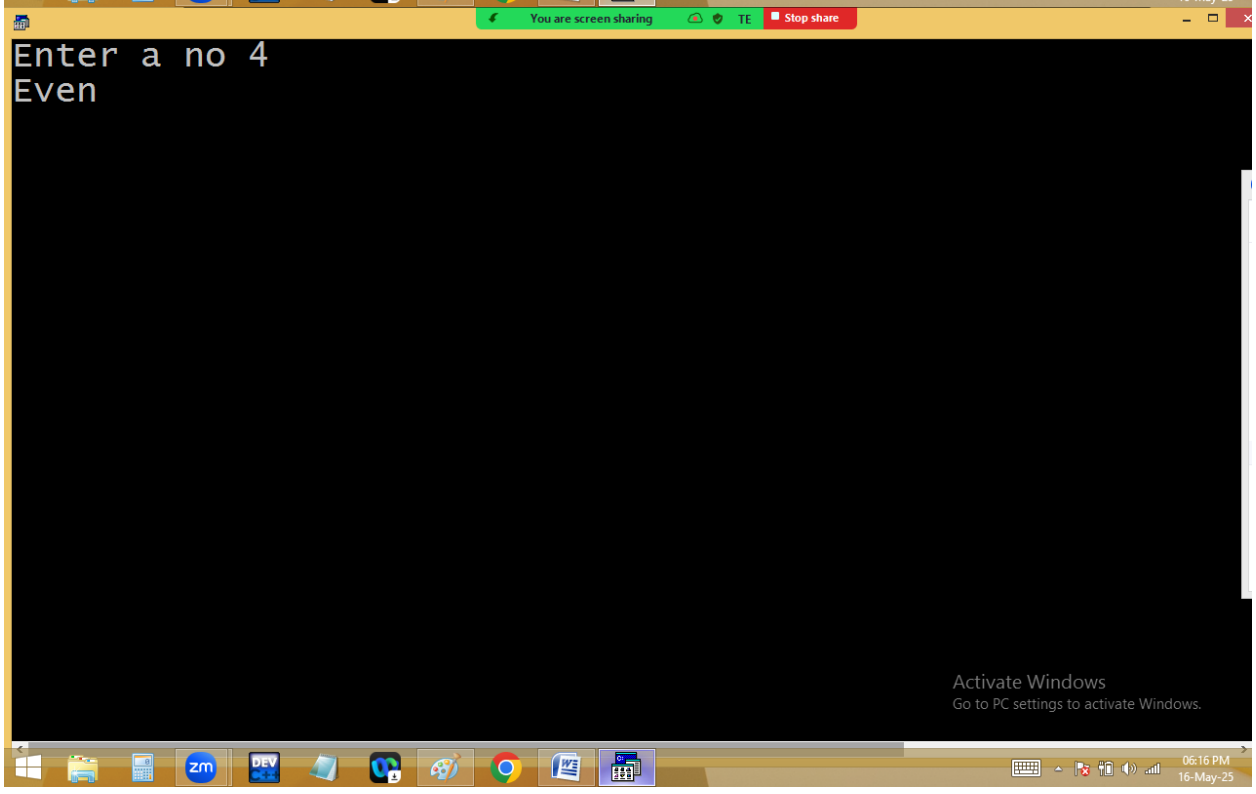


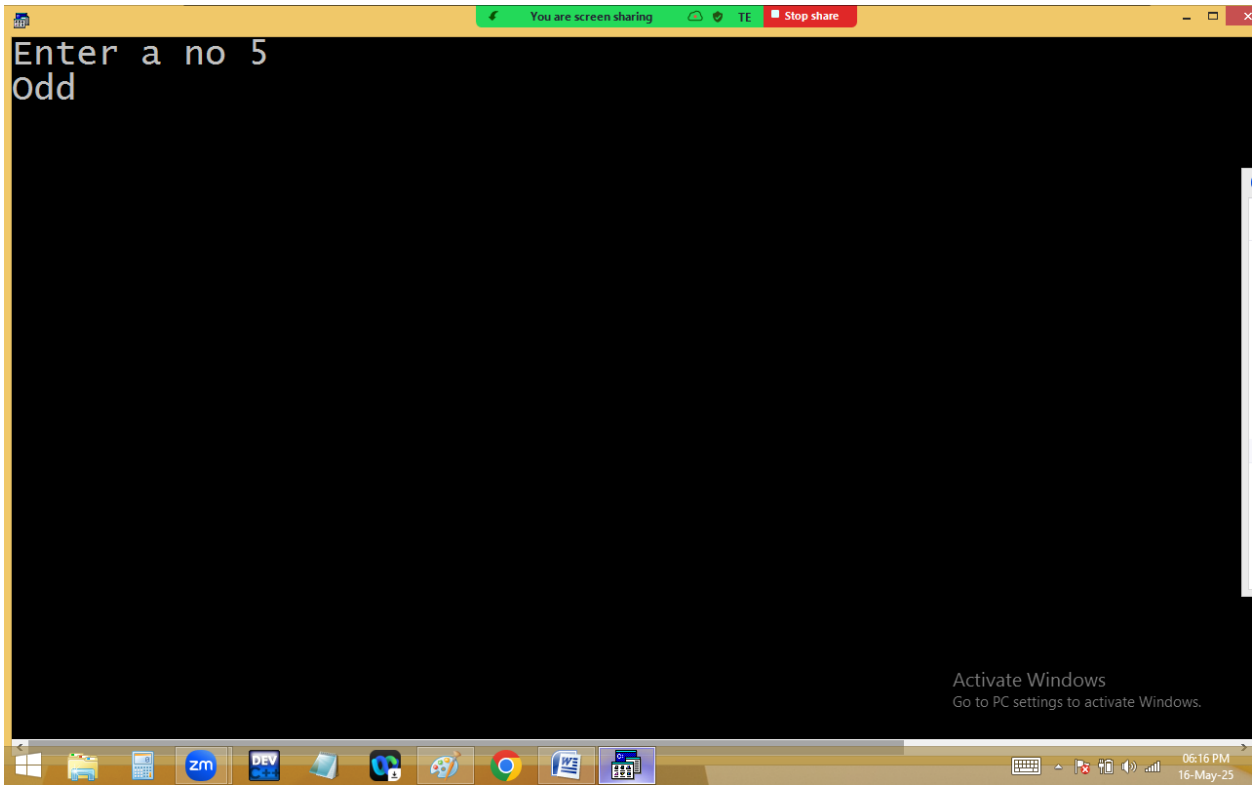
4%2=0==0

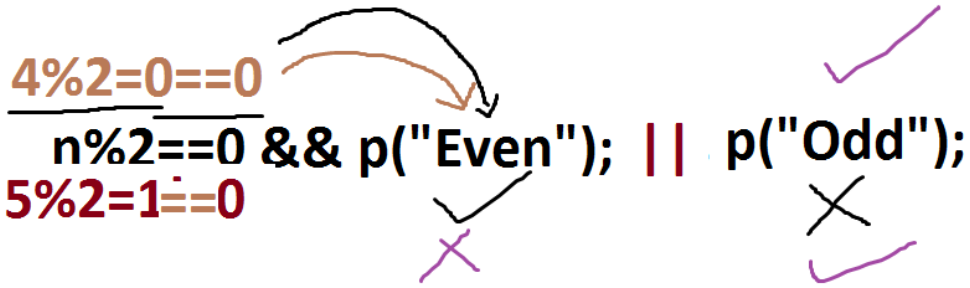
```
n%2==0 && p("Even");
n%2!=&& p("Odd");
```

5%2=1!=0


You are screen sharing
Stop share
File Edit Run Compile Project Options Debug
Line 9 Col 11 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter a no ");
scanf("%d",&n);
n%2==0 && printf("Even") || printf("Odd");
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:16 PM
16-May-25

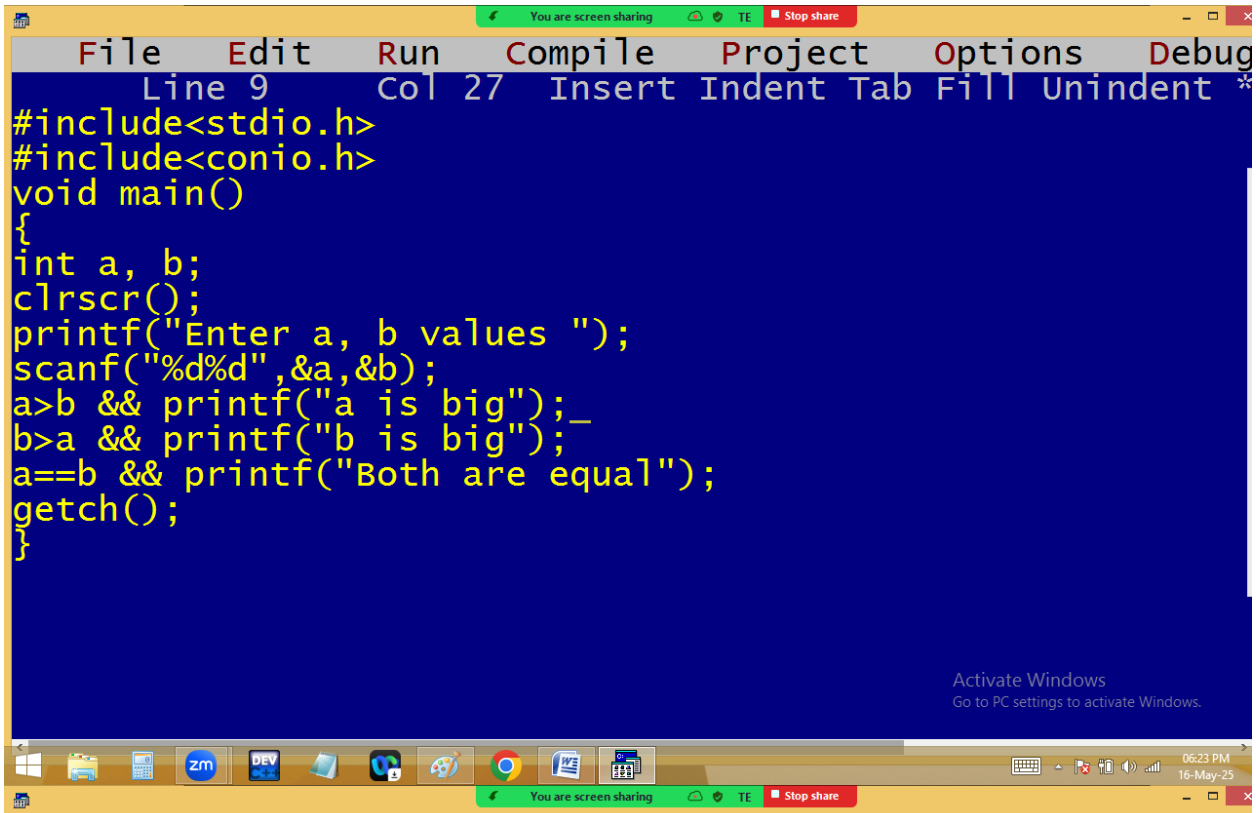

You are screen sharing
Stop share
Enter a no 4
Even
Activate Windows
Go to PC settings to activate Windows.
06:16 PM
16-May-25

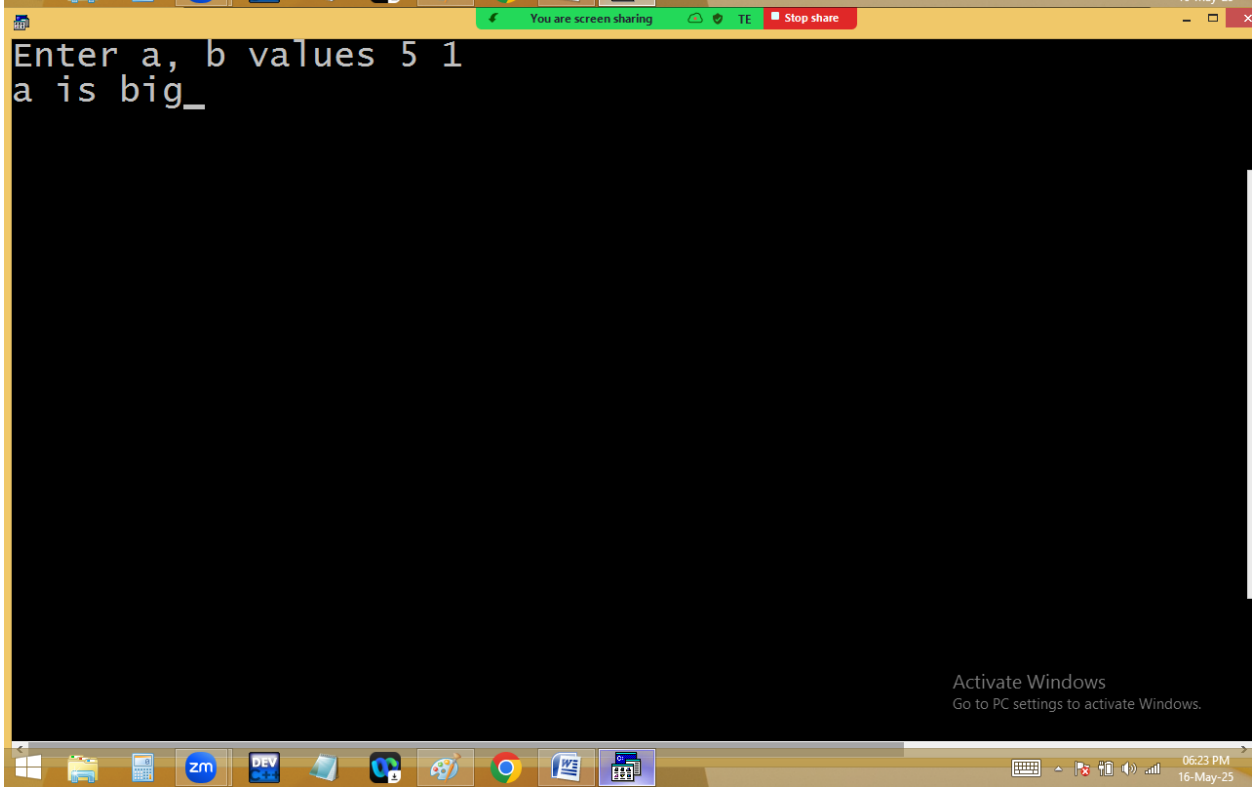


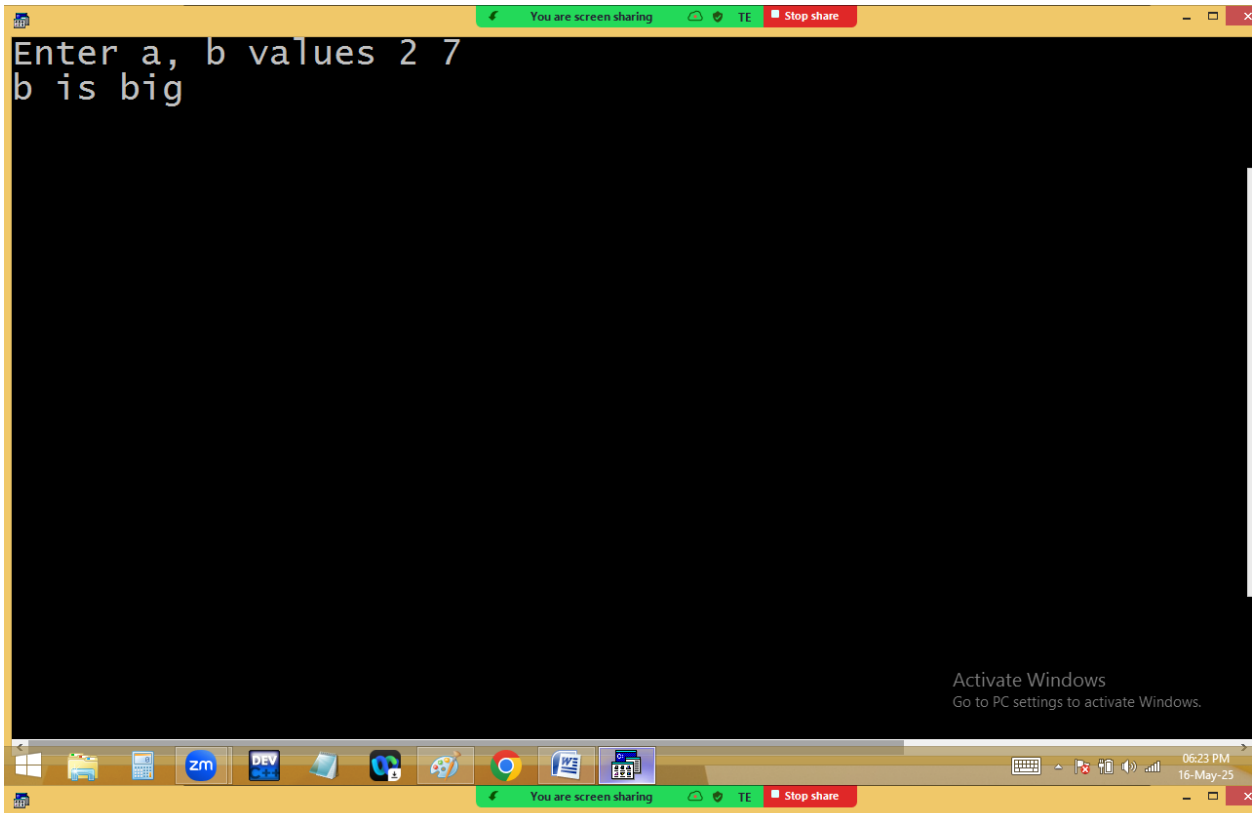


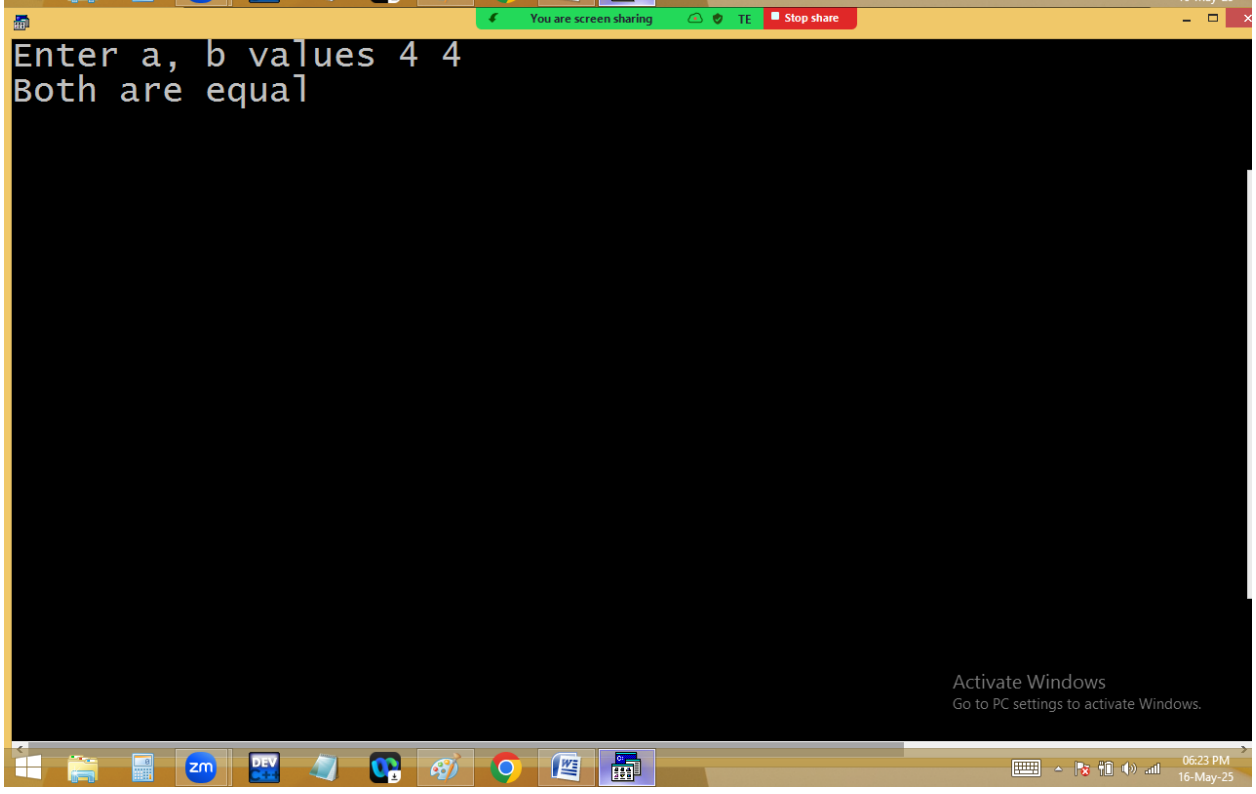
Note: In && left exp false right one not working
In || left exp true, right exp not working

Finding max in 2 no's without using if..else or ternary op?


You are screen sharing
Stop share
File Edit Run Compile Project Options Debug
Line 9 Col 27 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a, b;
clrscr();
printf("Enter a, b values ");
scanf("%d%d",&a,&b);
a>b && printf("a is big");
b>a && printf("b is big");
a==b && printf("Both are equal");
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:23 PM
16-May-25


You are screen sharing
Stop share
Enter a, b values 5 1
a is big
Activate Windows
Go to PC settings to activate Windows.
06:23 PM
16-May-25


You are screen sharing
TE
Stop share
Enter a, b values 2 7
b is big
Activate Windows
Go to PC settings to activate Windows.
06:23 PM
16-May-25


You are screen sharing
TE
Stop share
Enter a, b values 4 4
Both are equal
Activate Windows
Go to PC settings to activate Windows.
06:23 PM
16-May-25

5 7 4>4
9 > 3

```
a > b && p("a is big")
```

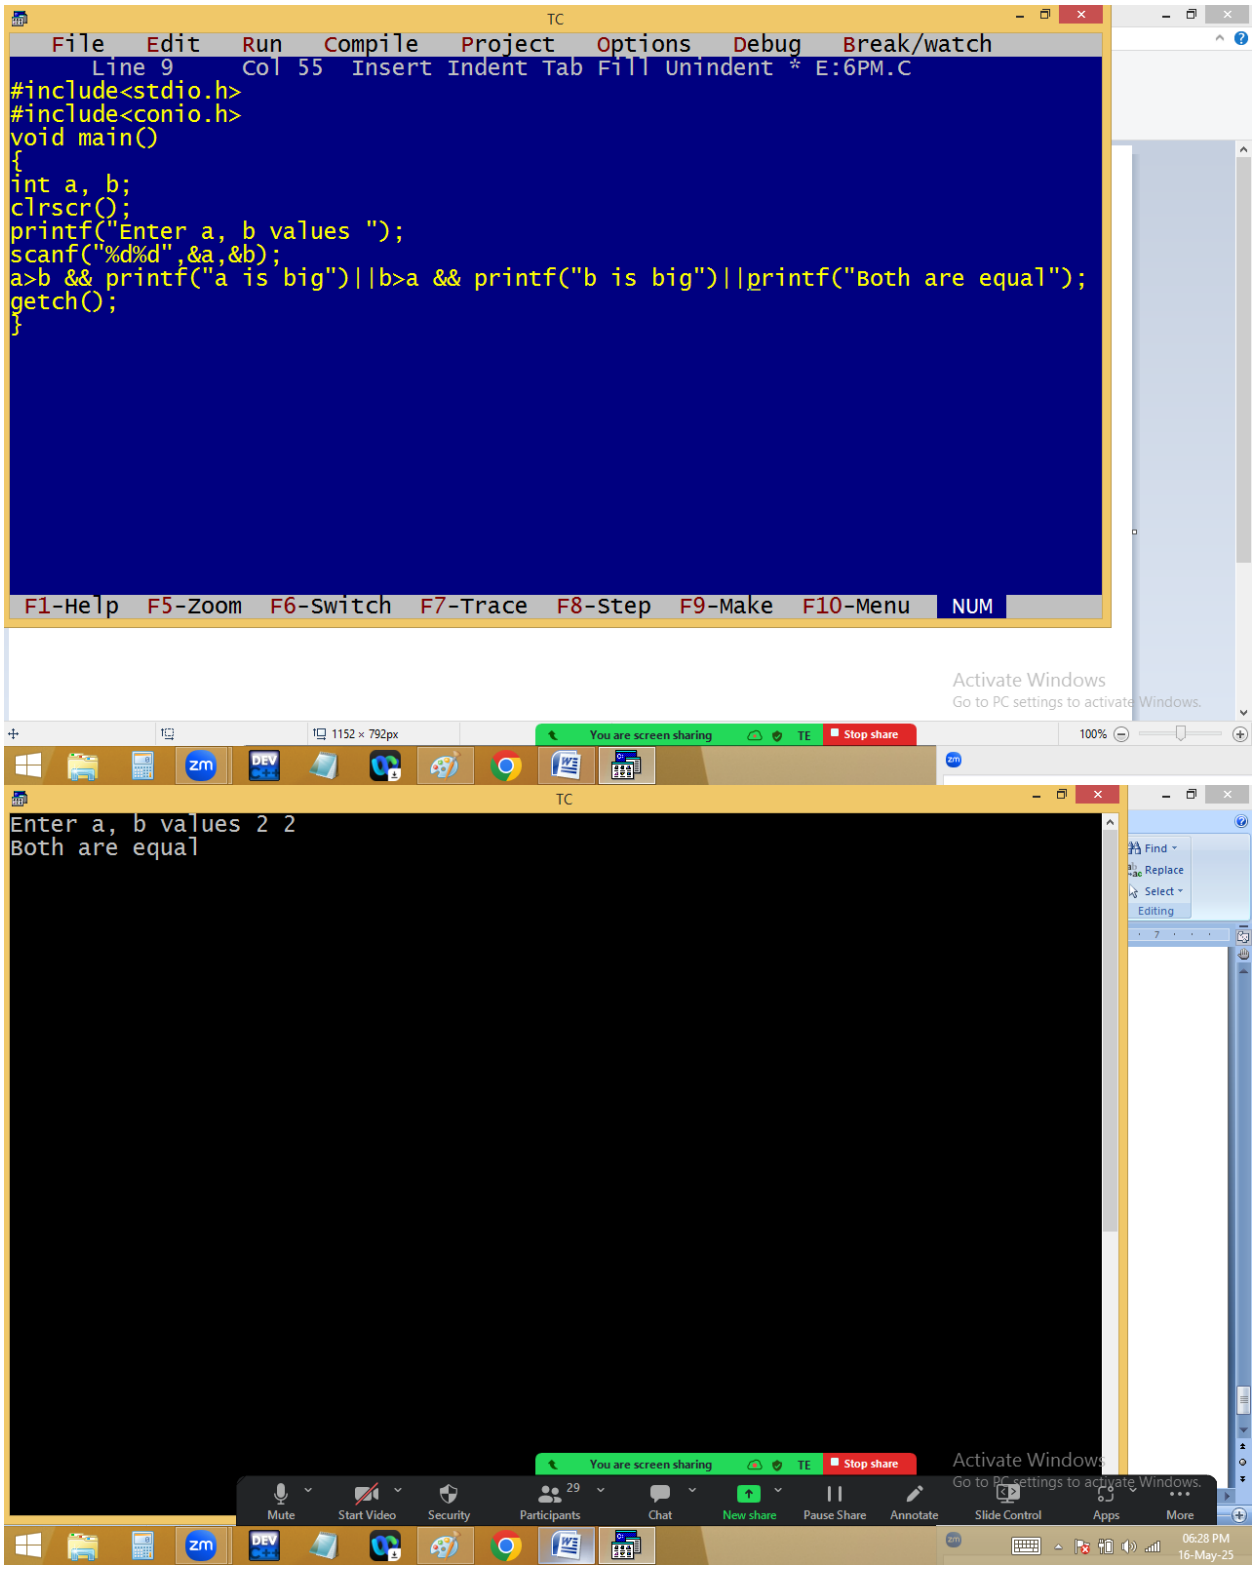
7>5 4>4

```
b > a && p("b is big")
```

✓

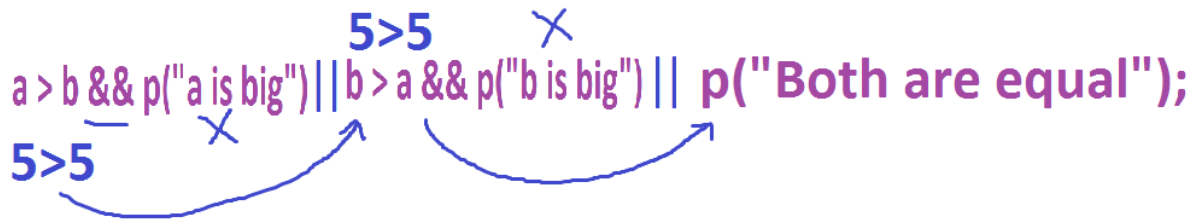
```
a == b && p("Both are equal");
```

4==4


TC
File Edit Run Compile Project Options Debug Break/watch
Line 9 Col 55 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a, b;
clrscr();
printf("Enter a, b values ");
scanf("%d%d",&a,&b);
a>b && printf("a is big")||b>a && printf("b is big")||printf("Both are equal");
getch();
}
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Menu NUM
Activate Windows
Go to PC settings to activate Windows.
1152 × 792px
You are screen sharing
Stop share
100%
TC
Enter a, b values 2 2
Both are equal
Find
Replace
Select
Editing
You are screen sharing
Stop share
Activate Windows
Go to PC settings to activate Windows.
Mute
Start Video
Security
Participants
29
Chat
New share
Pause Share
Annotate
Slide Control
Apps
More
06:28 PM
16-May-25


TC
Enter a, b values 3 4
b is big
You are screen sharing
Stop share
Mute
Start Video
Security
Participants
Manage Participants (Alt+U)
Pause Share
Annotate
Slide Control
Apps
More
Activate Windows
Go to PC settings to activate Windows.
Find
Replace
Select
Editing
06:28 PM
16-May-25


TC
Enter a, b values 9 2
a is big
You are screen sharing
Stop share
Mute
Webex
Security
Participants
Chat
New share
Pause Share
Annotate
Slide Control
Apps
More
Activate Windows
Go to PC settings to activate Windows.
Find
Replace
Select
Editing
06:28 PM
16-May-25



Ternary operator / Conditional operator[? :]:

It comes with 3 expressions or 3 parts / 3 operands. Hence it is a ternary operator.

It starts with condition. Hence it is a conditional operator.

Syntax:

Conditional part ? true part : false part ;

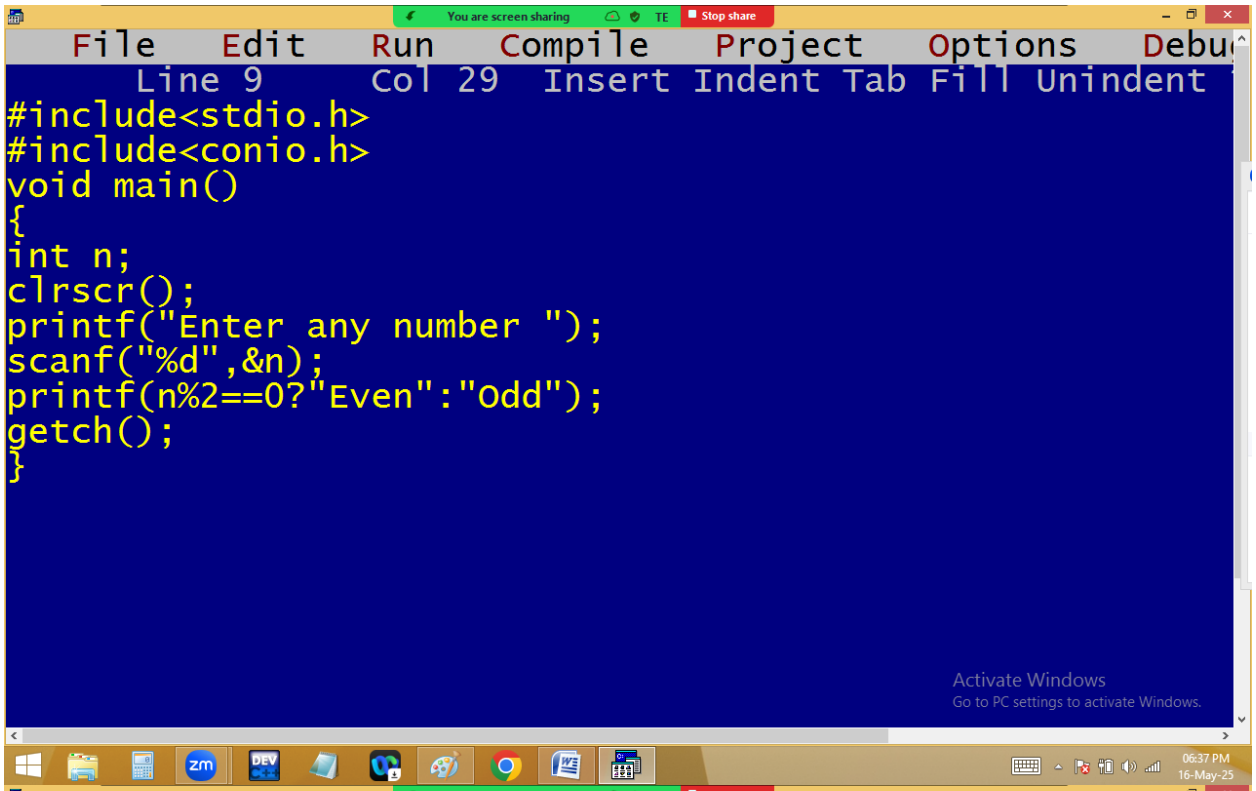
If condition true always ? part is executed.

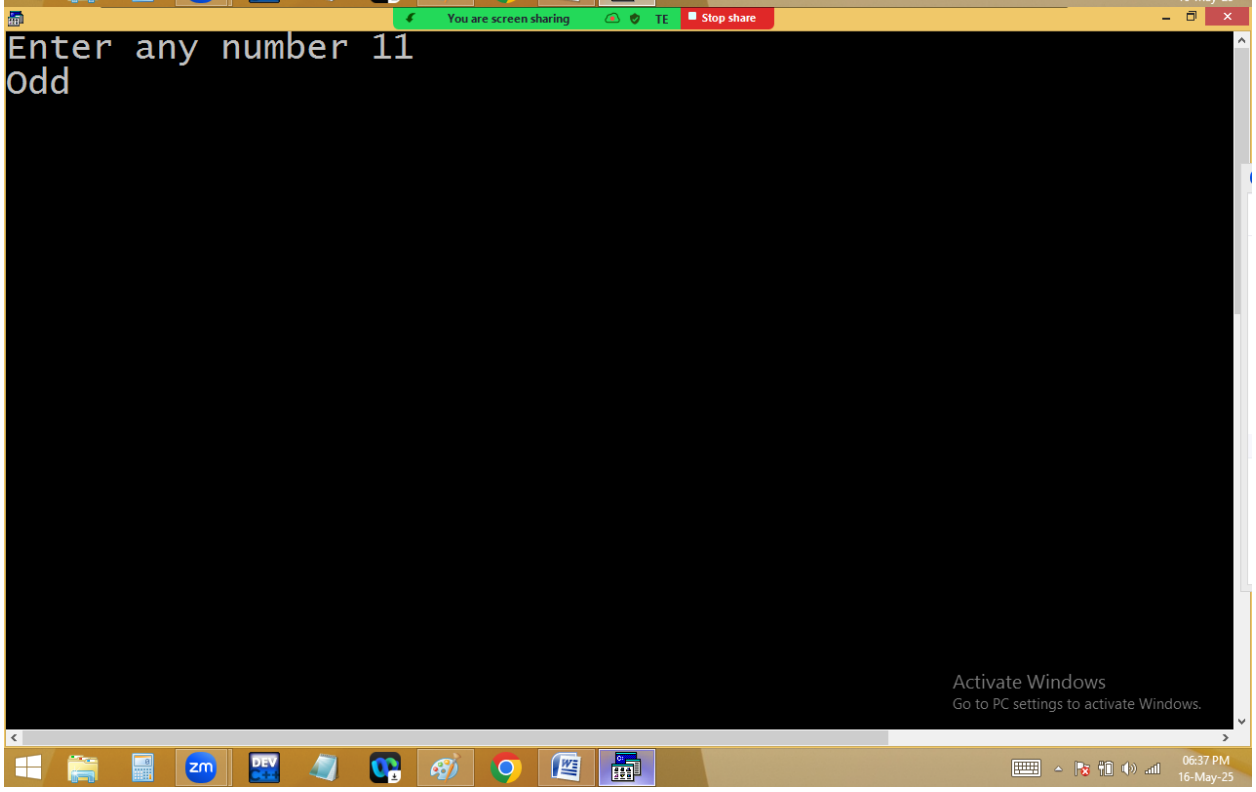
If condition false always : part is executed.

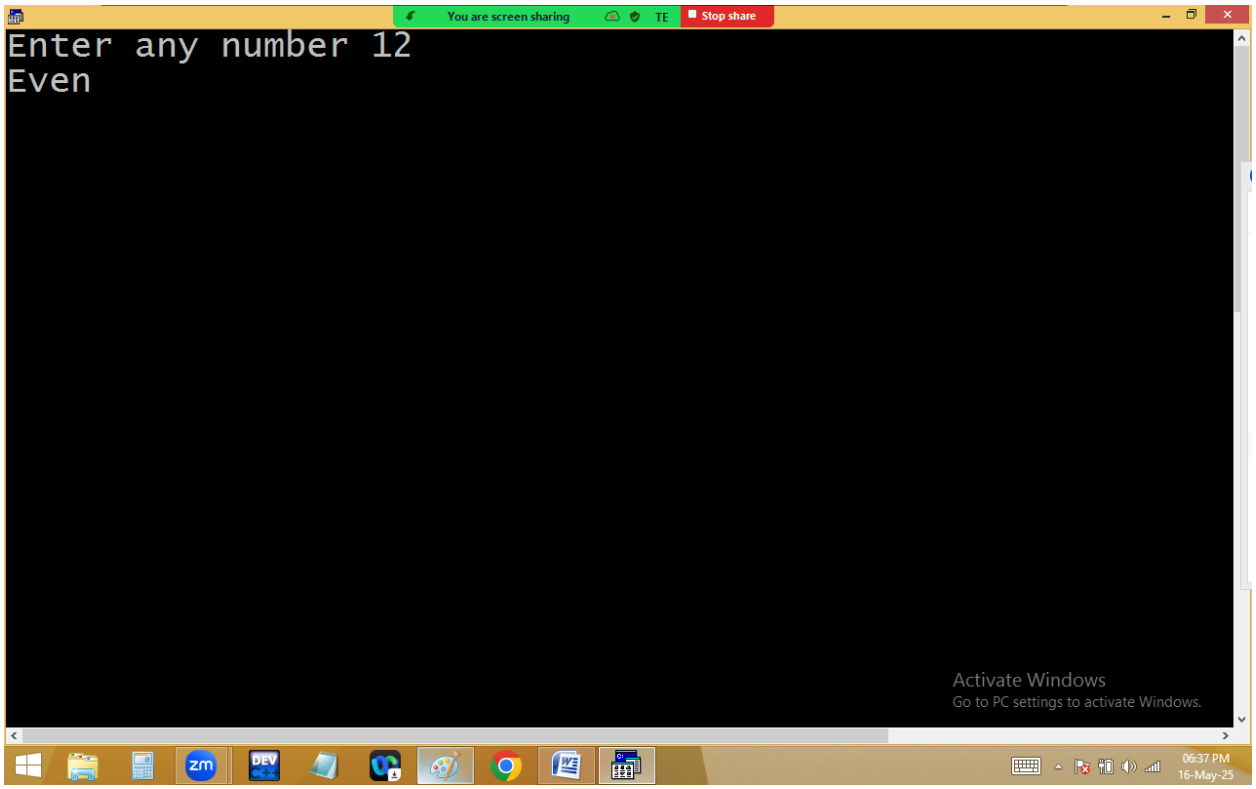
In ternary operator only one statement allowed in true / false part.

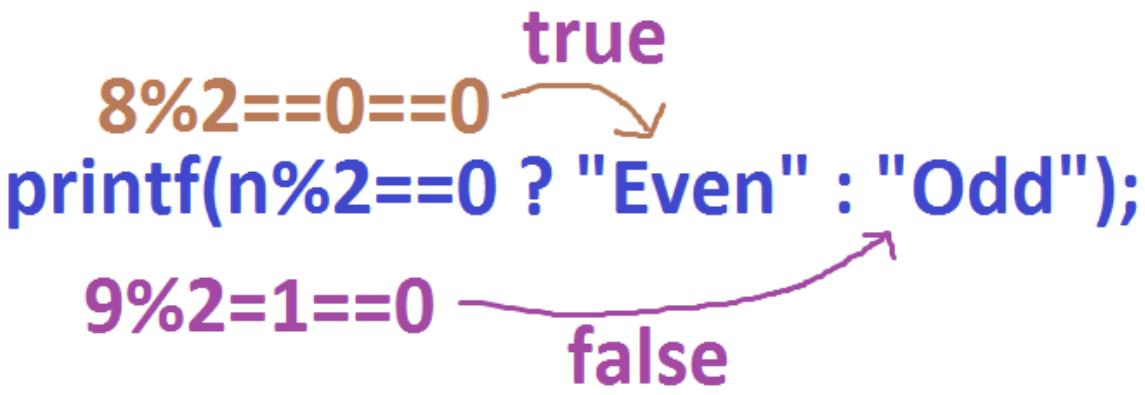
Eg: Finding even/odd using ternary operator?

printf(n%2==0?”Even”:”Odd”);

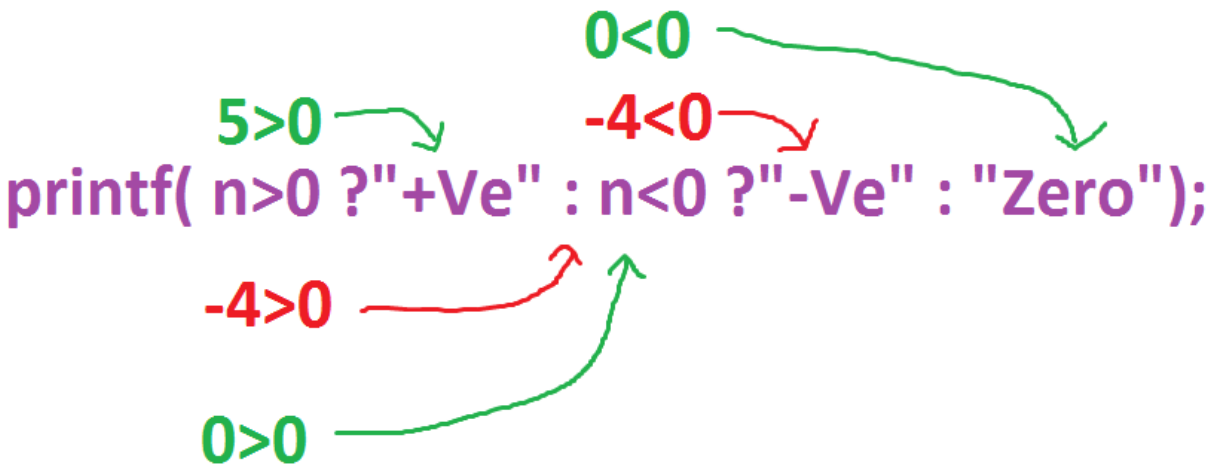

You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Line 9 Col 29 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter any number ");
scanf("%d",&n);
printf(n%2==0?"Even":"Odd");
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:37 PM
16-May-25

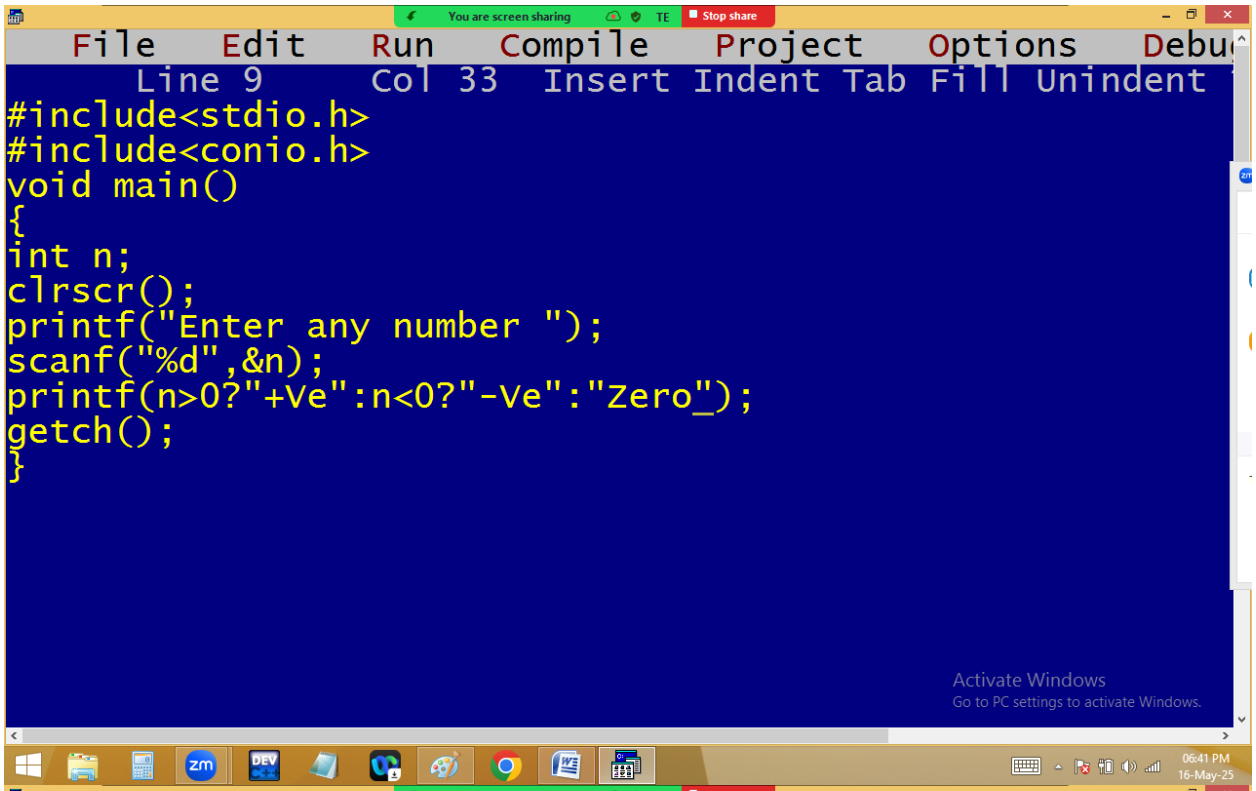

You are screen sharing
Stop share
Enter any number 11
Odd
Activate Windows
Go to PC settings to activate Windows.
06:37 PM
16-May-25

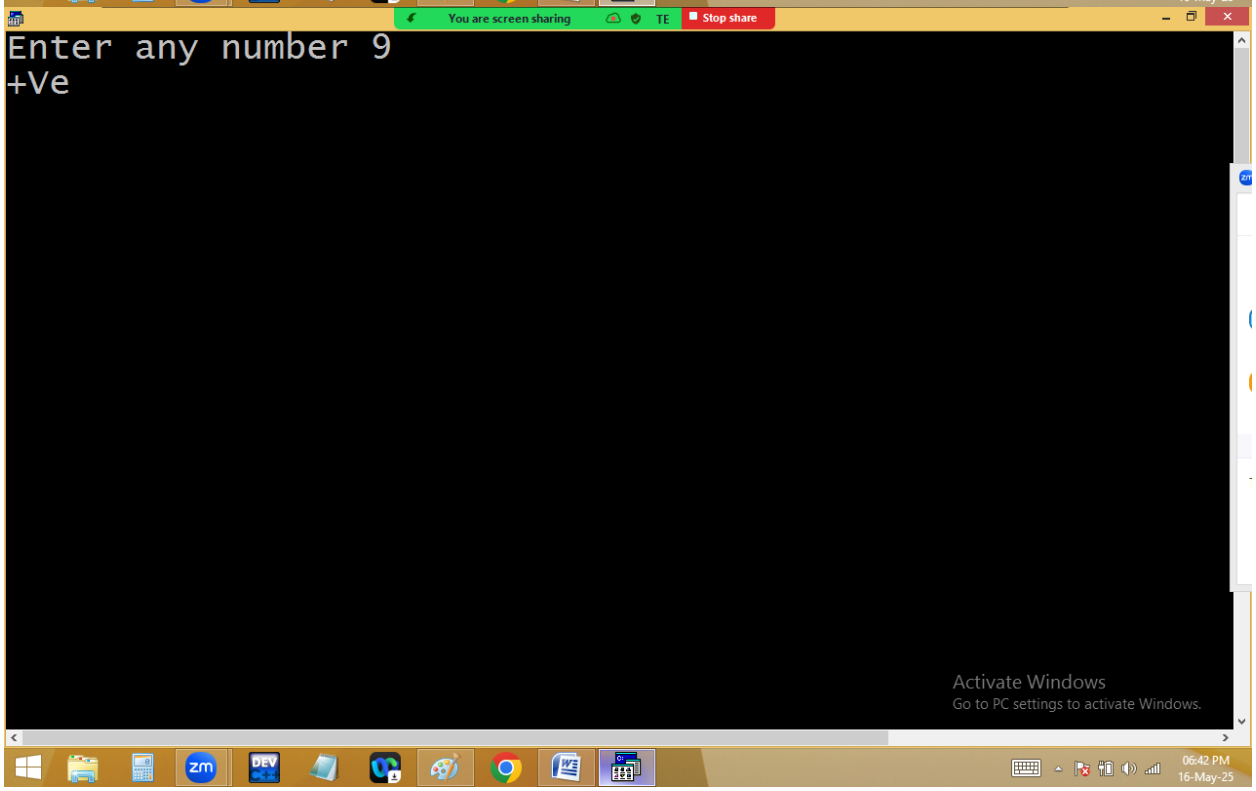


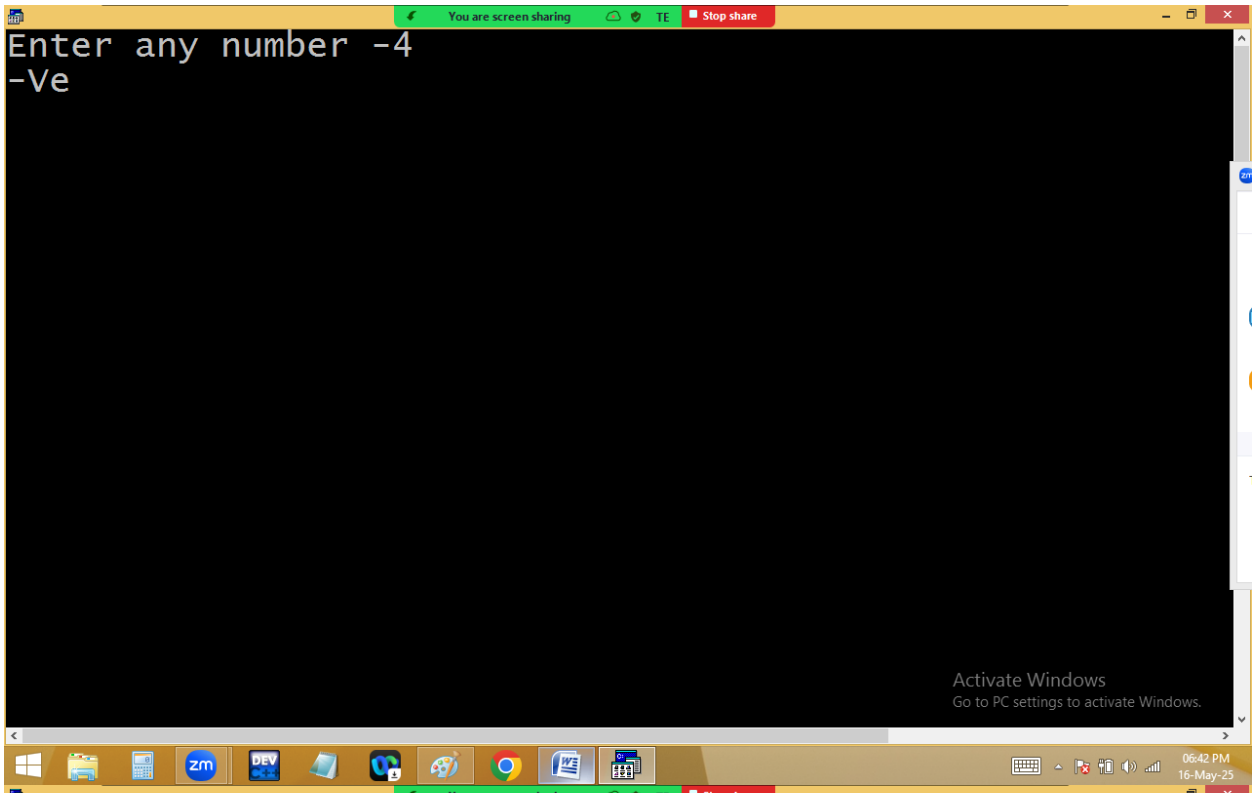


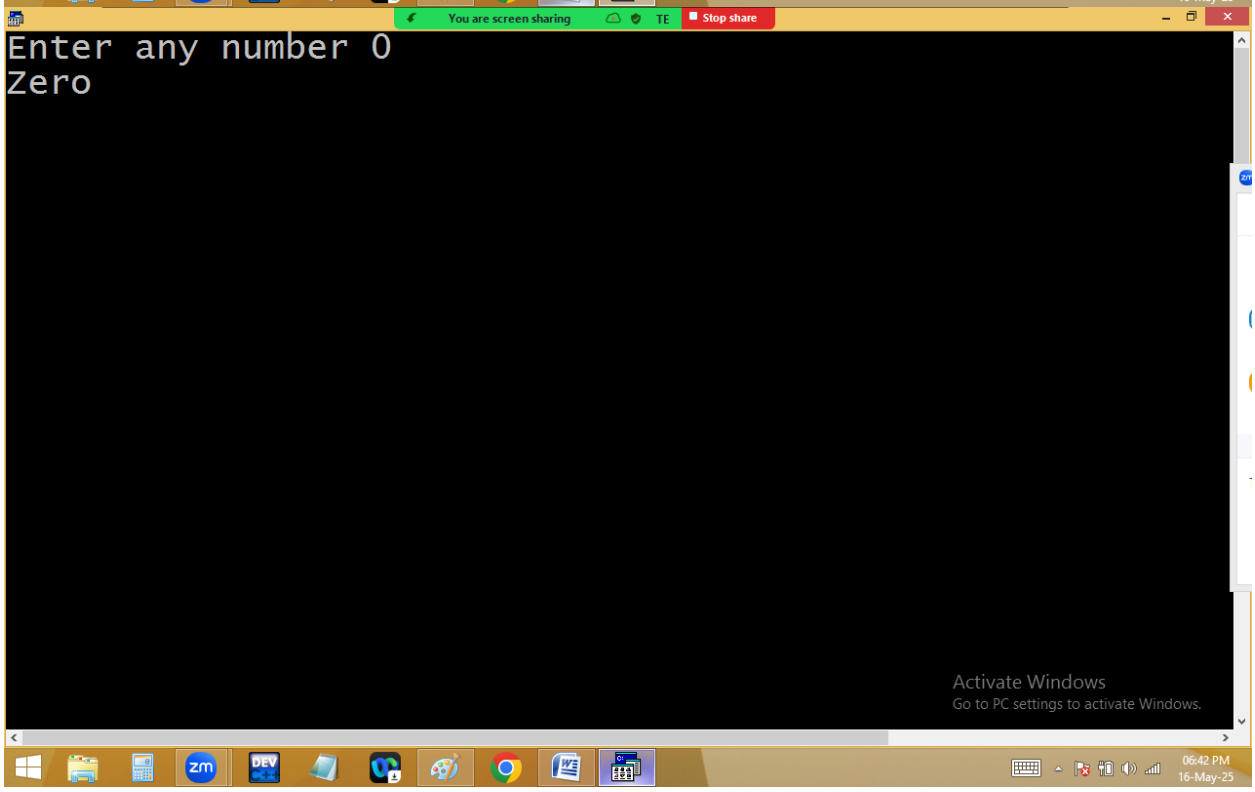
Finding +Ve / -Ve / Zero using ternary operator?


0<0
5>0
-4<0
printf(n>0 ?"+Ve" : n<0 ?"-Ve" : "Zero");
-4>0
0>0

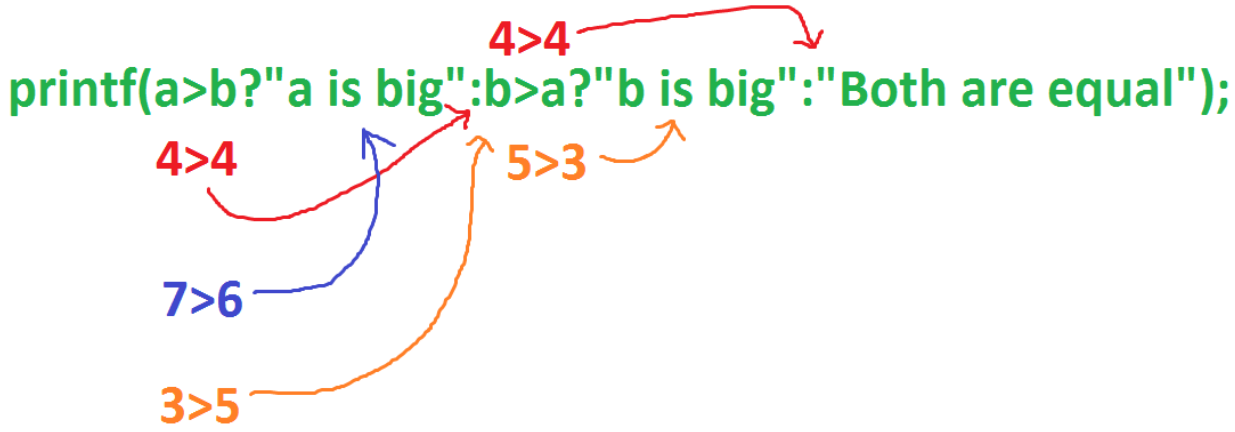

You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Line 9 Col 33 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter any number ");
scanf("%d",&n);
printf(n>0?"+Ve":n<0?"-Ve":"Zero");
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:41 PM
16-May-25

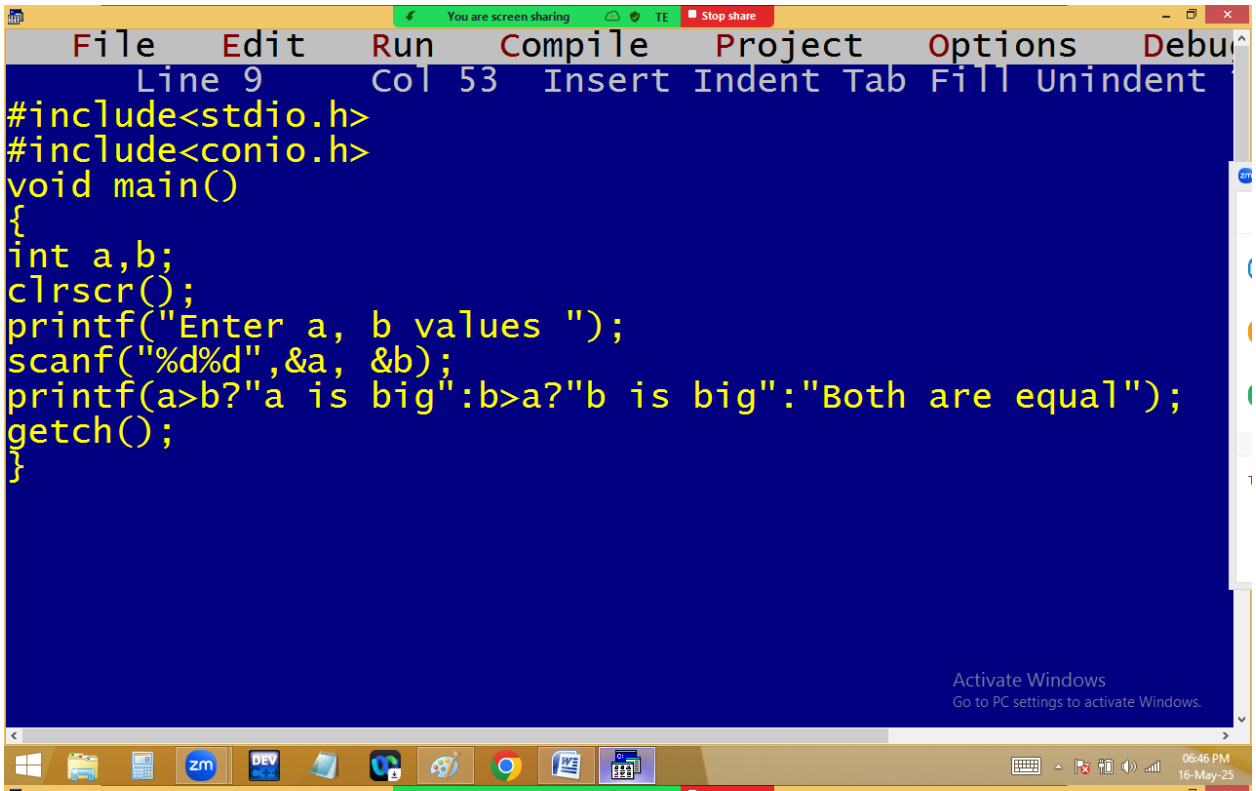

You are screen sharing
Stop share
Enter any number 9
+Ve
Activate Windows
Go to PC settings to activate Windows.
06:42 PM
16-May-25

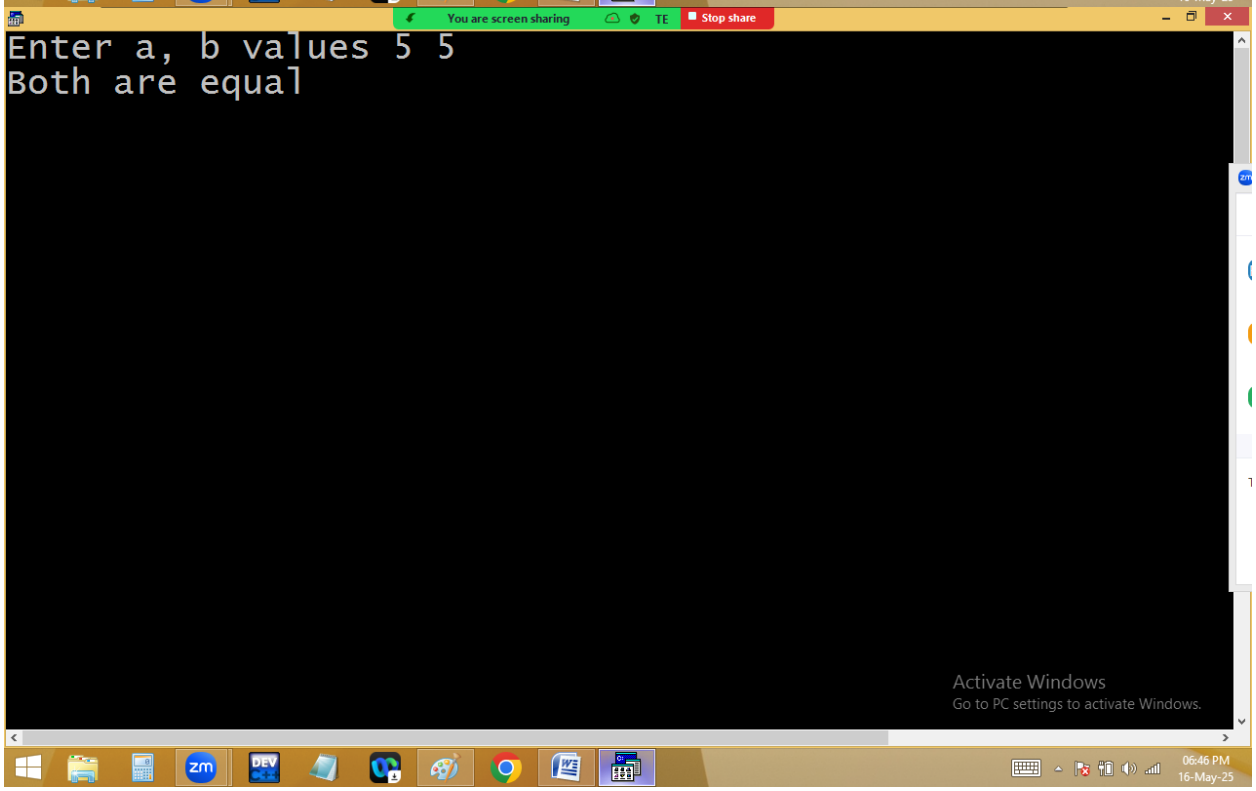

You are screen sharing
TE
Stop share
Enter any number -4
-Ve
Activate Windows
Go to PC settings to activate Windows.
06:42 PM
16-May-25

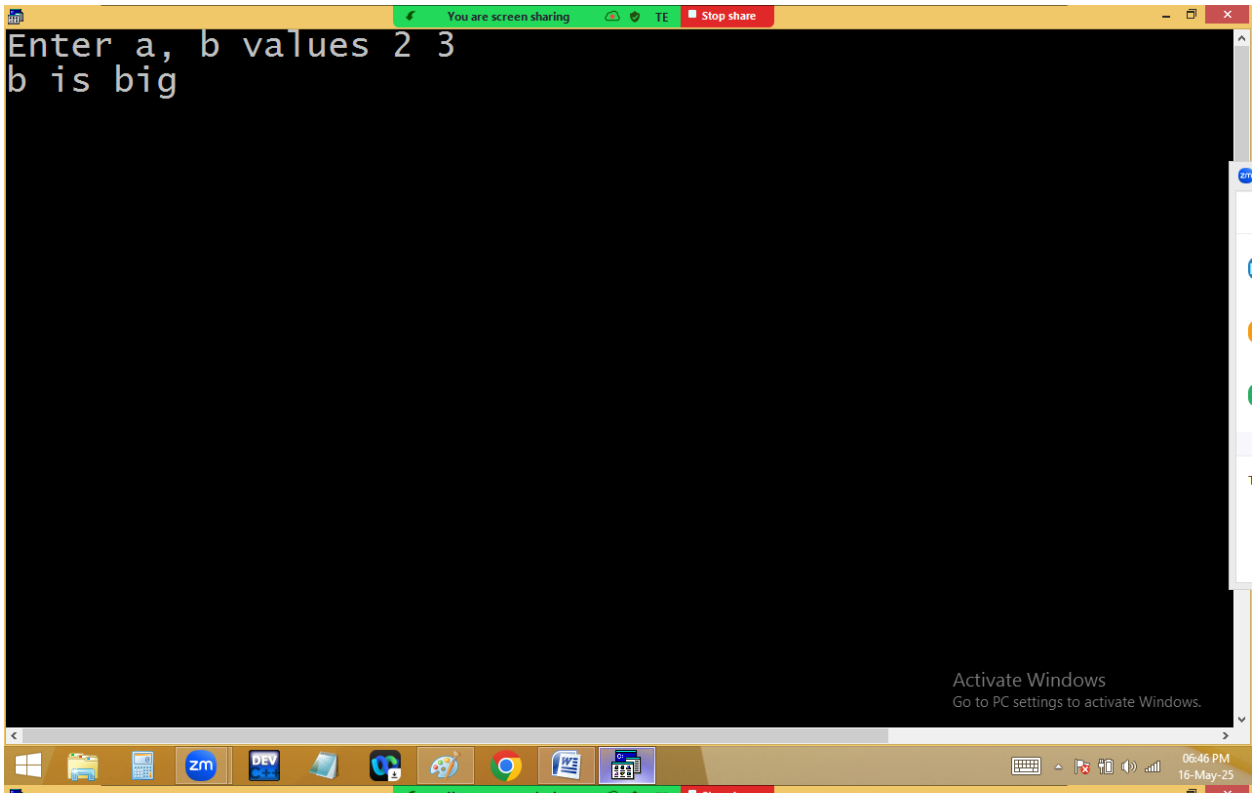

You are screen sharing
TE
Stop share
Enter any number 0
Zero
Activate Windows
Go to PC settings to activate Windows.
06:42 PM
16-May-25

Finding max in 2 no's using ternary operator?




You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Line 9 Col 53 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b;
clrscr();
printf("Enter a, b values ");
scanf("%d%d",&a, &b);
printf(a>b?"a is big":b>a?"b is big":"Both are equal");
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:46 PM
16-May-25


You are screen sharing
Stop share
Enter a, b values 5 5
Both are equal
Activate Windows
Go to PC settings to activate Windows.
06:46 PM
16-May-25


You are screen sharing
TE
Stop share
Enter a, b values 2 3
b is big
Activate Windows
Go to PC settings to activate Windows.
06:46 PM
16-May-25


You are screen sharing
TE
Stop share
Enter a, b values 9 0
a is big_
Activate Windows
Go to PC settings to activate Windows.
06:46 PM
16-May-25

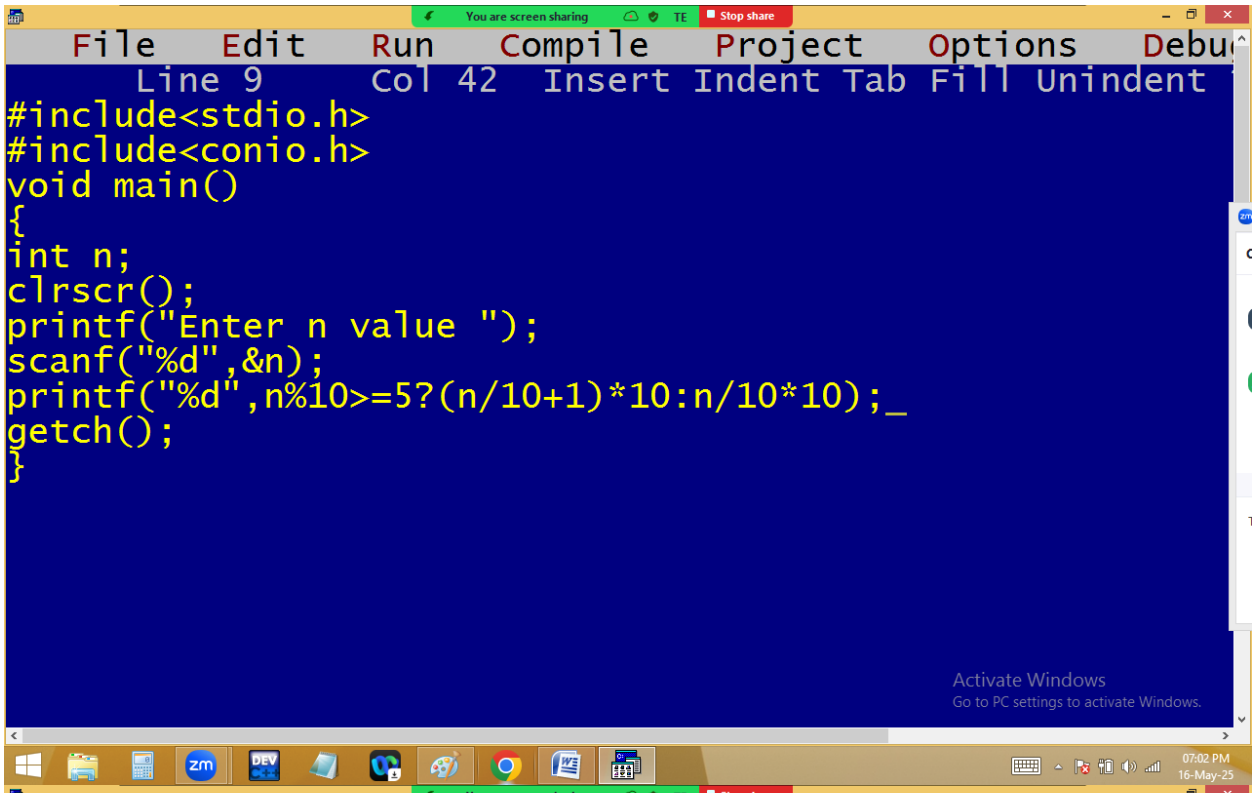
Finding the next 10 multiple of given no based on below condition using ternary operator?

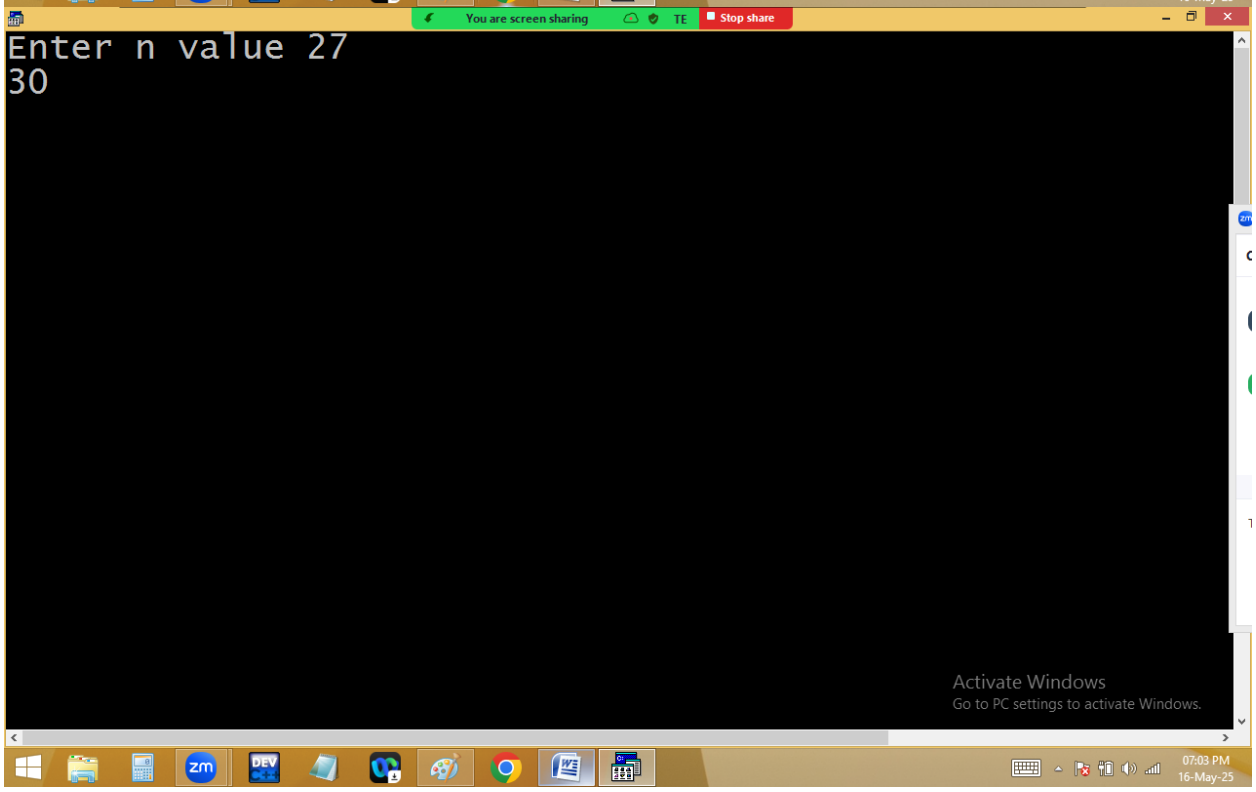
If the last digit is >=5 move to next multiple of 10

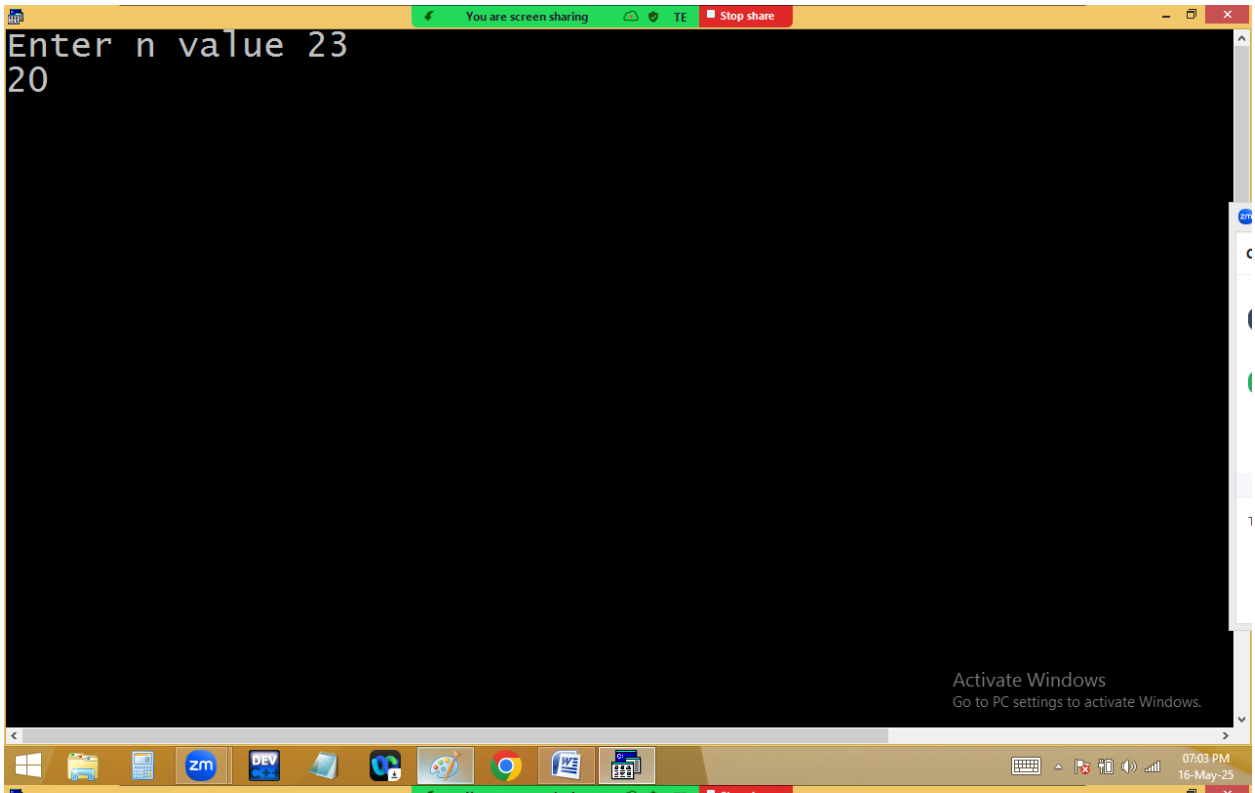
If the last digit is < 5 move to previous multiple of 10

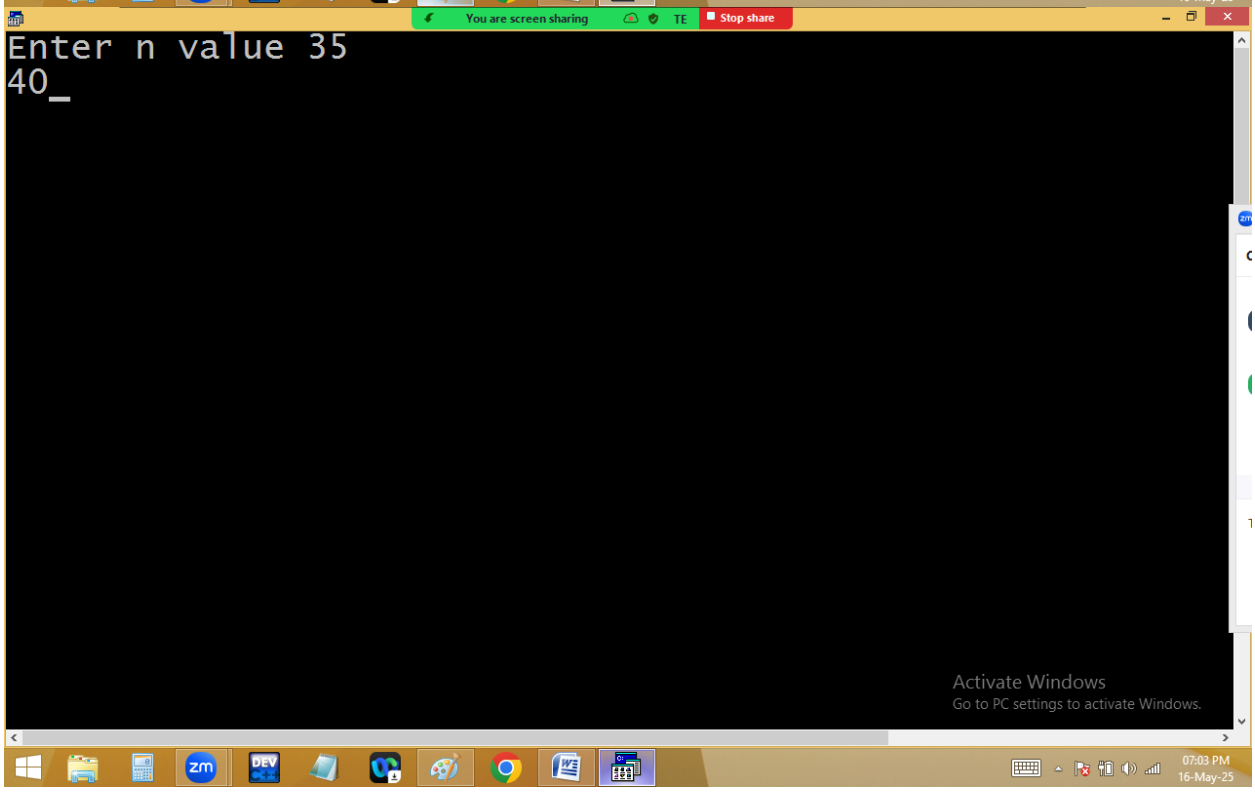
27 last digit is 7, which is >=5 ➔ (2+1)*10=30

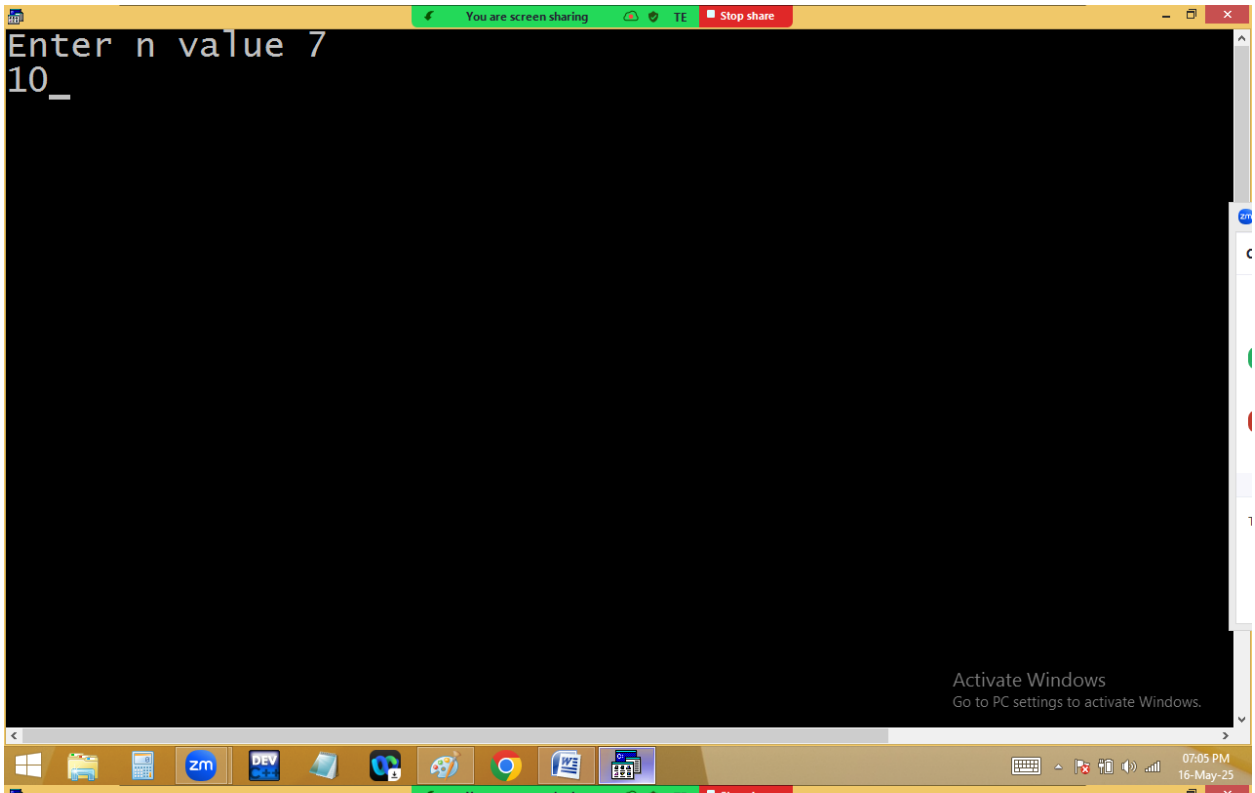
24 last digit is 4, which < 5 ➔ 2*10=20

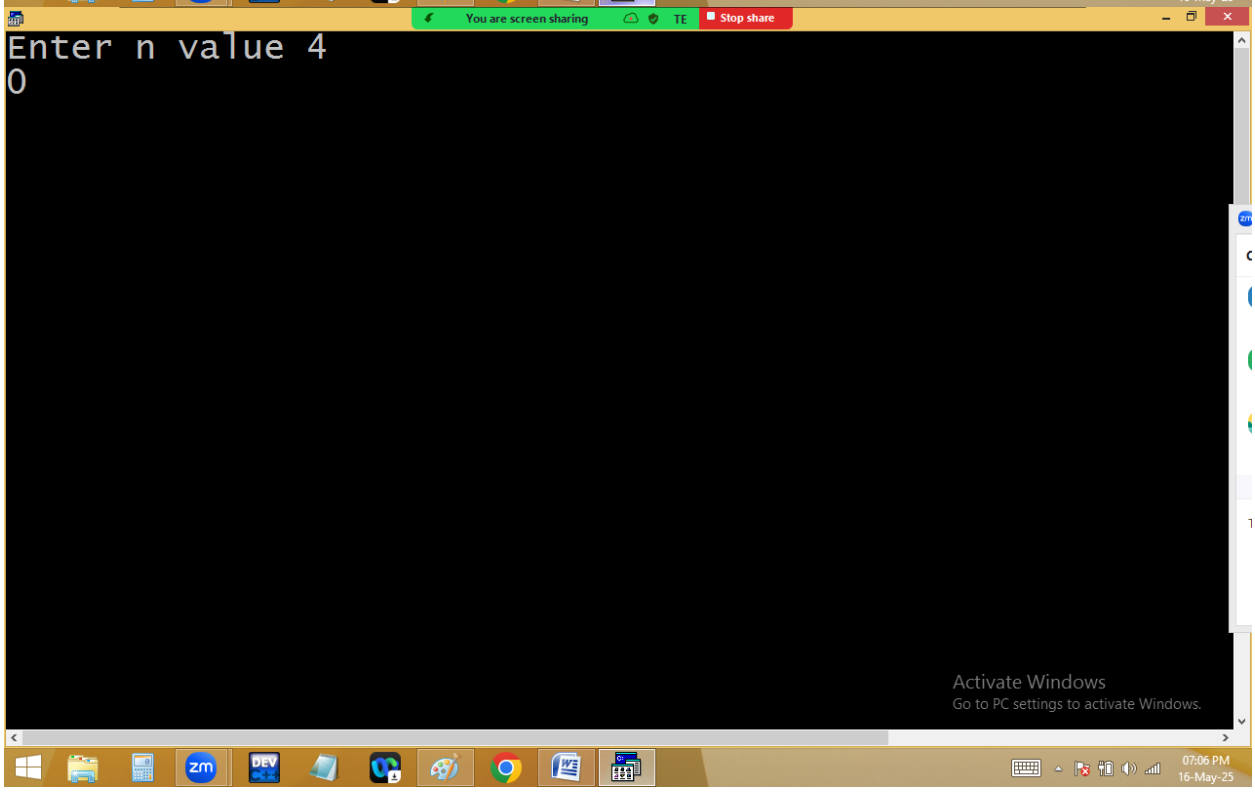

You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Line 9 Col 42 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter n value ");
scanf("%d",&n);
printf("%d",n%10>=5?(n/10+1)*10:n/10*10);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:02 PM
16-May-25


You are screen sharing
Stop share
Enter n value 27
30
Activate Windows
Go to PC settings to activate Windows.
07:03 PM
16-May-25


You are screen sharing
TE
Stop share
Enter n value 23
20
Activate Windows
Go to PC settings to activate Windows.
07:03 PM
16-May-25


You are screen sharing
TE
Stop share
Enter n value 35
40
Activate Windows
Go to PC settings to activate Windows.
07:03 PM
16-May-25


You are screen sharing
TE
Stop share
Enter n value 7
10_
Activate Windows
Go to PC settings to activate Windows.
07:05 PM
16-May-25


You are screen sharing
TE
Stop share
Enter n value 4
0
Activate Windows
Go to PC settings to activate Windows.
07:06 PM
16-May-25

27 % 10 = 7 >=5 ? (27/10=2+1)*10 ==> 30

24 % 10 = 4 >=5 : (24/10=2) * 10 ==> 20

Note: Any no%10 gives last digit
Any no/10 removes last digit.

Increment / Decrement / Modify operators[++ / --]:

They are used to increment / Decrement a variable value by 1.

Eg:

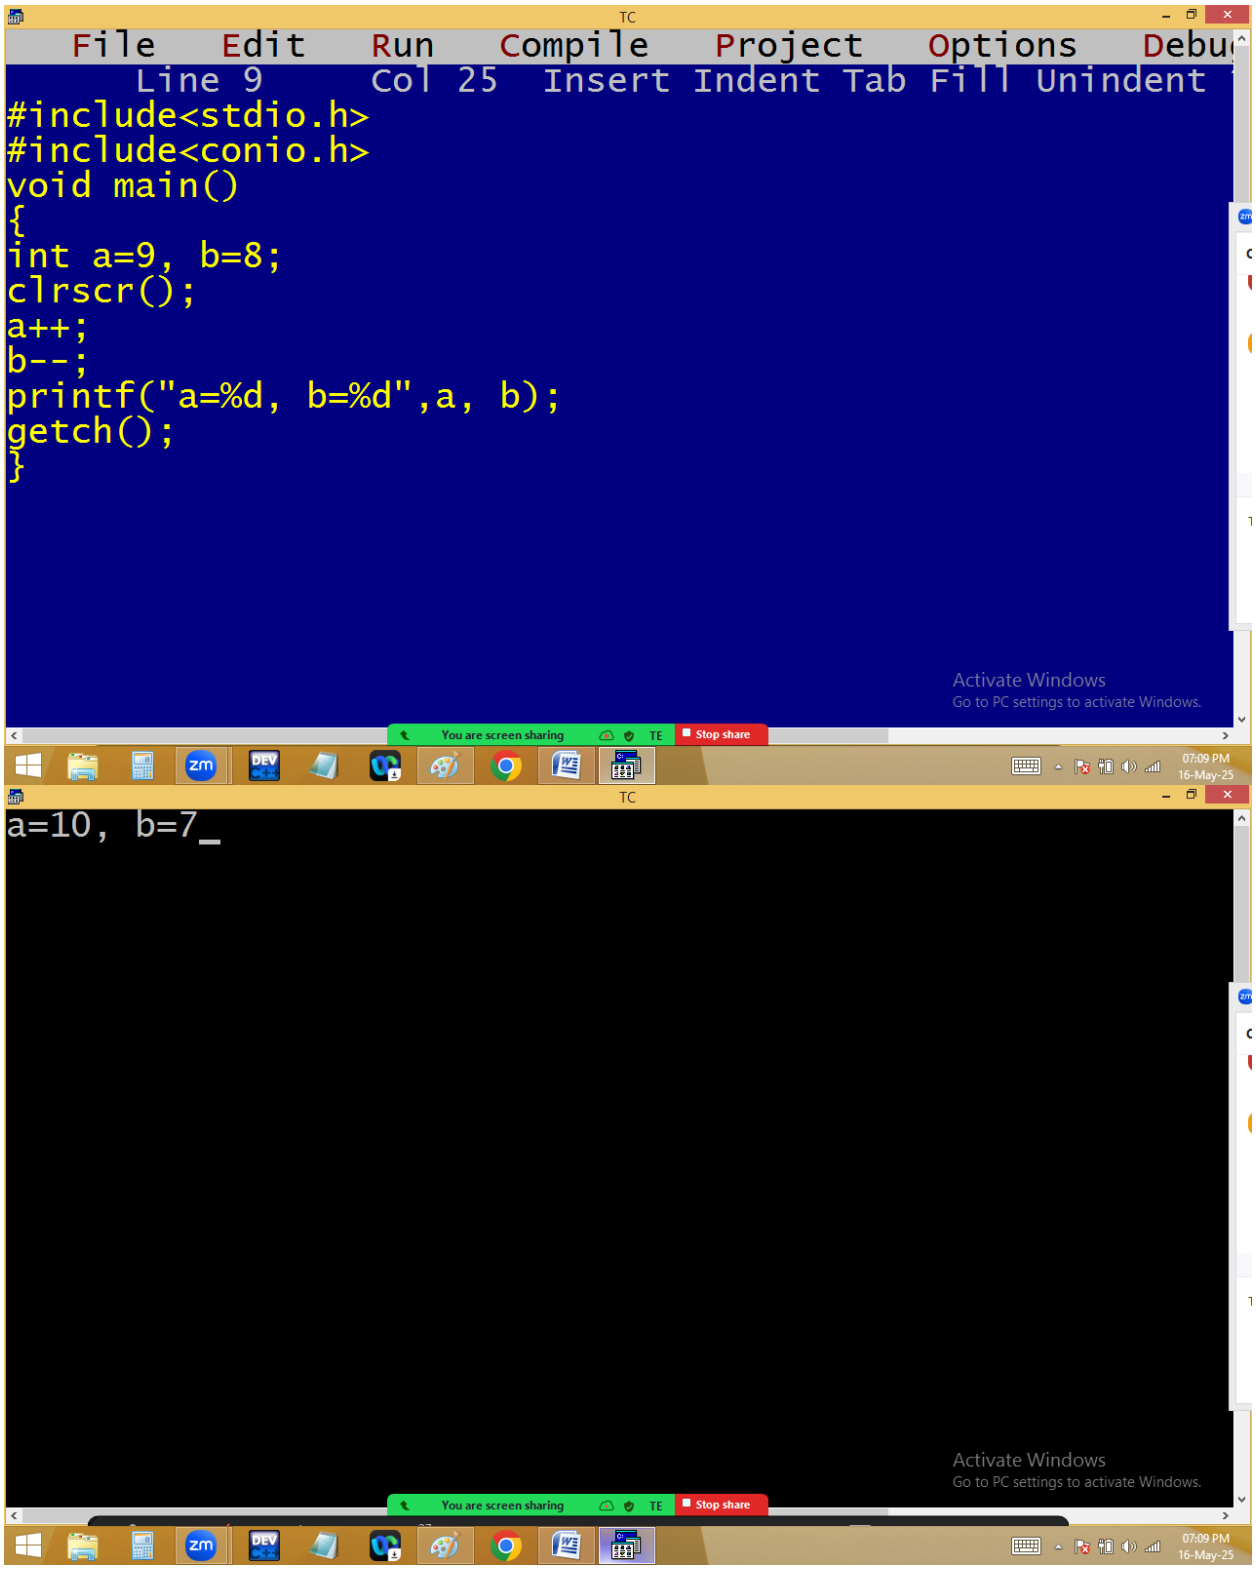
Int a=9;

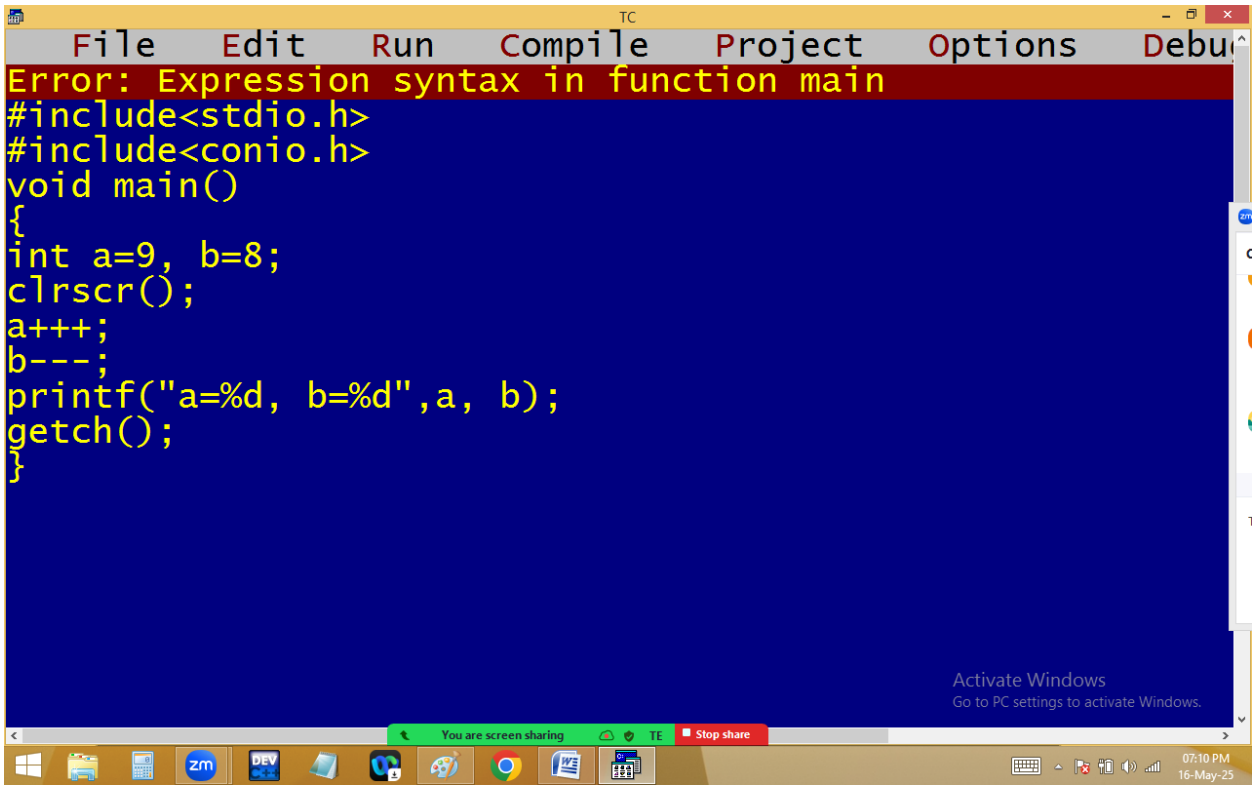
a++; ➔ a=a+1 ➔ a=10

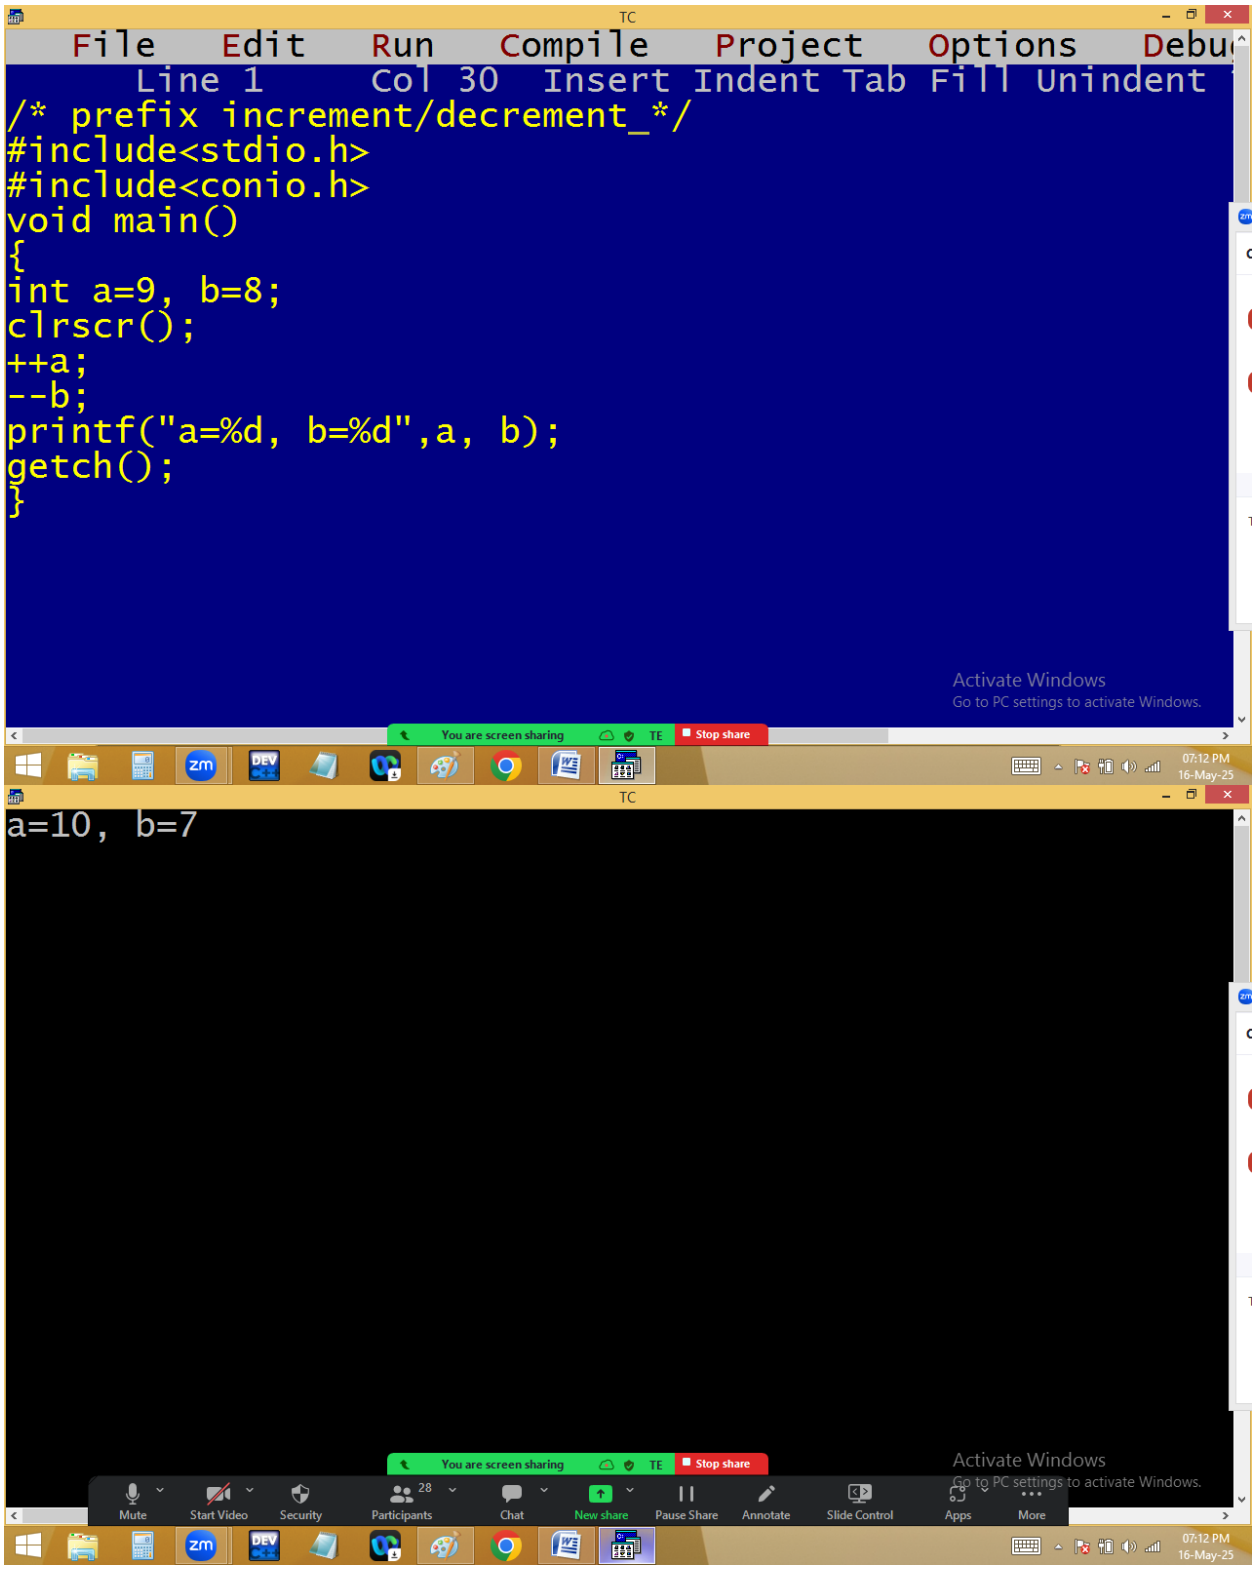
int b=8;

b--; ➔ b=b-1 ➔ b=7

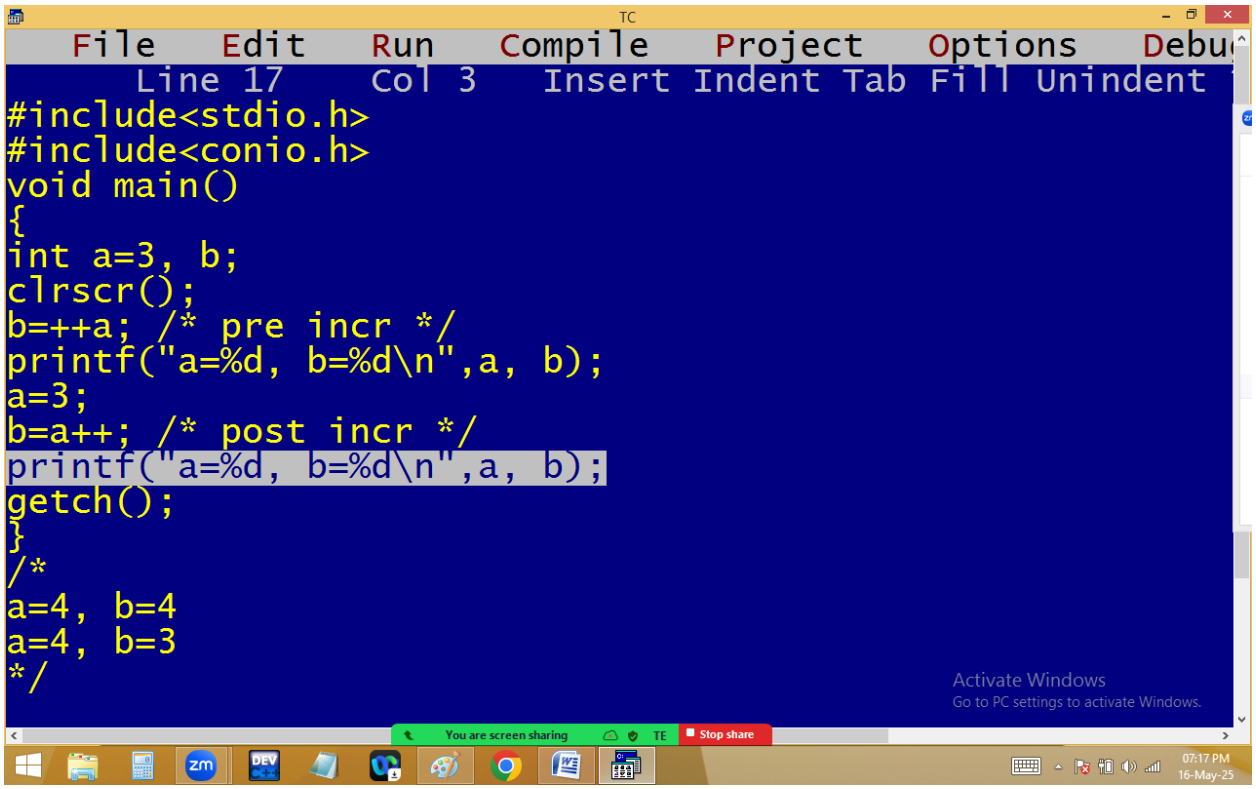
postfix increment / Decrement:


TC
File Edit Run Compile Project Options Debu
Line 9 Col 25 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=9, b=8;
clrscr();
a++;
b--;
printf("a=%d, b=%d",a, b);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
07:09 PM
16-May-25
TC
a=10, b=7
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
07:09 PM
16-May-25


TC
File Edit Run Compile Project Options Debu
Error: Expression syntax in function main
#include<stdio.h>
#include<conio.h>
void main()
{
int a=9, b=8;
clrscr();
a+++;
b---;
printf("a=%d, b=%d",a, b);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
You are screen sharing
Stop share
07:10 PM
16-May-25



Note: Until / Unless of using second variable, pre and post operations are same.



a=3

b = ++a;

priority: ++a, b=a

1. ++a ==> a=4

2. b=a ==> b=4

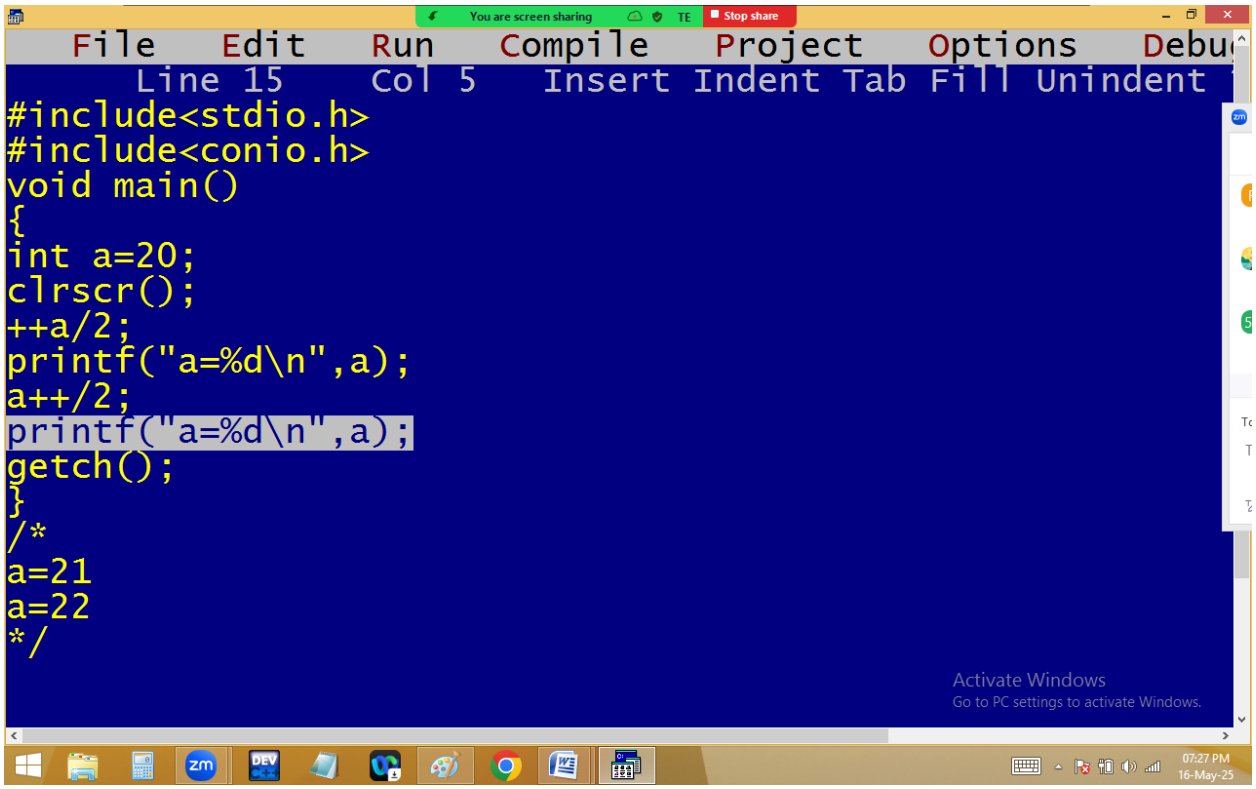
a=3

b = a++

priority: b=a, a++

1. b=a==> b=3

2. a++ ==> a=4



a=20

++a/2; priority: ++a, /

1. ++a ==> a=21

2. a/2 ==> 21/2=10[10 not stored in a because of = operator not used i.e. a=21]

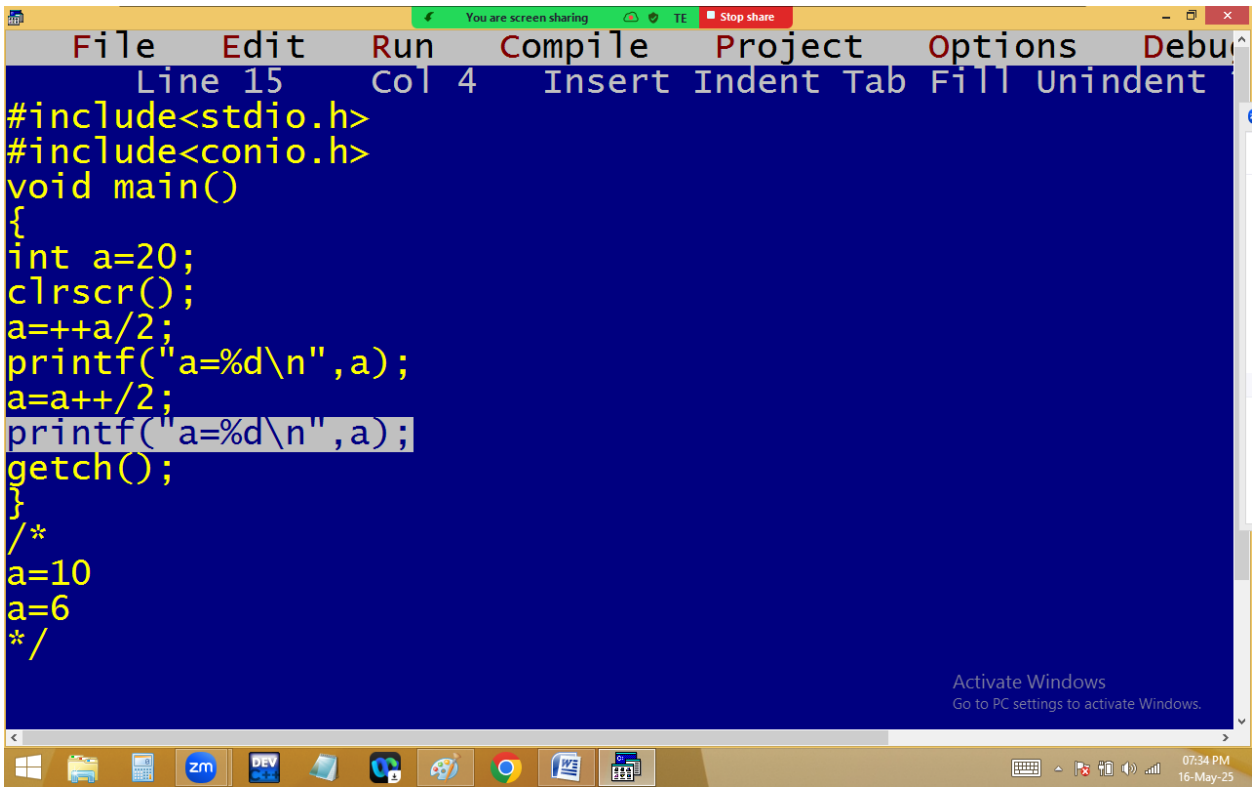
printf(a) ==> 21

a++/2; priority: /, a++

1. a/2==>21/2=10[10 not stored in a because of = operator not used i.e. a=21]

2. a++ ==> a=22

printf(a) ==> 22



a=20

a=a/2; priority: ++a, /, =

1. ++a ==> a=21

2. a= a/2 ==> 21/2=10

3. a=10

printf(a) ==> 10

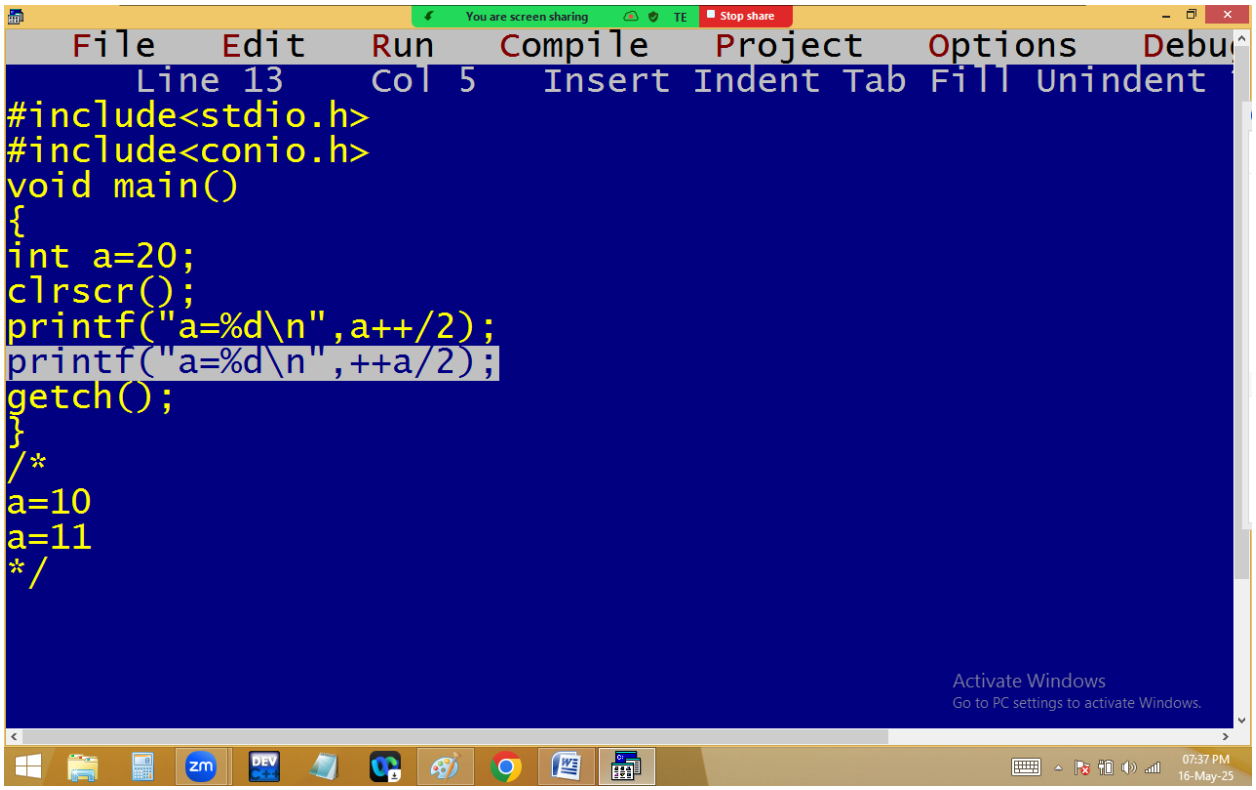
a=a++/2; priority: /,=, a++

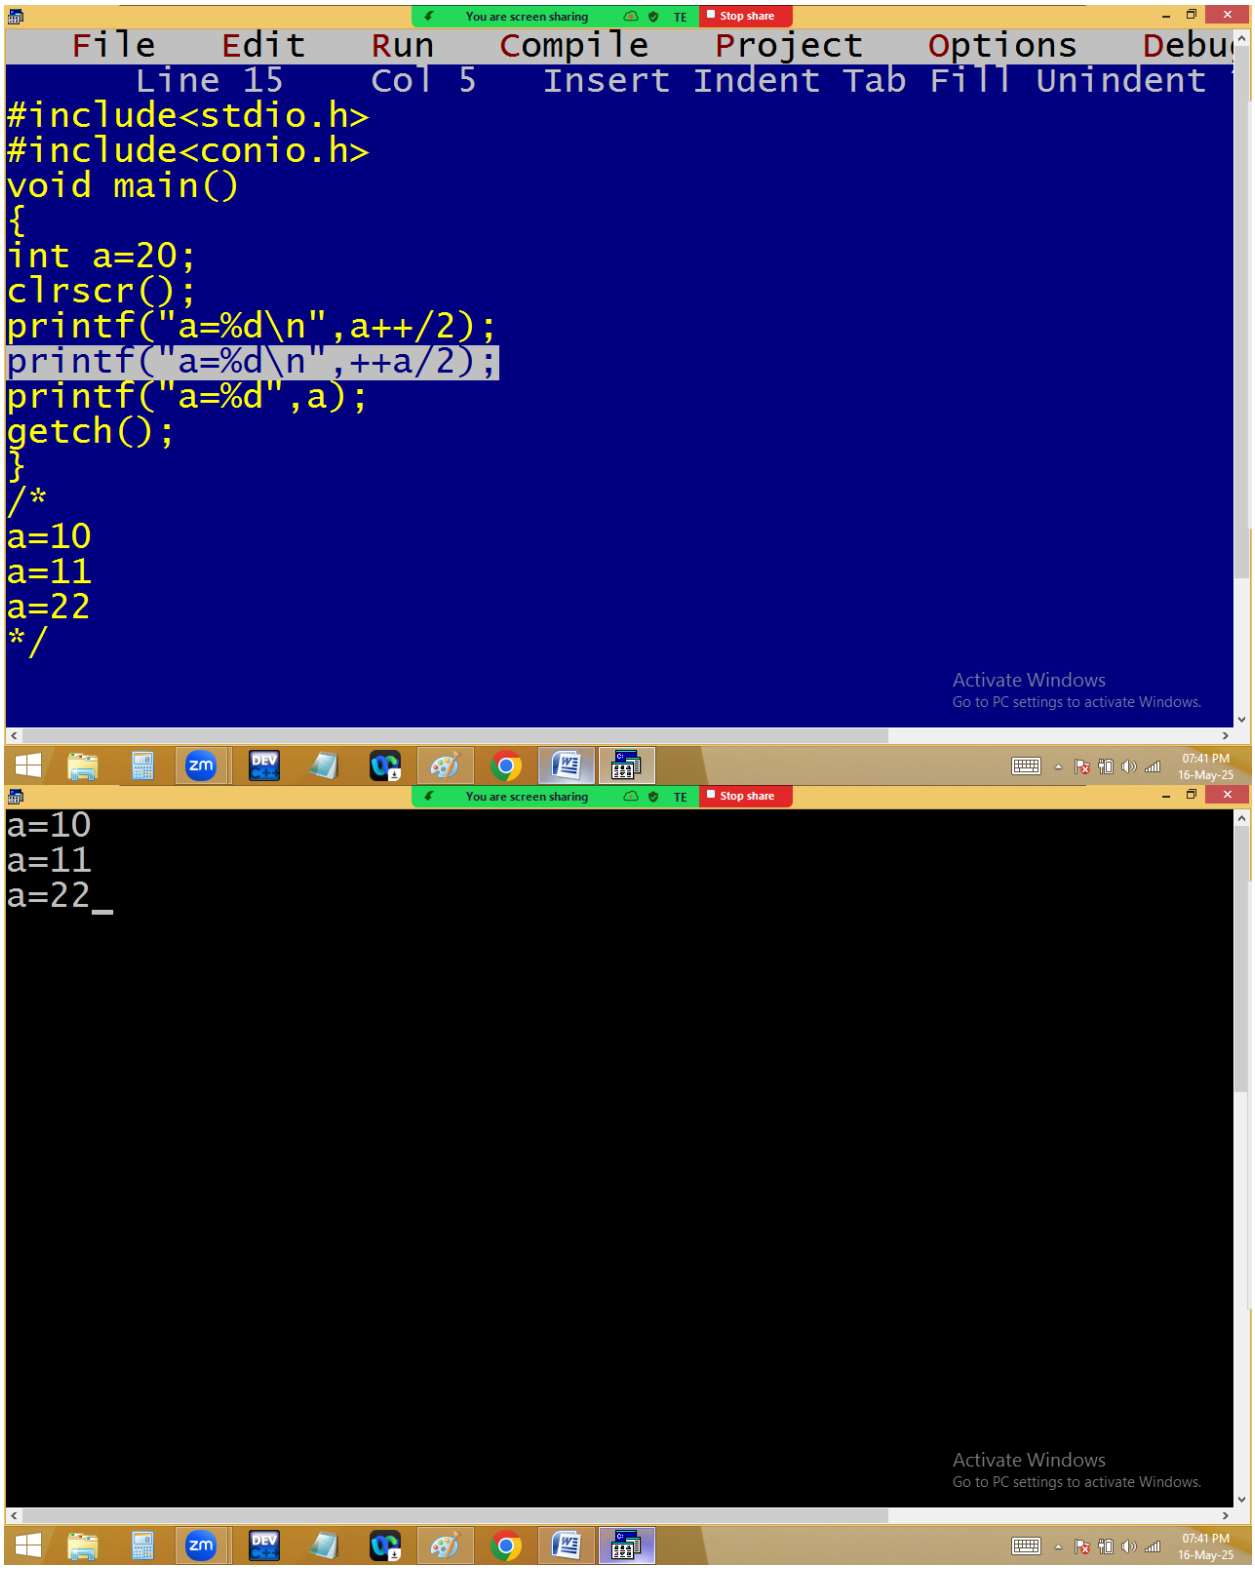
1. a=a/2==>10/2=5

2. a = 5

3. a++ ==> a=6

printf(a) ==> 6




You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Line 15 Col 5 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=20;
clrscr();
printf("a=%d\n",a++/2);
printf("a=%d\n",++a/2);
printf("a=%d",a);
getch();
}
/*
a=10
a=11
a=22
*/
Activate Windows
Go to PC settings to activate Windows.
07:41 PM
16-May-25
You are screen sharing
Stop share
a=10
a=11
a=22
Activate Windows
Go to PC settings to activate Windows.
07:41 PM
16-May-25