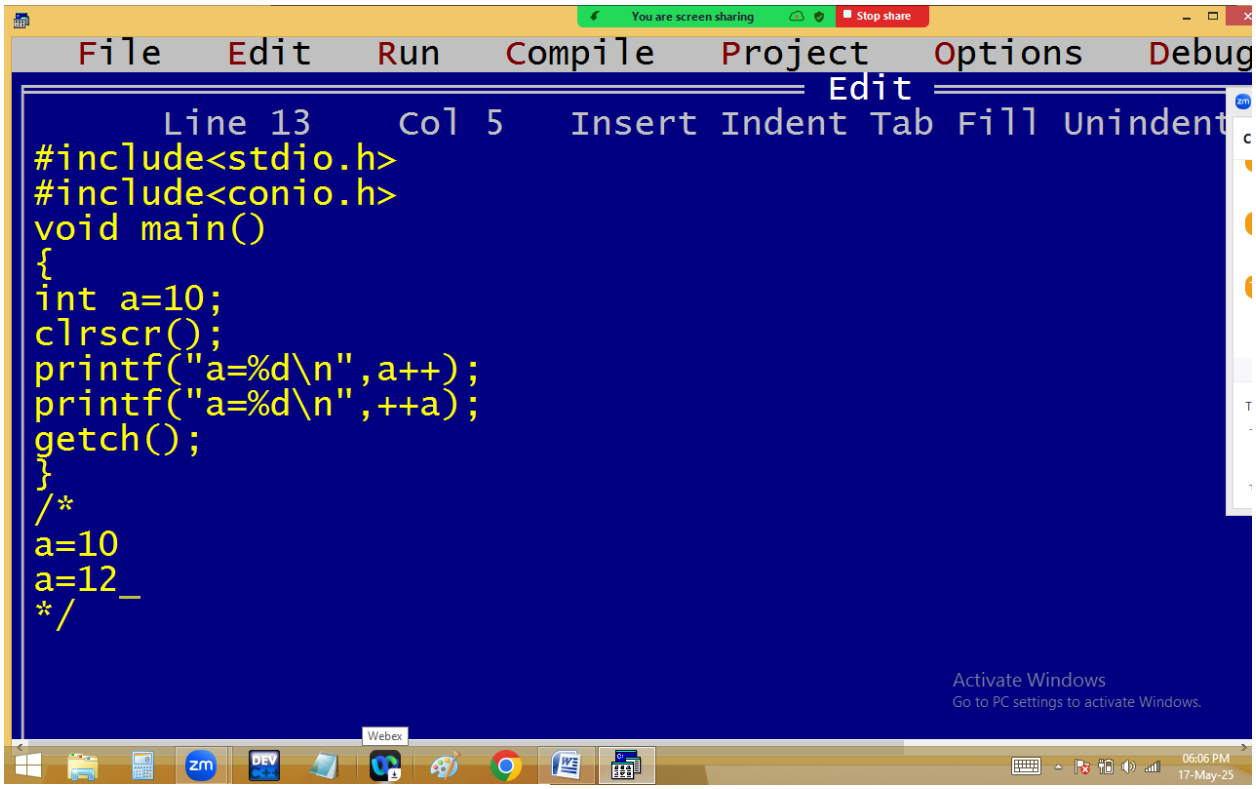
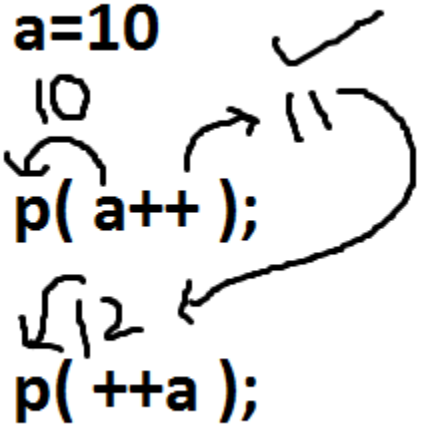
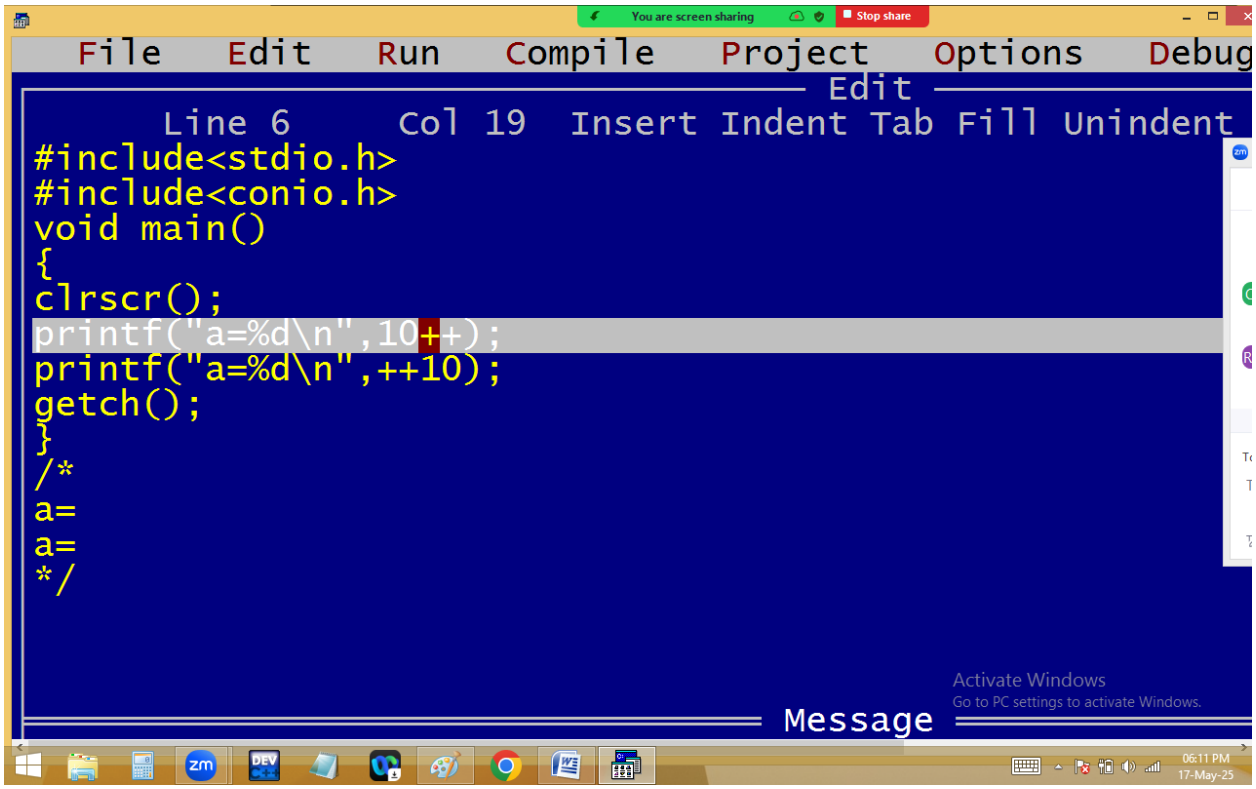

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug
Edit
Line 13 Col 5 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=10;
clrscr();
printf("a=%d\n",a++);
printf("a=%d\n",++a);
getch();
}
/*
a=10
a=12_
*/
Activate Windows
Go to PC settings to activate Windows.
Webex
06:06 PM
17-May-25

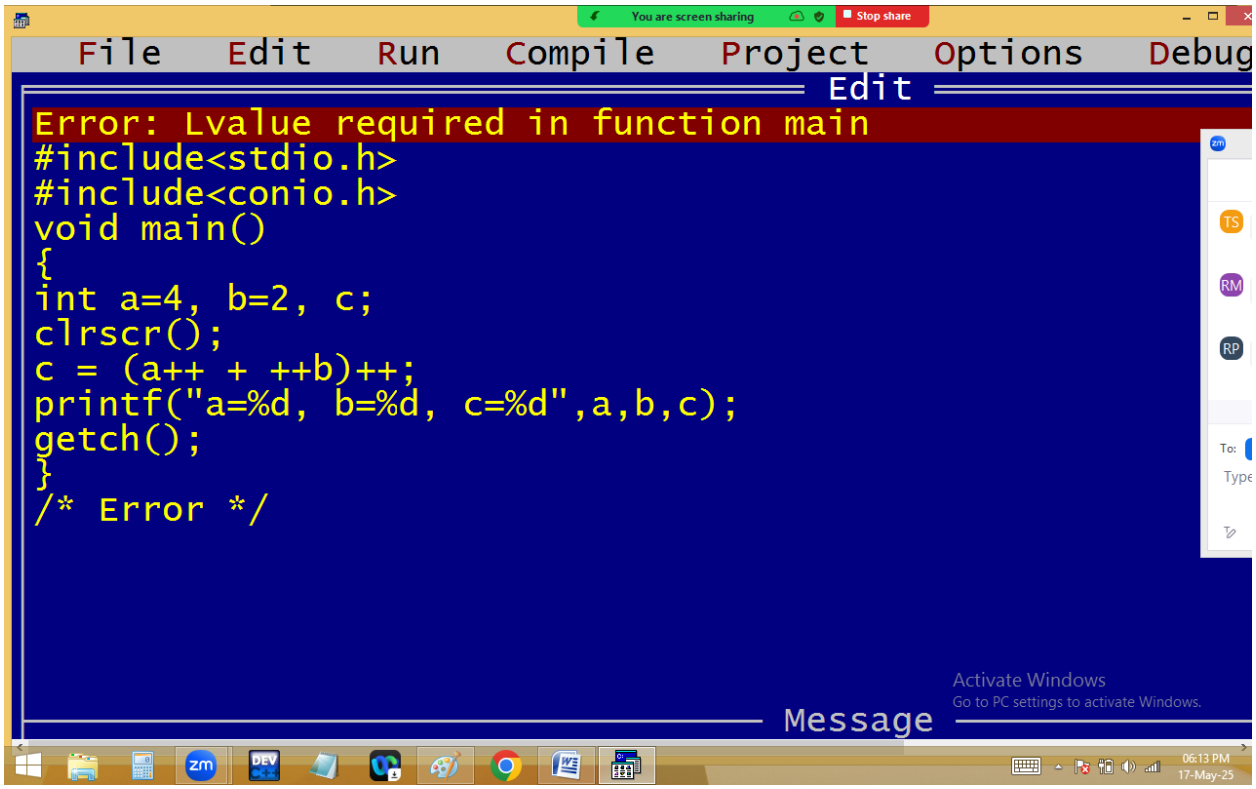

a=10
10
11
p(a++);
12
p(++a);



a++ means a=a+1

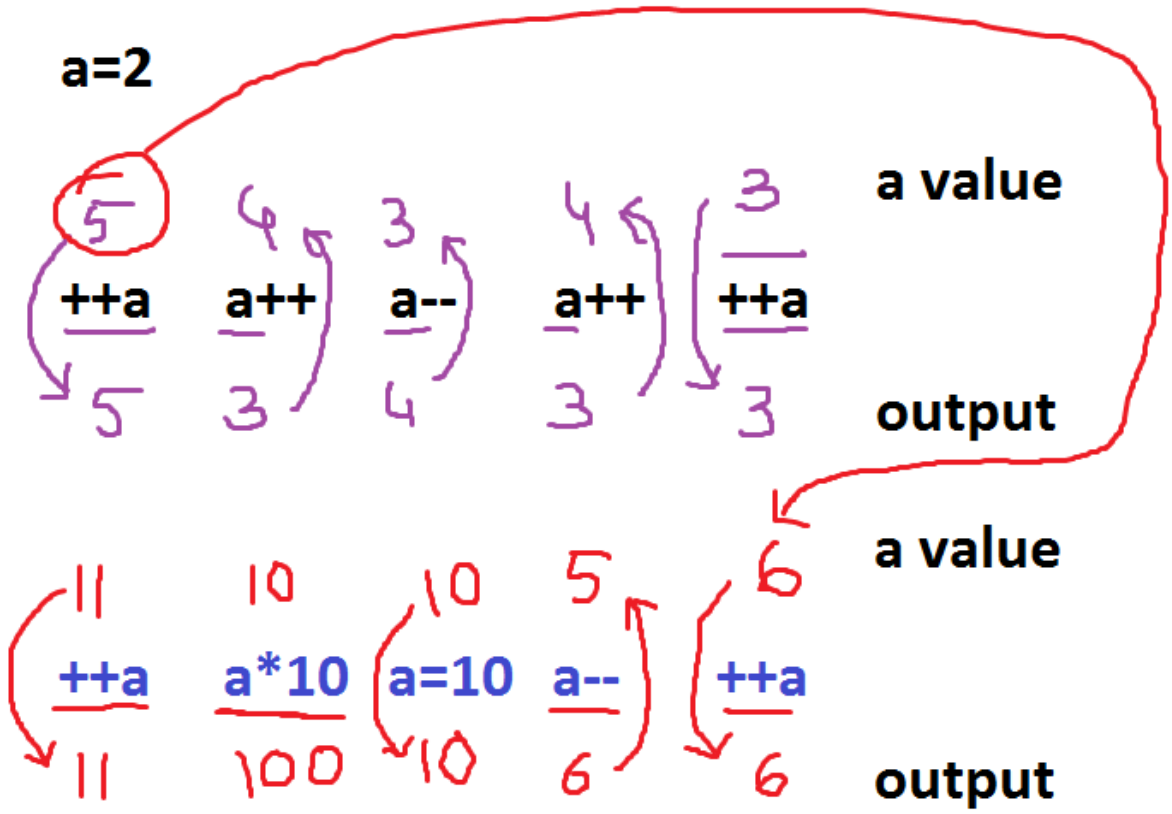
10++ means 10=10+1 ==> 10=11

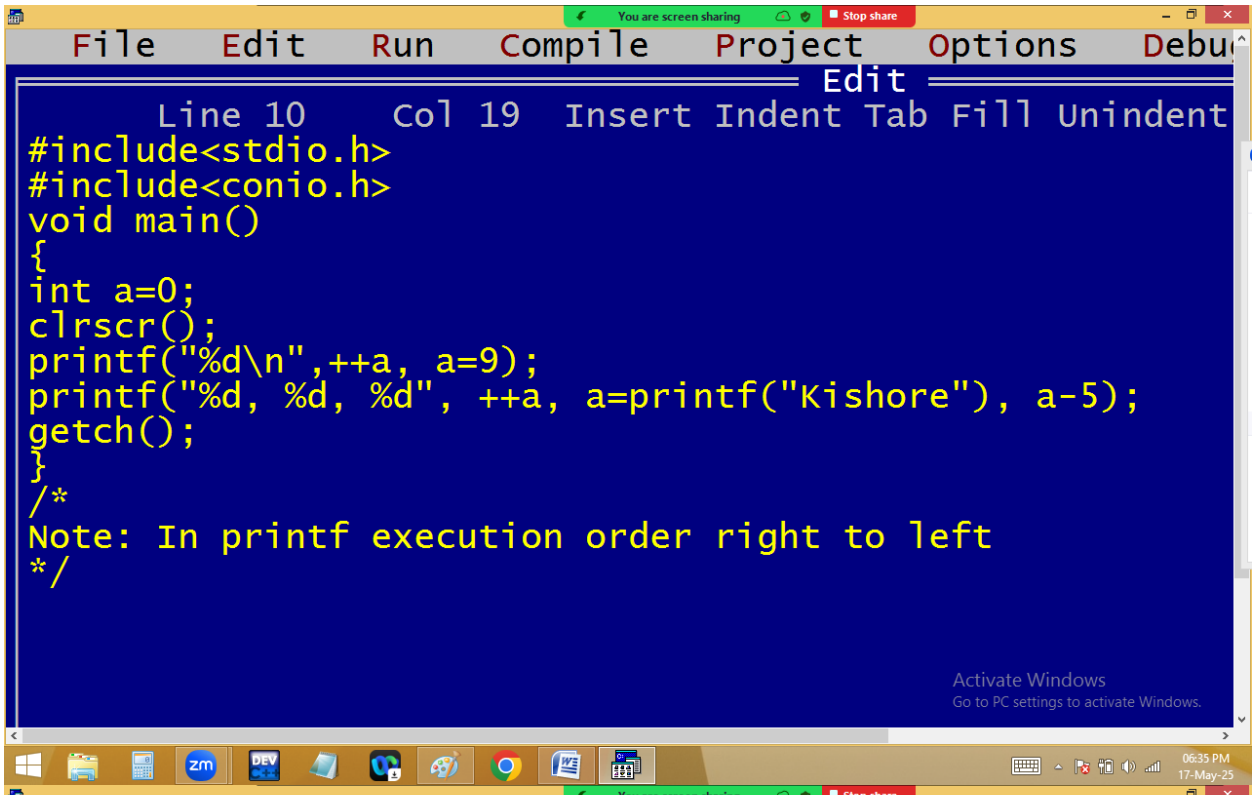
and here 10 is a constant which is never changed ==> Error

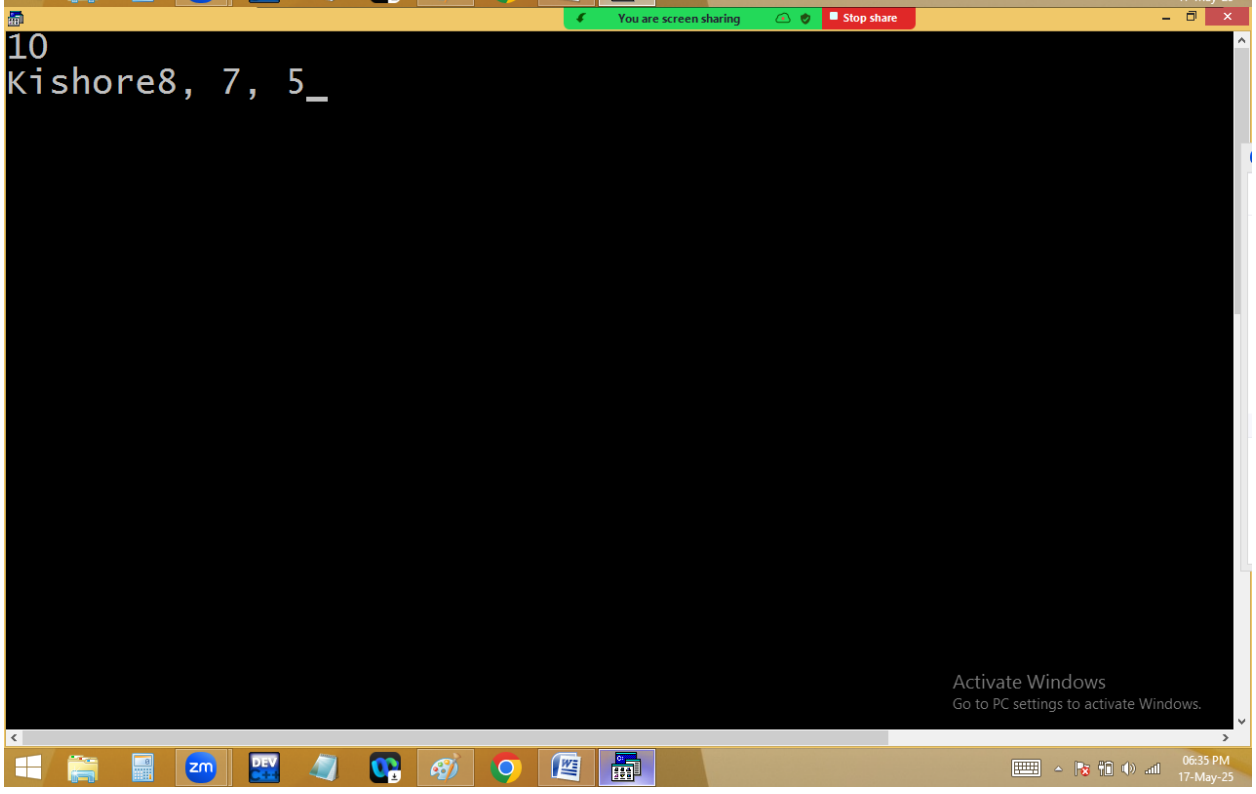

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug
Edit
Error: Lvalue required in function main
#include<stdio.h>
#include<conio.h>
void main()
{
int a=4, b=2, c;
clrscr();
c = (a++ + ++b)++;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
/* Error */
Message
Activate Windows
Go to PC settings to activate Windows.
06:13 PM
17-May-25

```
File   Edit   Run   Compile   Project   Options   Debu
                    Edit
      Line 7     Col 25   Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=2;
clrscr();
printf("%d,%d,%d,%d,%d\n",++a,a++,a--,a++,++a);
printf("%d,%d,%d,%d,%d",++a,a*10,a=10,a--,++a);
getch();
}
/*
Note: In printf execution order right to left

5 3 4 4 3
11 100 10 6 6
*/
```




You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Line 10 Col 19 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0;
clrscr();
printf("%d\n",++a, a=9);
printf("%d, %d, %d", ++a, a=printf("Kishore"), a-5);
getch();
}
/*
Note: In printf execution order right to left
*/
Activate Windows
Go to PC settings to activate Windows.
06:35 PM
17-May-25


You are screen sharing
Stop share
10
Kishore8, 7, 5
Activate Windows
Go to PC settings to activate Windows.
06:35 PM
17-May-25

Compound assignment operators / Short hand operators:

Here we are using one assignment operator with the combination other operators as follows.

+=, -=, *=, %=, /=, ~=, <<=, >>=,…

Eg:

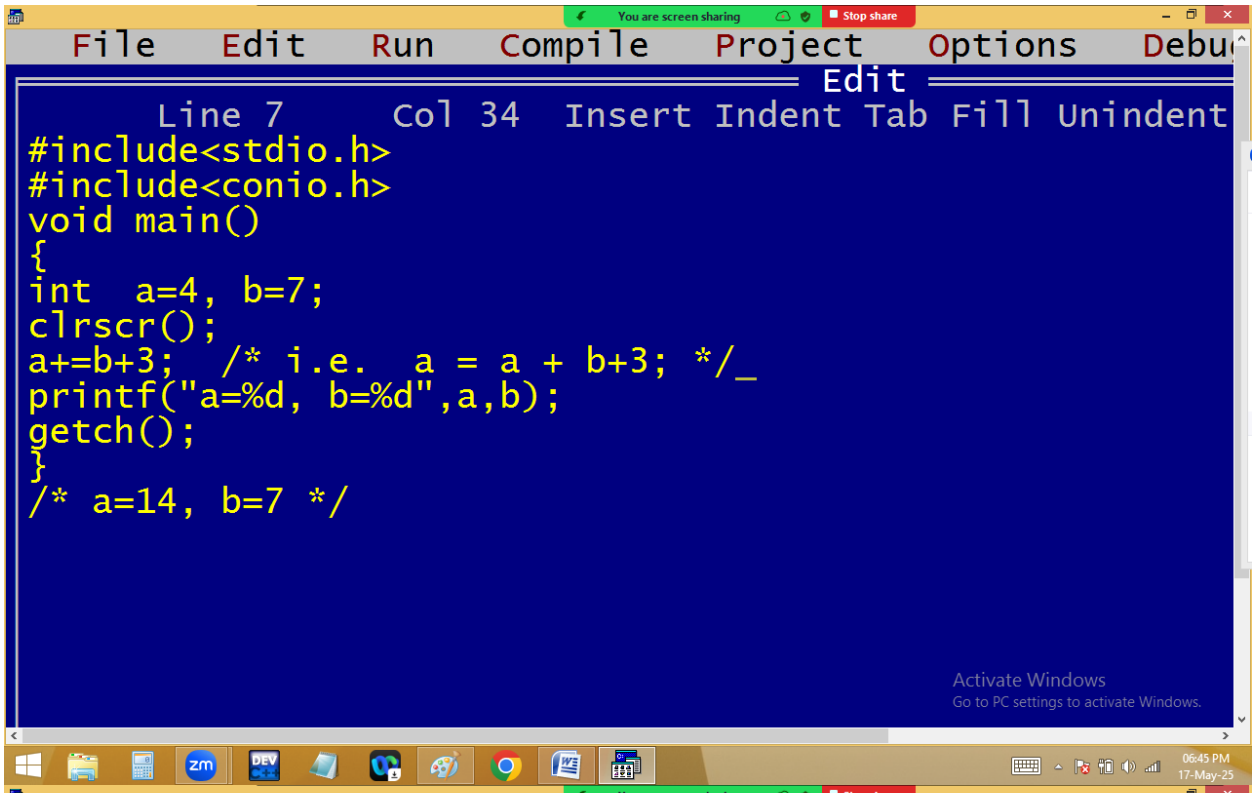
```
int  a=9,  b=20;

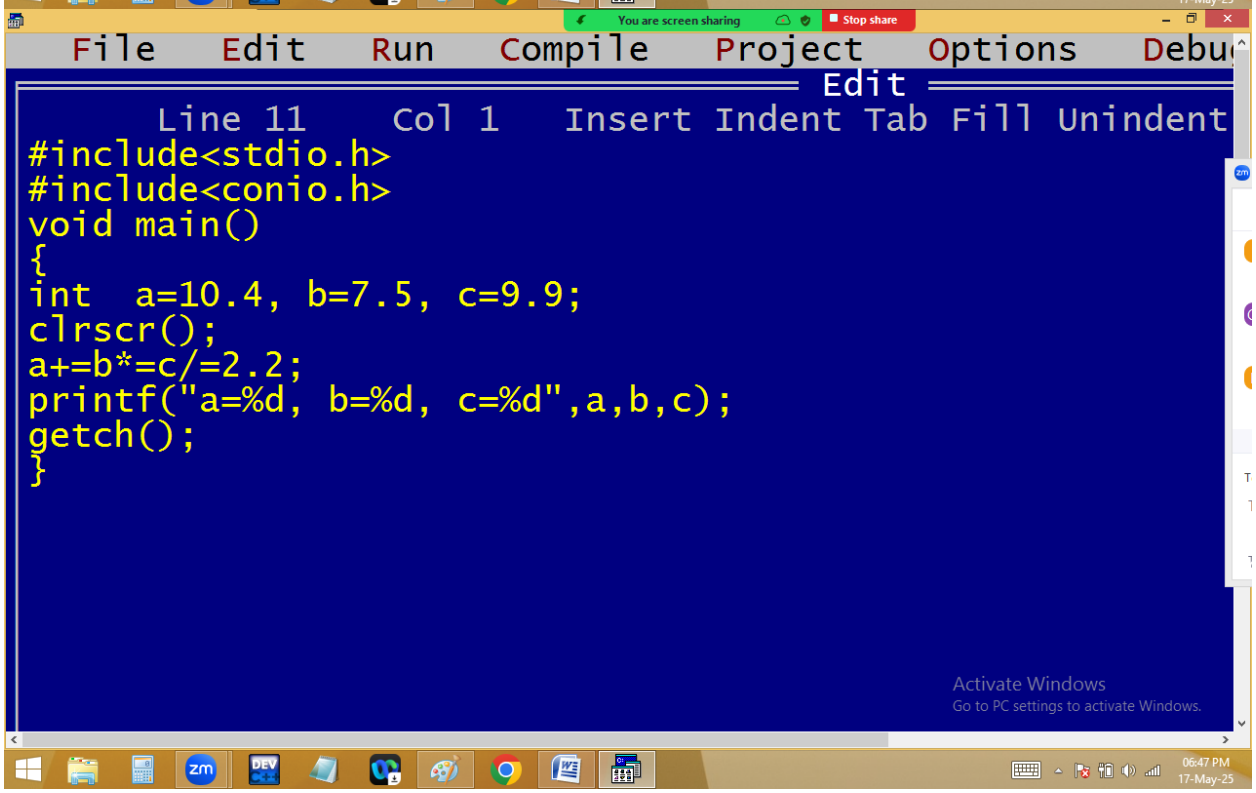
float c=5;
```

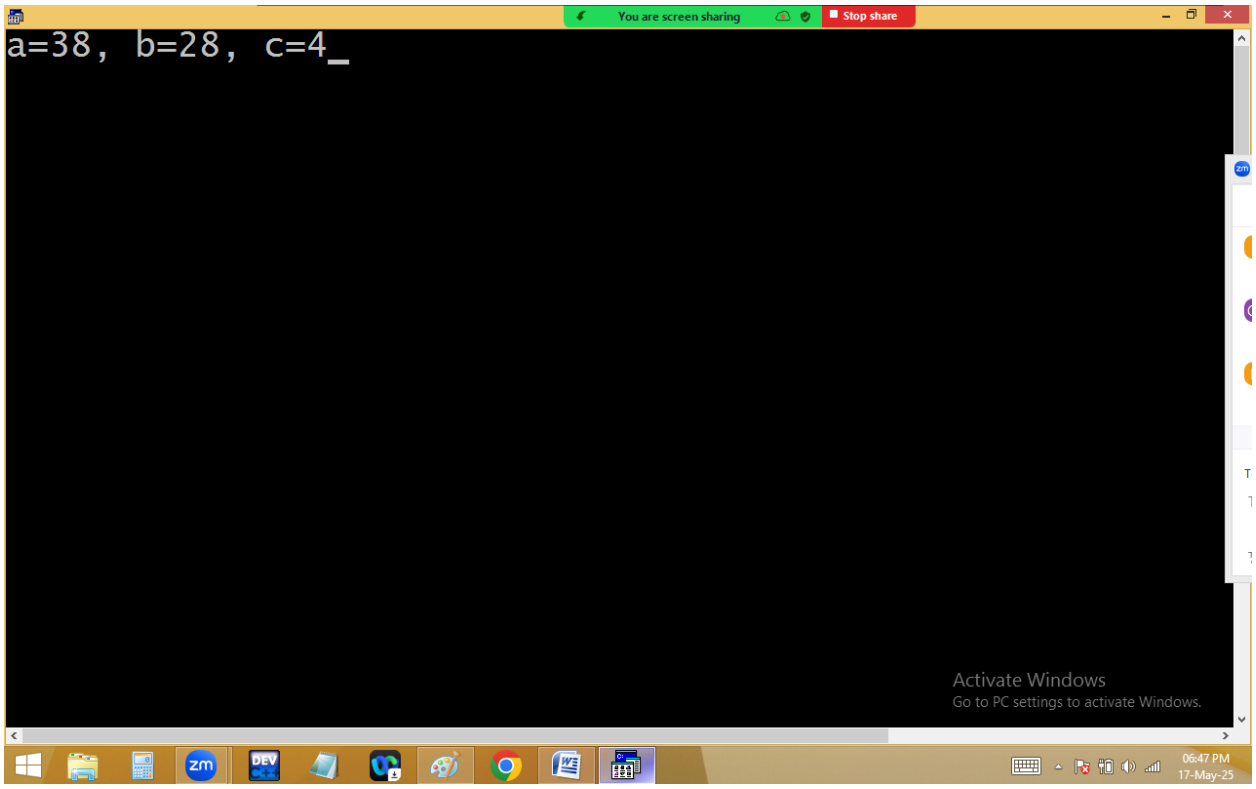
a+=3; i.e. a=a+3 ➔ a=9+3=12

b*=5; i.e. b=b*5 ➔ b=20*5=100

c/=2; i.e. c=c/2 ➔ c=5/2=2.5


You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Line 7 Col 34 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=4, b=7;
clrscr();
a+=b+3; /* i.e. a = a + b+3; */_
printf("a=%d, b=%d",a,b);
getch();
}
/* a=14, b=7 */
Activate Windows
Go to PC settings to activate Windows.
06:45 PM
17-May-25


You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Line 11 Col 1 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=10.4, b=7.5, c=9.9;
clrscr();
a+=b*=c/=2.2;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:47 PM
17-May-25



a=10 b=7 c=9

a+= b*= c/=2.2;

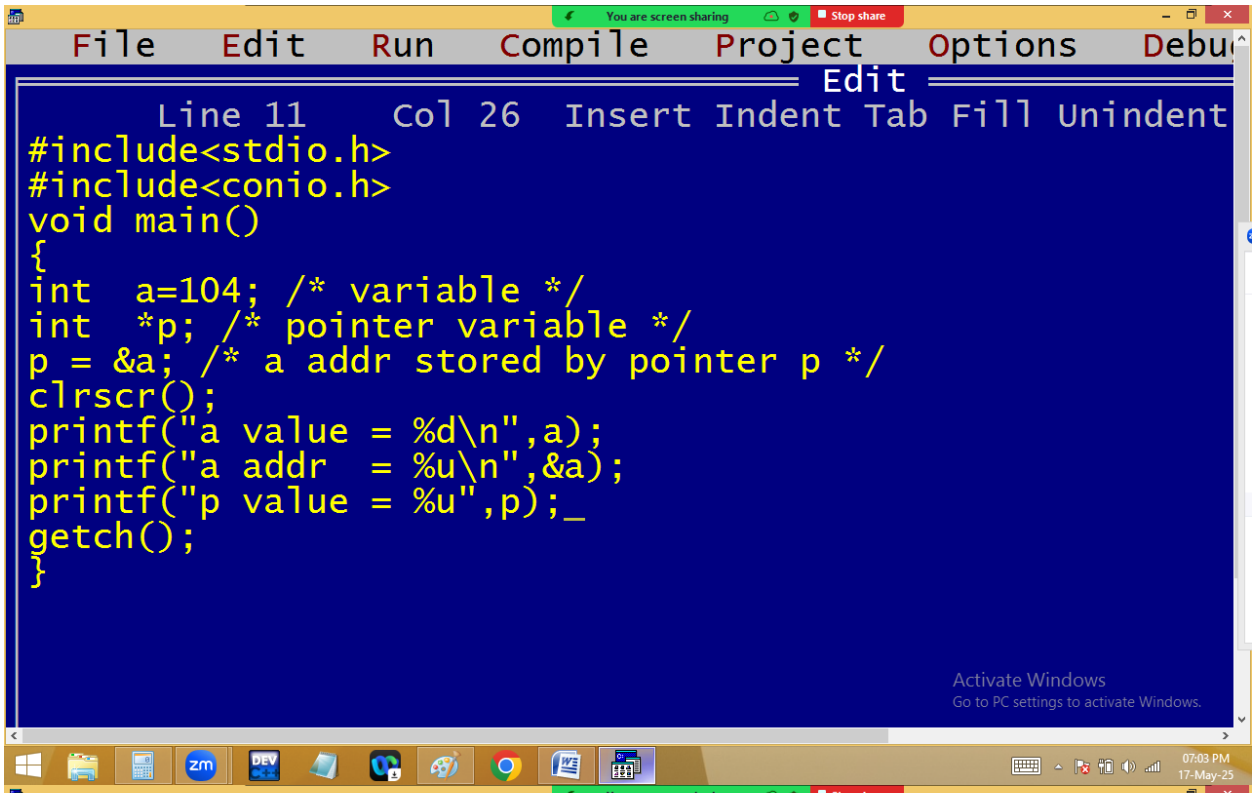
1. c/=2.2 ==> c=c/2.2 ==> 9/2.2=4 ✓

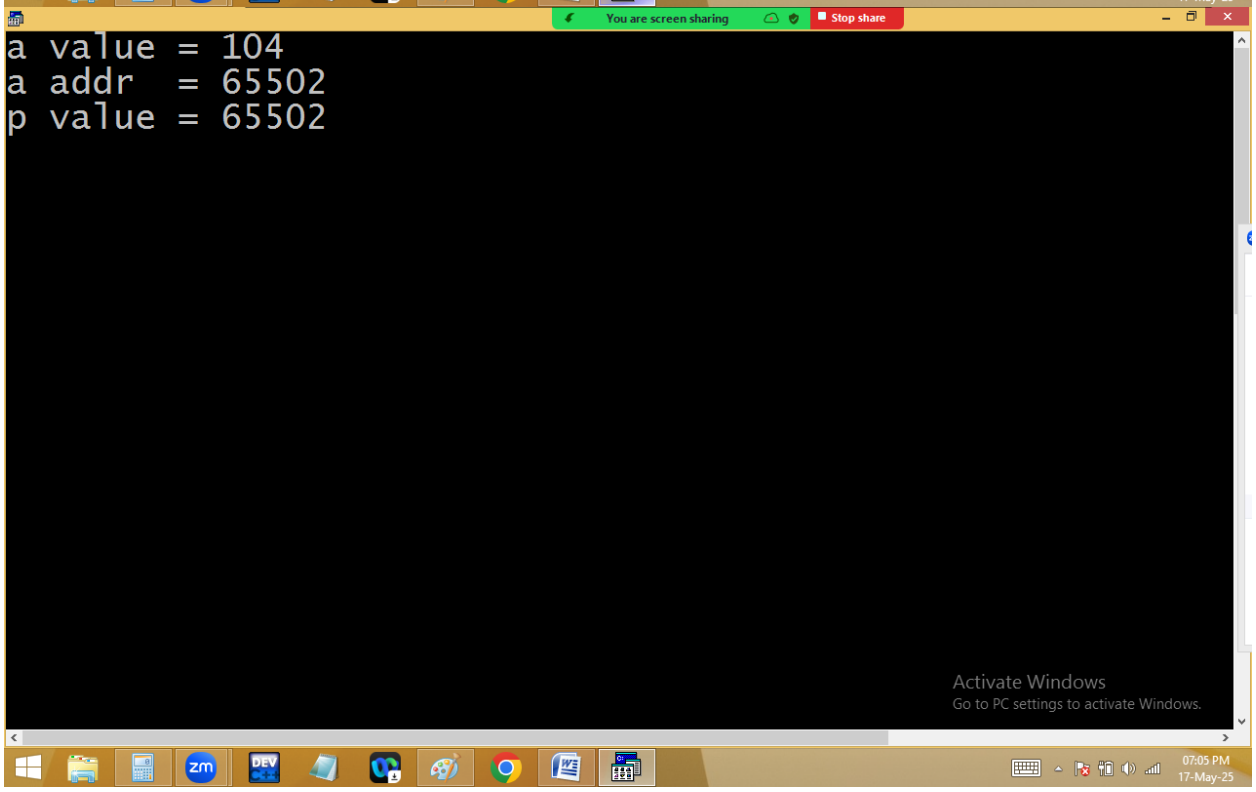
2. b*=c ==> b=b*c ==> 7*4=28 ✓

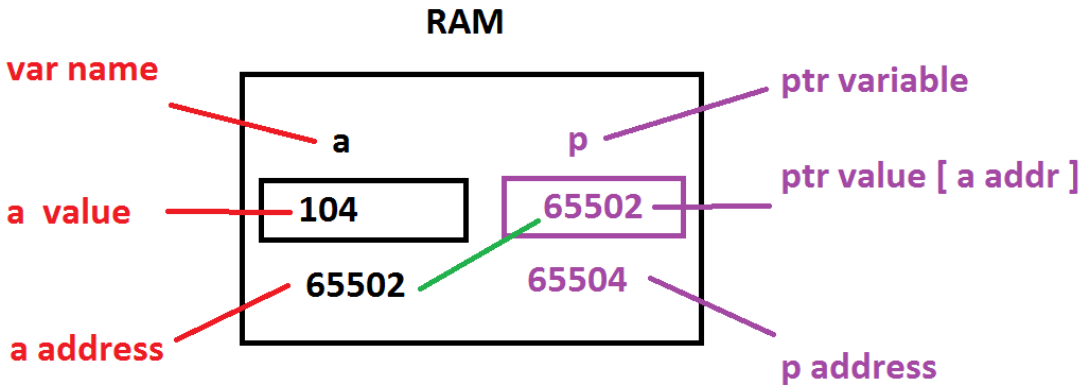
3. a+=b ==> a=a+b ==> 10 + 28 = 38 ✓

Address operators:

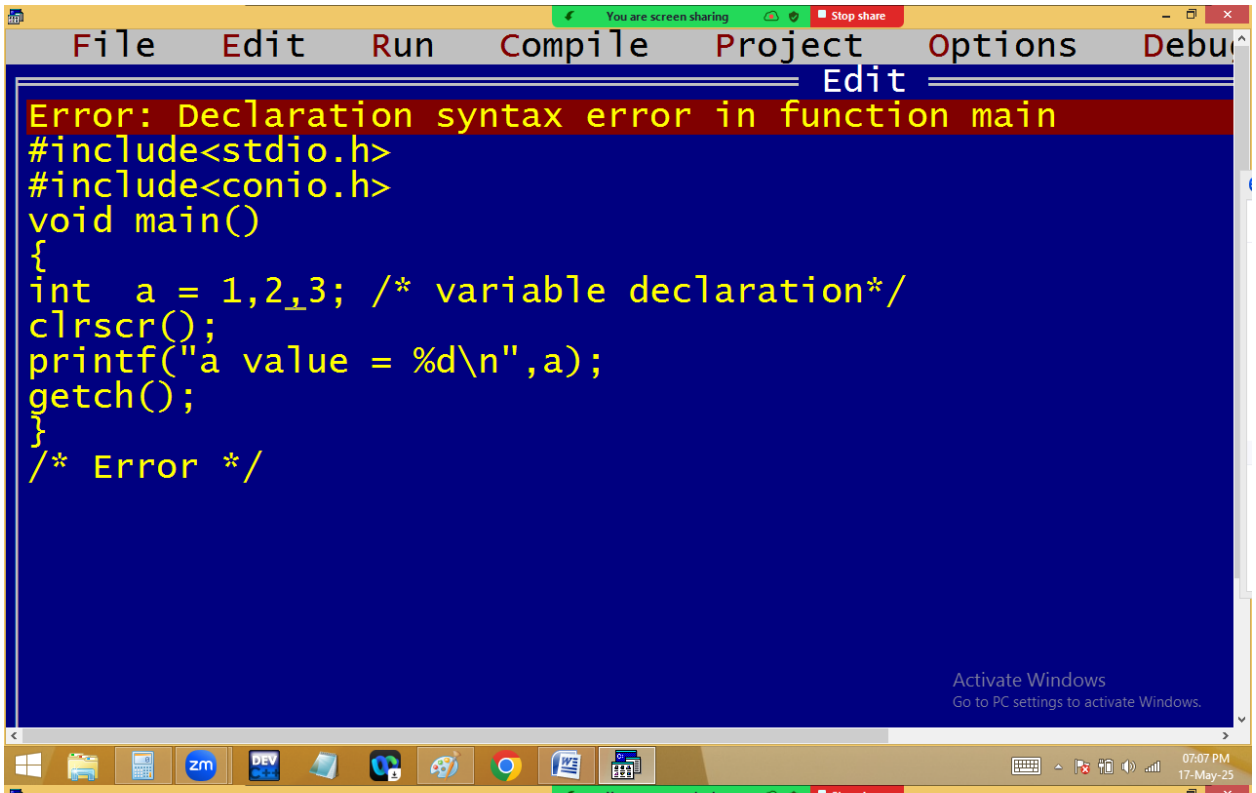
1. & - Address of the variable
2. * - pointer – Address of another variable

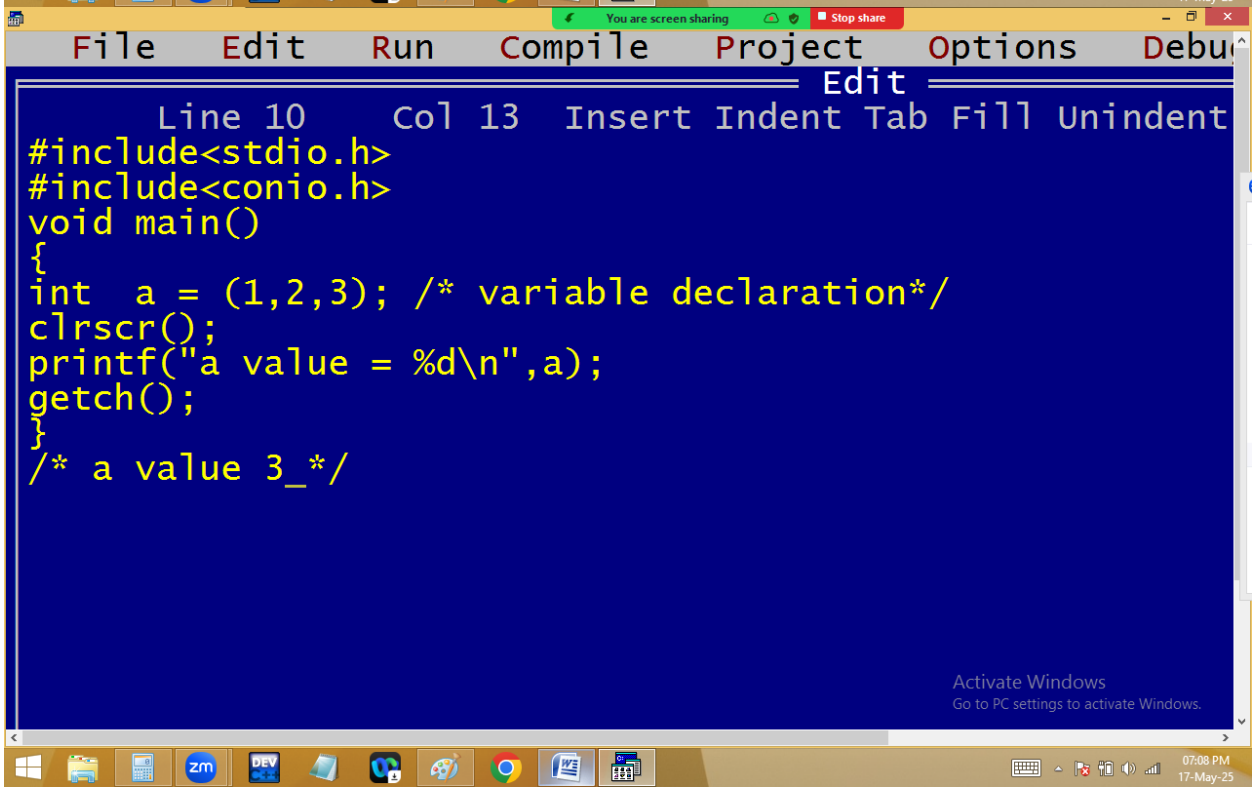

You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Line 11 Col 26 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a=104; /* variable */
int *p; /* pointer variable */
p = &a; /* a addr stored by pointer p */
clrscr();
printf("a value = %d\n",a);
printf("a addr = %u\n",&a);
printf("p value = %u",p);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:03 PM
17-May-25


You are screen sharing
Stop share
a value = 104
a addr = 65502
p value = 65502
Activate Windows
Go to PC settings to activate Windows.
07:05 PM
17-May-25



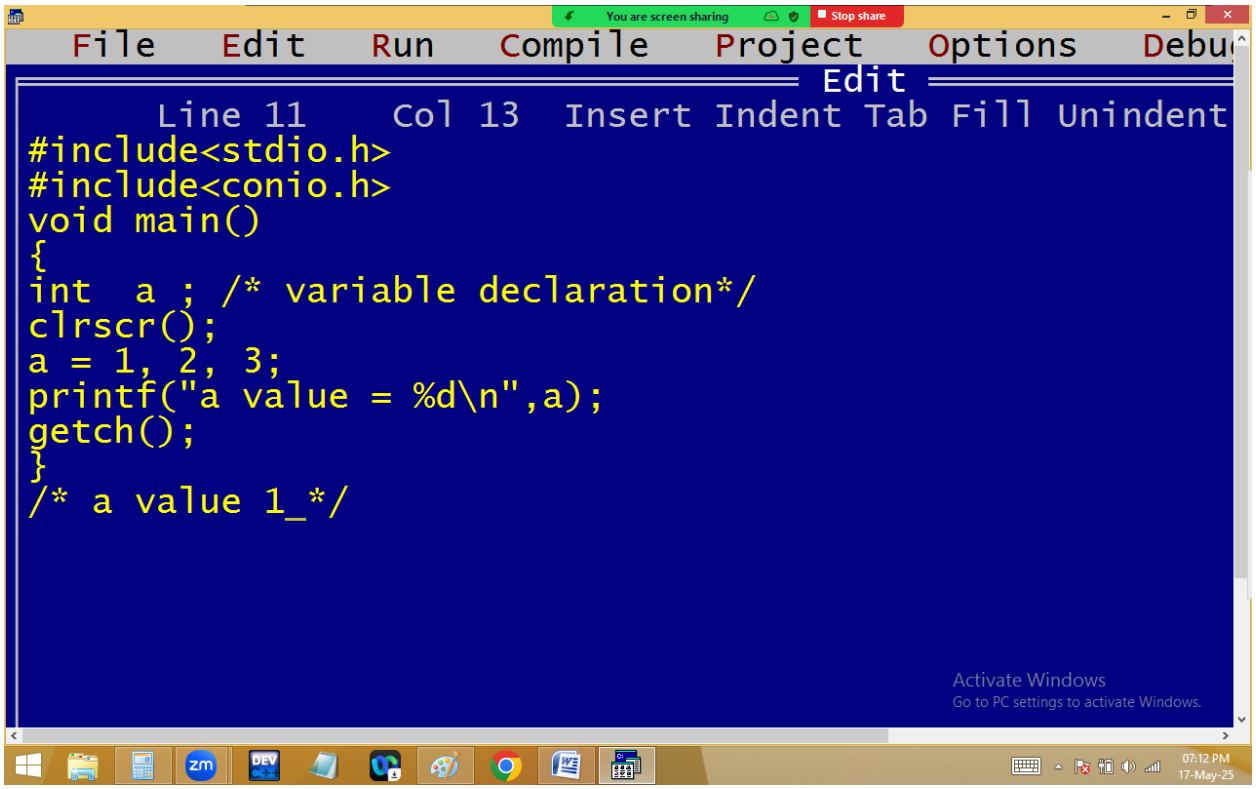
( ) and , separators:

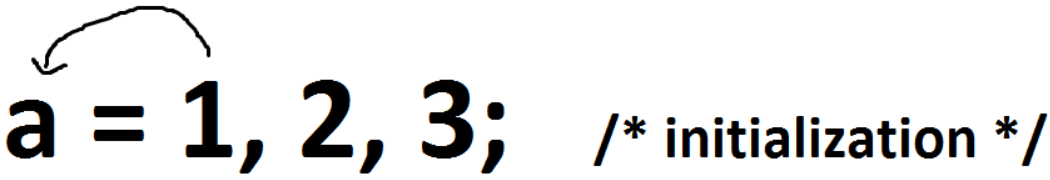

You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Error: Declaration syntax error in function main
#include<stdio.h>
#include<conio.h>
void main()
{
int a = 1,2,3; /* variable declaration*/
clrscr();
printf("a value = %d\n",a);
getch();
}
/* Error */
Activate Windows
Go to PC settings to activate Windows.
07:07 PM
17-May-25

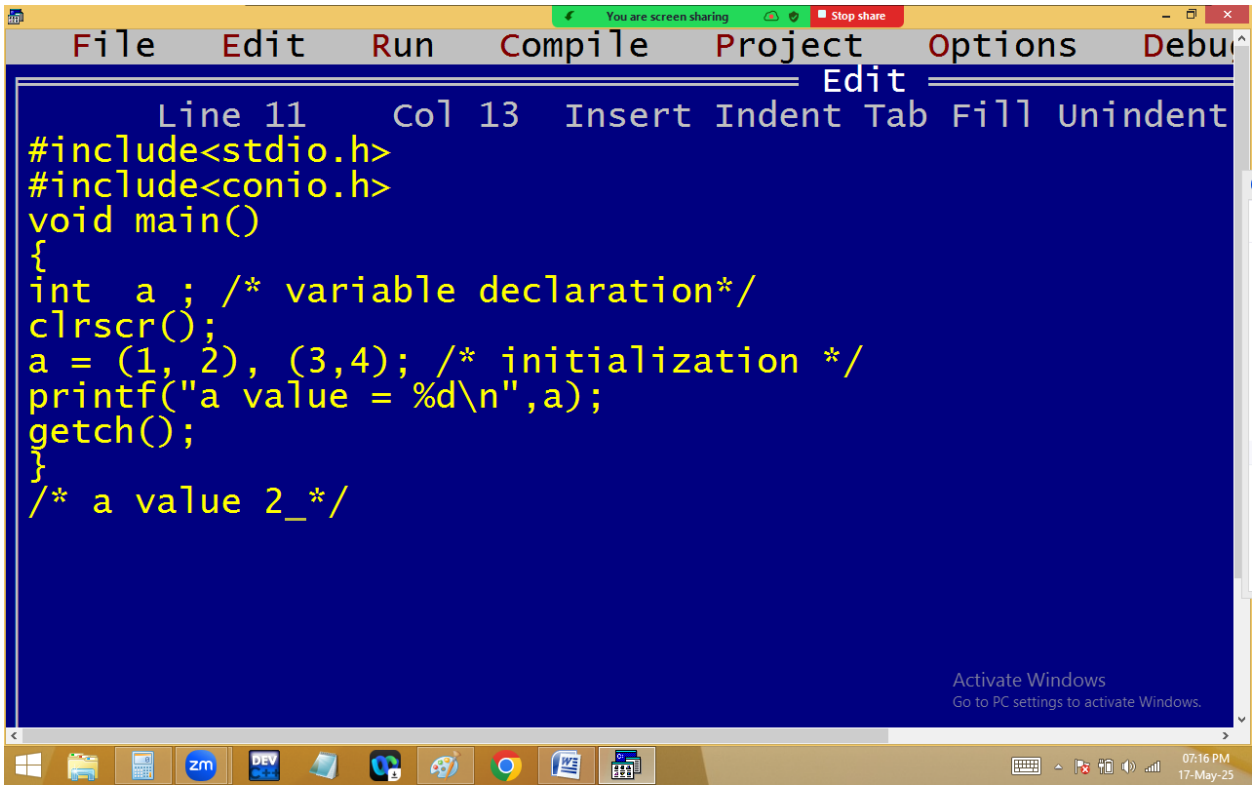

You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Line 10 Col 13 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a = (1,2,3); /* variable declaration*/
clrscr();
printf("a value = %d\n",a);
getch();
}
/* a value 3_*/
Activate Windows
Go to PC settings to activate Windows.
07:08 PM
17-May-25

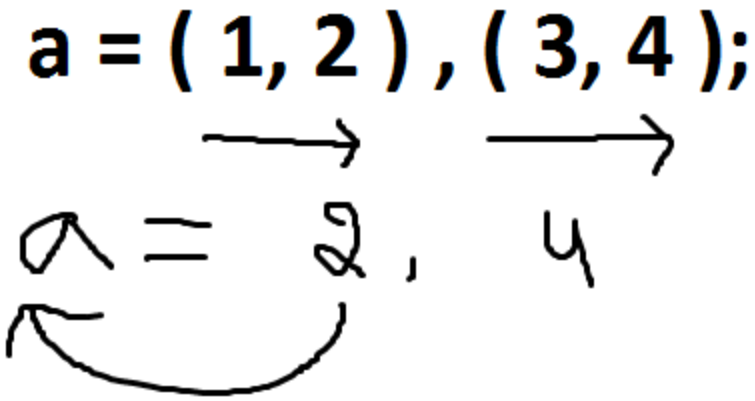
```
int  a = ( 1, 2, 3 );
```

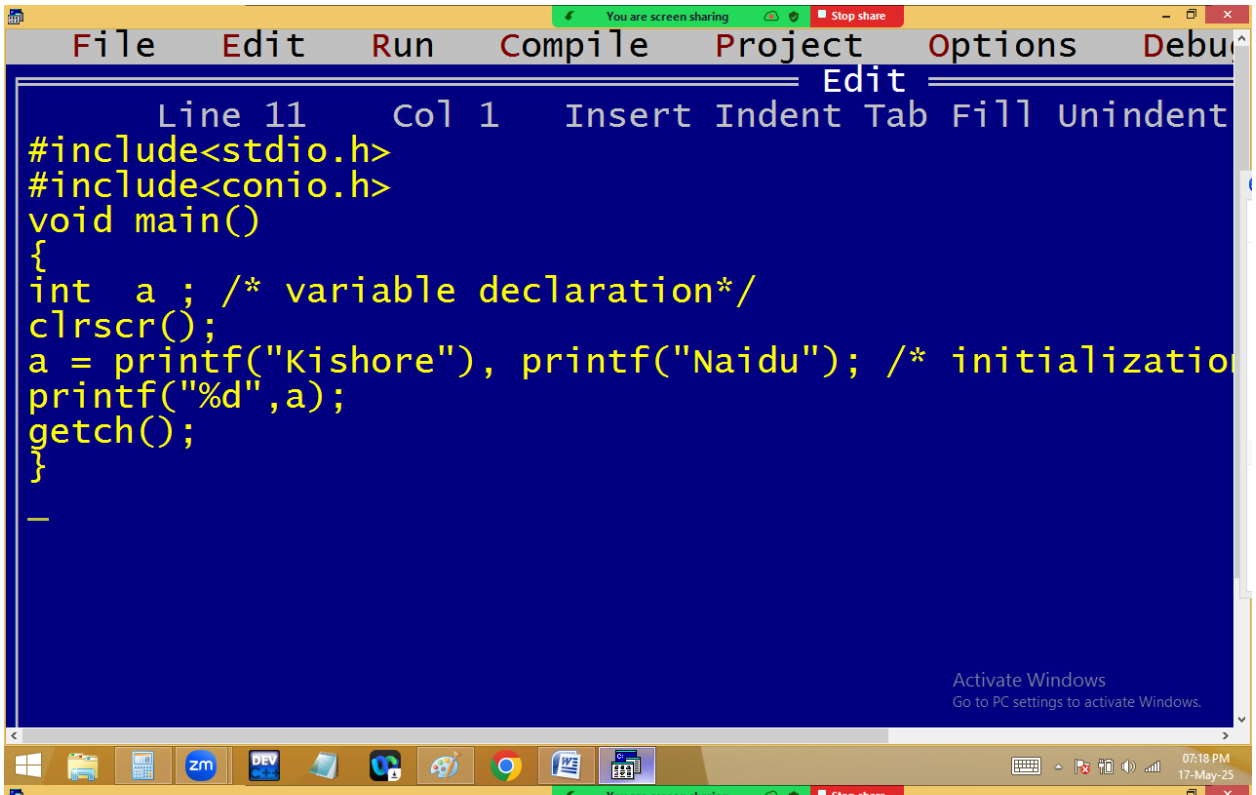


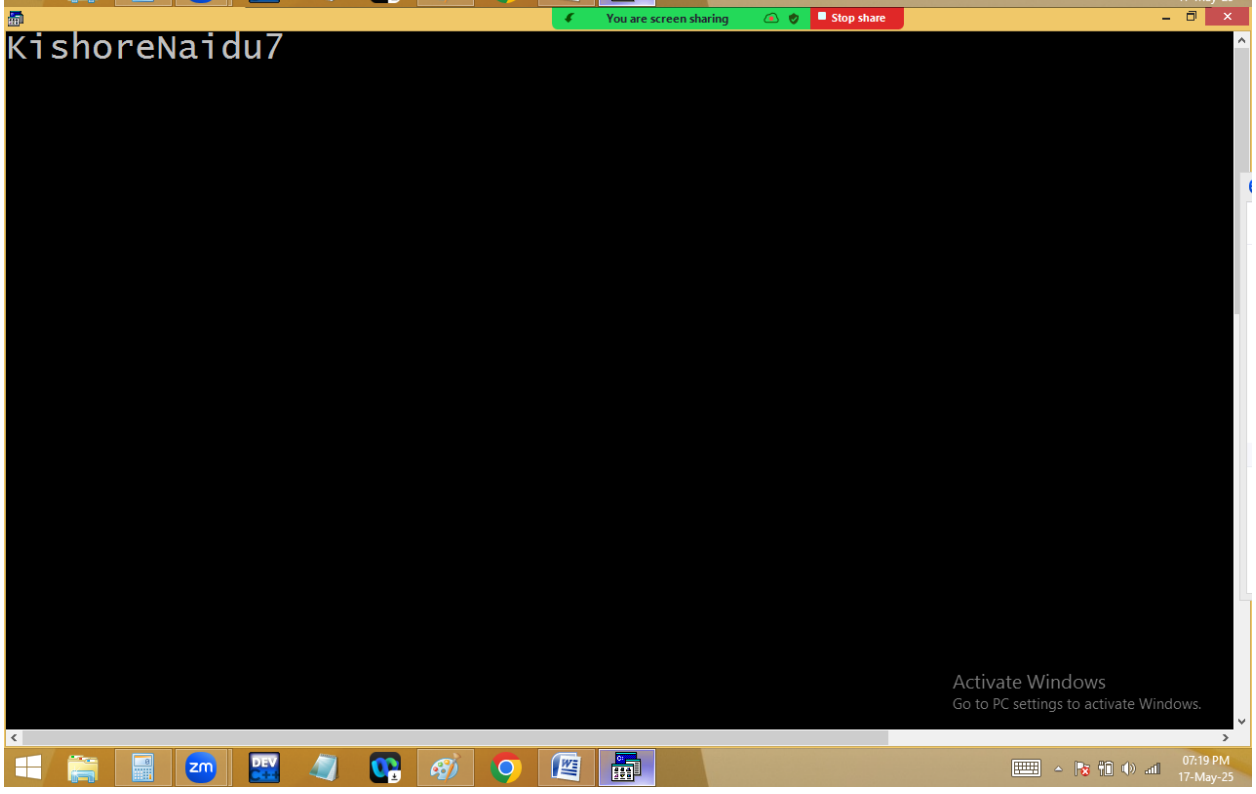

You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Line 11 Col 13 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a ; /* variable declaration*/
clrscr();
a = 1, 2, 3;
printf("a value = %d\n",a);
getch();
}
/* a value 1_*/
Activate Windows
Go to PC settings to activate Windows.
07:12 PM
17-May-25


a = 1, 2, 3; /* initialization */


You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Line 11 Col 13 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a ; /* variable declaration*/
clrscr();
a = (1, 2), (3,4); /* initialization */
printf("a value = %d\n",a);
getch();
}
/* a value 2_*/
Activate Windows
Go to PC settings to activate Windows.
07:16 PM
17-May-25


a = (1, 2) , (3, 4);
a = 2 , 4


You are screen sharing
Stop share
File Edit Run Compile Project Options Debu
Edit
Line 11 Col 1 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a ; /* variable declaration*/
clrscr();
a = printf("Kishore"), printf("Naidu"); /* initializatio
printf("%d",a);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:18 PM
17-May-25


You are screen sharing
Stop share
KishoreNaidu7
Activate Windows
Go to PC settings to activate Windows.
07:19 PM
17-May-25

```
a=0

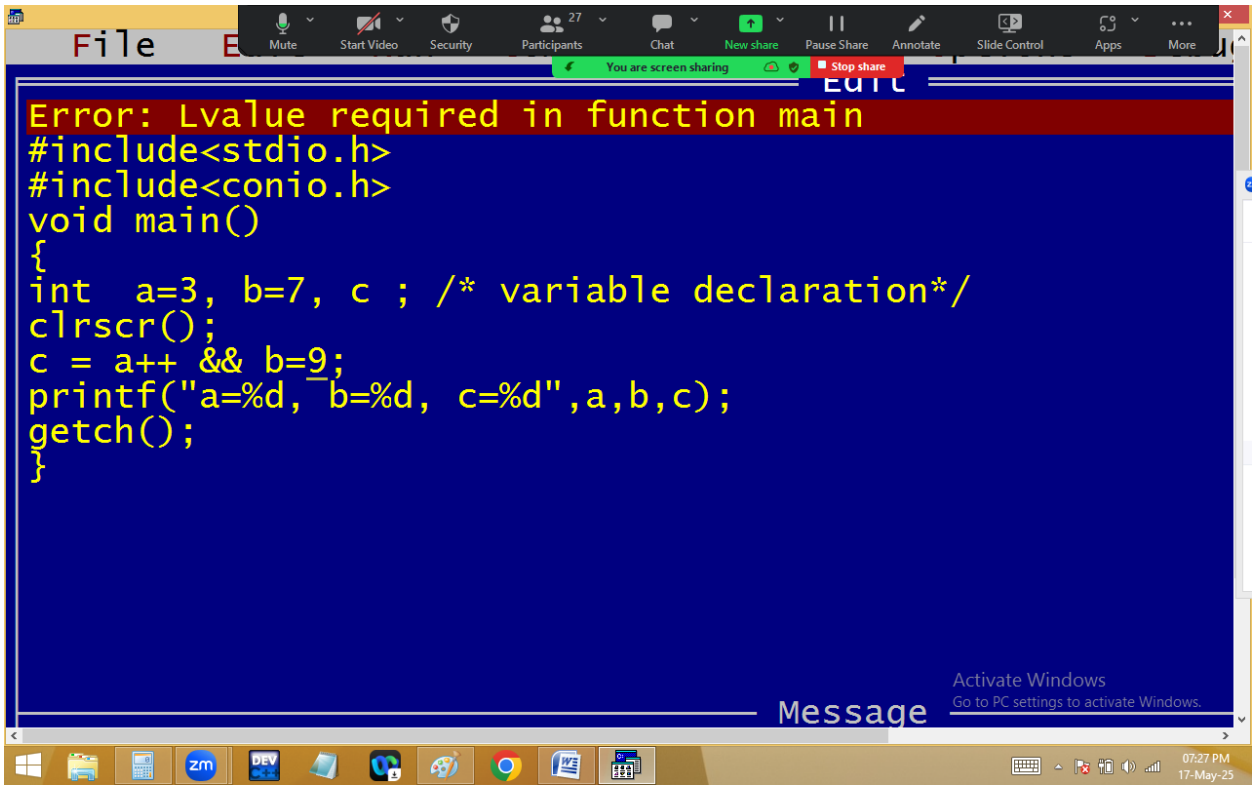
a++ && printf("Kishore");

a++ || printf("Naidu");

a++ && printf("Hyd");
```

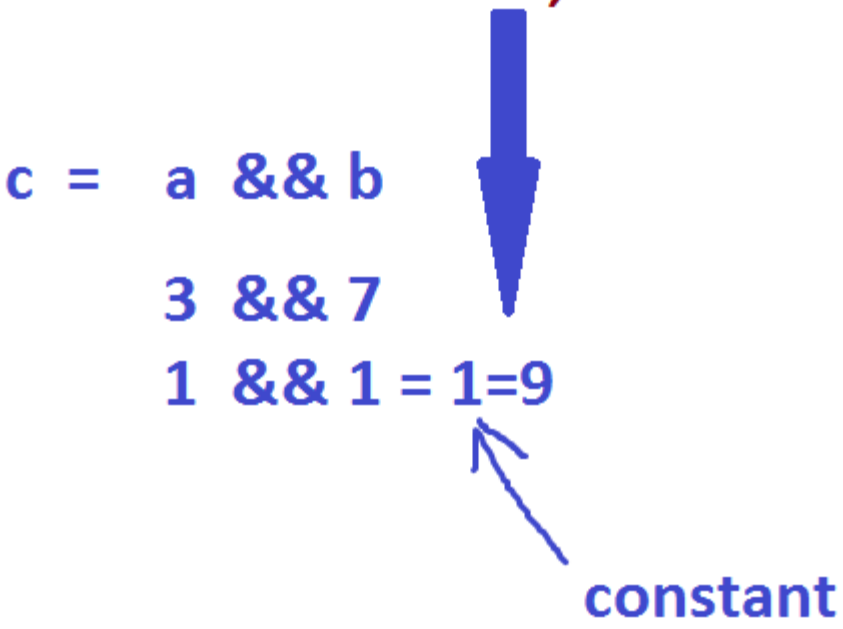
Note: In && operation when left exp false, right exp not checked

In || operation when left exp true, right exp not checked.


File
Mute
Start Video
Security
Participants
27
Chat
New share
Pause Share
Annotate
Slide Control
Apps
More
You are screen sharing
Stop share
Edit
Error: Lvalue required in function main
#include<stdio.h>
#include<conio.h>
void main()
{
int a=3, b=7, c ; /* variable declaration*/
clrscr();
c = a++ && b=9;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
Message
Activate Windows
Go to PC settings to activate Windows.
07:27 PM
17-May-25

a=3 b=7

c = a++ && b=9;



Operator precedence / Operator priority

(ASSOCIATION OF OPERATORS)

1. ( )
2. +, - , ! (sign operators, unary operators)
3. ++, -- (pre increment & decrement)
4. *, / , %
5. +, - (Binary)

6. = =, !=
7. &&
8. ||
9. **? :** (ternary operator)
10. =
11. ++, -- (Post increment & decrement)
12. , (comma)