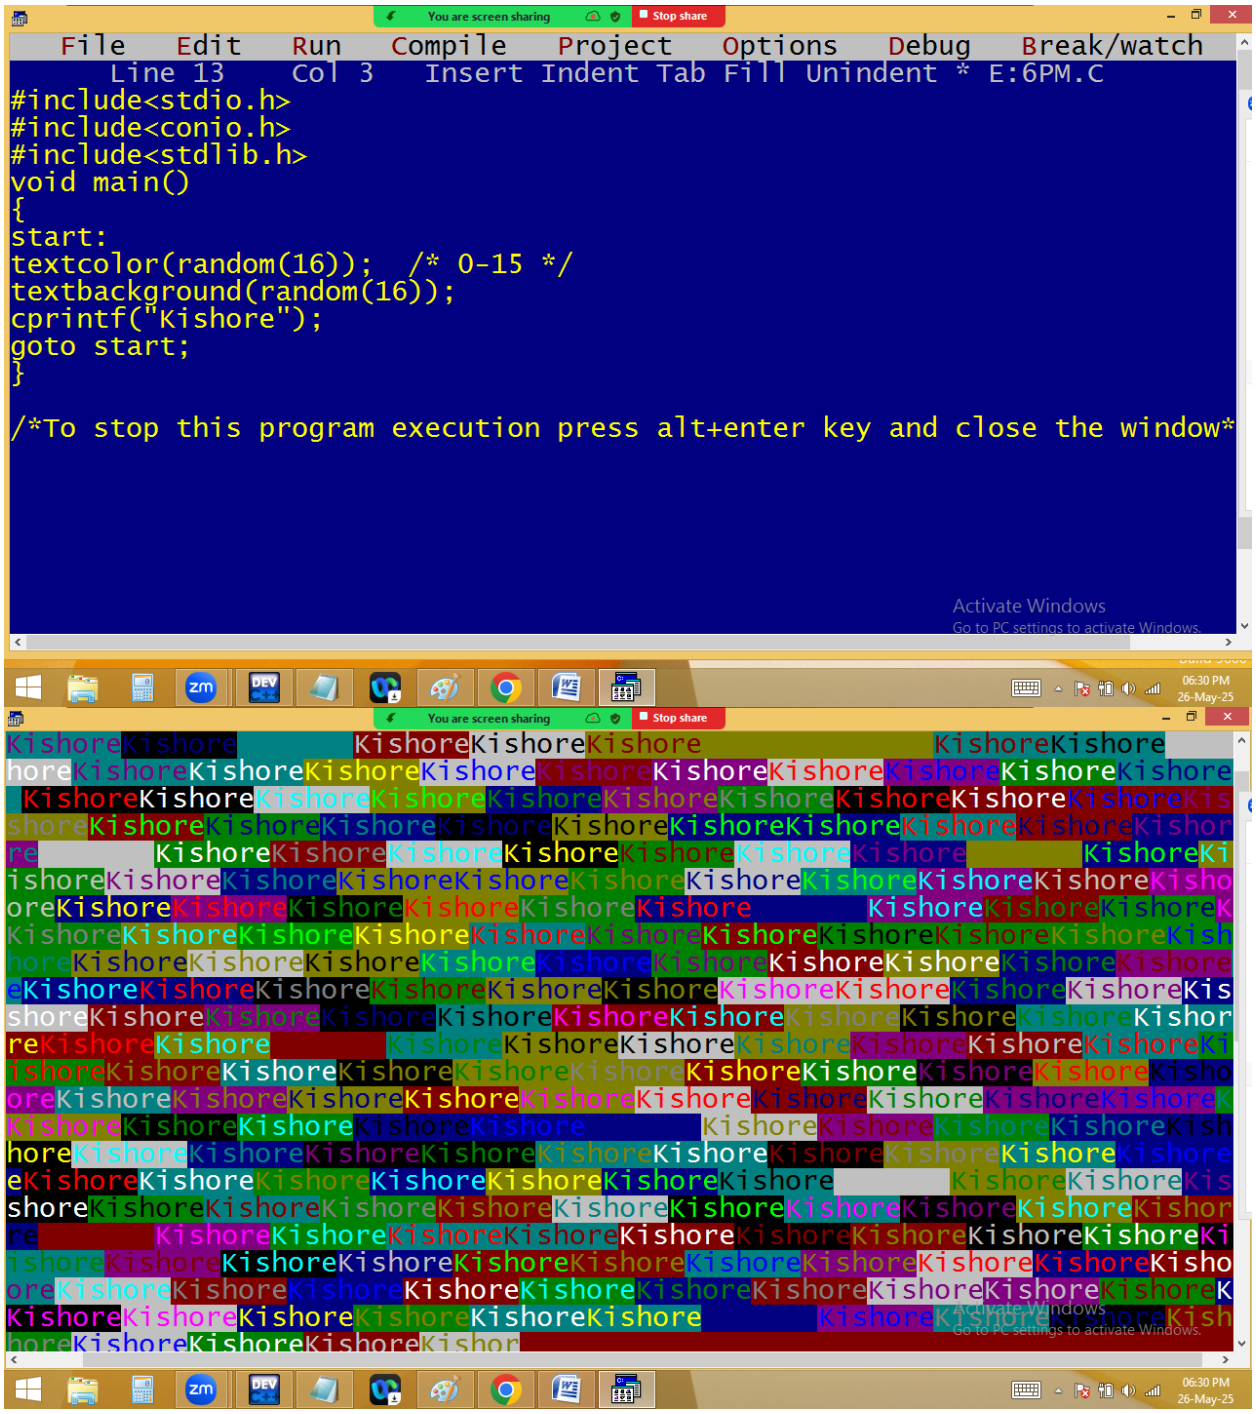


Conditional control statements:

They are working based on a condition.

In c we are using 2 type of conditional control statements.

1. If
2. Switch

if:

It is a decision making statement.

It is used to check the given condition / expressions is true or false. If condition true then only if allows execute the statements in if **block { }**.

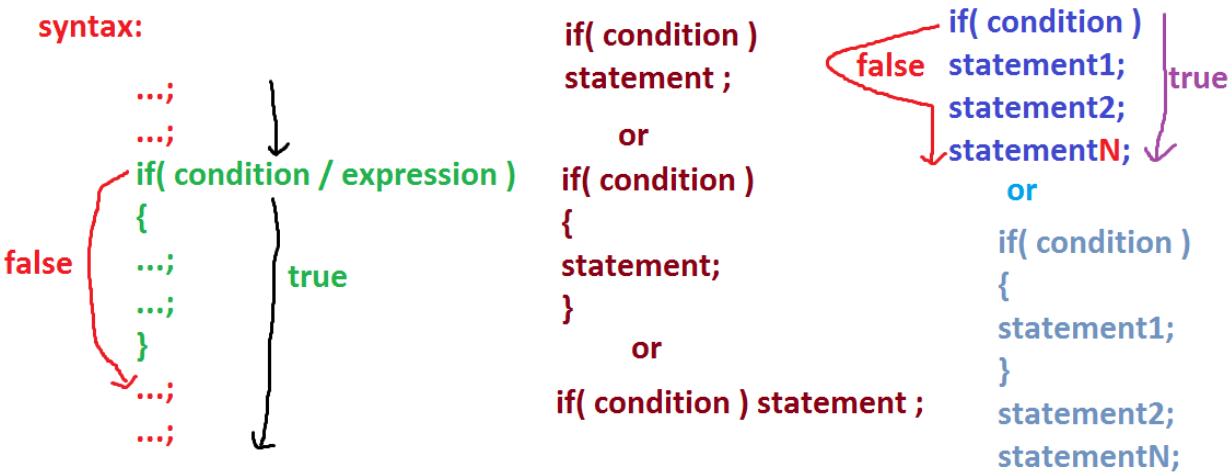
In C language we are using 4 type of if conditions.

1. **Simple if** – when single option only there
2. **If..else** – when two options are there
3. **If…else if ladder**: when more than two options available
4. **Nested if**: if within if ..

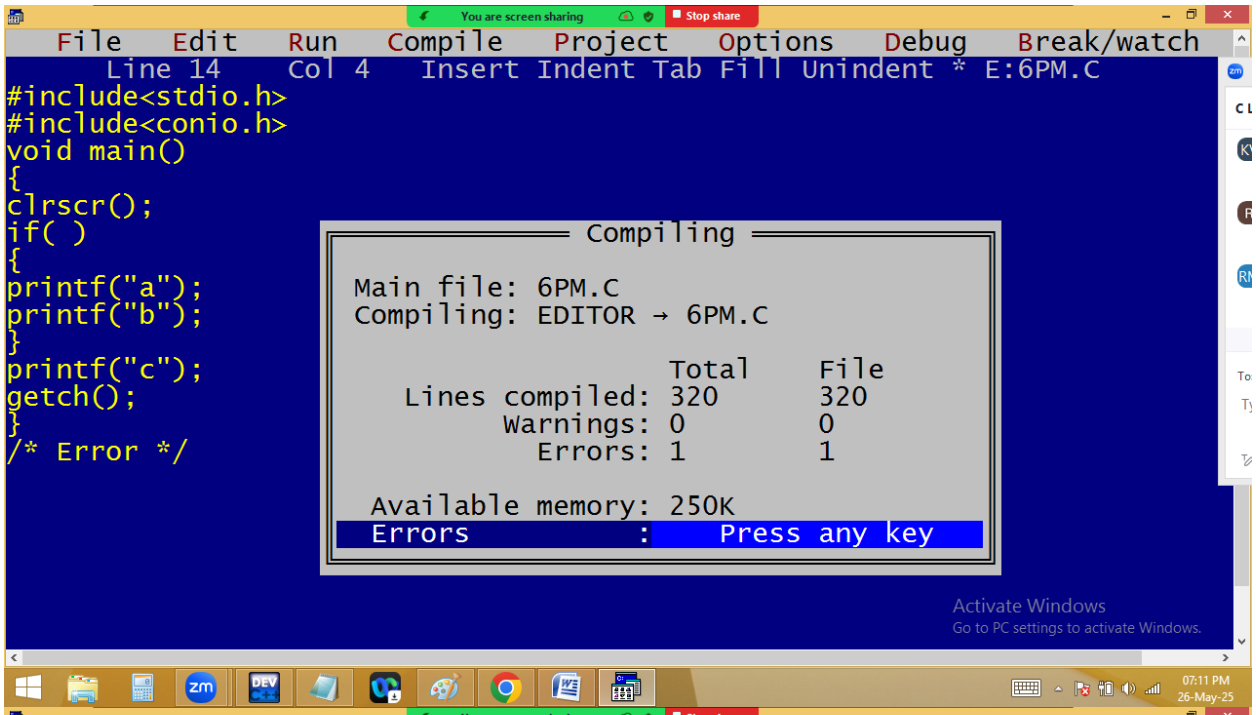
Simple if: When the program is having only one option then go for simple if.

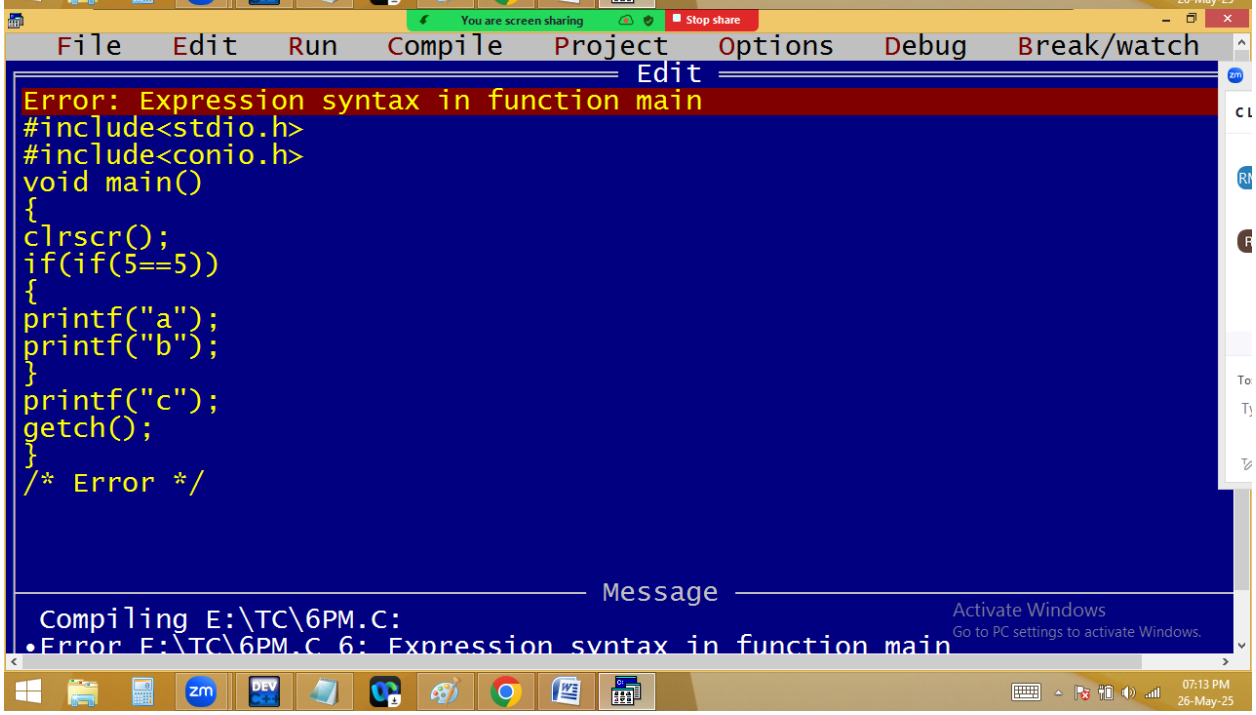
If checks the condition and it is true then only it allows to execute the statements in **if block { }** and later **outside statements**.

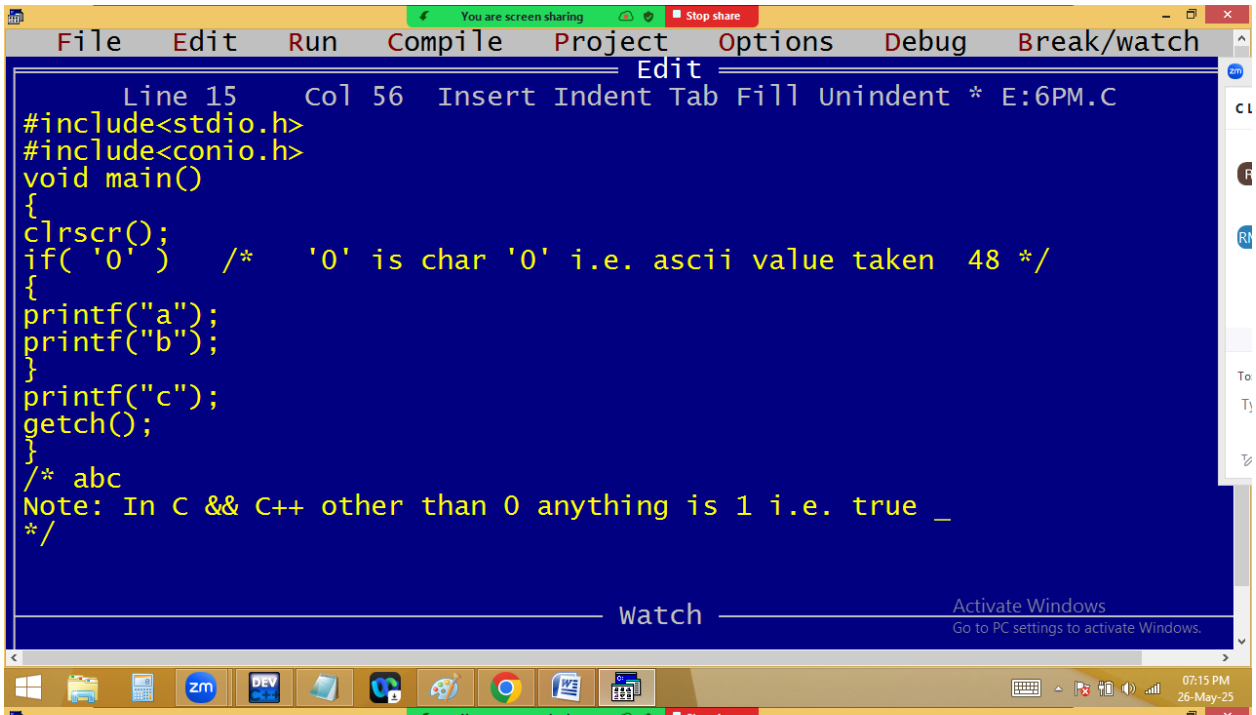
If condition **false** then **only the outside statements** executed.

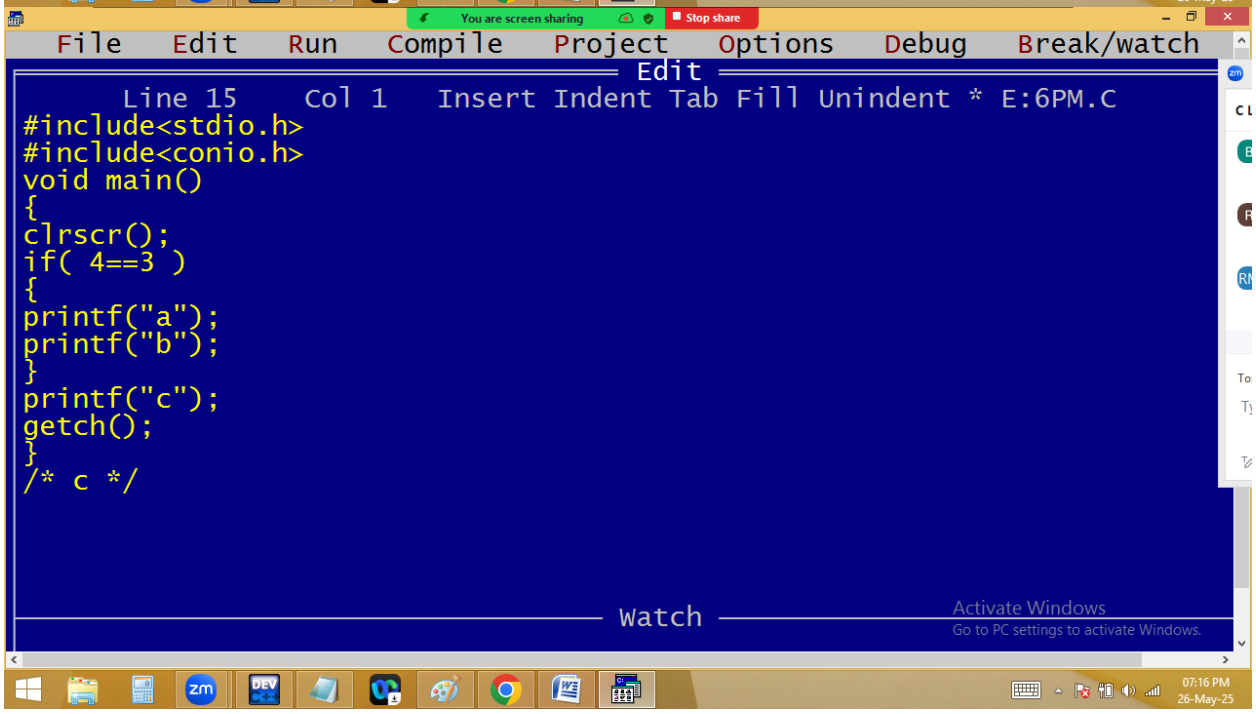


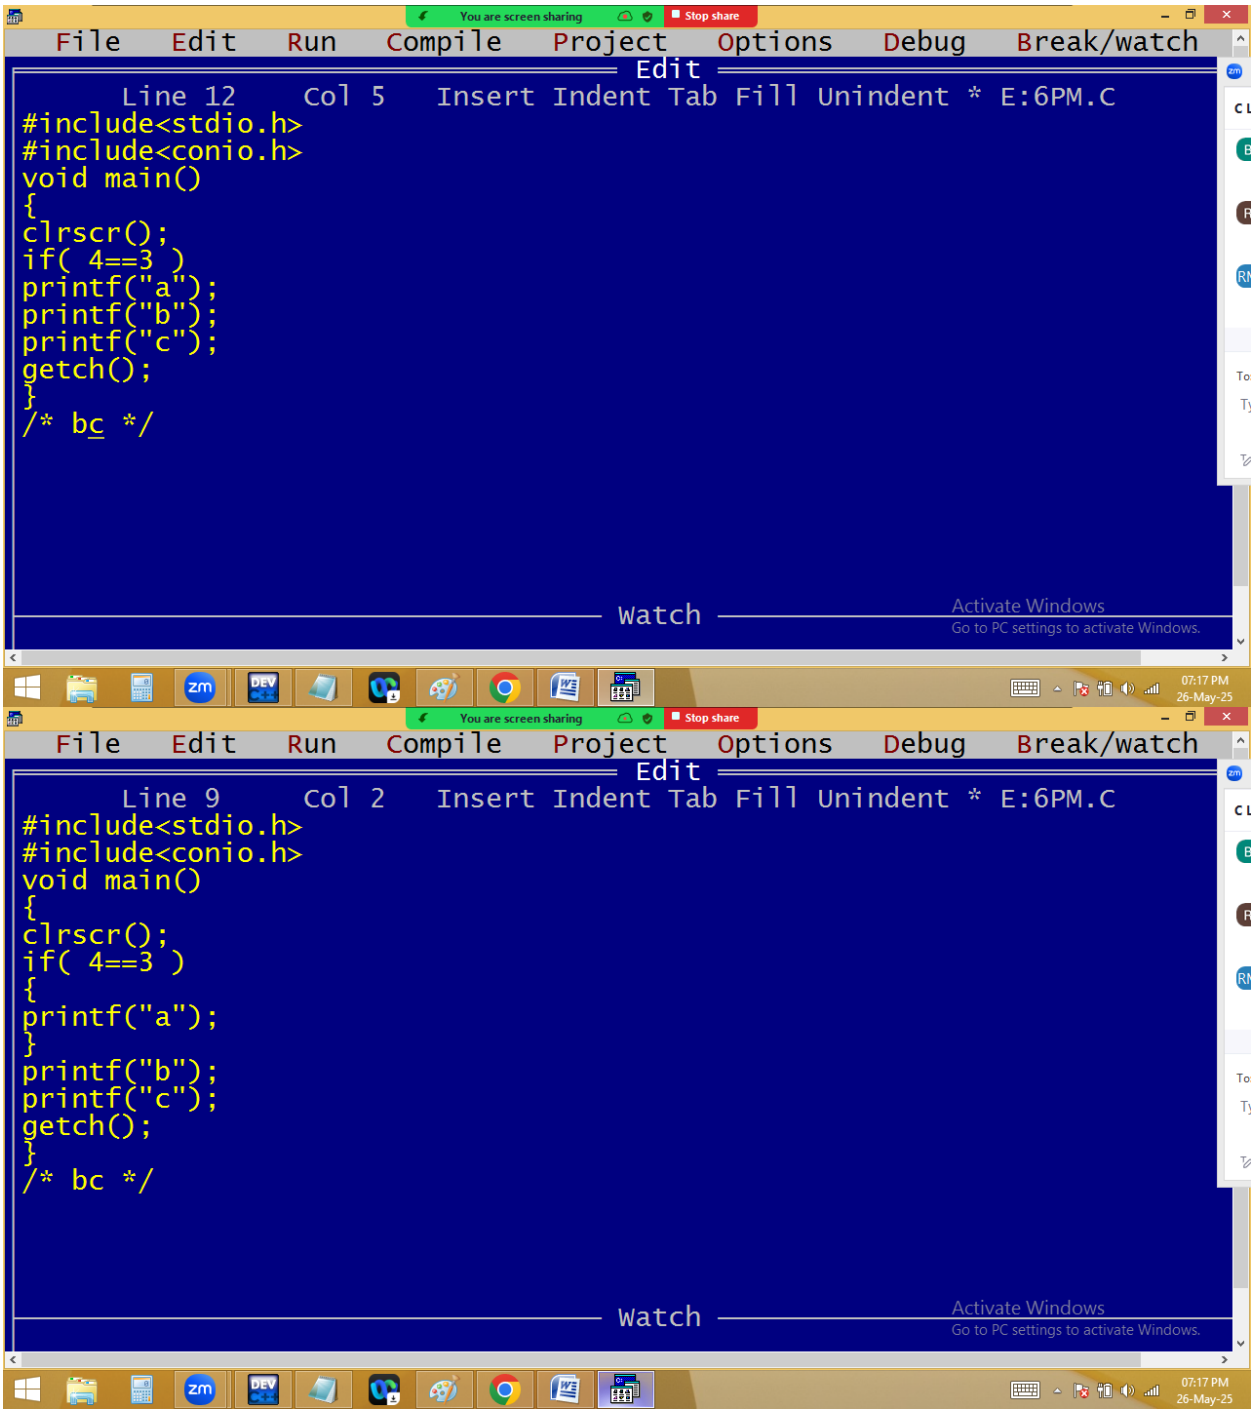
Interview question on simple if:

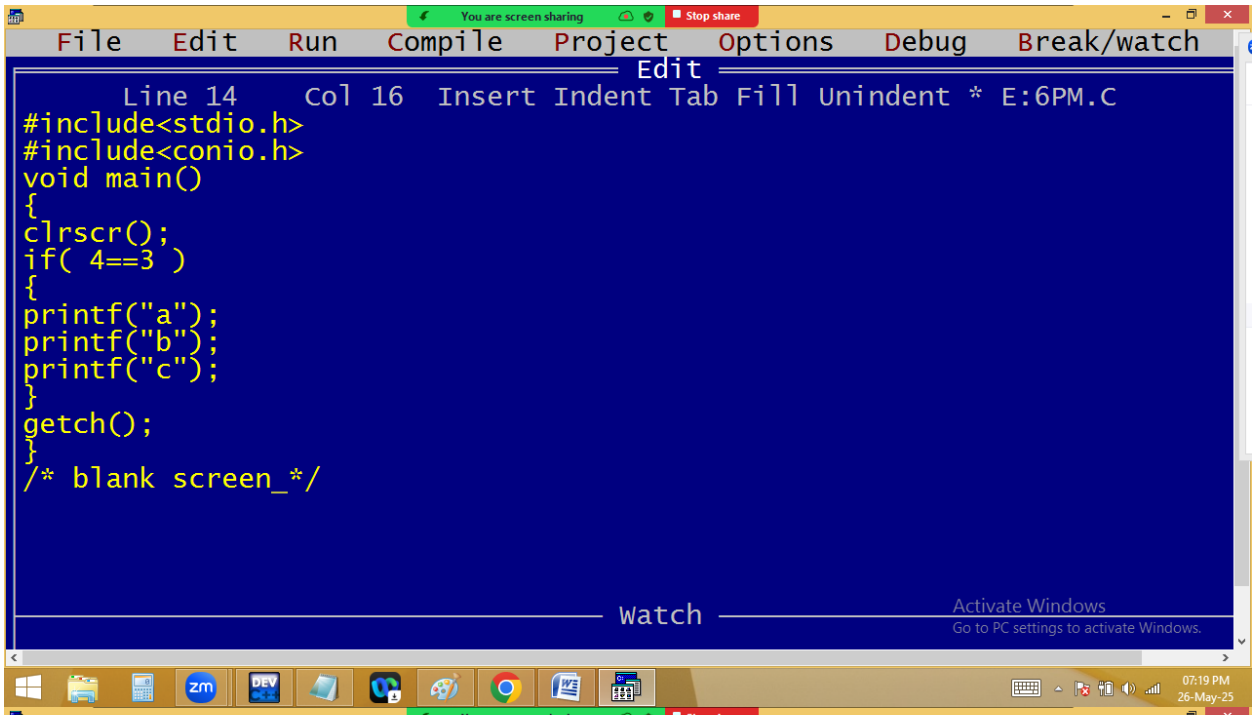

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 14 Col 4 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
Compiling
Main file: 6PM.C
Compiling: EDITOR → 6PM.C
Total File
Lines compiled: 320 320
Warnings: 0 0
Errors: 1 1
Available memory: 250K
Errors : Press any key
Activate Windows
Go to PC settings to activate Windows.
07:11 PM
26-May-25

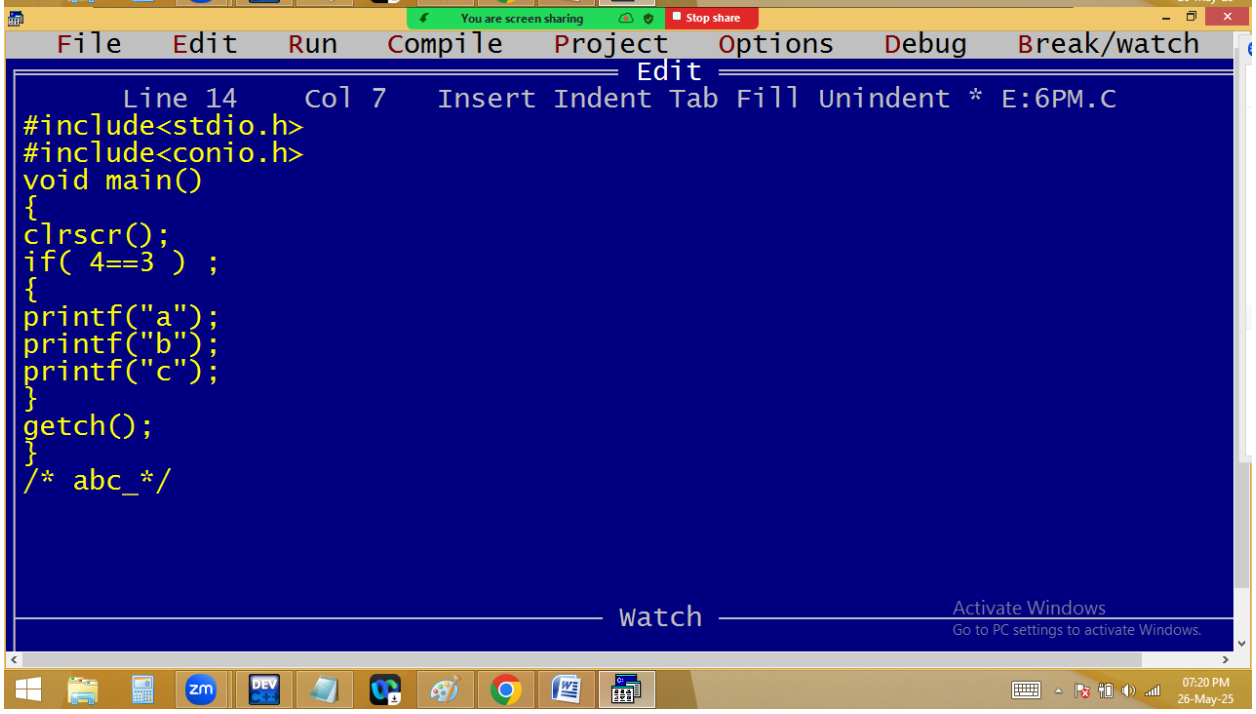

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Error: Expression syntax in function main
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(if(5==5))
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
Message
Compiling E:\TC\6PM.C:
Error E:\TC\6PM.C 6: Expression syntax in function main
Activate Windows
Go to PC settings to activate Windows.
07:13 PM
26-May-25

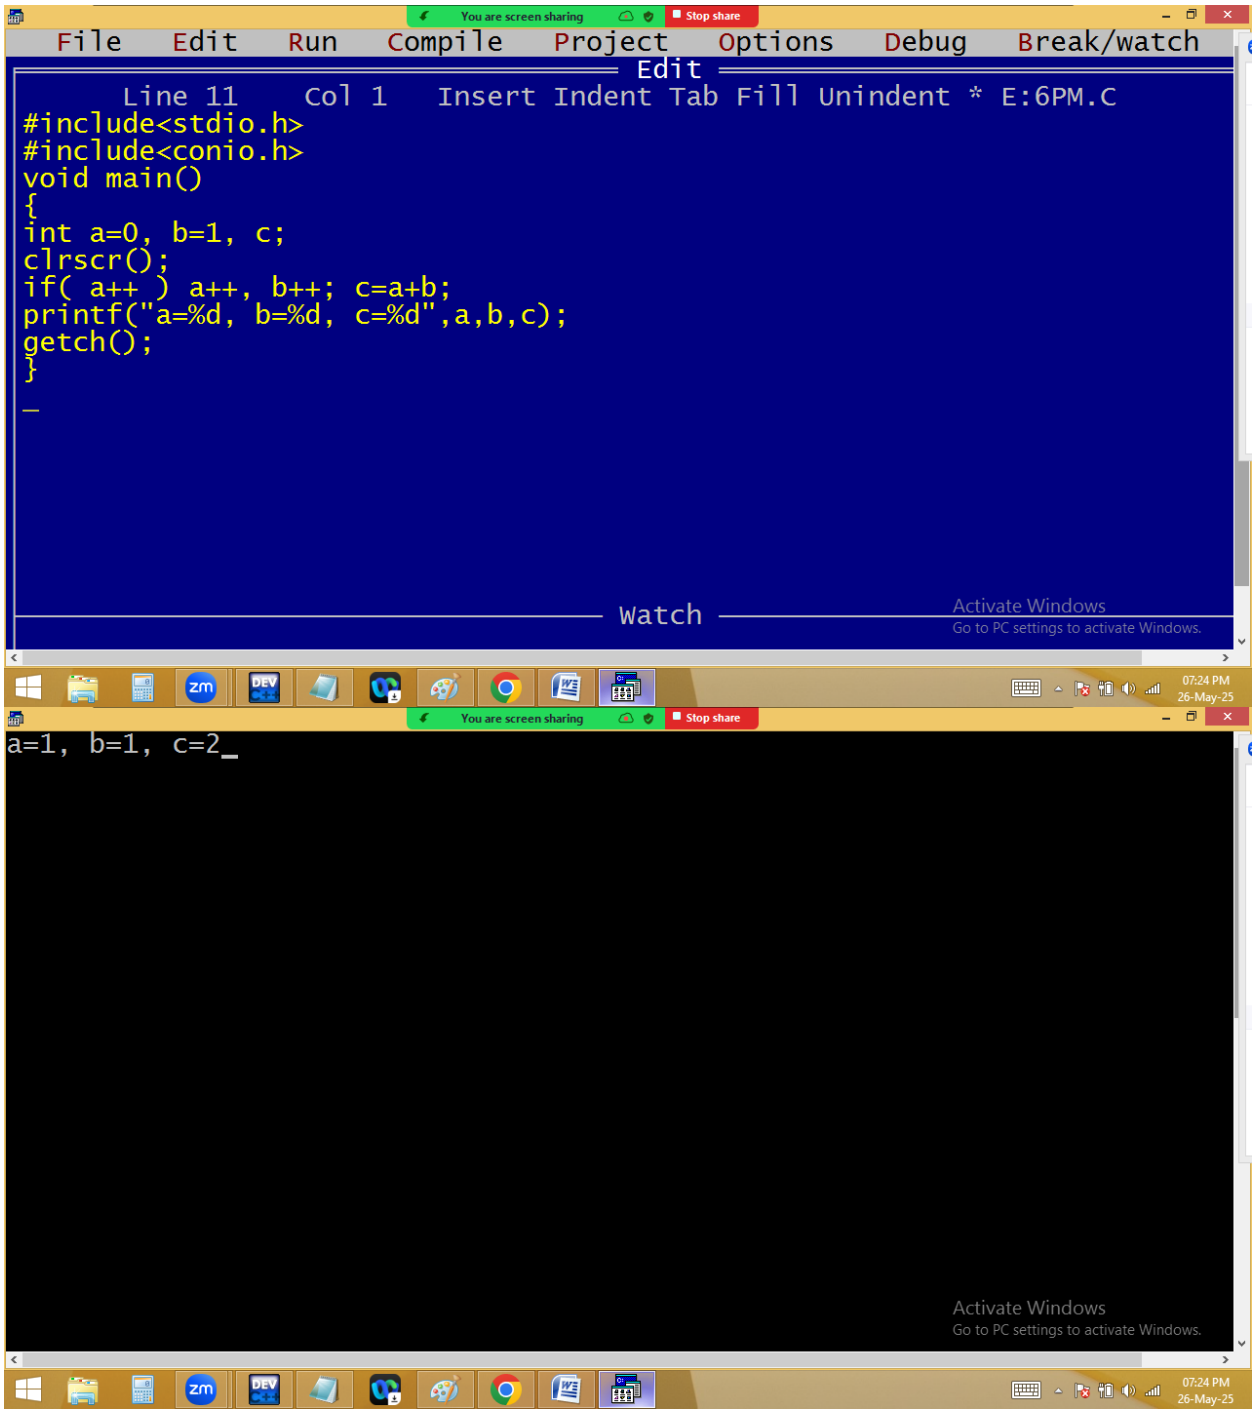

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 15 Col 56 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if('0') /* '0' is char '0' i.e. ascii value taken 48 */
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* abc
Note: In C && C++ other than 0 anything is 1 i.e. true _
*/
Watch
Activate Windows
Go to PC settings to activate Windows.
07:15 PM
26-May-25

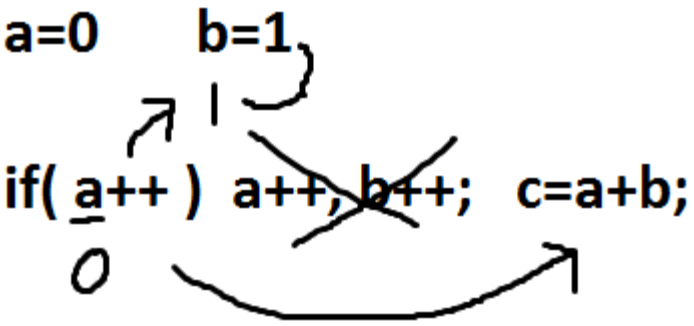

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 15 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(4==3)
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c */
Watch
Activate Windows
Go to PC settings to activate Windows.
07:16 PM
26-May-25

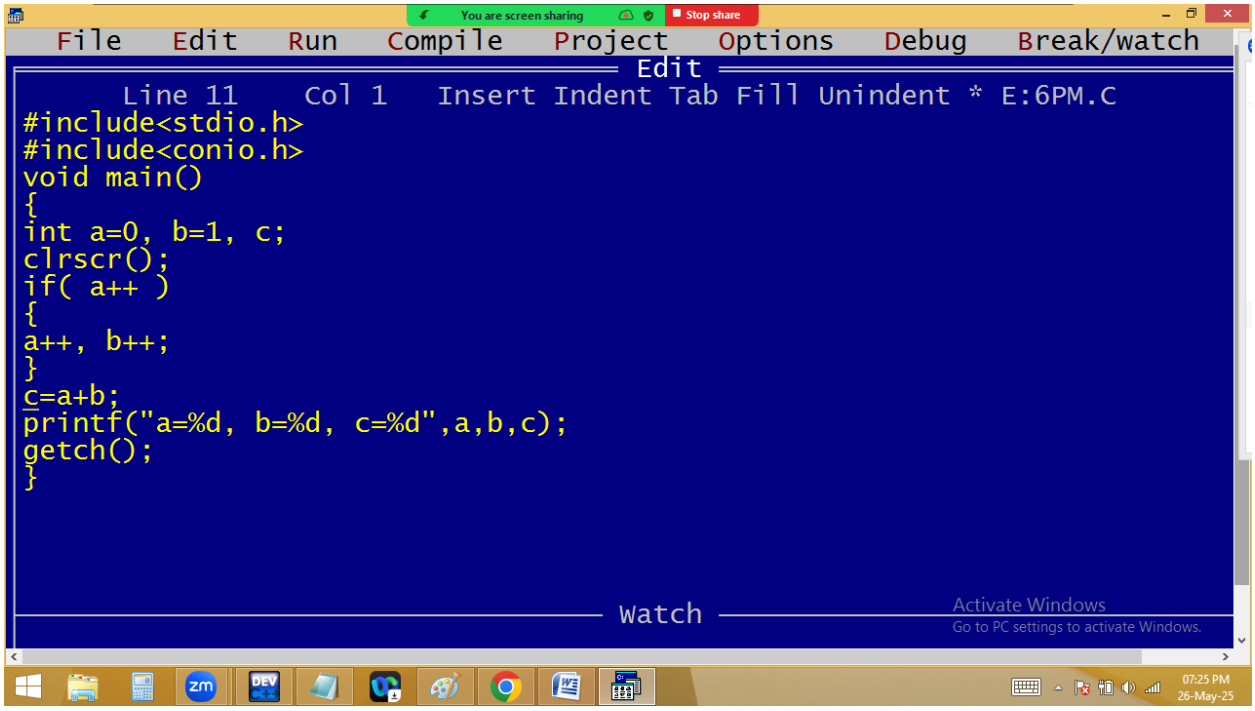

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 12 Col 5 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(4==3)
printf("a");
printf("b");
printf("c");
getch();
}
/* bc */
Watch
Activate Windows
Go to PC settings to activate Windows.
07:17 PM
26-May-25
You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 9 Col 2 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(4==3)
{
printf("a");
}
printf("b");
printf("c");
getch();
}
/* bc */
Watch
Activate Windows
Go to PC settings to activate Windows.
07:17 PM
26-May-25

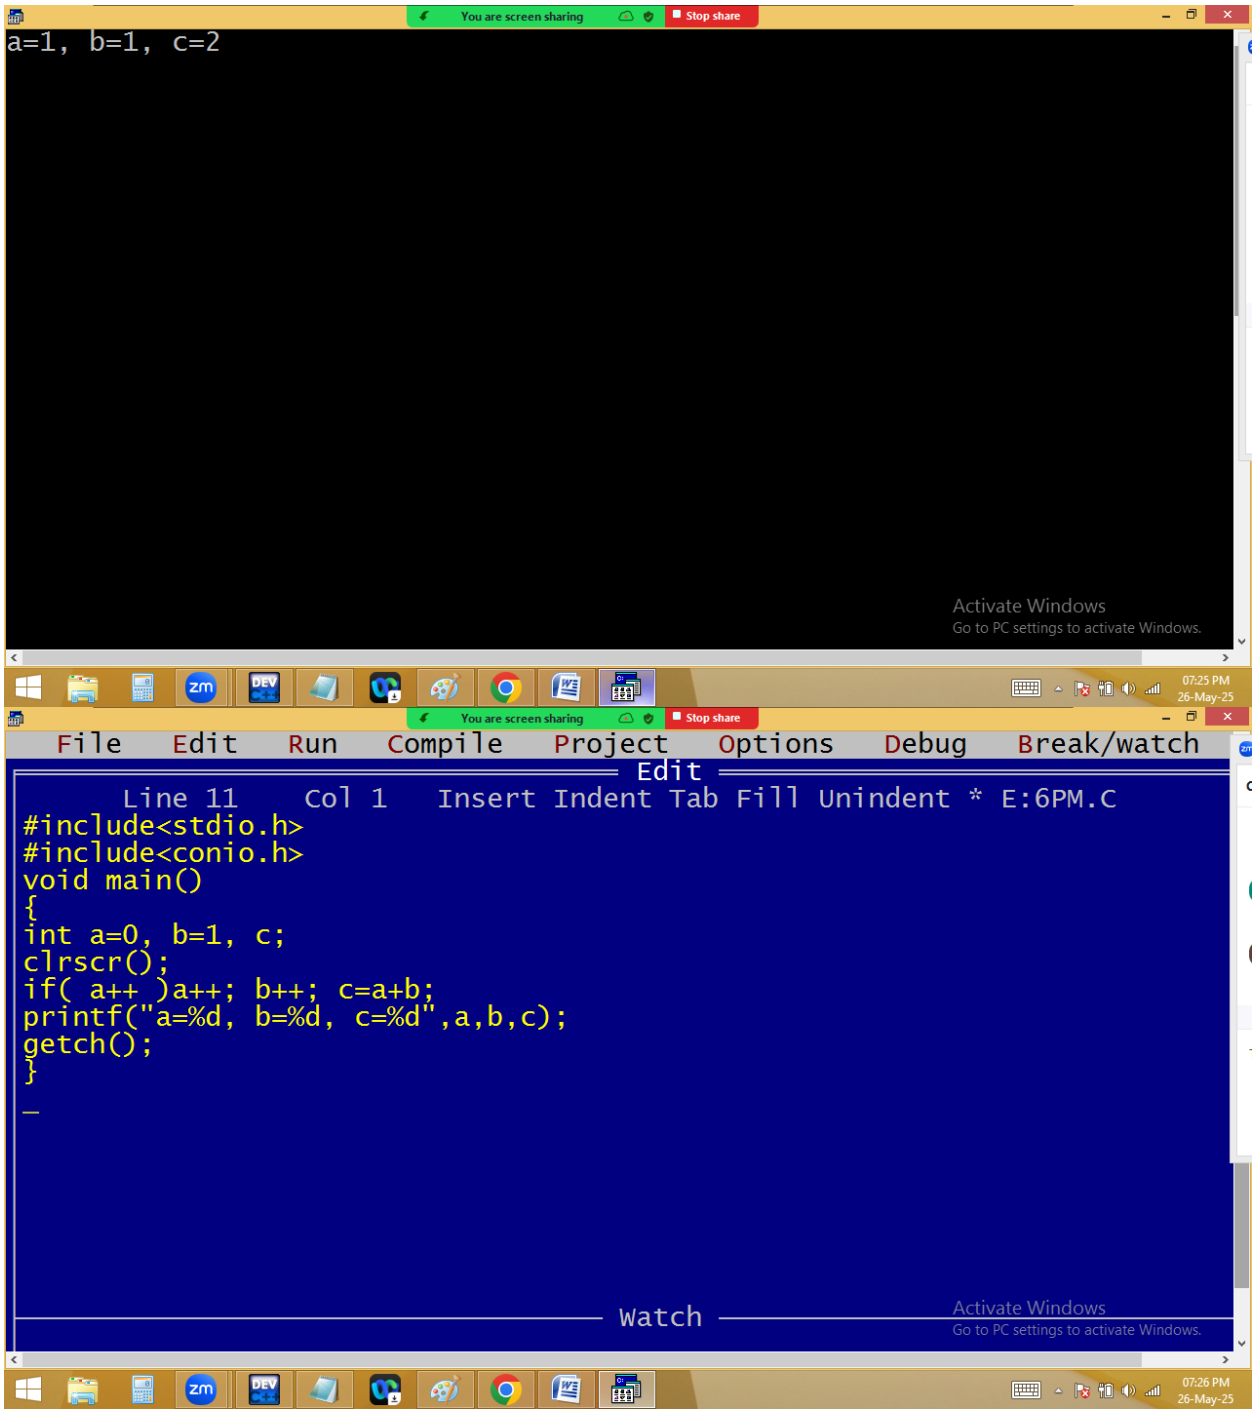

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 14 Col 16 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(4==3)
{
printf("a");
printf("b");
printf("c");
}
getch();
}
/* blank screen_*/
Watch
Activate Windows
Go to PC settings to activate Windows.
07:19 PM
26-May-25

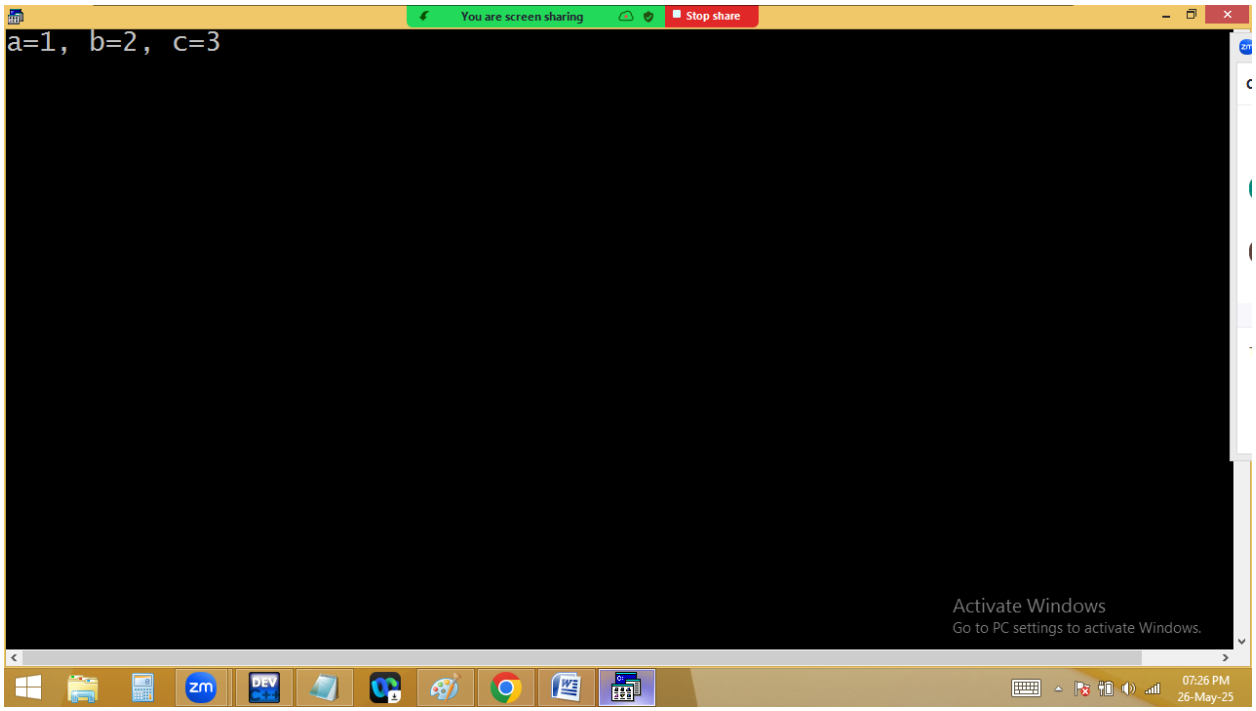

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 14 Col 7 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(4==3) ;
{
printf("a");
printf("b");
printf("c");
}
getch();
}
/* abc_*/
Watch
Activate Windows
Go to PC settings to activate Windows.
07:20 PM
26-May-25

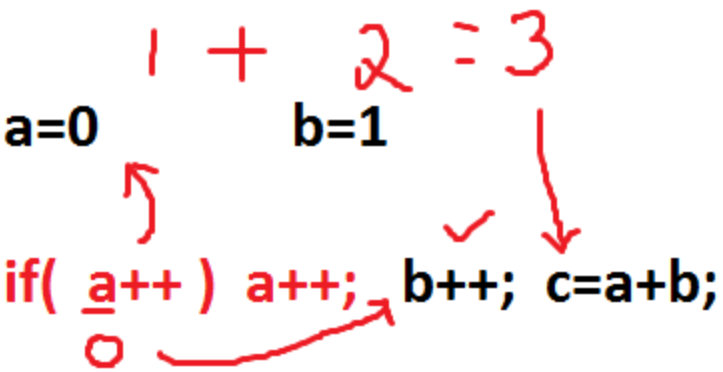

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 11 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1, c;
clrscr();
if(a++) a++, b++; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
Watch
Activate Windows
Go to PC settings to activate Windows.
07:24 PM
26-May-25
You are screen sharing
Stop share
a=1, b=1, c=2
Activate Windows
Go to PC settings to activate Windows.
07:24 PM
26-May-25

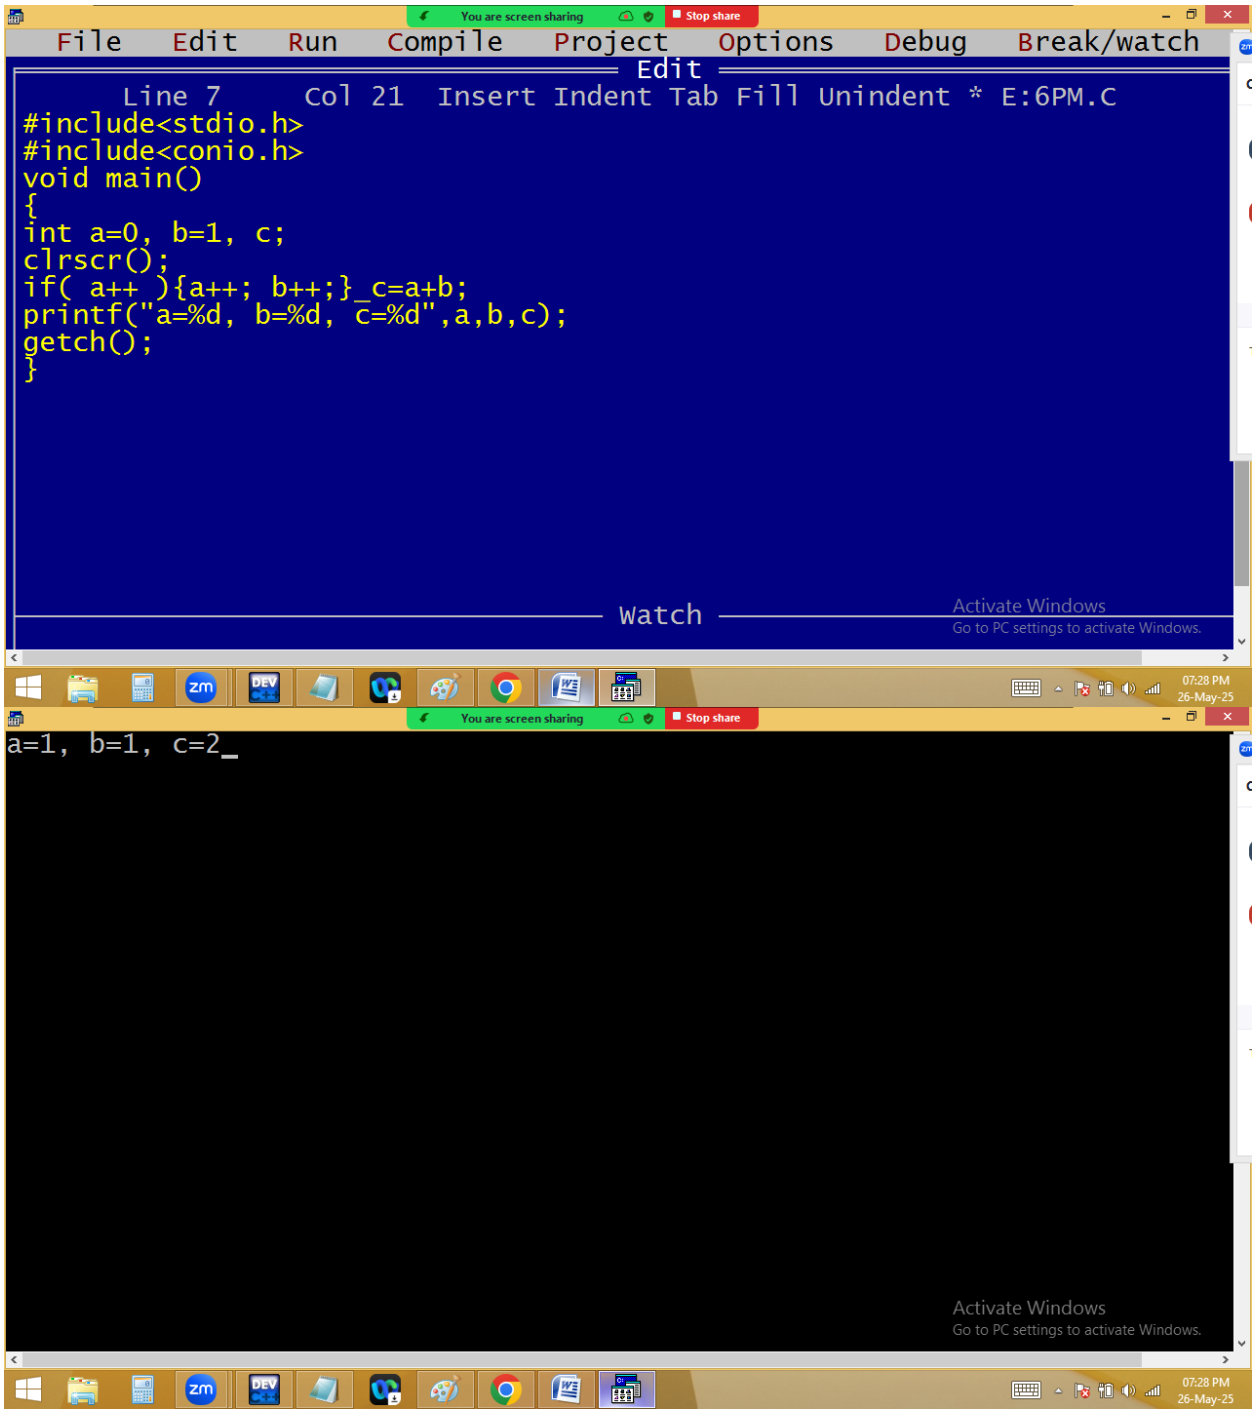

a=0
b=1
if(a++) a++, b++; c=a+b;
0

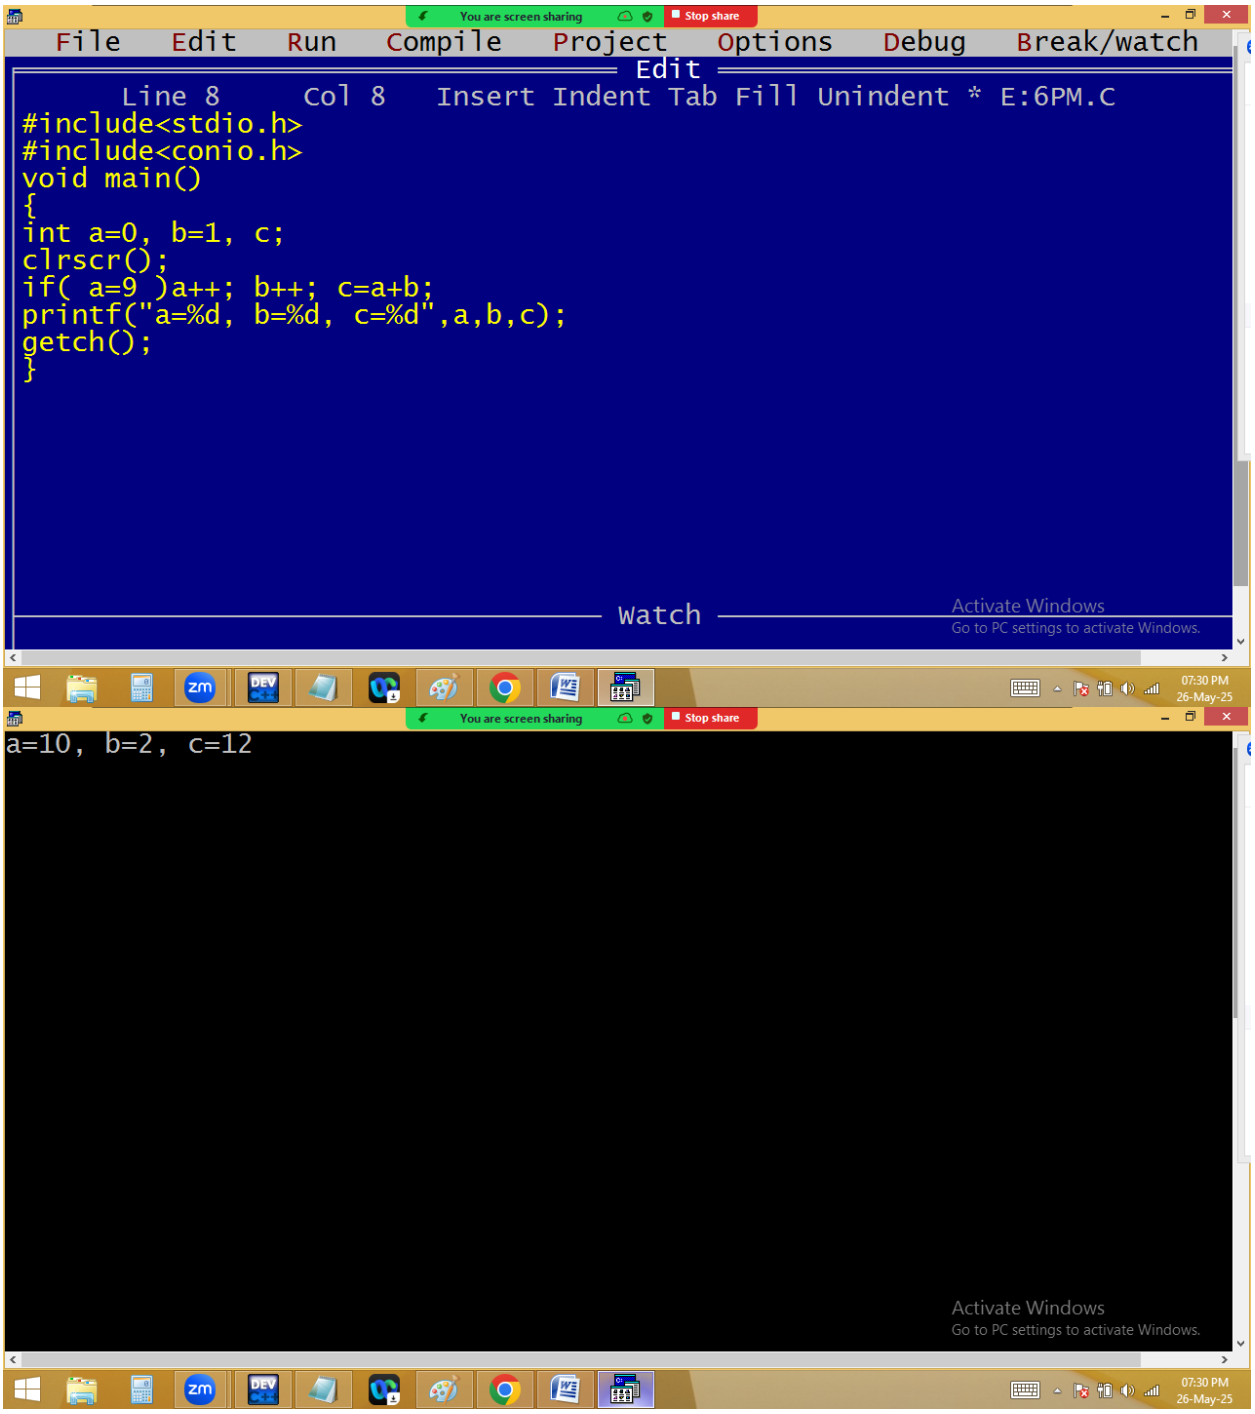

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 11 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1, c;
clrscr();
if(a++)
{
a++, b++;
}
c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
Watch
Activate Windows
Go to PC settings to activate Windows.
07:25 PM
26-May-25

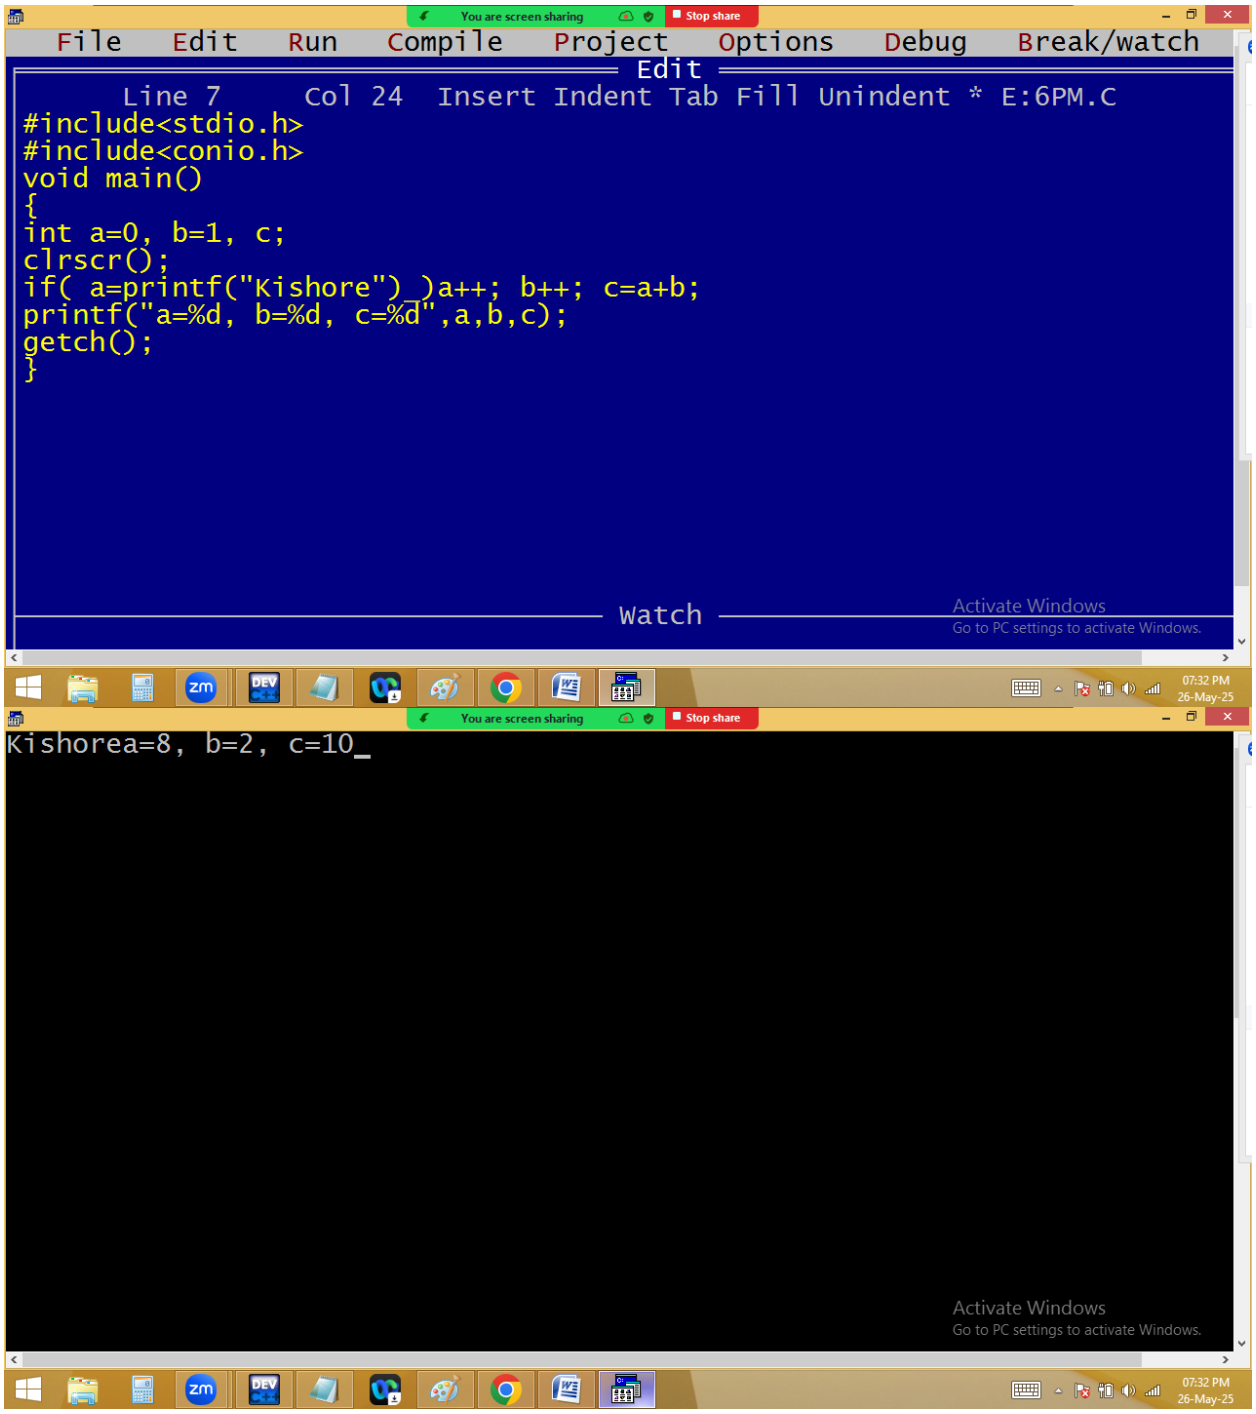

You are screen sharing
Stop share
a=1, b=1, c=2
Activate Windows
Go to PC settings to activate Windows.
07:25 PM
26-May-25
You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 11 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1, c;
clrscr();
if(a++)a++; b++; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
Watch
Activate Windows
Go to PC settings to activate Windows.
07:26 PM
26-May-25


You are screen sharing
Stop share
a=1, b=2, c=3
Activate Windows
Go to PC settings to activate Windows.
07:26 PM
26-May-25

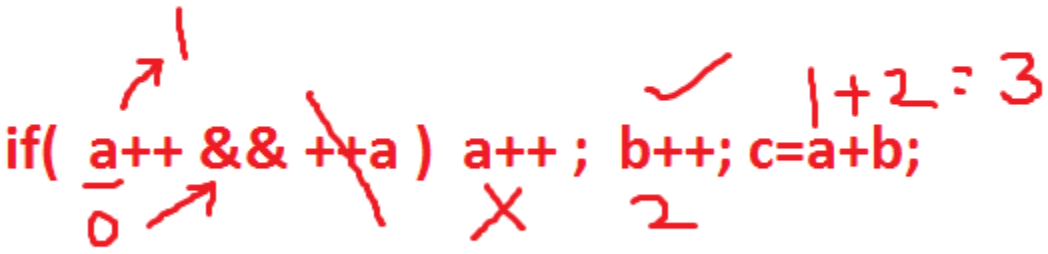

1 + 2 = 3
a=0
b=1
if(a++) a++; b++; c=a+b;
0


You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 7 Col 21 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1, c;
clrscr();
if(a++){a++; b++;}_c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
Watch
Activate Windows
Go to PC settings to activate Windows.
07:28 PM
26-May-25
You are screen sharing
Stop share
a=1, b=1, c=2_
Activate Windows
Go to PC settings to activate Windows.
07:28 PM
26-May-25

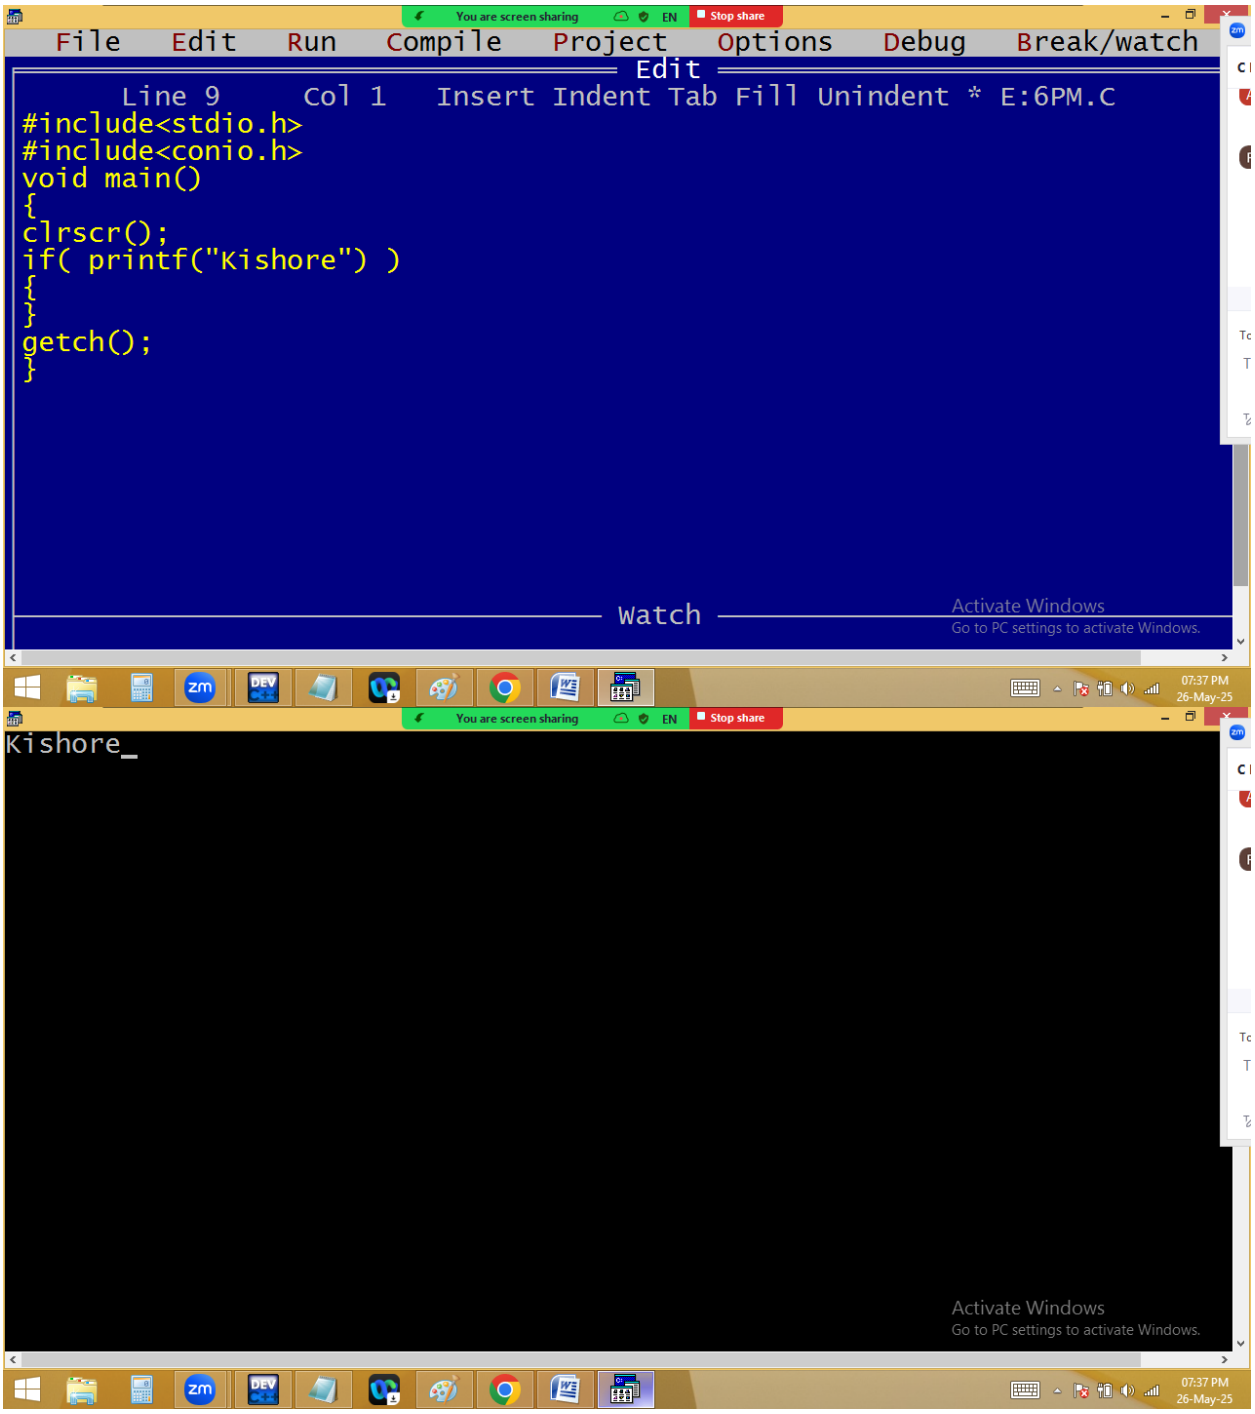

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 8 Col 8 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1, c;
clrscr();
if(a=9)a++; b++; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
Watch
Activate Windows
Go to PC settings to activate Windows.
07:30 PM
26-May-25
You are screen sharing
Stop share
a=10, b=2, c=12
Activate Windows
Go to PC settings to activate Windows.
07:30 PM
26-May-25


You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 7 Col 24 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1, c;
clrscr();
if(a=printf("Kishore"))a++; b++; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
Watch
Activate Windows
Go to PC settings to activate Windows.
07:32 PM
26-May-25
You are screen sharing
Stop share
Kishorea=8, b=2, c=10
Activate Windows
Go to PC settings to activate Windows.
07:32 PM
26-May-25

a=0 b=1



Write a c program to print kishore without using semicolon?


You are screen sharing
EN
Stop share
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 9 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(printf("Kishore"))
{
}
getch();
}
Watch
Activate Windows
Go to PC settings to activate Windows.
07:37 PM
26-May-25
You are screen sharing
EN
Stop share
Kishore_
Activate Windows
Go to PC settings to activate Windows.
07:37 PM
26-May-25