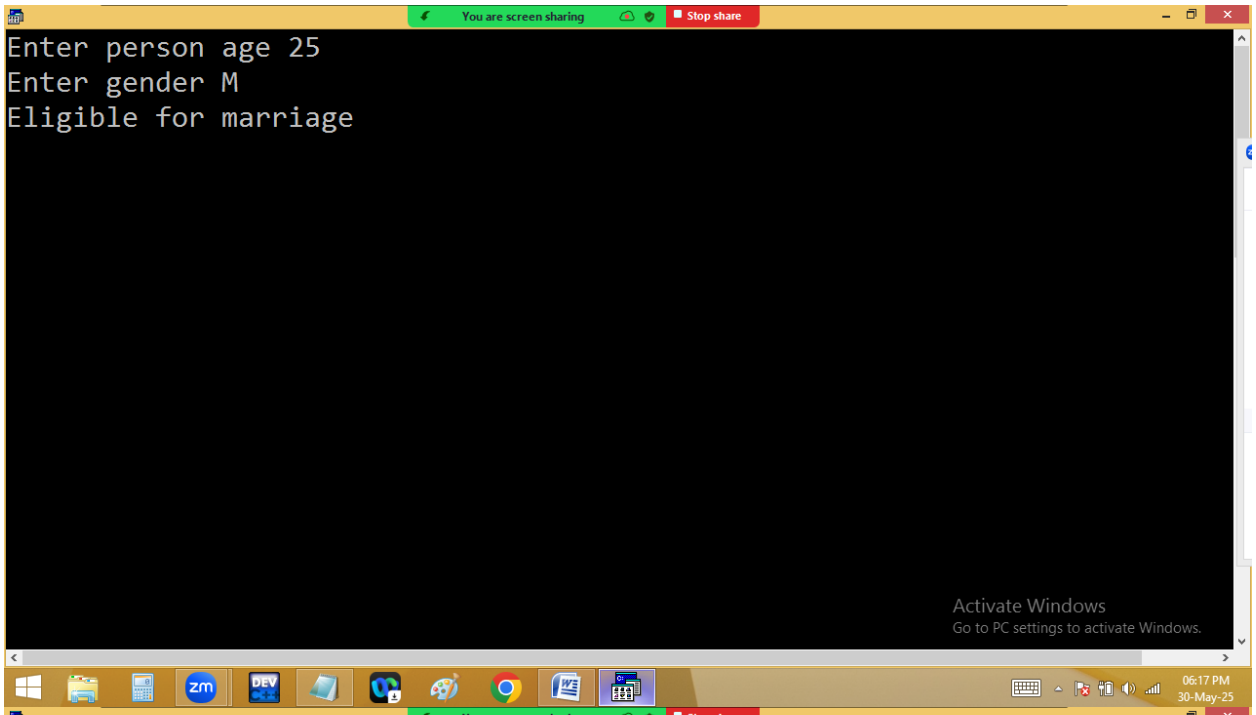
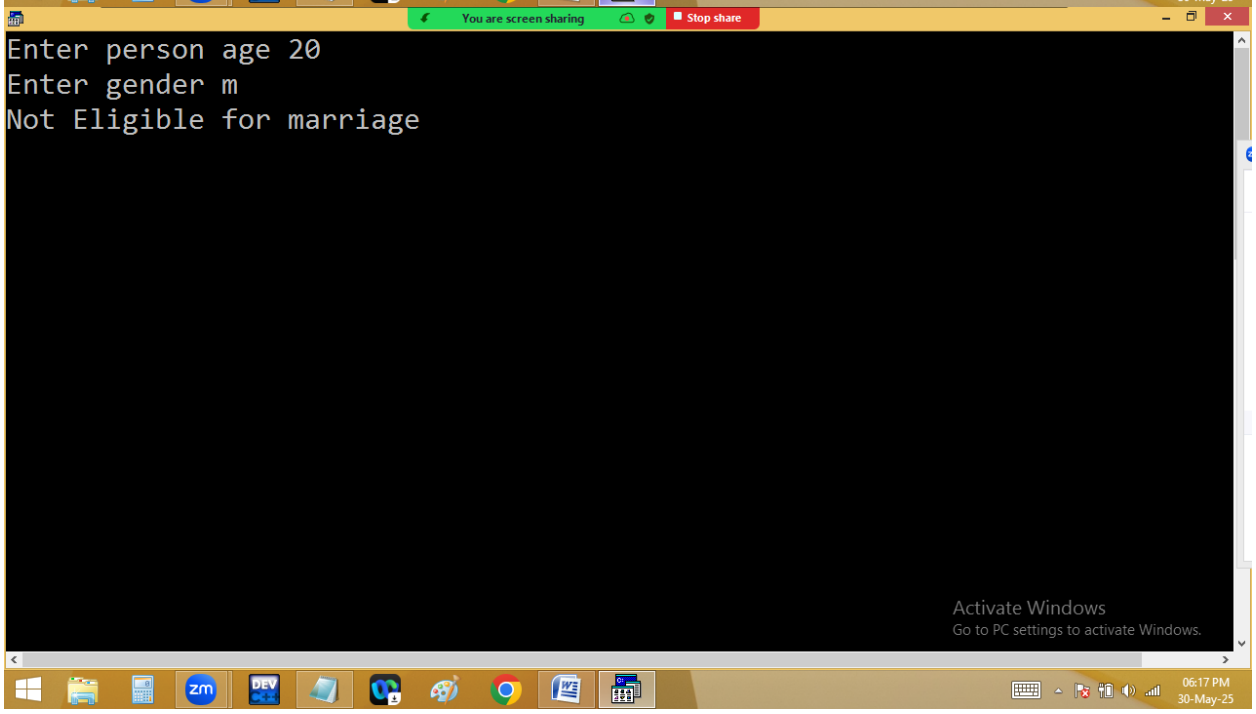
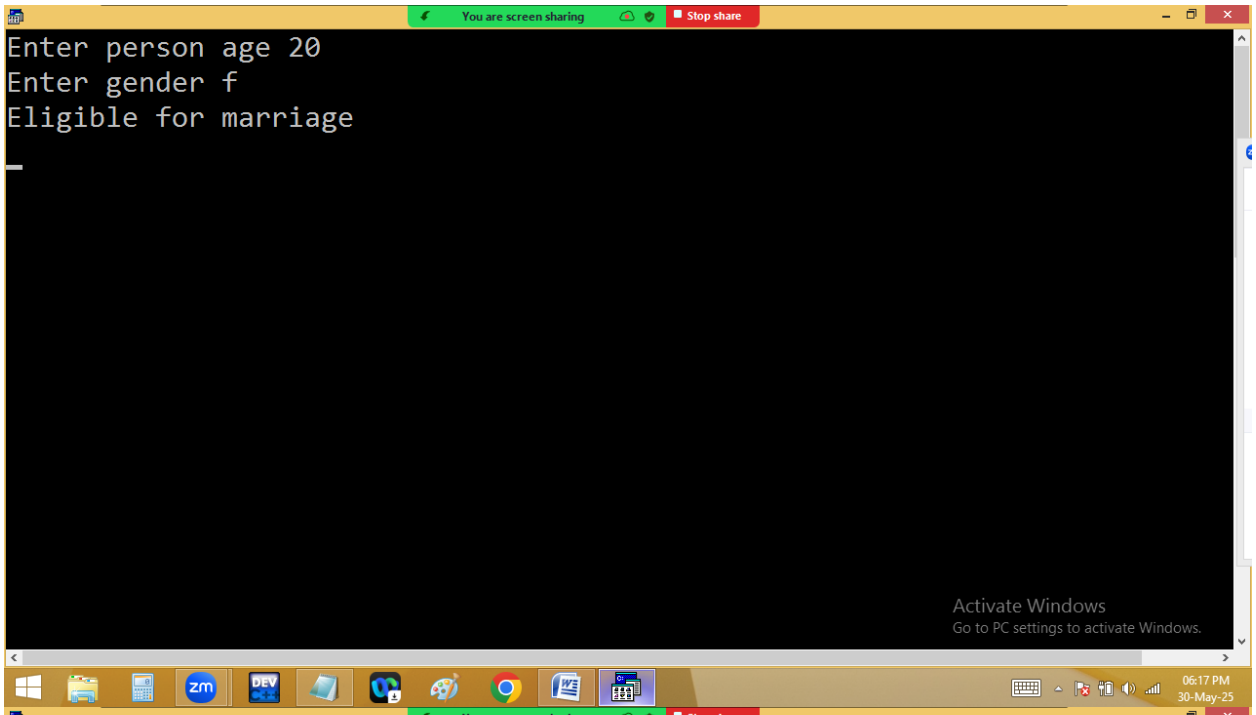
Finding person marriage eligibility?

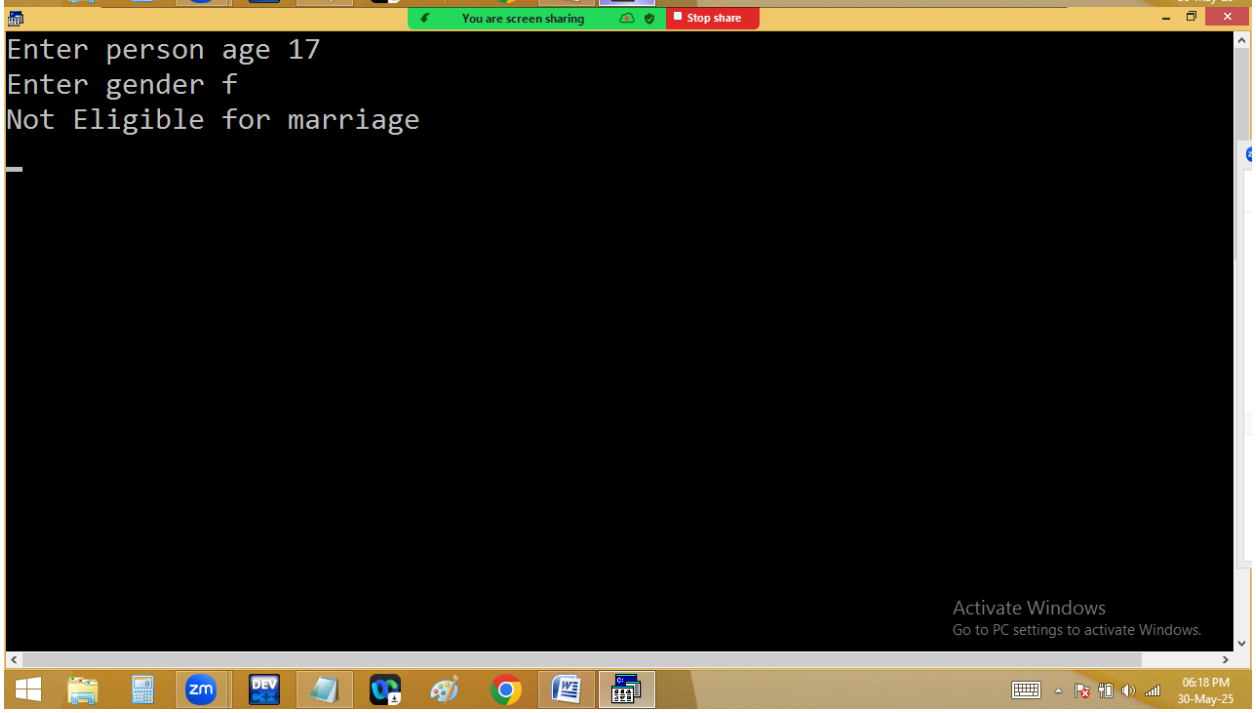
```c
#include<stdio.h>
#include<conio.h>
void main()
{
int age;
char gen;
clrscr();
printf("Enter person age "); scanf("%d",&age);
flushall();
printf("Enter gender "); scanf("%c",&gen);
if(gen=='m'||gen=='M'||gen=='f'||gen=='F')
{
if(age>=21||(gen=='F'||gen=='f')&&age>=18)puts("Eligible for marriage");
else  puts("Not Eligible for marriage");
}
else puts("Invalid gender");
getch();
}
```

```
Enter person age 25
Enter gender g
Invalid gender
```

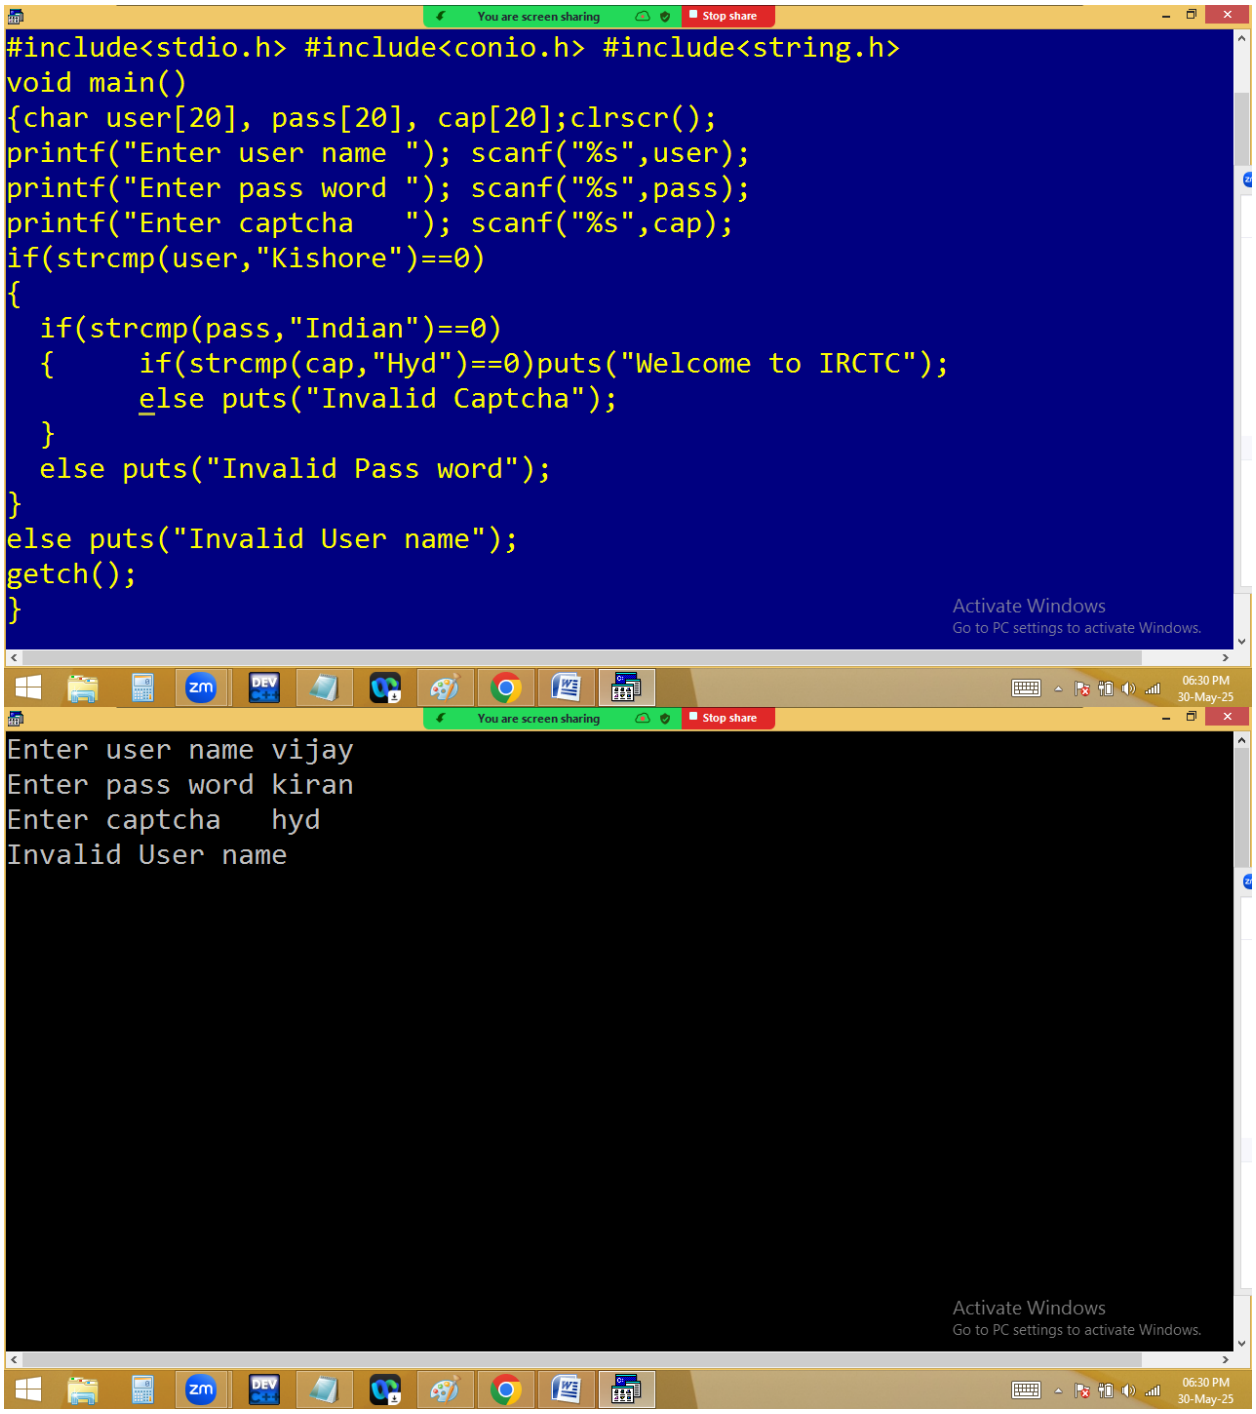

You are screen sharing
Stop share
Enter person age 25
Enter gender M
Eligible for marriage
Activate Windows
Go to PC settings to activate Windows.
06:17 PM
30-May-25

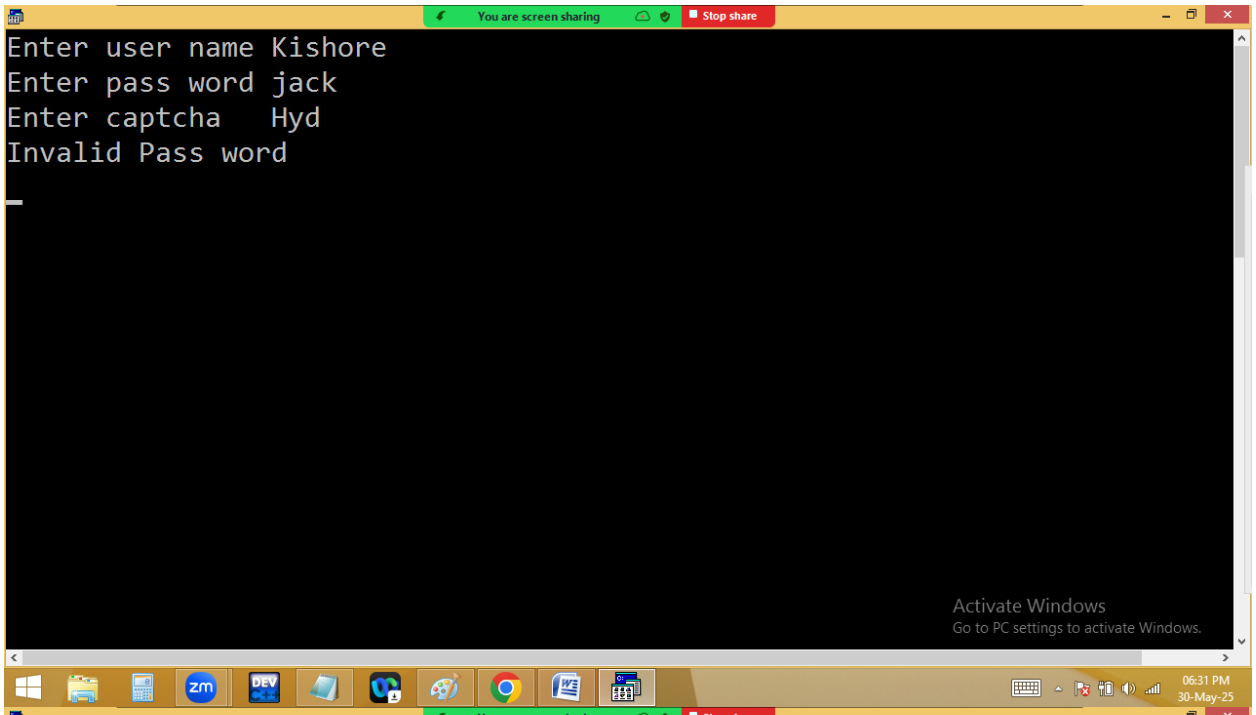

You are screen sharing
Stop share
Enter person age 20
Enter gender m
Not Eligible for marriage
Activate Windows
Go to PC settings to activate Windows.
06:17 PM
30-May-25

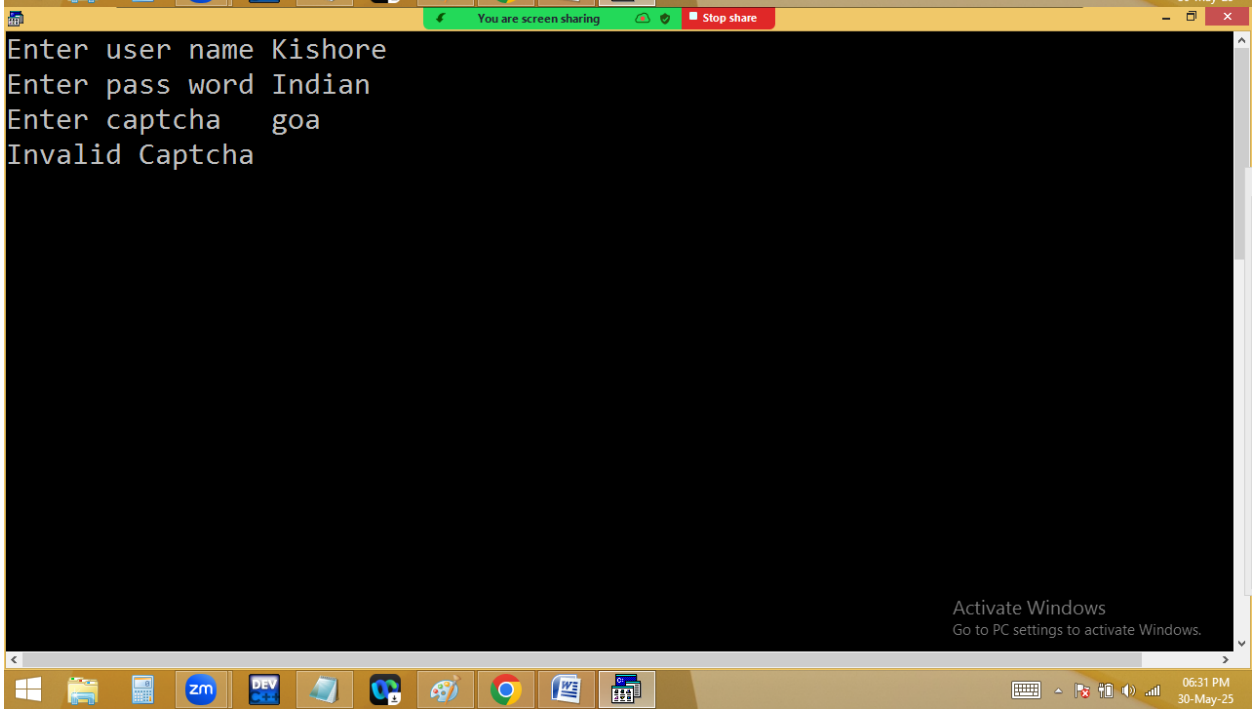

You are screen sharing
Stop share
Enter person age 20
Enter gender f
Eligible for marriage
Activate Windows
Go to PC settings to activate Windows.
06:17 PM
30-May-25

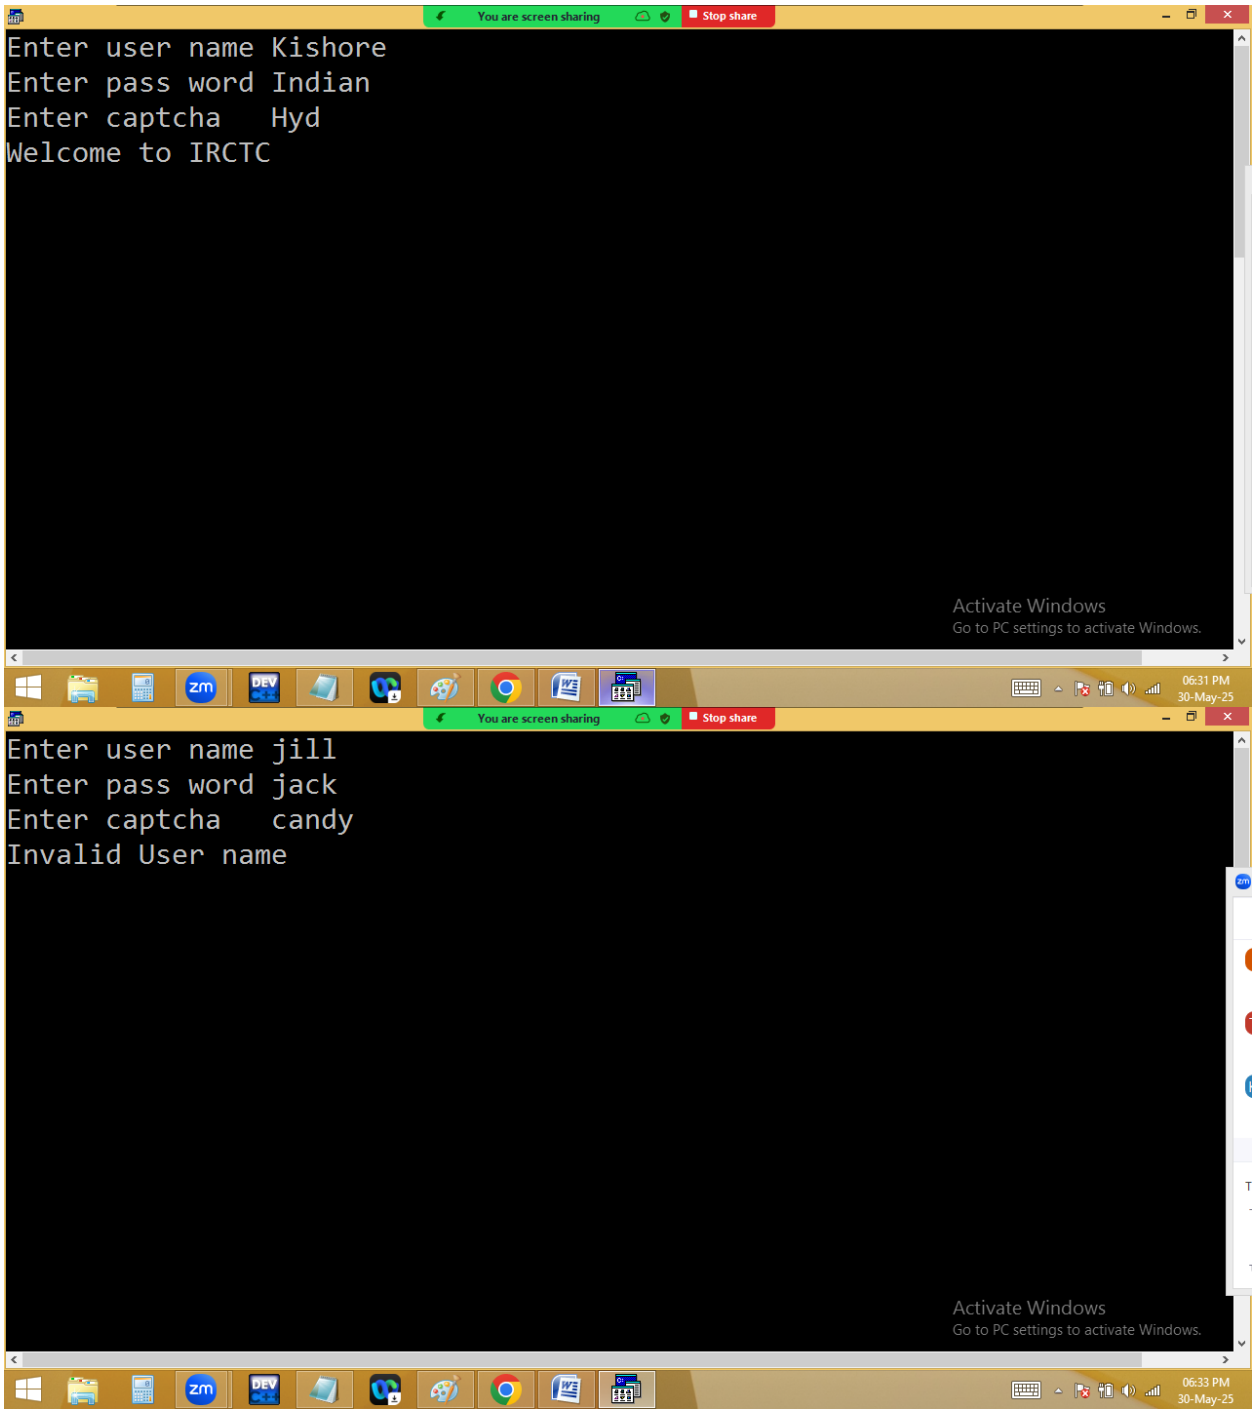

You are screen sharing
Stop share
Enter person age 17
Enter gender f
Not Eligible for marriage
Activate Windows
Go to PC settings to activate Windows.
06:18 PM
30-May-25

IRCTC Login?

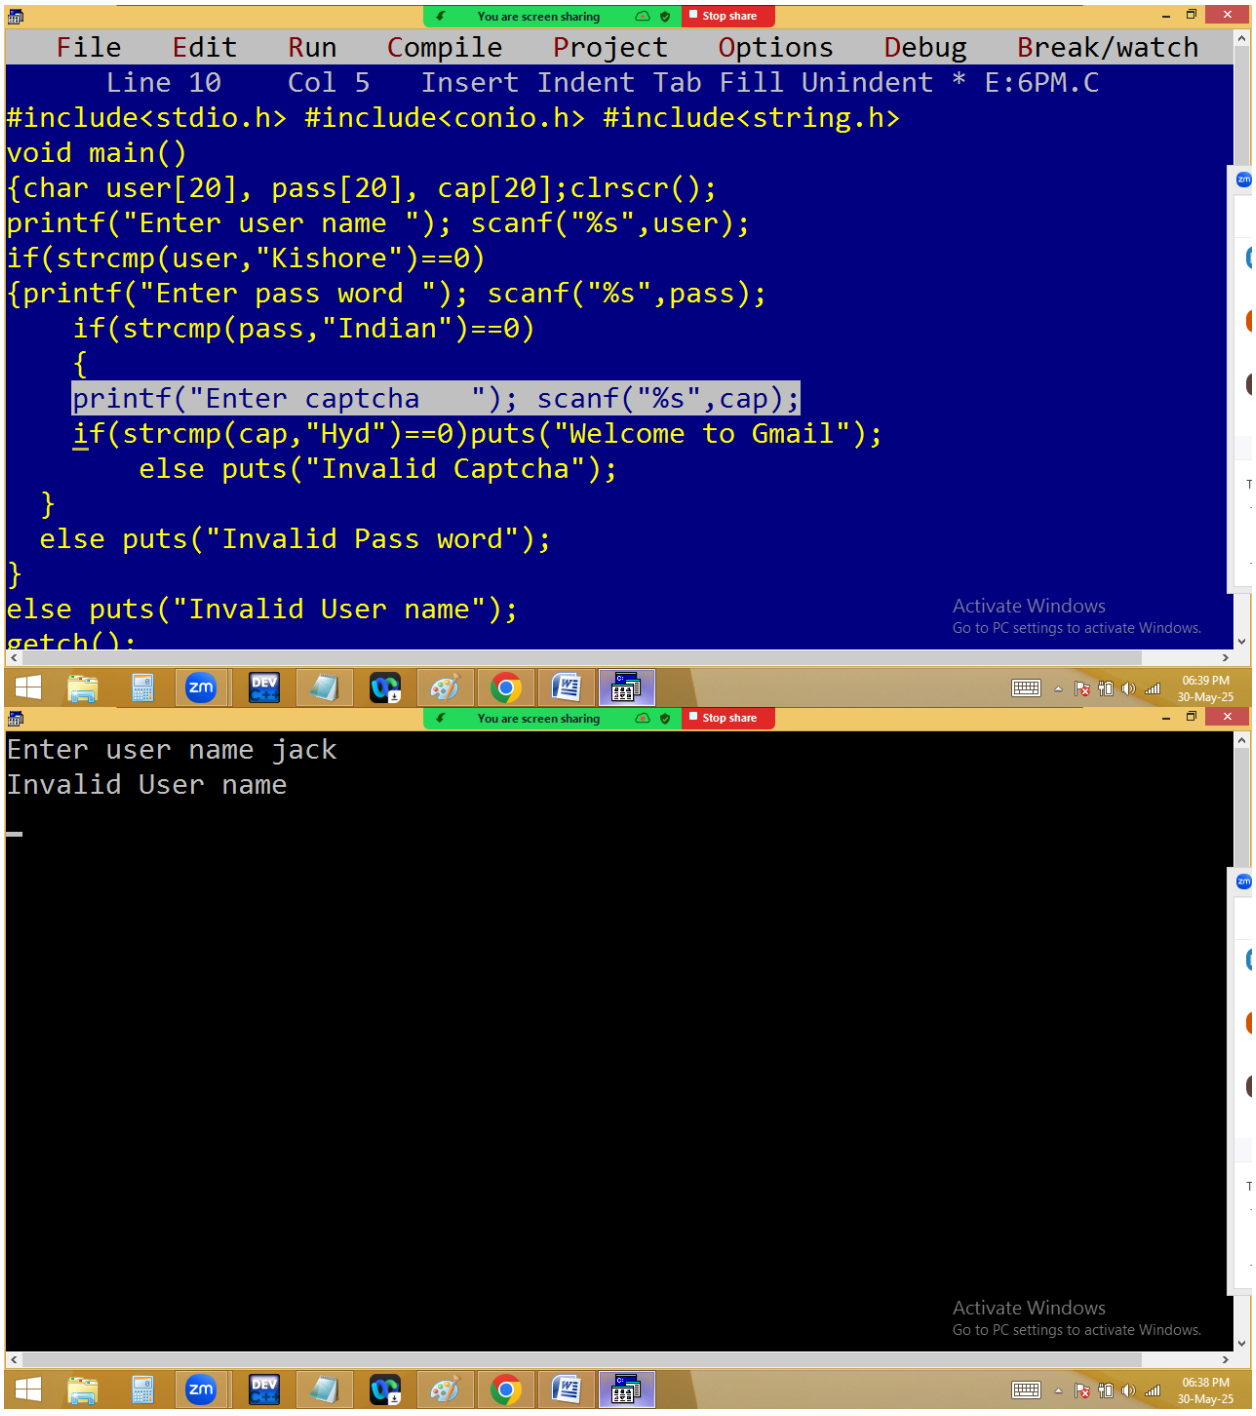

You are screen sharing
Stop share
#include<stdio.h> #include<conio.h> #include<string.h>
void main()
{char user[20], pass[20], cap[20];clrscr();
printf("Enter user name "); scanf("%s",user);
printf("Enter pass word "); scanf("%s",pass);
printf("Enter captcha   "); scanf("%s",cap);
if(strcmp(user,"Kishore")==0)
{
if(strcmp(pass,"Indian")==0)
{ if(strcmp(cap,"Hyd")==0)puts("Welcome to IRCTC");
else puts("Invalid Captcha");
}
else puts("Invalid Pass word");
}
else puts("Invalid User name");
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:30 PM
30-May-25
You are screen sharing
Stop share
Enter user name vijay
Enter pass word kiran
Enter captcha   hyd
Invalid User name
Activate Windows
Go to PC settings to activate Windows.
06:30 PM
30-May-25

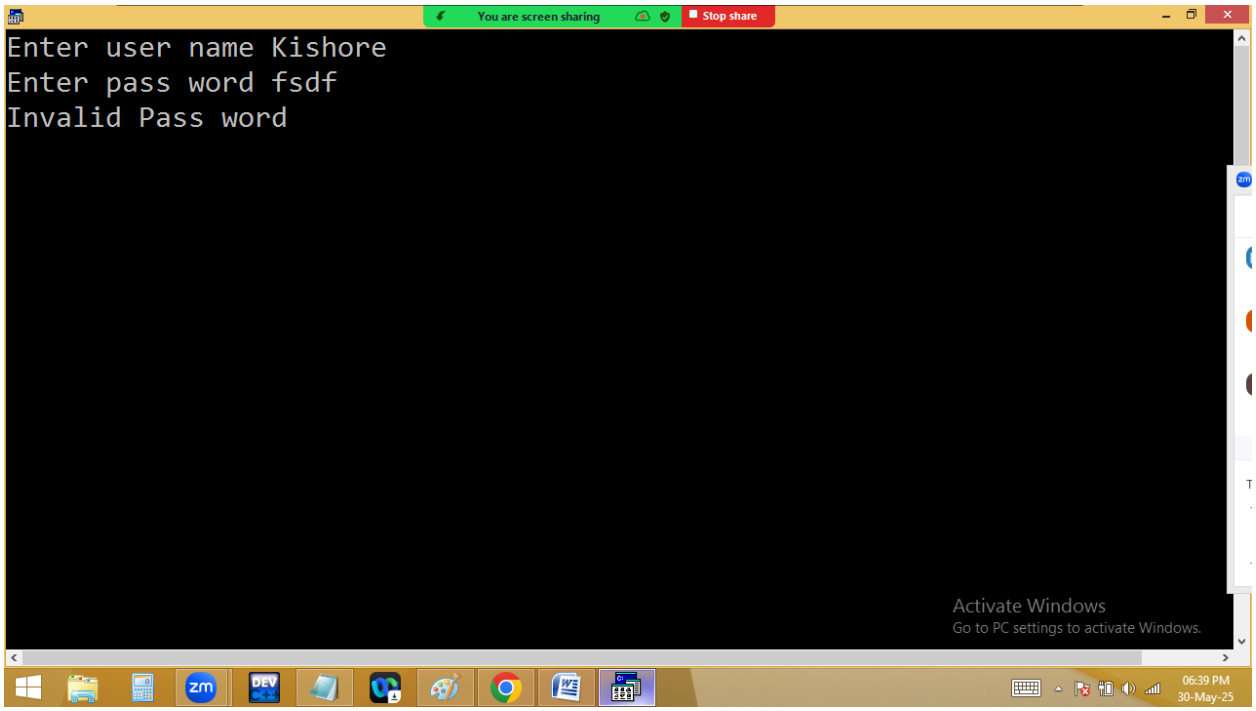

You are screen sharing
Stop share
Enter user name Kishore
Enter pass word jack
Enter captcha   Hyd
Invalid Pass word
Activate Windows
Go to PC settings to activate Windows.
06:31 PM
30-May-25

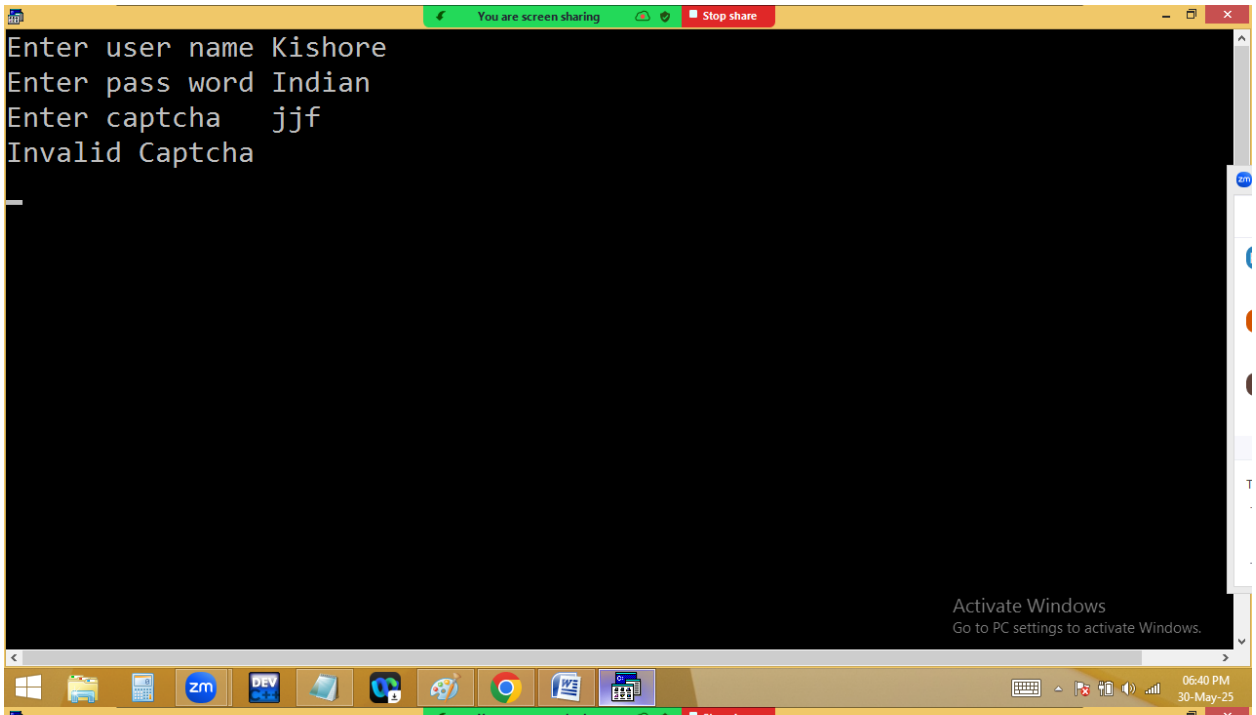

You are screen sharing
Stop share
Enter user name Kishore
Enter pass word Indian
Enter captcha   goa
Invalid Captcha
Activate Windows
Go to PC settings to activate Windows.
06:31 PM
30-May-25

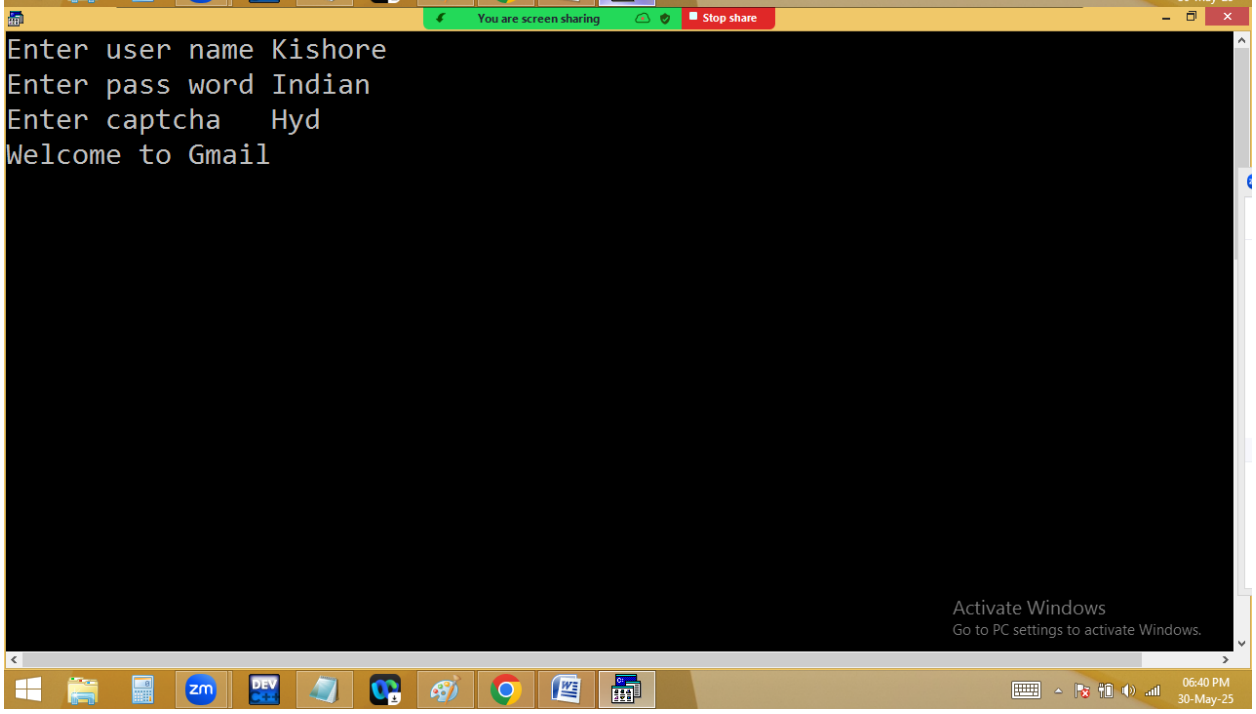


Gmail style login?

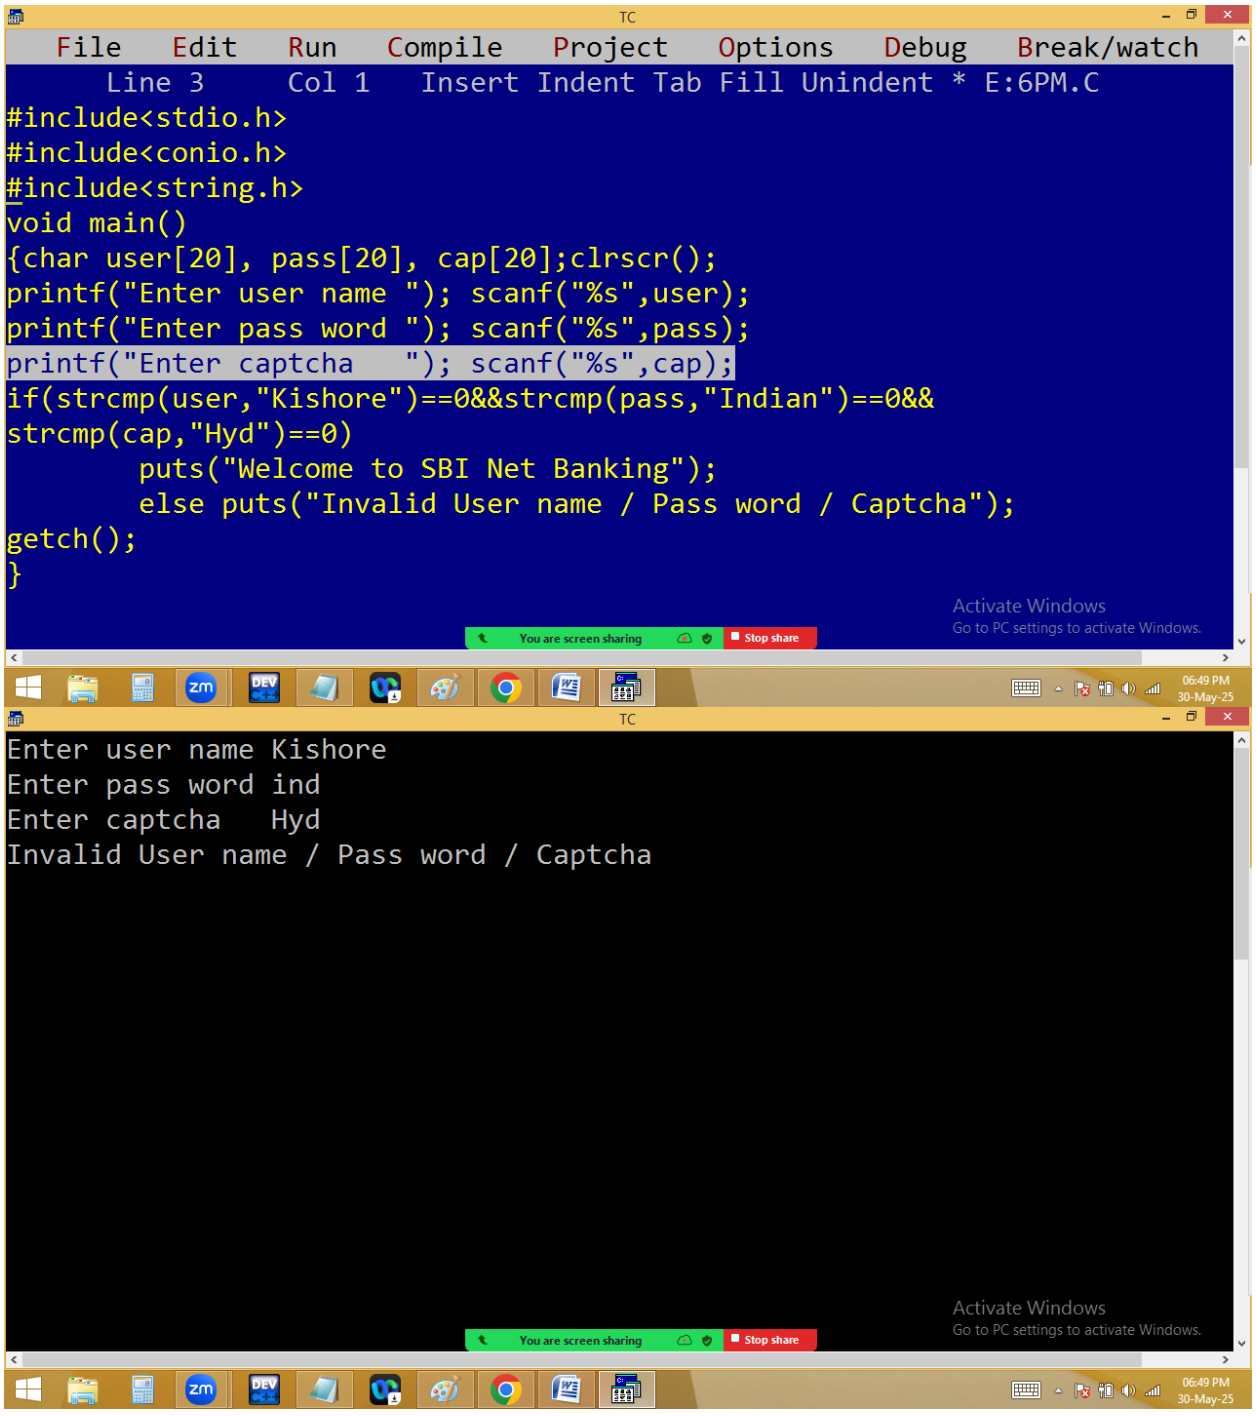

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 10 Col 5 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h> #include<conio.h> #include<string.h>
void main()
{char user[20], pass[20], cap[20];clrscr();
printf("Enter user name "); scanf("%s",user);
if(strcmp(user,"Kishore")==0)
{printf("Enter pass word "); scanf("%s",pass);
if(strcmp(pass,"Indian")==0)
{
printf("Enter captcha "); scanf("%s",cap);
if(strcmp(cap,"Hyd")==0)puts("Welcome to Gmail");
else puts("Invalid Captcha");
}
else puts("Invalid Pass word");
}
else puts("Invalid User name");
getch();
Activate Windows
Go to PC settings to activate Windows.
06:39 PM
30-May-25
You are screen sharing
Stop share
Enter user name jack
Invalid User name
Activate Windows
Go to PC settings to activate Windows.
06:38 PM
30-May-25

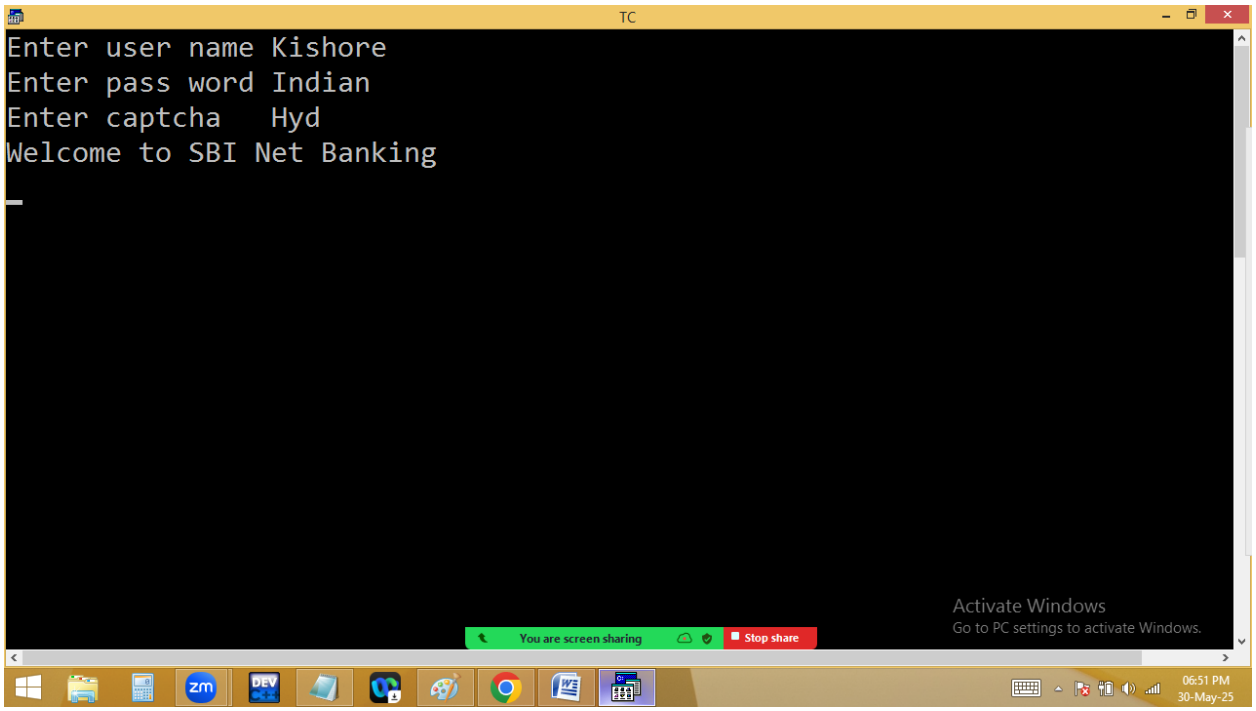

You are screen sharing
Stop share
Enter user name Kishore
Enter pass word fsdf
Invalid Pass word
Activate Windows
Go to PC settings to activate Windows.
06:39 PM
30-May-25


You are screen sharing
Stop share
Enter user name Kishore
Enter pass word Indian
Enter captcha jjf
Invalid Captcha
Activate Windows
Go to PC settings to activate Windows.
06:40 PM
30-May-25


You are screen sharing
Stop share
Enter user name Kishore
Enter pass word Indian
Enter captcha Hyd
Welcome to Gmail
Activate Windows
Go to PC settings to activate Windows.
06:40 PM
30-May-25

Net banking style login?


TC
File Edit Run Compile Project Options Debug Break/watch
Line 3 Col 1 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
#include<string.h>
void main()
{char user[20], pass[20], cap[20];clrscr();
printf("Enter user name "); scanf("%s",user);
printf("Enter pass word "); scanf("%s",pass);
printf("Enter captcha "); scanf("%s",cap);
if(strcmp(user,"Kishore")==0&&strcmp(pass,"Indian")==0&&
strcmp(cap,"Hyd")==0)
puts("Welcome to SBI Net Banking");
else puts("Invalid User name / Pass word / Captcha");
getch();
}
You are screen sharing
Stop share
Activate Windows
Go to PC settings to activate Windows.
06:49 PM
30-May-25
TC
Enter user name Kishore
Enter pass word ind
Enter captcha Hyd
Invalid User name / Pass word / Captcha
You are screen sharing
Stop share
Activate Windows
Go to PC settings to activate Windows.
06:49 PM
30-May-25



SWITCH

It is a selection statement.

It is used to execute one case of statements from no of cases according to the switch expression value matched with case expression value. In switch the program is jumped to matching case like the go to label.

It is similar to ladder if in working style.

Switch performance is high when compared with ladder if because of it jumps to matching case.

Syntax:

switch(**condition / expression**)

{

case **constexp1:**

statements;

break;

case **constexp2:**

statements;

break;

case **constexpN**:

statements;

break;

[**default:** statements;]

}

Here switch, case, break, default are the keywords.

In between case and case expression / value at least one space should be provided. Otherwise it will become a label.

case expression/value should be a constant integer/char value. i.e. float / string not allowed.

One case contains one expression only.
case expression doesn't contain any separators like , . etc.

case expression should be end with : (colon)

Each case should be separated with break keyword. Otherwise remaining cases also executed.

Duplicate cases not allowed.

default is similar to the else and all cases are failed then default statements are executed. Default is

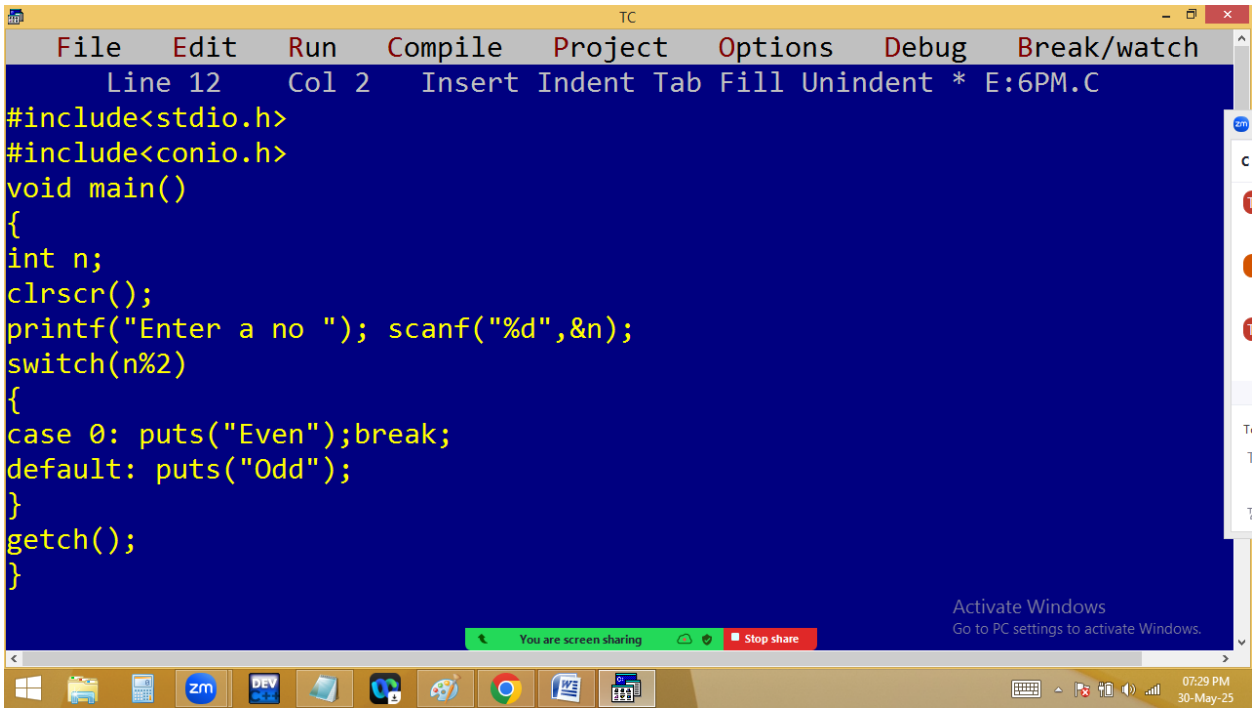
optional and we can declare it anywhere in our switch.

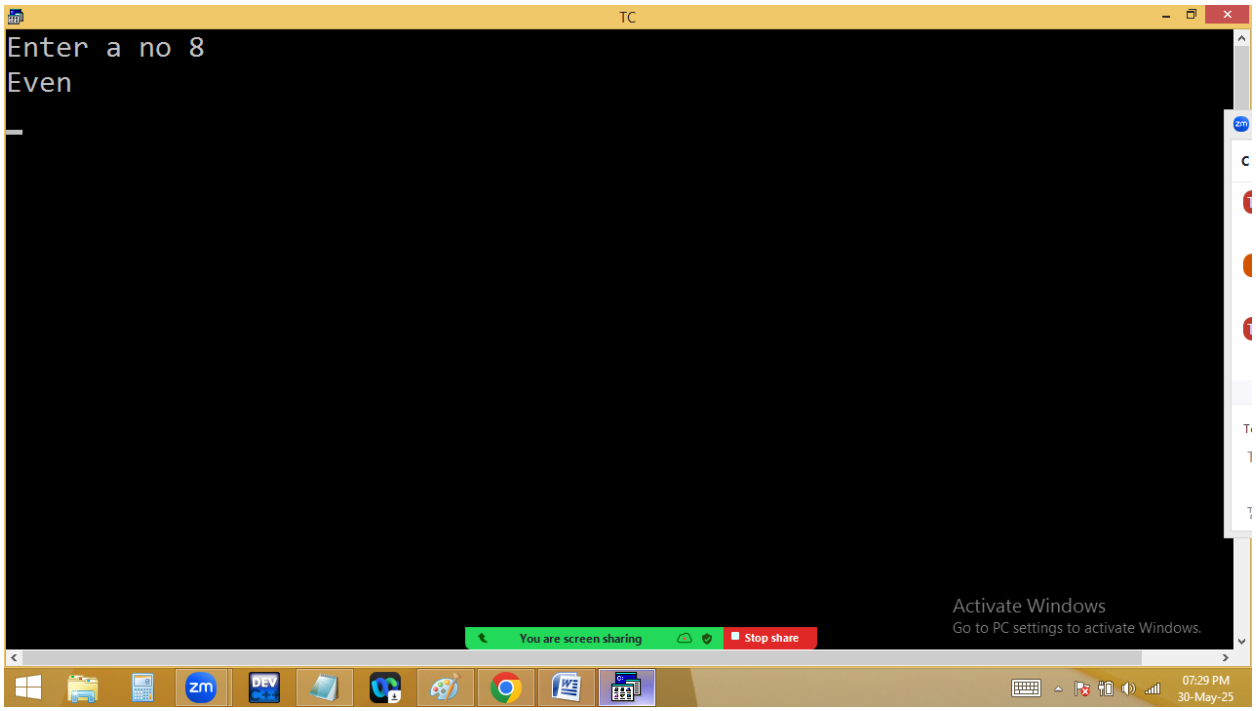
Outside case expressions not considered in switch.

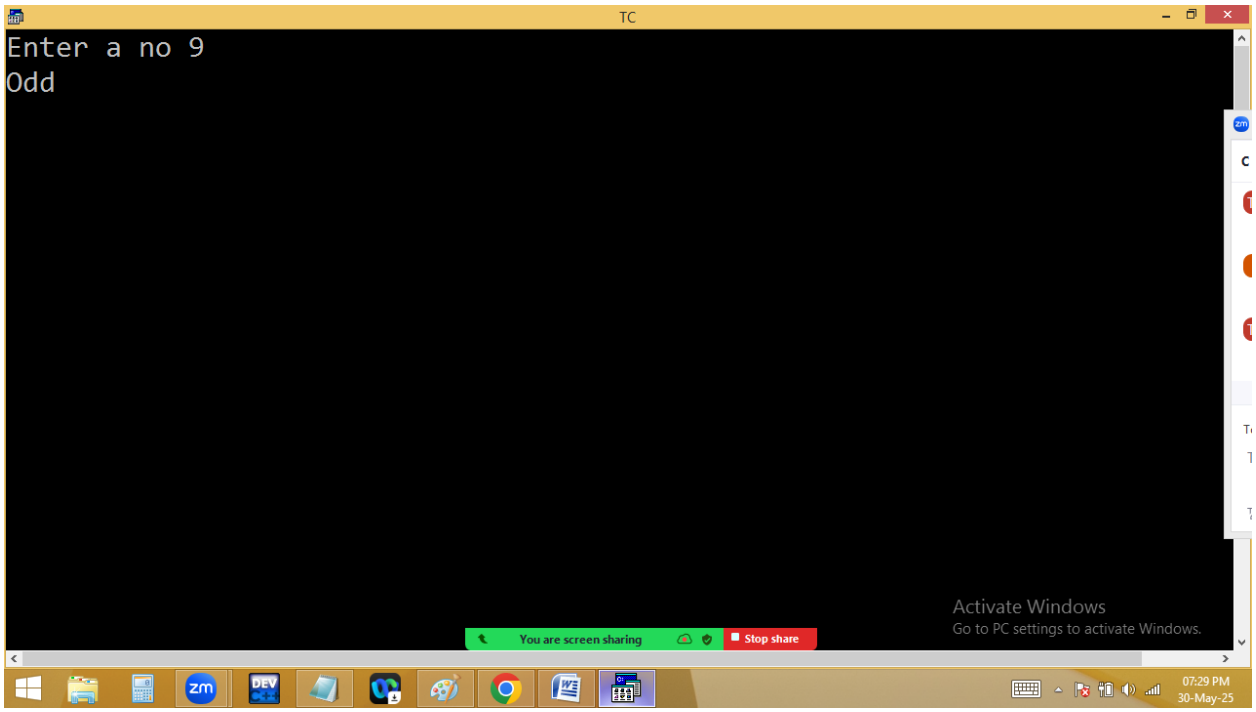
1. Case value should be a const int.
2. Variables not allowed in case.
3. Float / string not allowed.
4. Duplicate cases not allowed.
5. Case and case value have to separated with at least one space.
6. If space not provided then it is converted into a label.
7. Every case should be end with :
8. Break is optional and when it is not there, remaining case also executed until the next break is occurred.
9. Case doen’t allows range of values.
10. Case doesn’t allows , . like separators,
11. Default is optional and working similar to else. We can declare default anywhere.

12. Switch, case, break and default are the keywords.

Finding even/odd using switch?




TC
Enter a no 8
Even
You are screen sharing
Stop share
Activate Windows
Go to PC settings to activate Windows.
07:29 PM
30-May-25


TC
Enter a no 9
Odd
You are screen sharing
Stop share
Activate Windows
Go to PC settings to activate Windows.
07:29 PM
30-May-25