




Finding power using a loop?

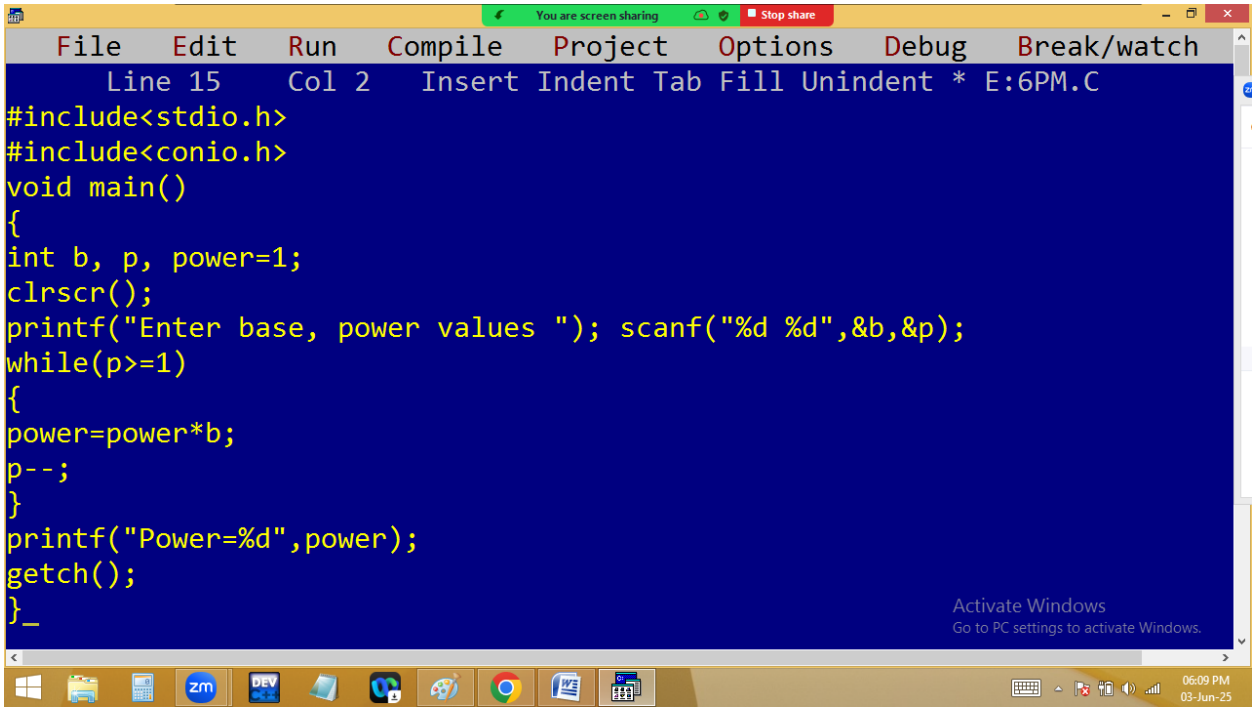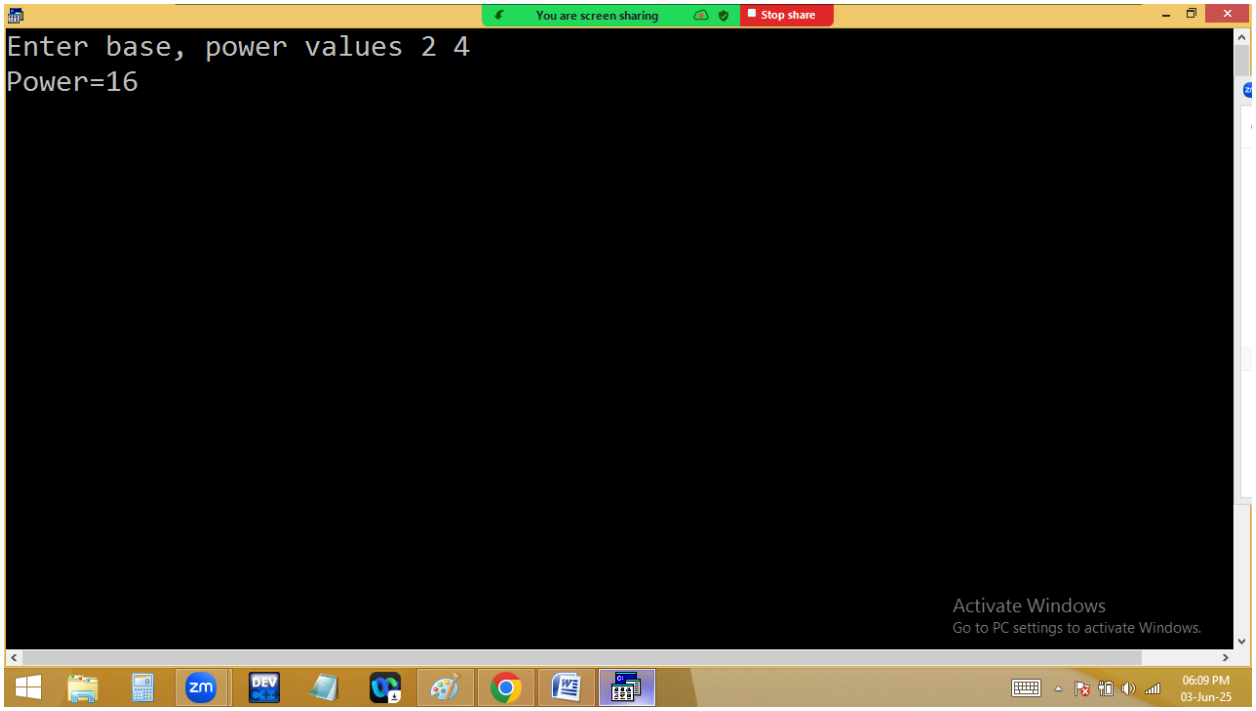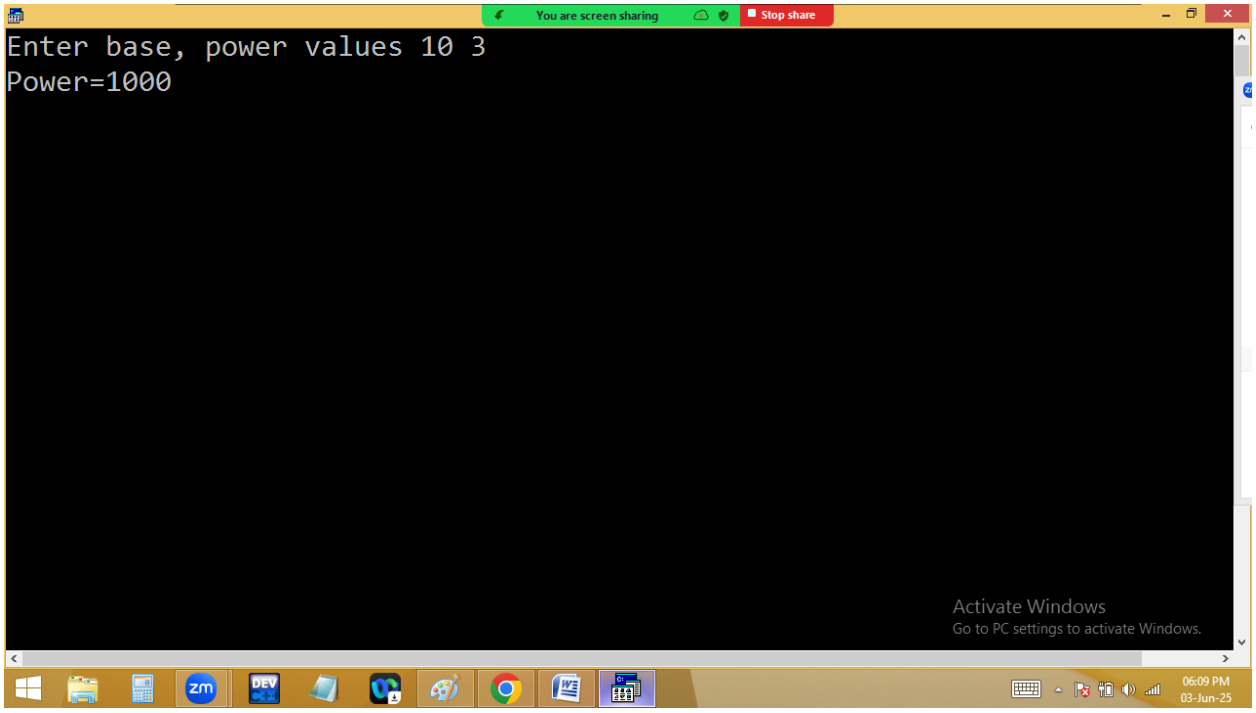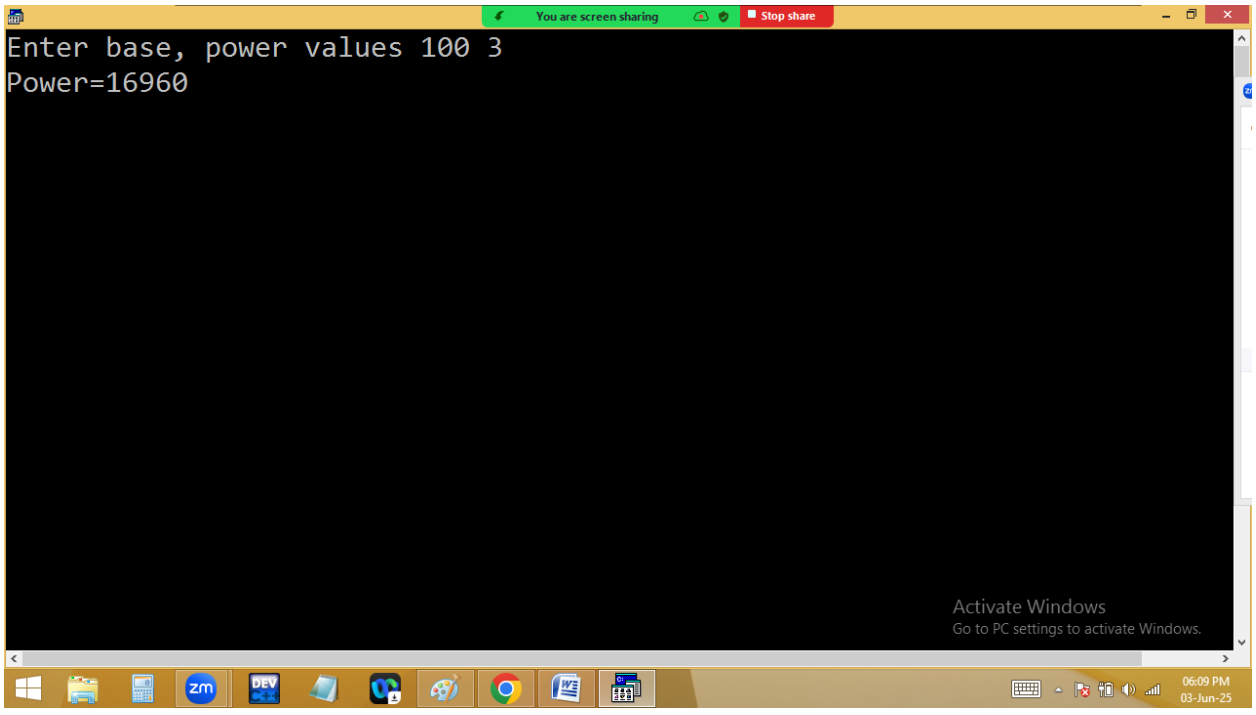


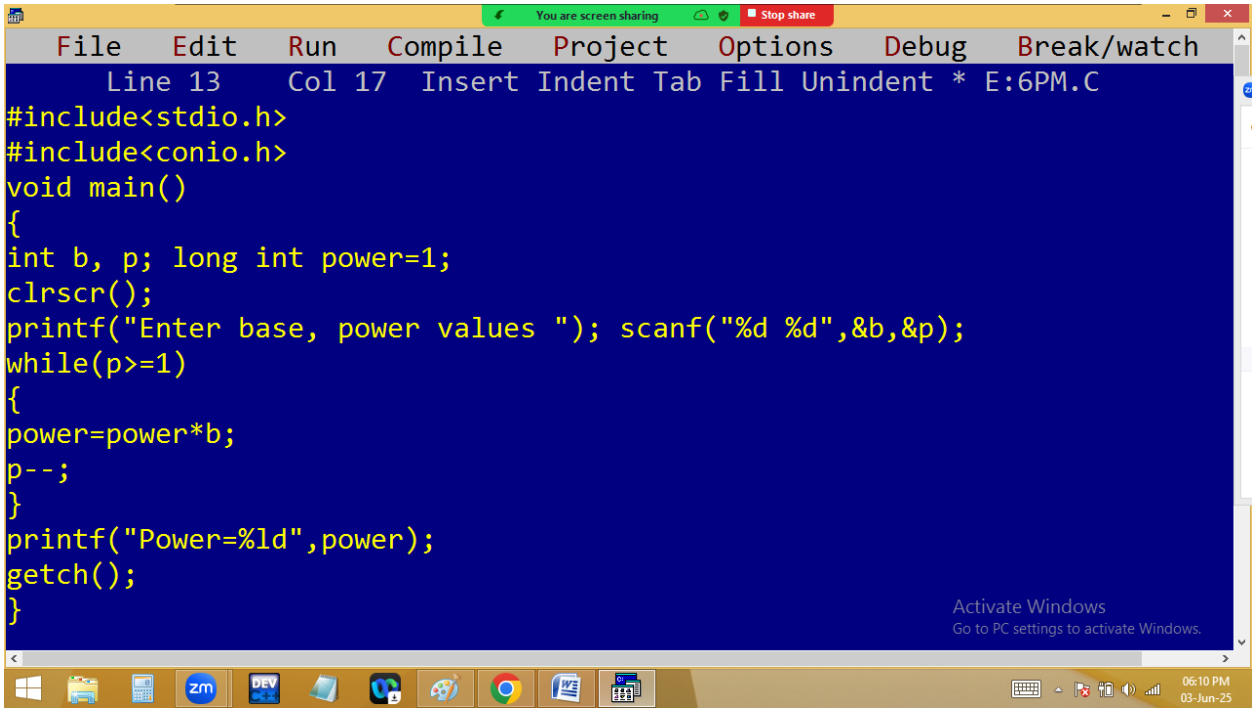




You are screen sharing
Stop share
Enter base, power values 10 3
Power=1000
Activate Windows
Go to PC settings to activate Windows.
06:09 PM
03-Jun-25



You are screen sharing
Stop share
Enter base, power values 100 3
Power=16960
Activate Windows
Go to PC settings to activate Windows.
06:09 PM
03-Jun-25



You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 13 Col 17 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int b, p; long int power=1;
clrscr();
printf("Enter base, power values "); scanf("%d %d",&b,&p);
while(p>=1)
{
power=power*b;
p--;
}
printf("Power=%ld",power);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:10 PM
03-Jun-25

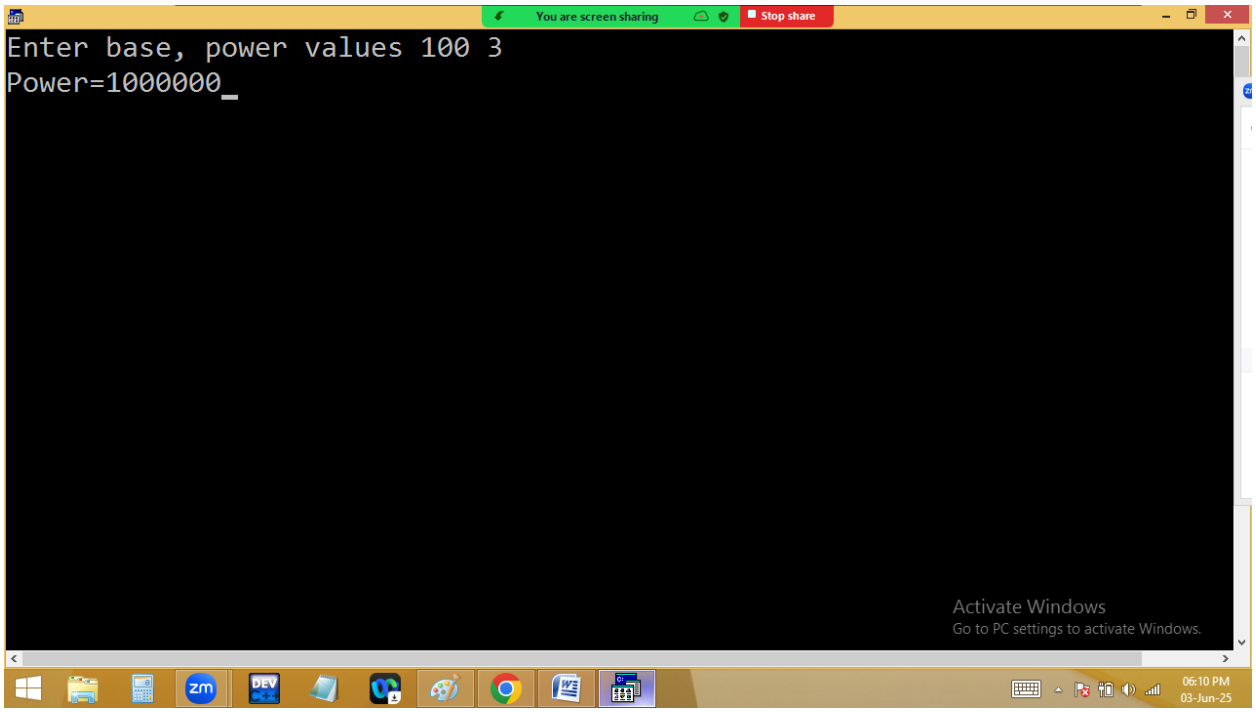
You are screen sharing
Stop share
Enter base, power values 100 3
Power=1000000
Activate Windows
Go to PC settings to activate Windows.
06:10 PM
03-Jun-25

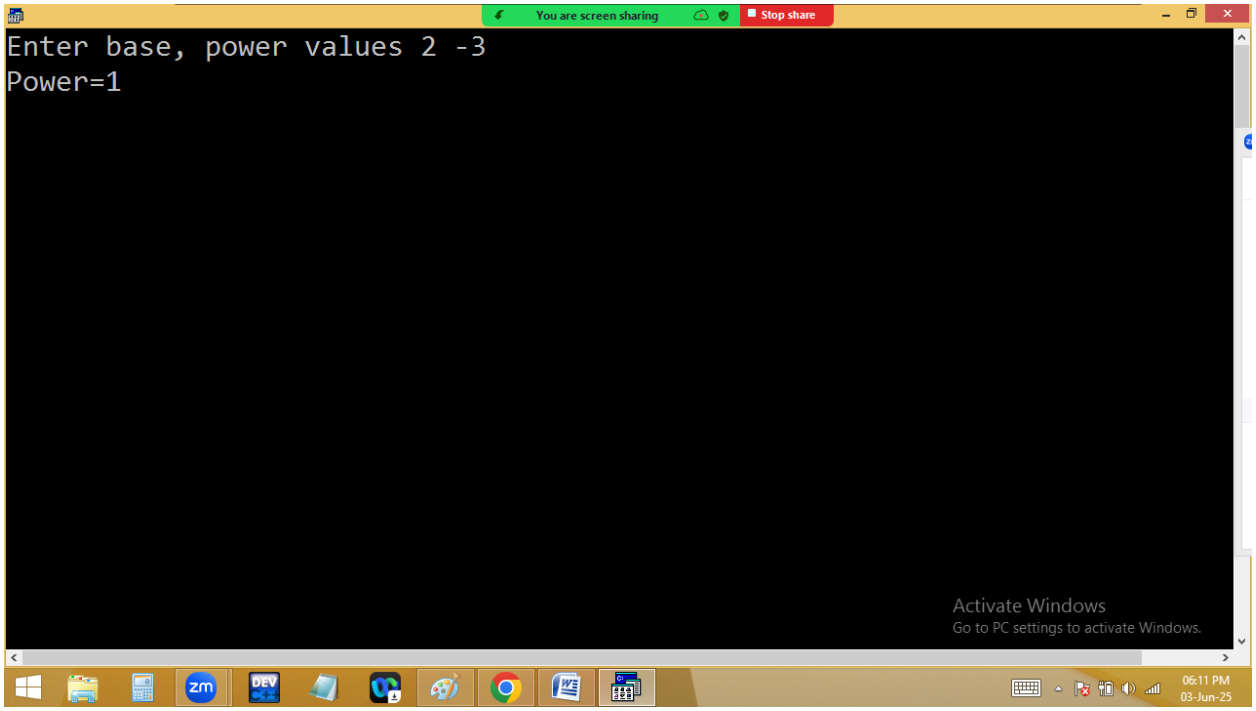
You are screen sharing
Stop share
Enter base, power values 2 -3
Power=1
Activate Windows
Go to PC settings to activate Windows.
06:11 PM
03-Jun-25

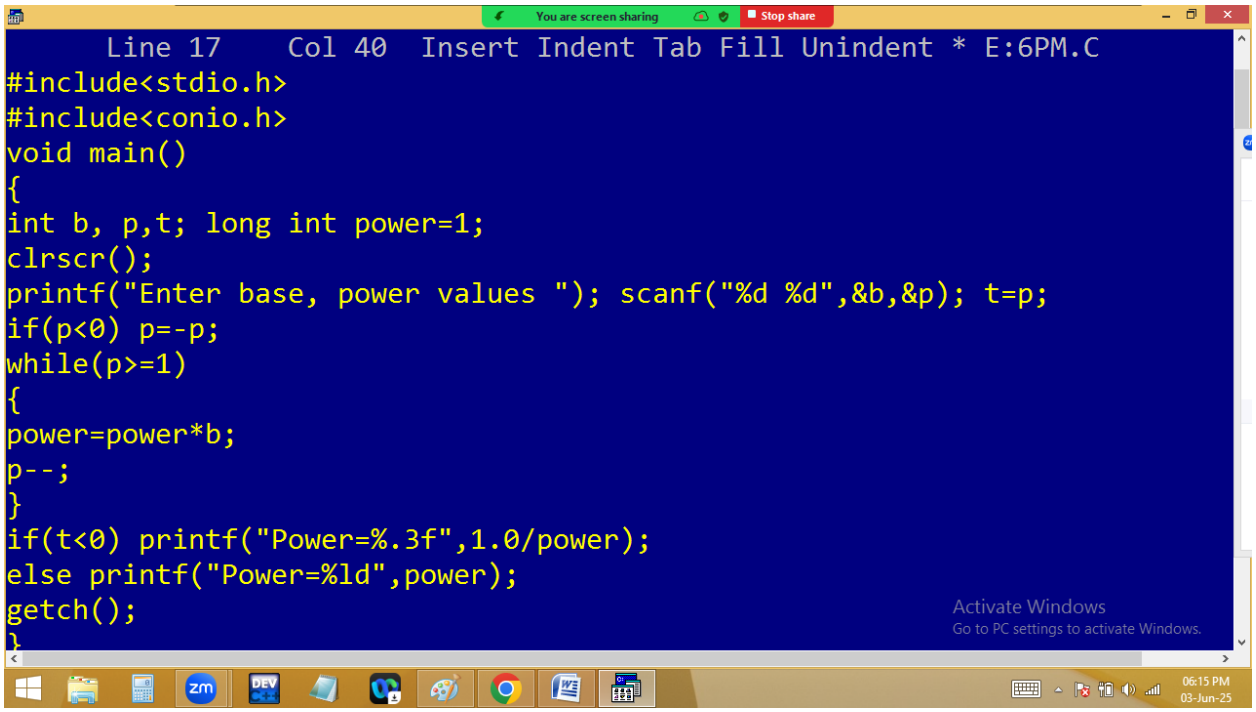
You are screen sharing
Stop share
Line 17 Col 40 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int b, p,t; long int power=1;
clrscr();
printf("Enter base, power values "); scanf("%d %d",&b,&p); t=p;
if(p<0) p=-p;
while(p>=1)
{
power=power*b;
p--;
}
if(t<0) printf("Power=%.3f",1.0/power);
else printf("Power=%ld",power);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
06:15 PM
03-Jun-25

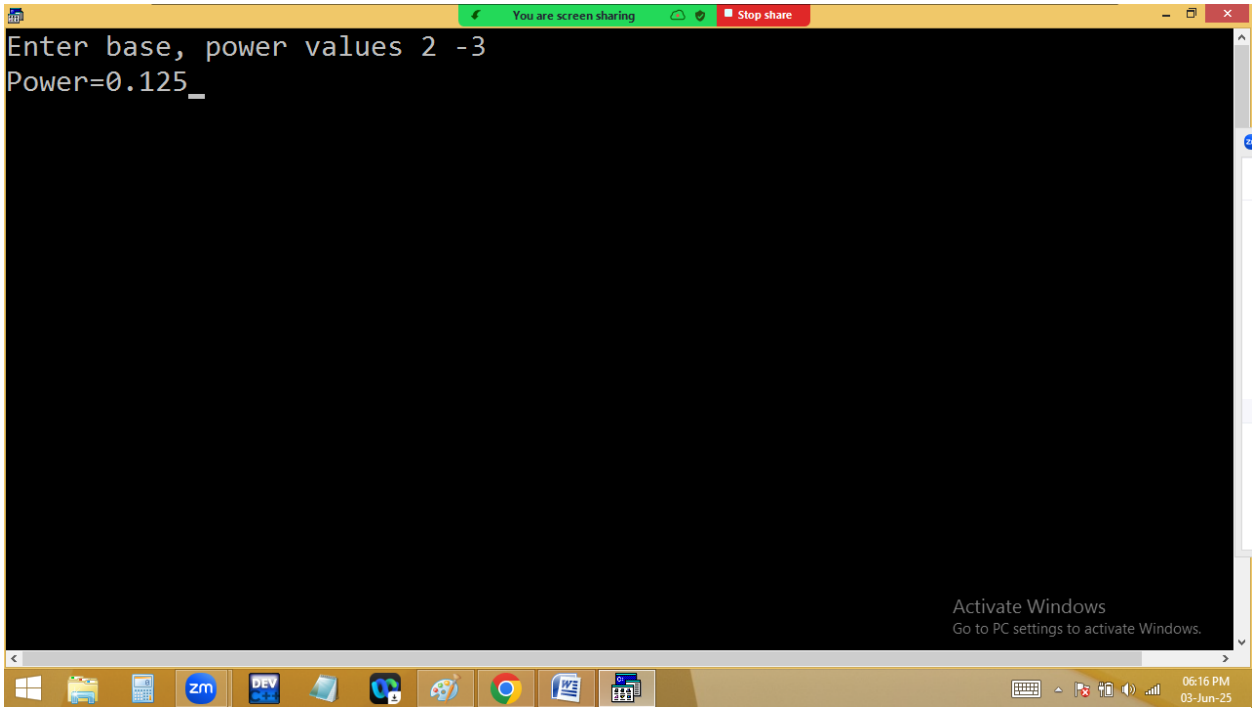

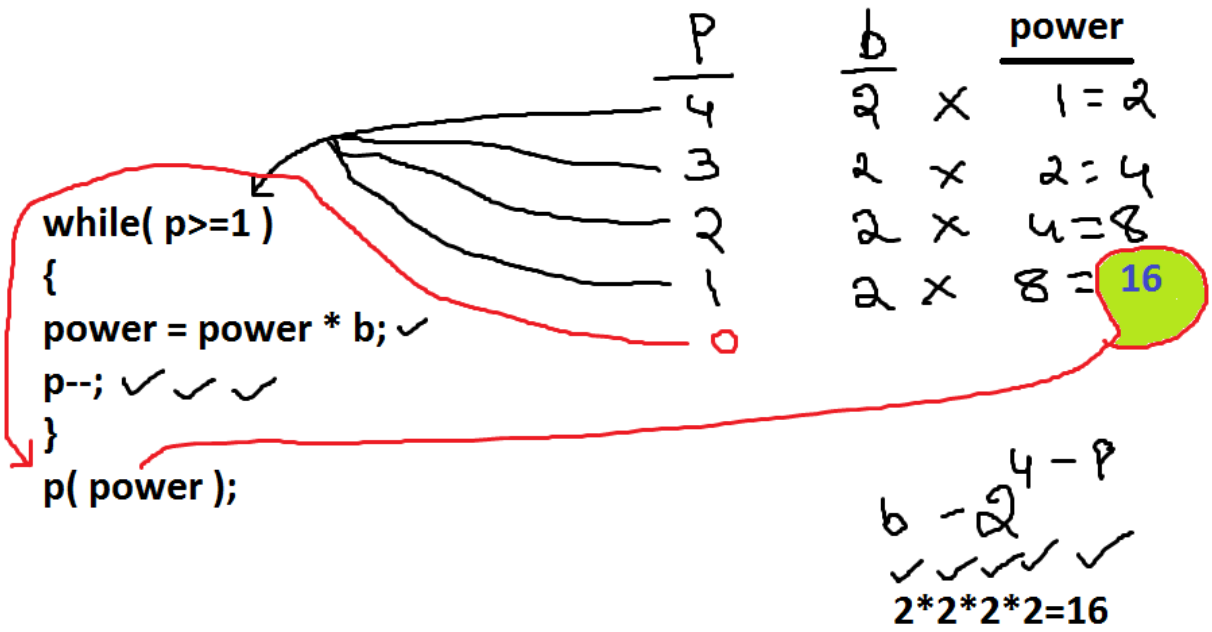


Finding gcd / hcf of given two no's?


Greatest common divisor or highest common factor of given two no's


4 factors are 1, 2, 4


6 factors are 1, 2, 3, 6

2 is the gcd of 4 and 6

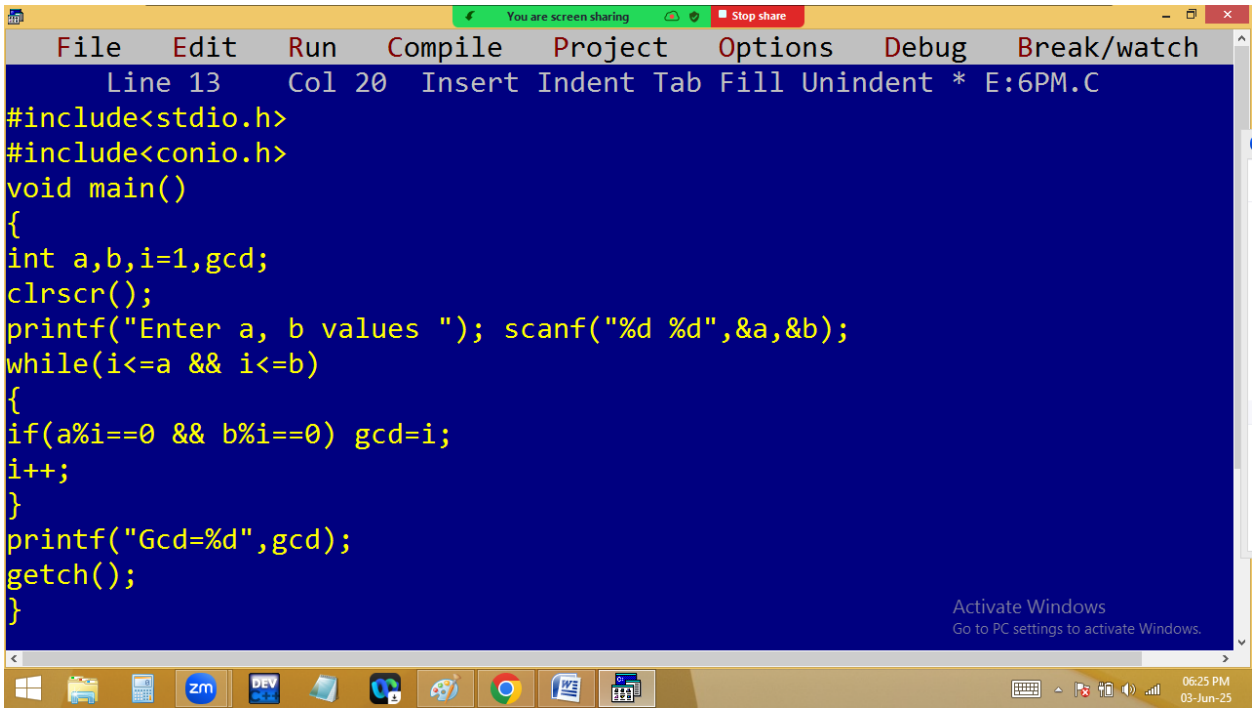

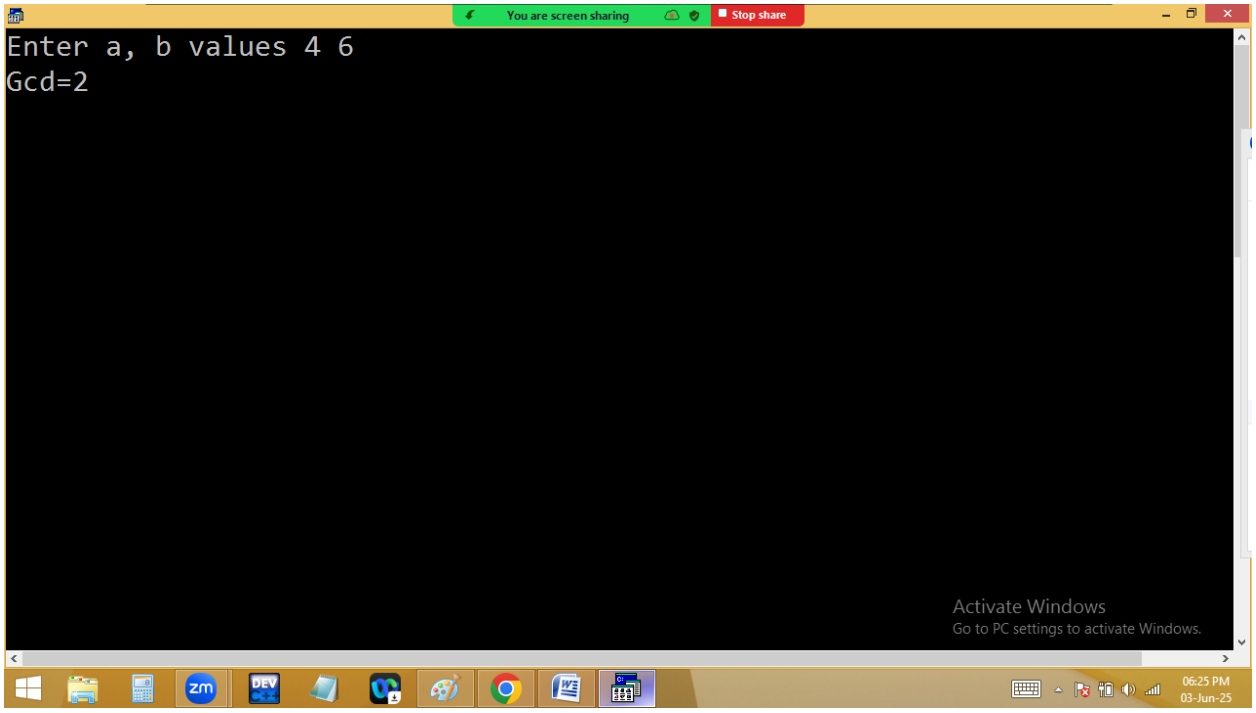
You are screen sharing
Stop share
Enter a, b values 4 6
Gcd=2
Activate Windows
Go to PC settings to activate Windows.
06:25 PM
03-Jun-25

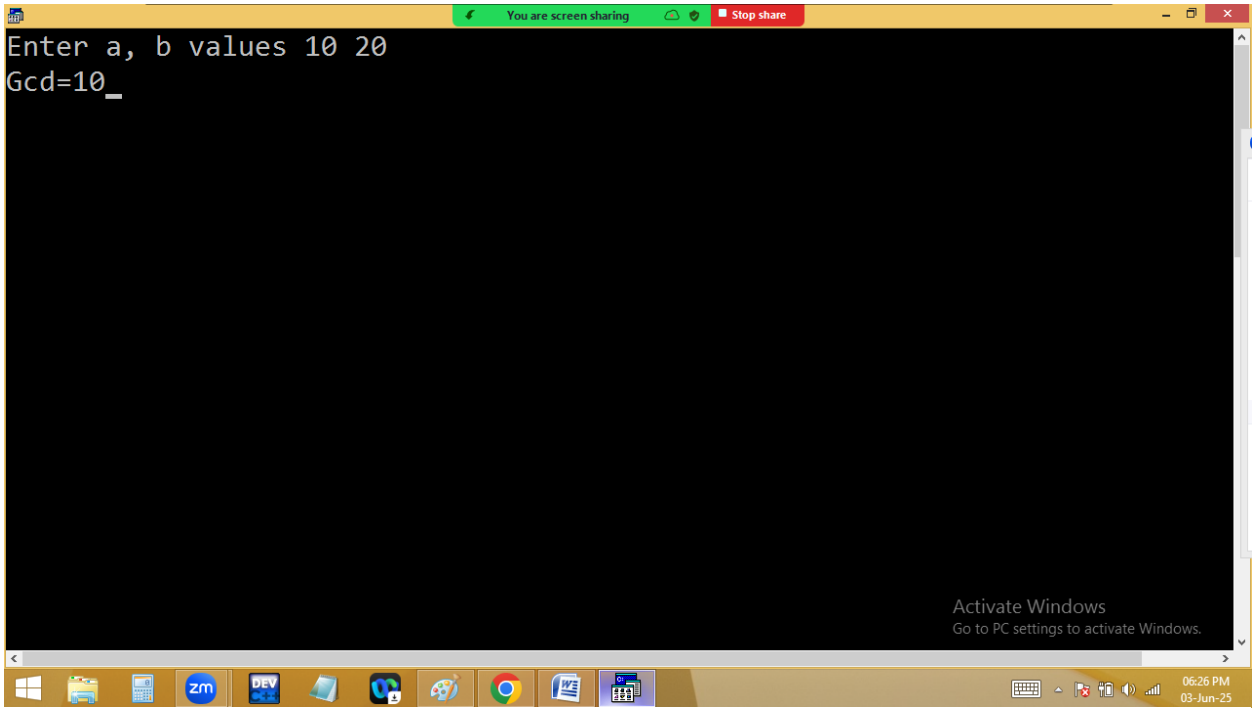

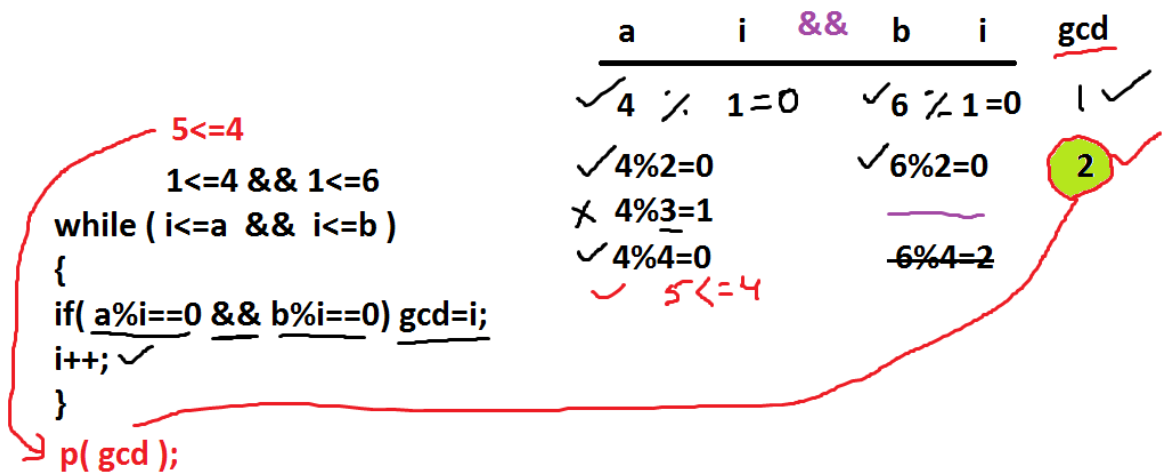


Finding lcm of given two no's:


Method1 ➔ Using gcd value

a*b/gcd=lcm


for example 4 and 6 gcd is 2


4*6/2 ➔ 24/2=12 ➔ lcm

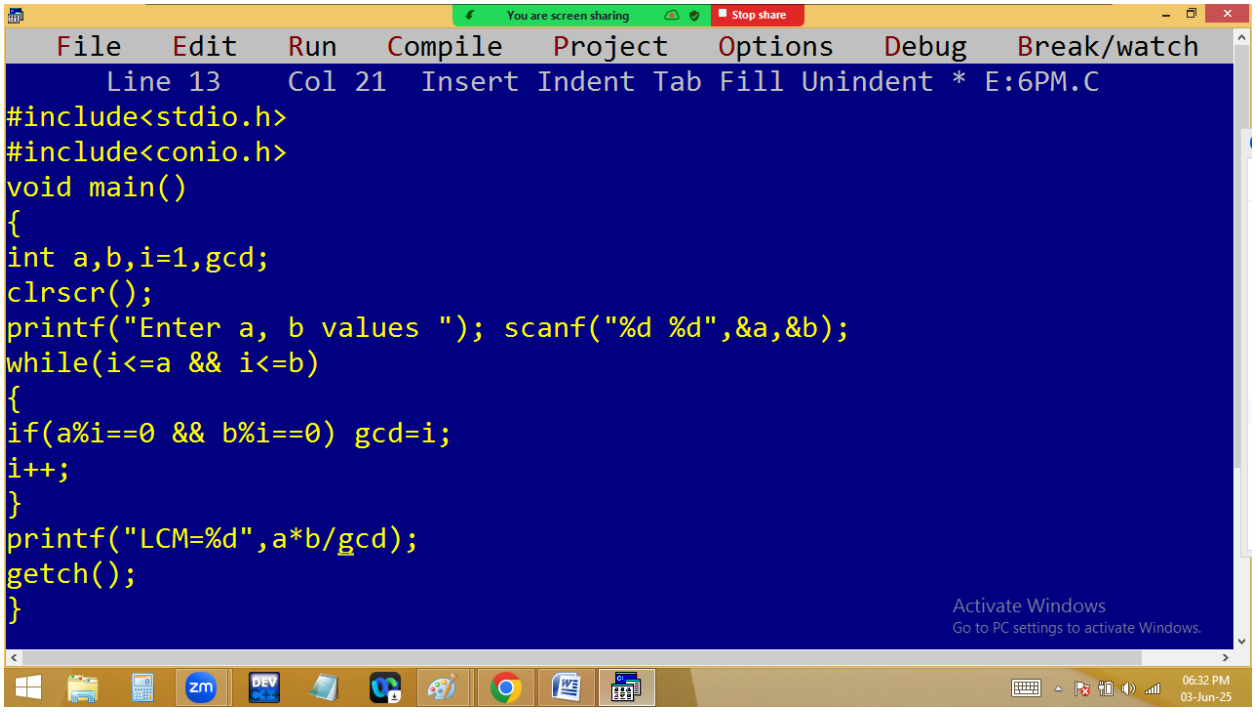


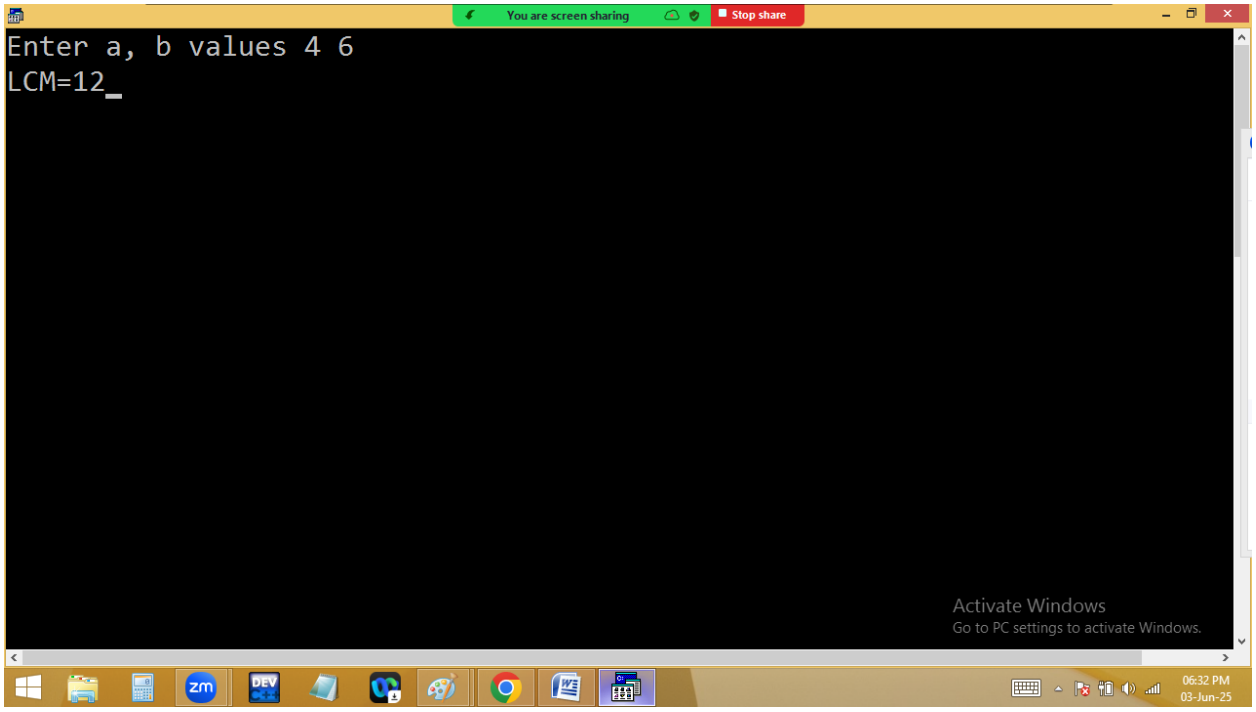

Without using gcd:

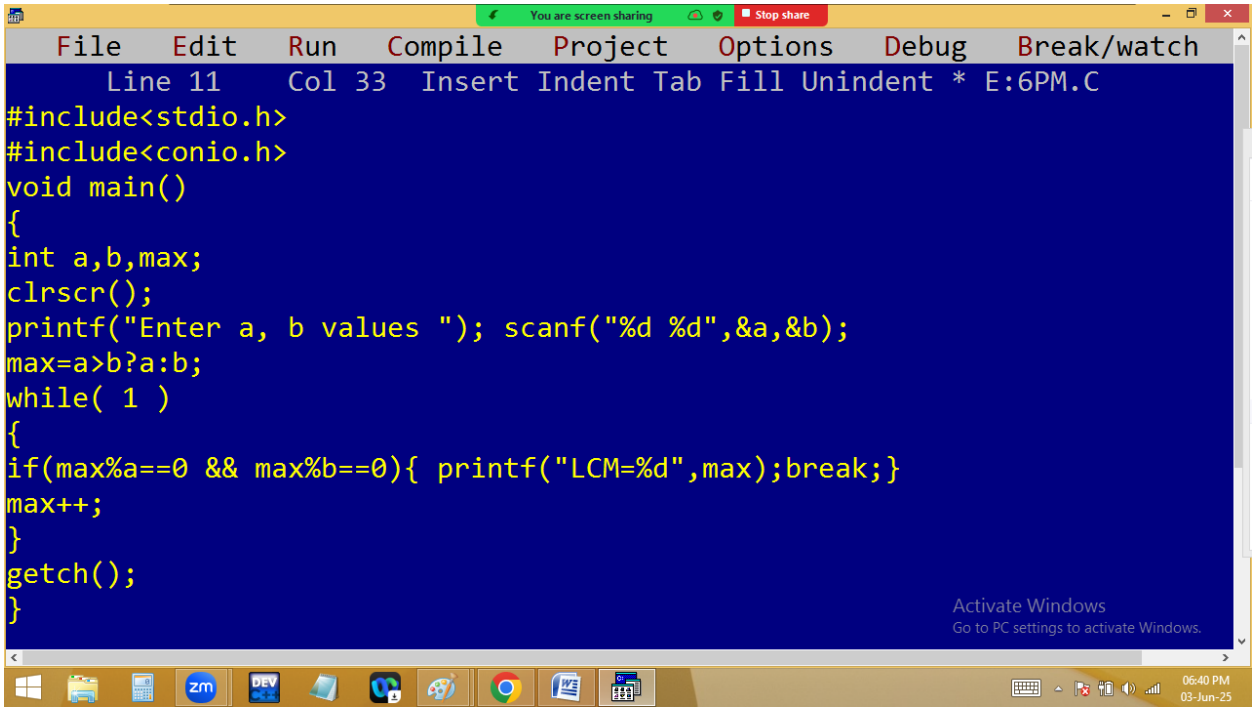

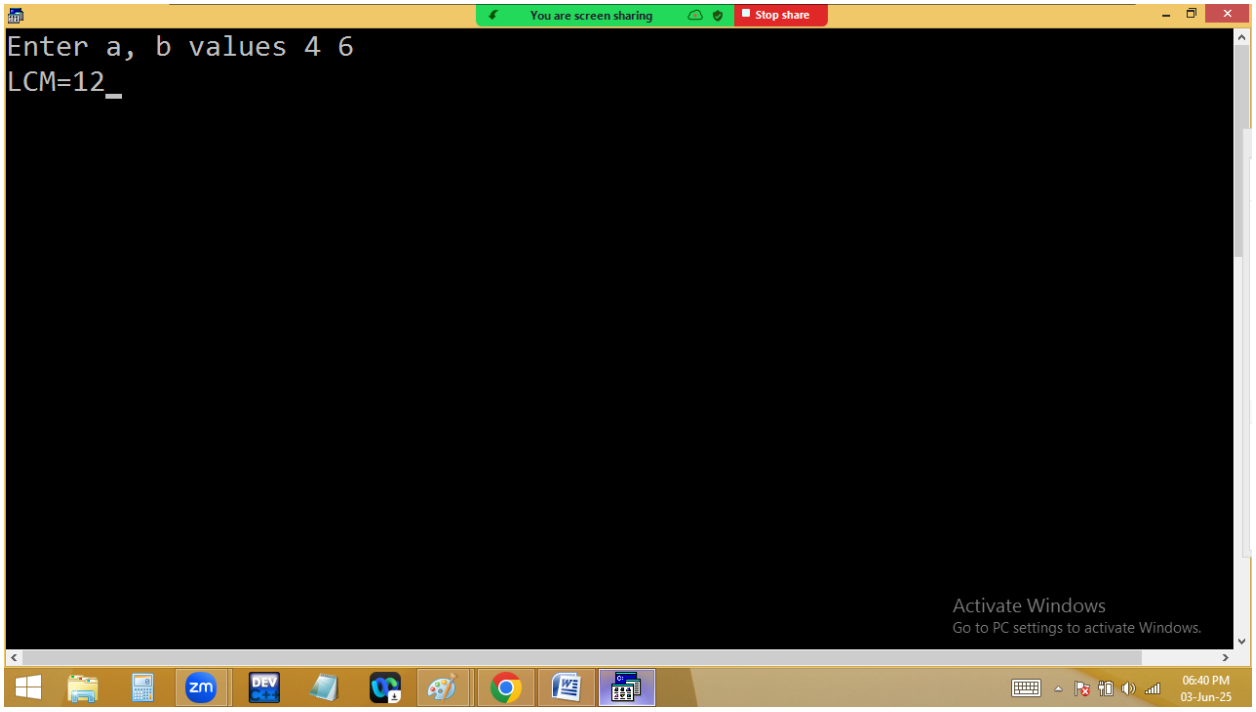

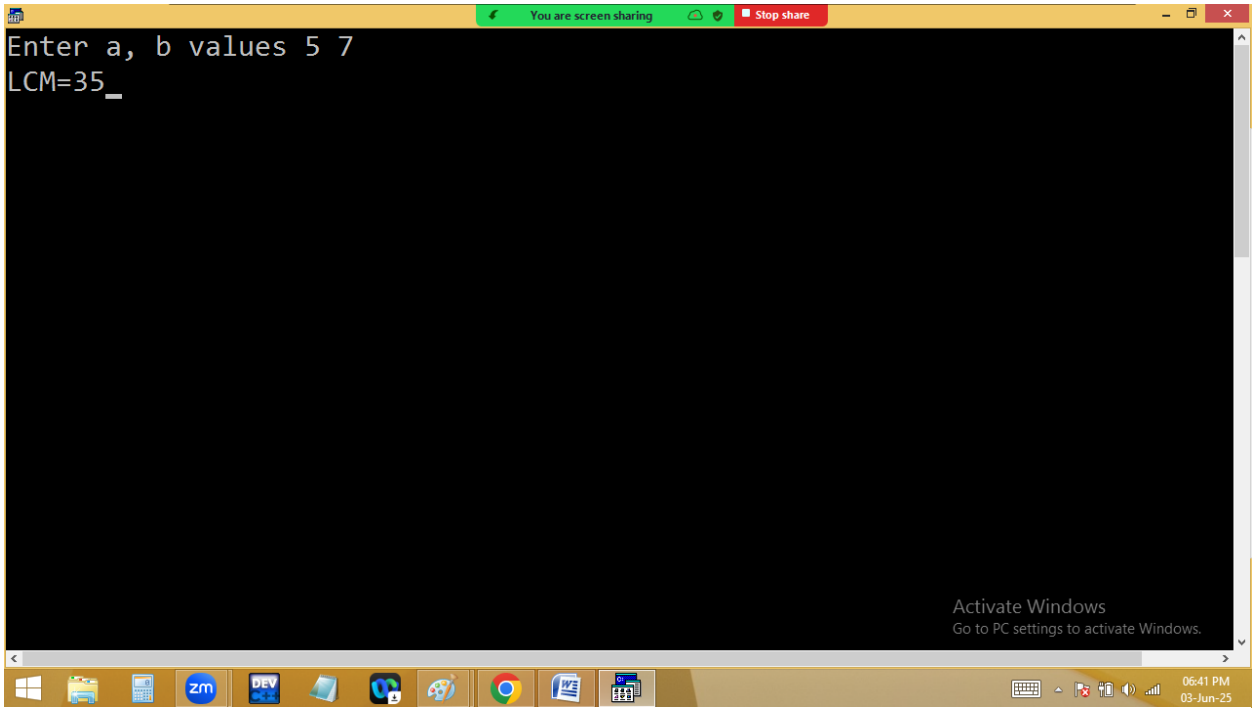

4 > 6


```
max = a>b ? a : b;
```


```
while ( 1==1 )
{
if(max%a==0 && max%b==0)
{
p("LCM=%d", max); ==> 12  ==> break;
}
max++;
}
```


max++		a	max	b
6	%	4 = 2	6	6
7	%	4 = 3		
8	%	4 = 0	~~8 % 6 = 2~~	
9	%	4 = 1		
10	% 4	= 2		
11	%	4 = 3		
12	%	4 = 0	12 % 6 = 0	


Finding factorial of given no?


4 factorial is 4*3*2*1=24

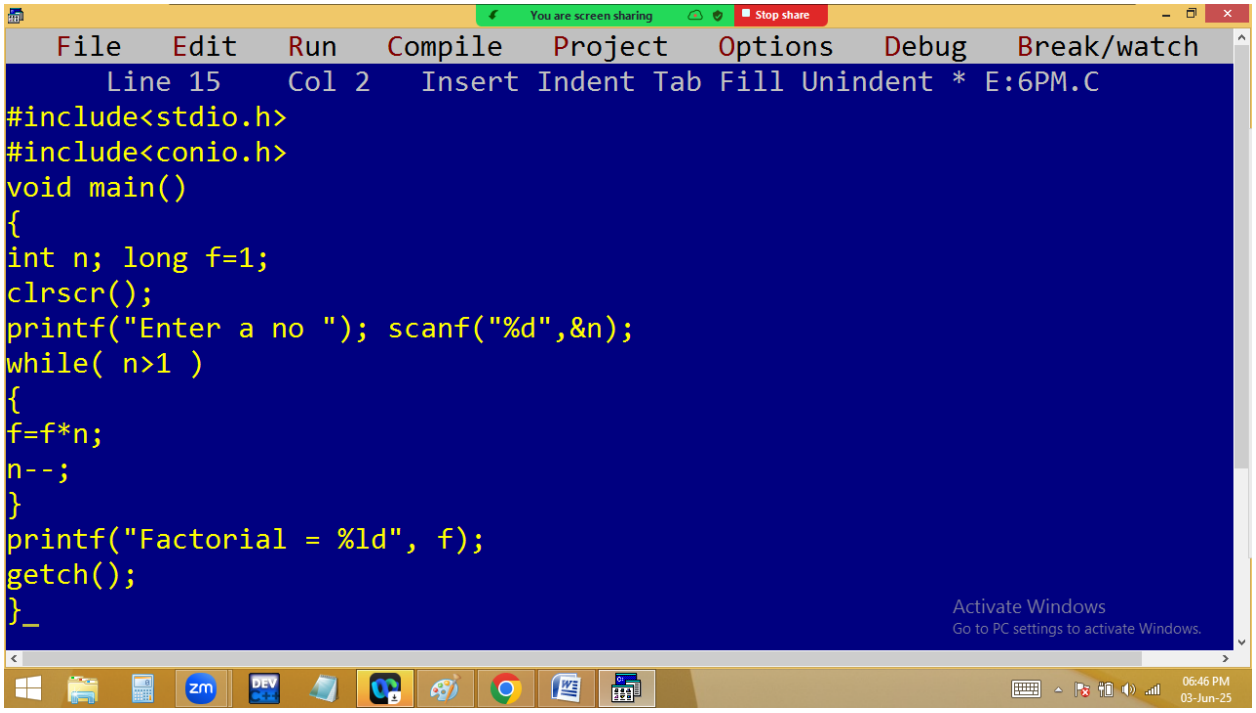

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 15 Col 2 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int n; long f=1;
clrscr();
printf("Enter a no "); scanf("%d",&n);
while(n>1)
{
f=f*n;
n--;
}
printf("Factorial = %ld", f);
getch();
}_
Activate Windows
Go to PC settings to activate Windows.
06:46 PM
03-Jun-25

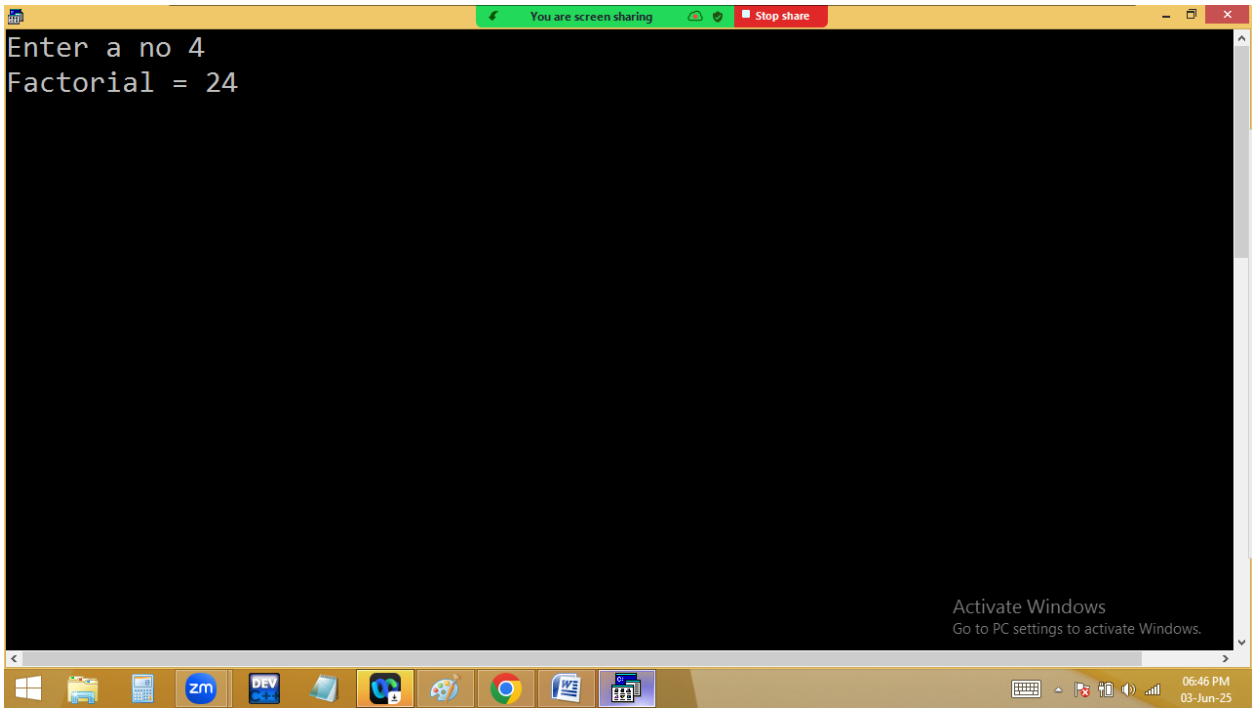
You are screen sharing
Stop share
Enter a no 4
Factorial = 24
Activate Windows
Go to PC settings to activate Windows.
06:46 PM
03-Jun-25

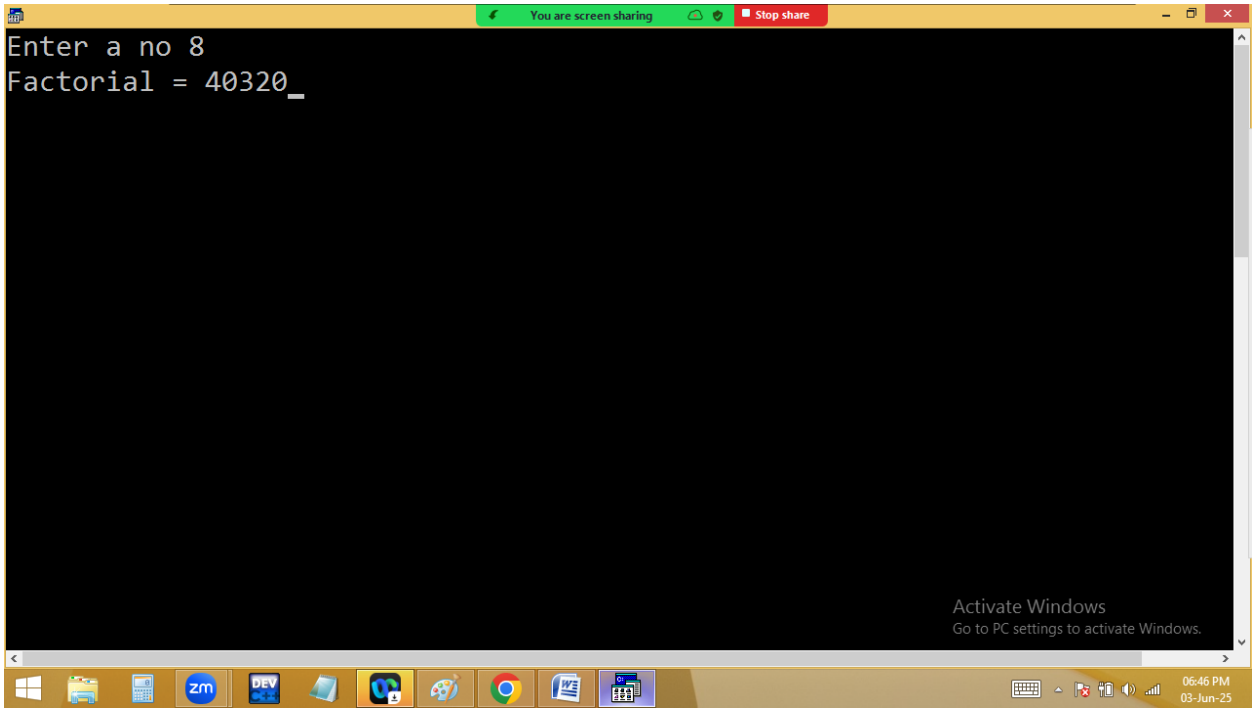
You are screen sharing
Stop share
Enter a no 8
Factorial = 40320
Activate Windows
Go to PC settings to activate Windows.
06:46 PM
03-Jun-25

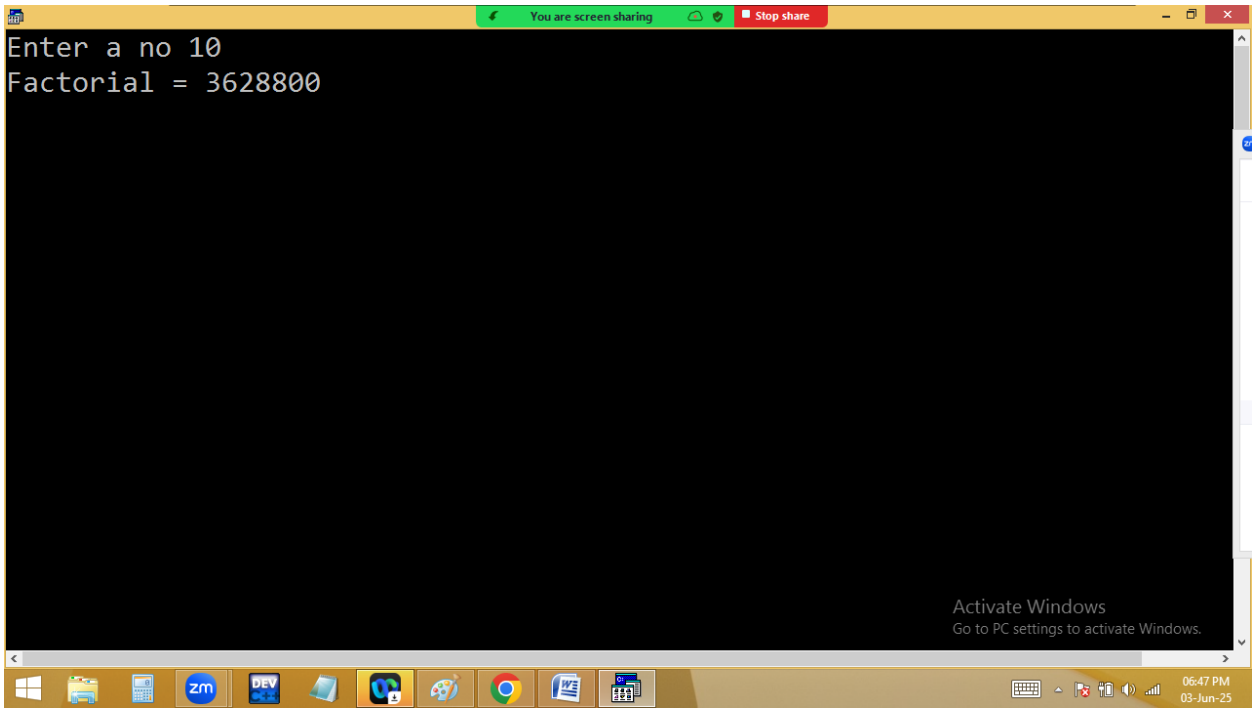
You are screen sharing
Stop share
Enter a no 10
Factorial = 3628800
Activate Windows
Go to PC settings to activate Windows.
06:47 PM
03-Jun-25

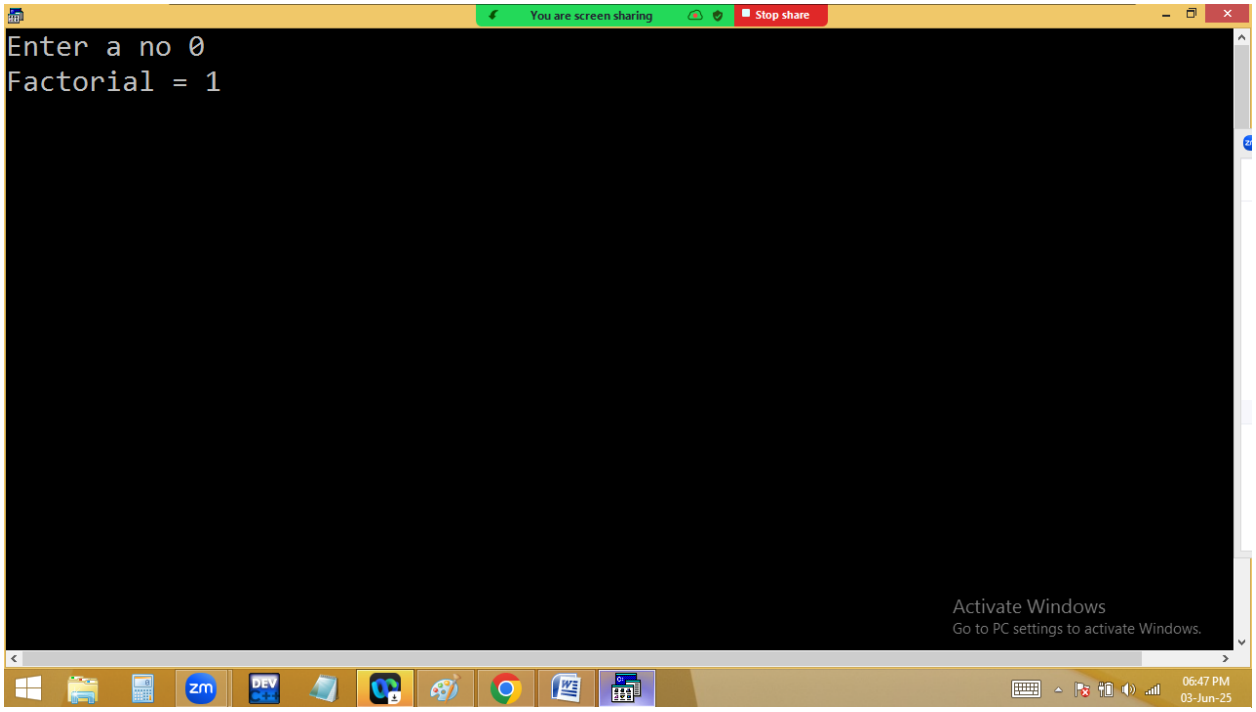
You are screen sharing
Stop share
Enter a no 0
Factorial = 1
Activate Windows
Go to PC settings to activate Windows.
06:47 PM
03-Jun-25

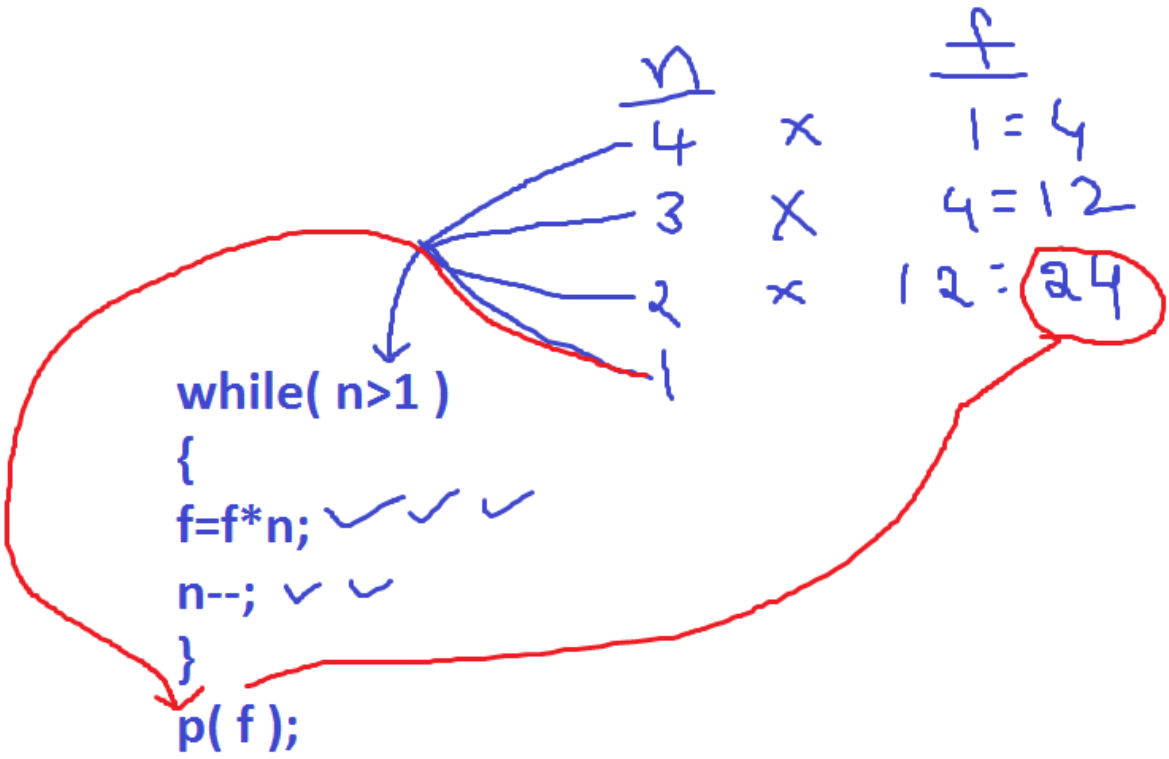

n
f
4 x 1 = 4
3 x 4 = 12
2 x 12 = 24
1
while(n>1)
{
f=f*n;
n--;
}
p(f);


do..while:

- It is an exit control loop. i.e. in a do while the condition is tested at last.
- Here do , while are the keywords.
- It is also used to repeat a program several times based on a condition.
- In a do while, do block statements are executed first and later while condition is tested. If the while condition is true then once again the do block statements are repeated. Like this the process is continued until the while condition becomes false.
- In do while, the while should be end with semicolon (;) .
- Regardless of while condition, the do statements are executed at least one

time. Due to this sometimes we are getting unwanted results [garbage values].


- Use do while whenever it is compulsory because of in do while the program is controlled at the bottom / last.

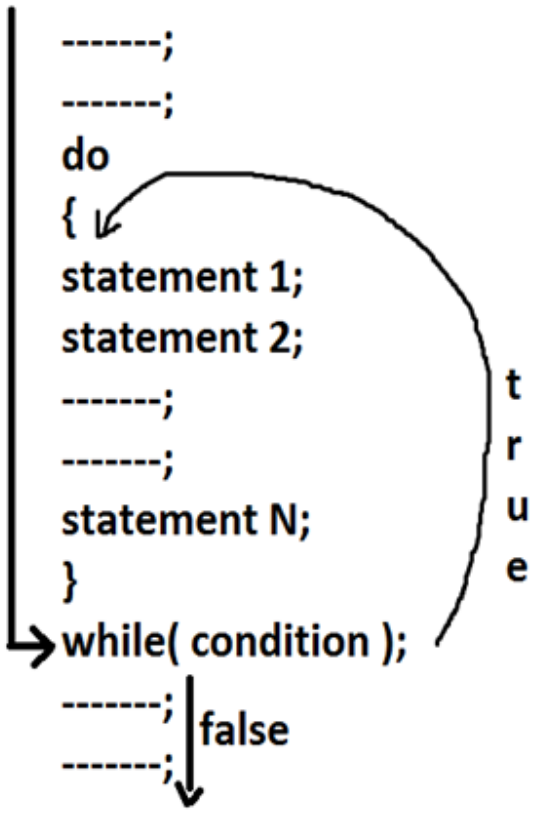


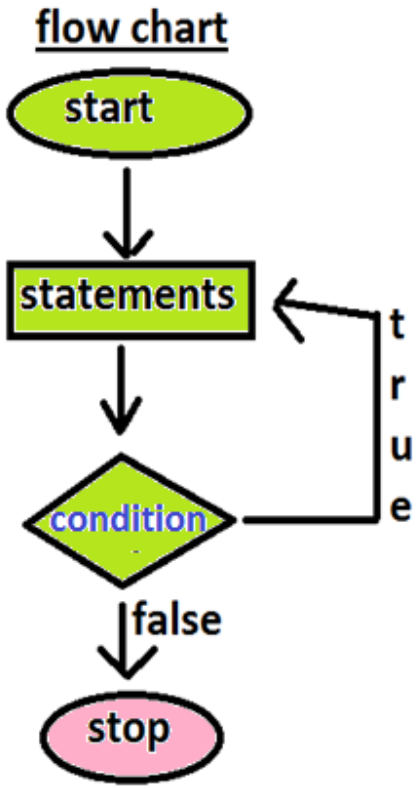



Finding no of digits in given no?


Eg: 2025 ➔ 4 digit no

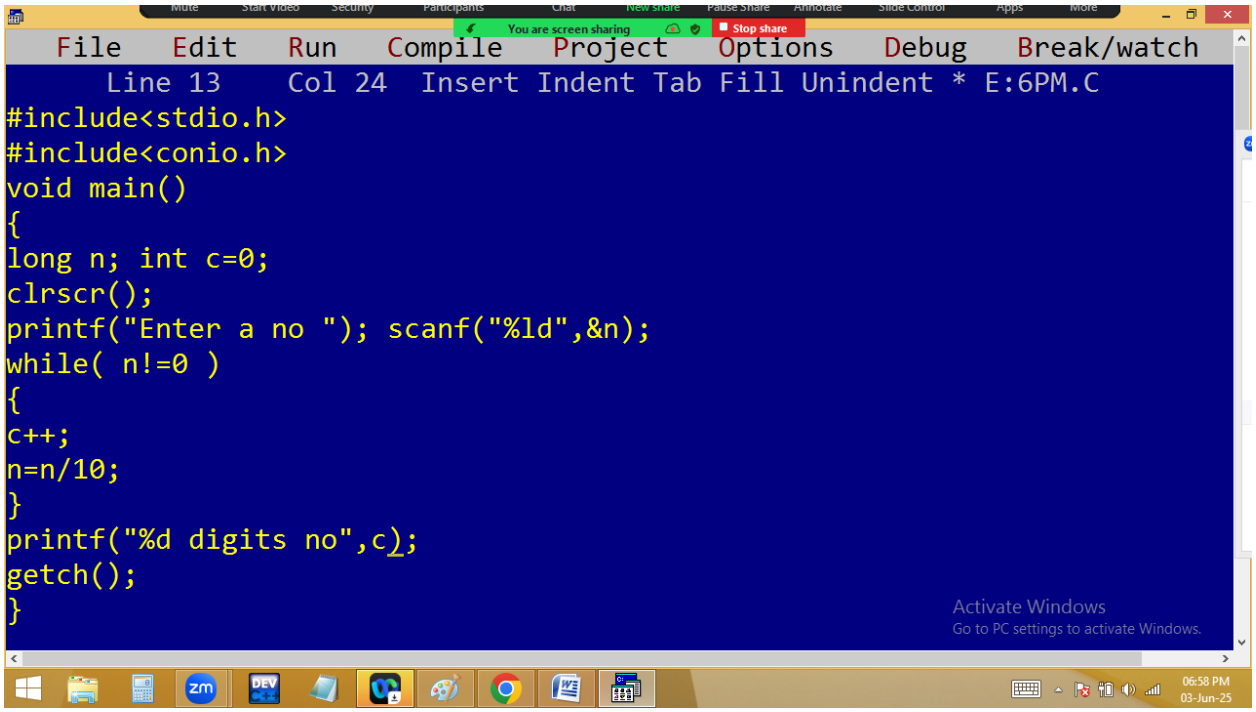


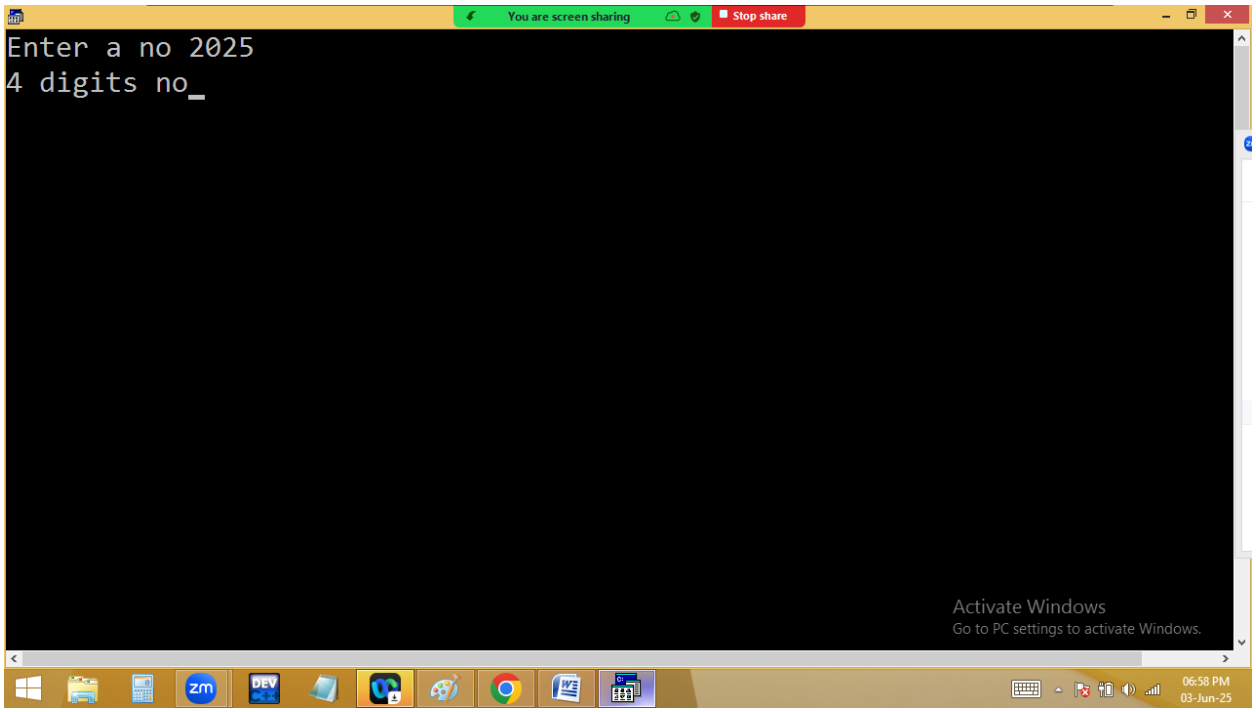


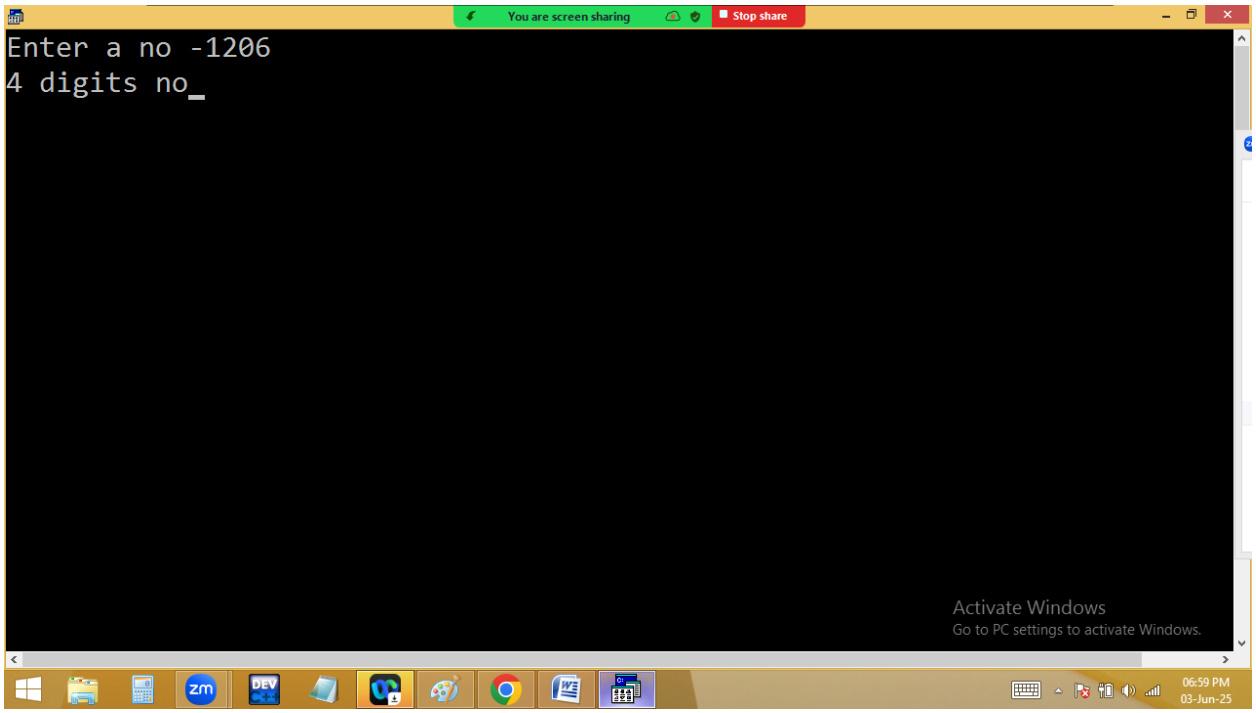

You are screen sharing
Stop share
Enter a no -1206
4 digits no
Activate Windows
Go to PC settings to activate Windows.
06:59 PM
03-Jun-25

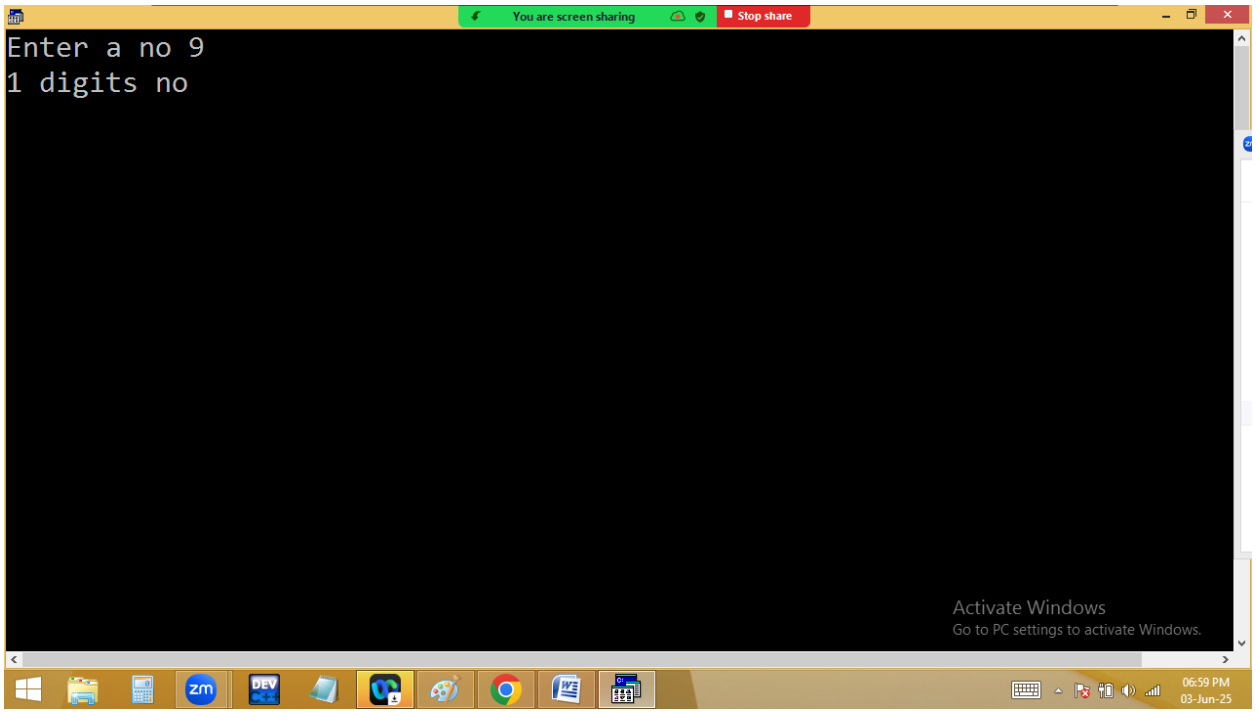

You are screen sharing
Stop share
Enter a no 9
1 digits no
Activate Windows
Go to PC settings to activate Windows.
06:59 PM
03-Jun-25

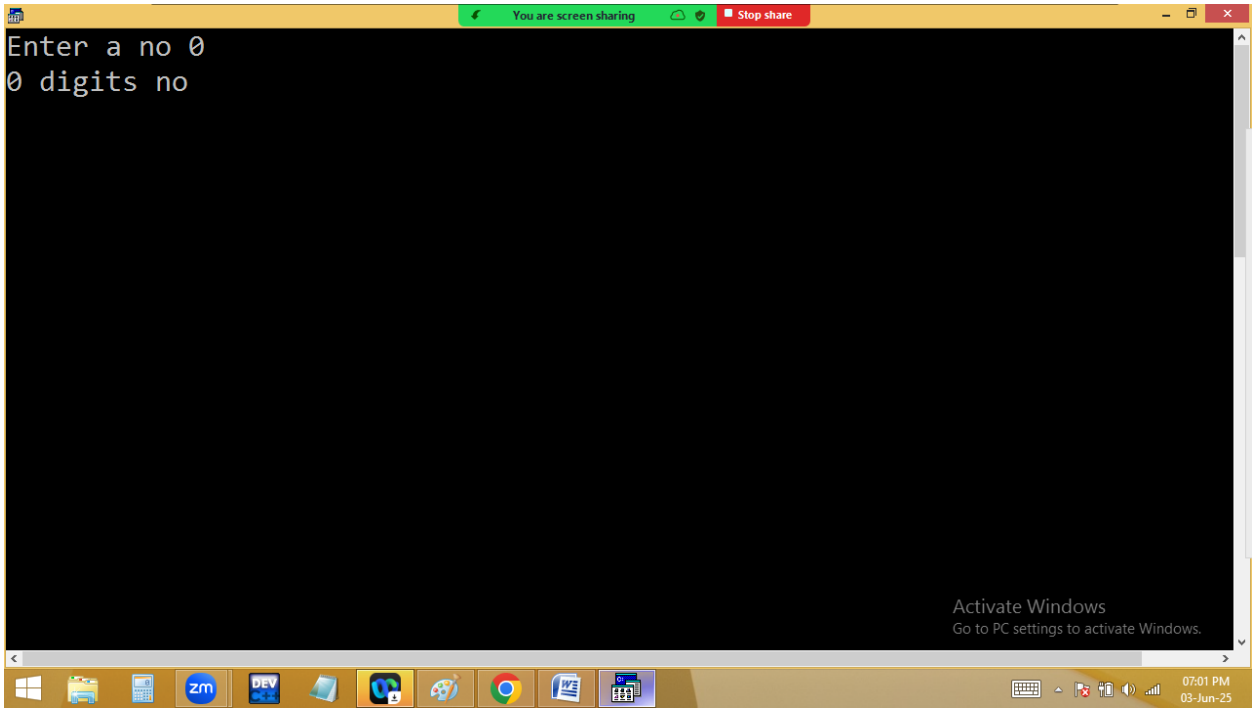

You are screen sharing
Stop share
Enter a no 0
0 digits no
Activate Windows
Go to PC settings to activate Windows.
07:01 PM
03-Jun-25

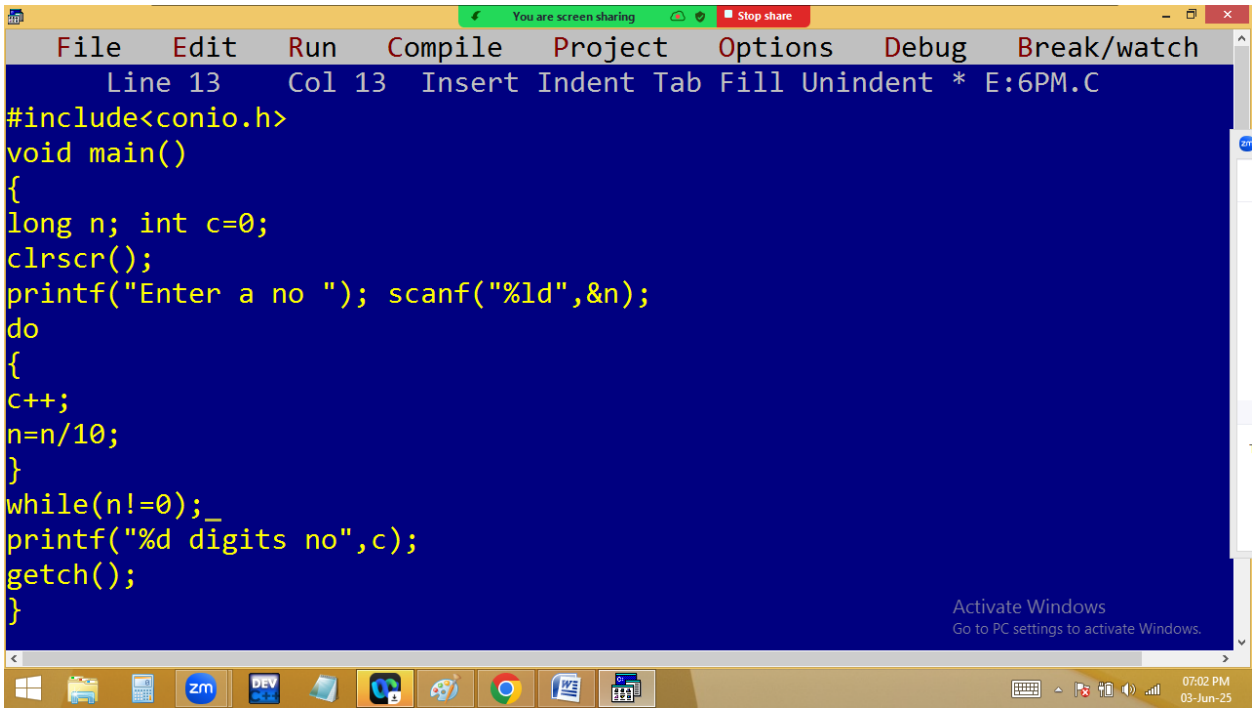

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 13 Col 13 Insert Indent Tab Fill Unindent * E:6PM.C
#include<conio.h>
void main()
{
long n; int c=0;
clrscr();
printf("Enter a no "); scanf("%ld",&n);
do
{
c++;
n=n/10;
}
while(n!=0);
printf("%d digits no",c);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:02 PM
03-Jun-25

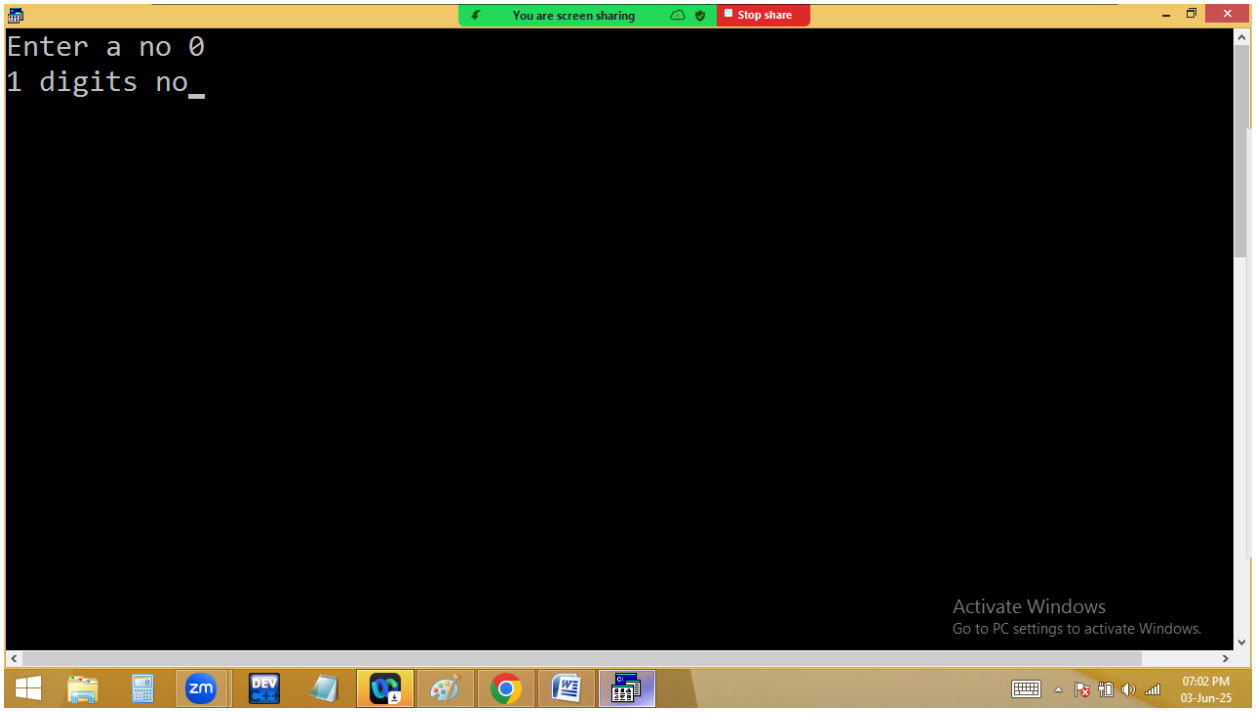
You are screen sharing
Stop share
Enter a no 0
1 digits no_
Activate Windows
Go to PC settings to activate Windows.
07:02 PM
03-Jun-25

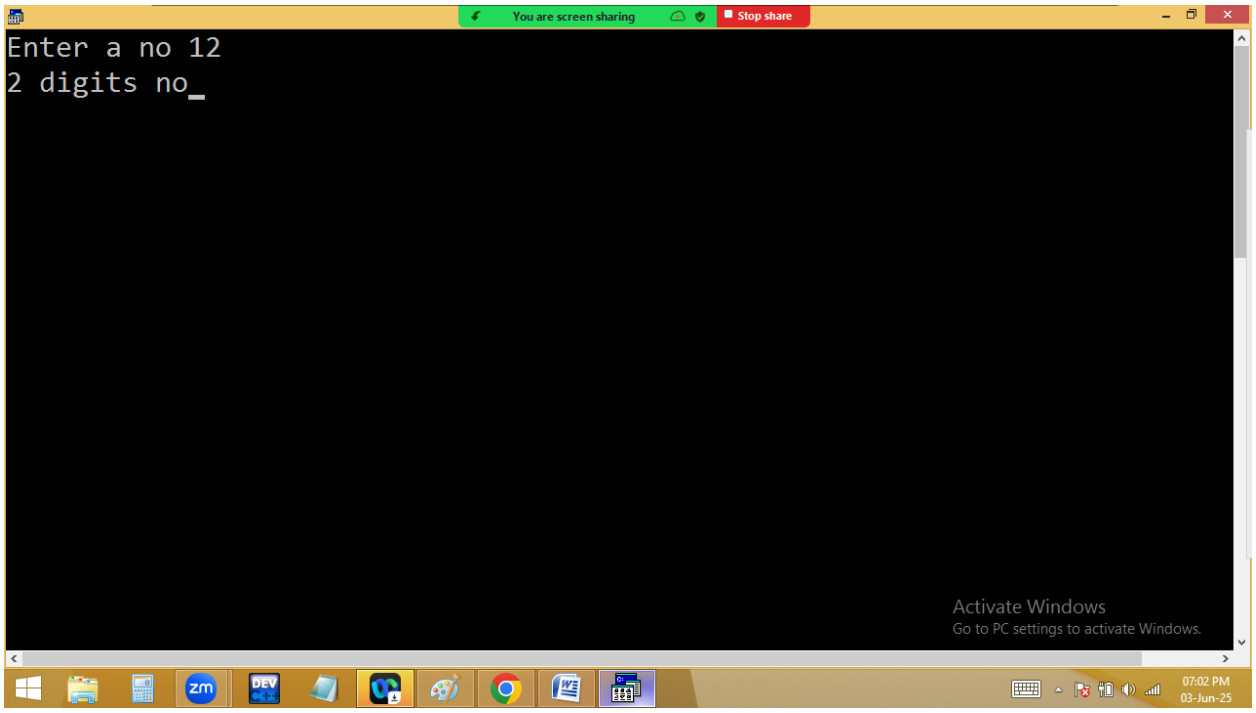
You are screen sharing
Stop share
Enter a no 12
2 digits no_
Activate Windows
Go to PC settings to activate Windows.
07:02 PM
03-Jun-25

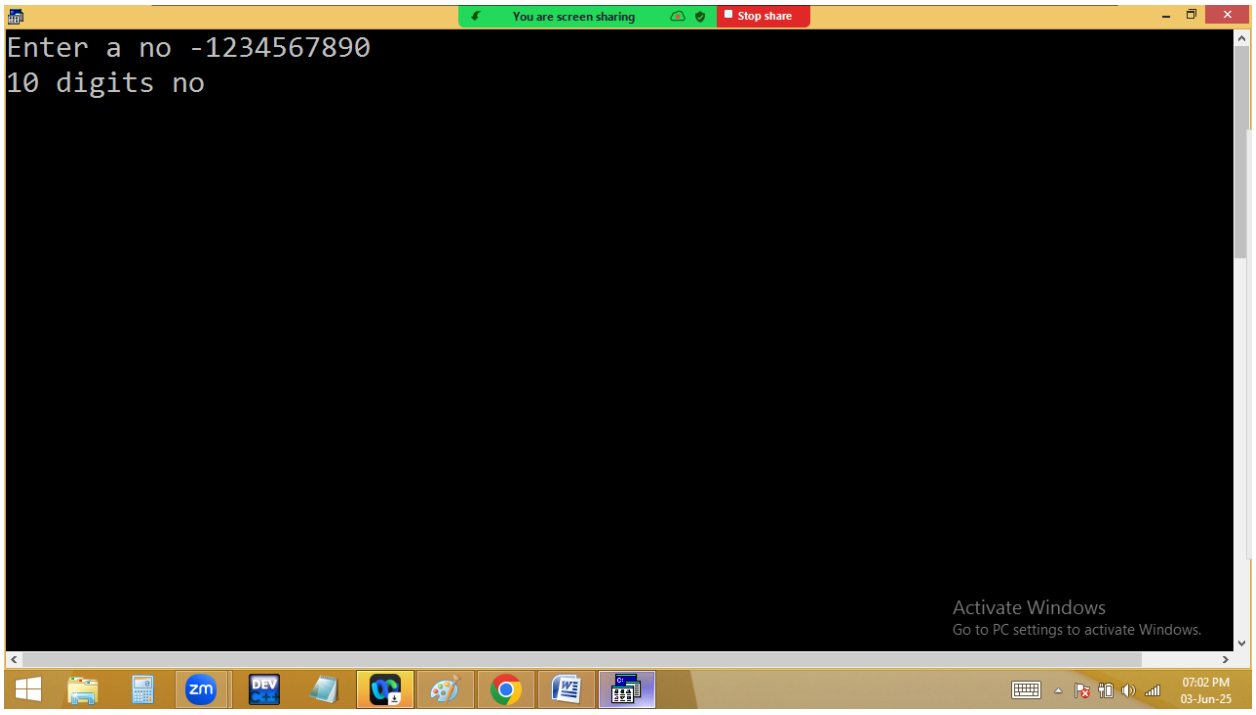

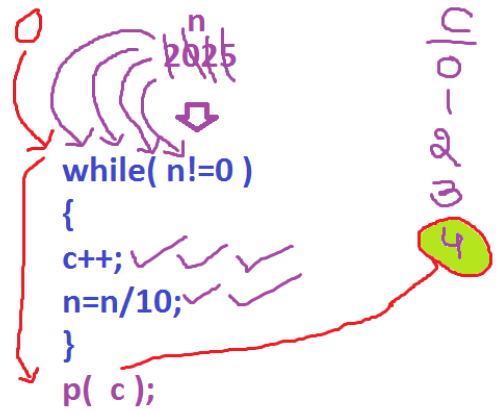


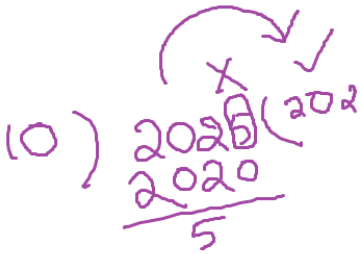



Note: Any no/10 removes last digit.


Finding no of even/odd/ zero digits in given no?


Eg: 1023 ➔ 1 even, 2 odd, 1 zero

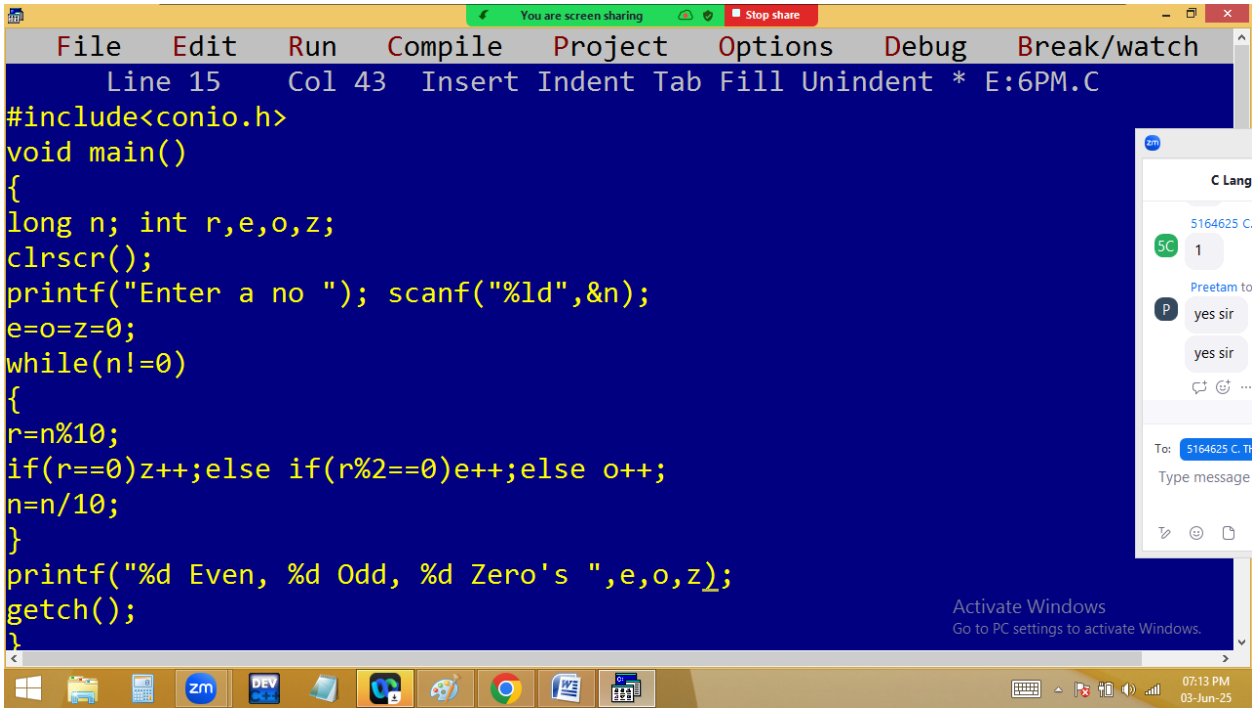

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 15 Col 43 Insert Indent Tab Fill Unindent * E:6PM.C
#include<conio.h>
void main()
{
long n; int r,e,o,z;
clrscr();
printf("Enter a no "); scanf("%ld",&n);
e=o=z=0;
while(n!=0)
{
r=n%10;
if(r==0)z++;else if(r%2==0)e++;else o++;
n=n/10;
}
printf("%d Even, %d Odd, %d Zero's ",e,o,z);
getch();
}
C Lang
5164625 C.
1
Preetam to
yes sir
yes sir
To: 5164625 C. Th
Type message
Activate Windows
Go to PC settings to activate Windows.
07:13 PM
03-Jun-25

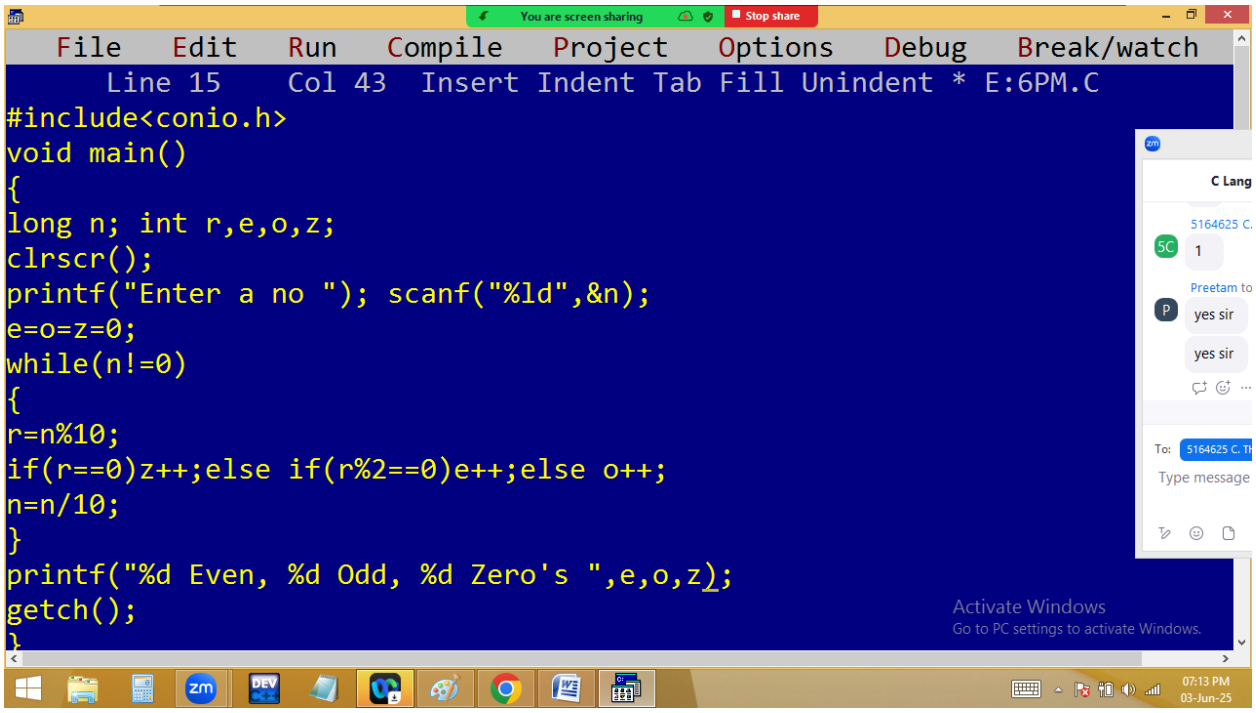

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 15 Col 43 Insert Indent Tab Fill Unindent * E:6PM.C
#include<conio.h>
void main()
{
long n; int r,e,o,z;
clrscr();
printf("Enter a no "); scanf("%ld",&n);
e=o=z=0;
while(n!=0)
{
r=n%10;
if(r==0)z++;else if(r%2==0)e++;else o++;
n=n/10;
}
printf("%d Even, %d Odd, %d Zero's ",e,o,z);
getch();
}
C Lang
5164625 C.
1
Preetam to
yes sir
yes sir
To: 5164625 C. Th
Type message
Activate Windows
Go to PC settings to activate Windows.
07:13 PM
03-Jun-25

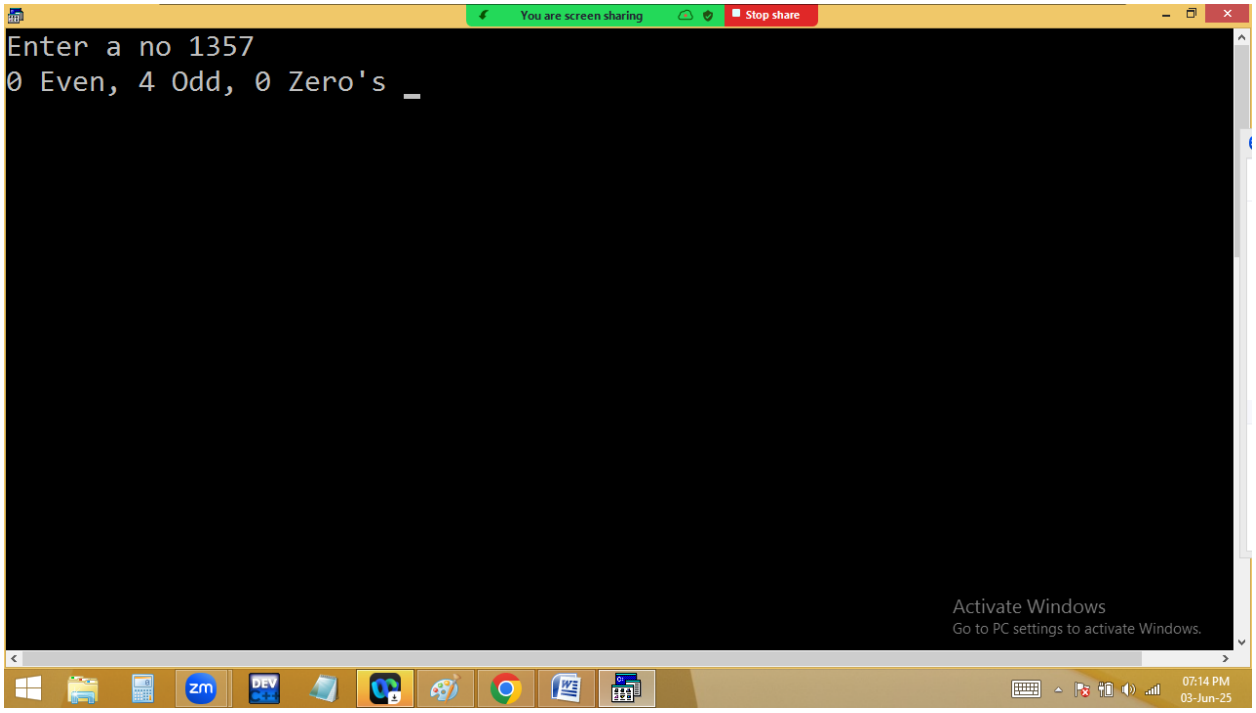

You are screen sharing
Stop share
Enter a no 1357
0 Even, 4 Odd, 0 Zero's
Activate Windows
Go to PC settings to activate Windows.
07:14 PM
03-Jun-25

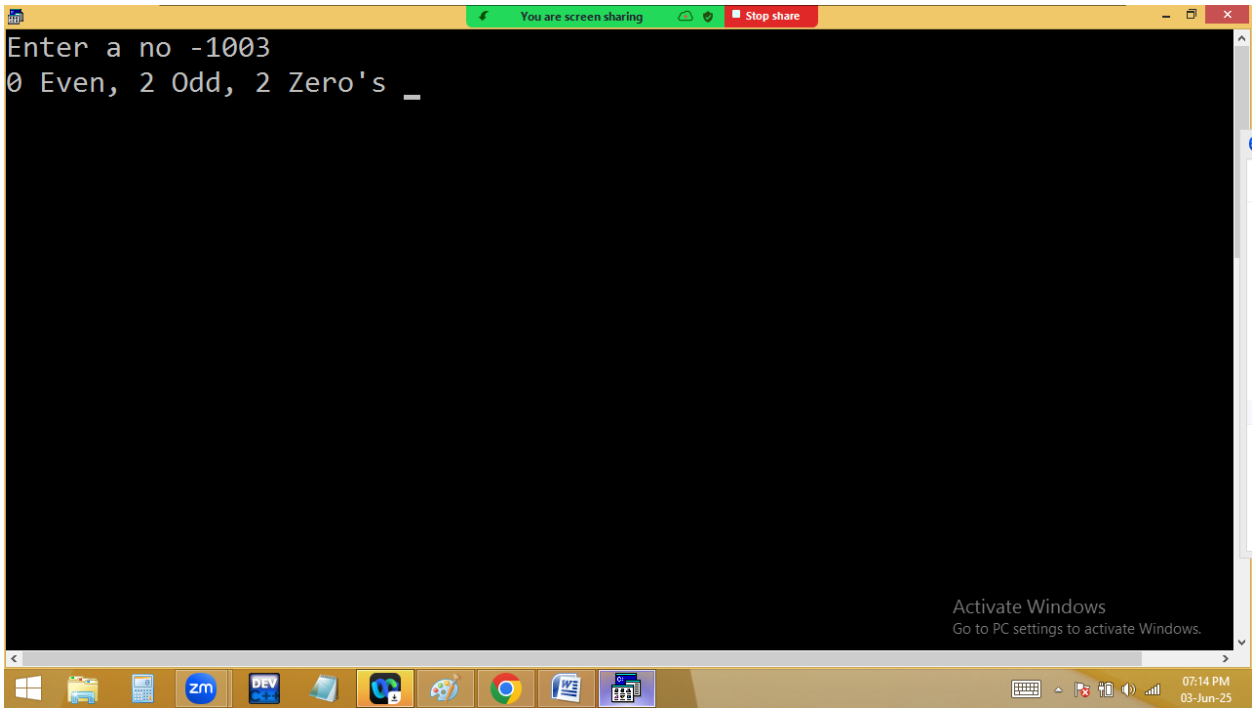
You are screen sharing
Stop share
Enter a no -1003
0 Even, 2 Odd, 2 Zero's
Activate Windows
Go to PC settings to activate Windows.
07:14 PM
03-Jun-25

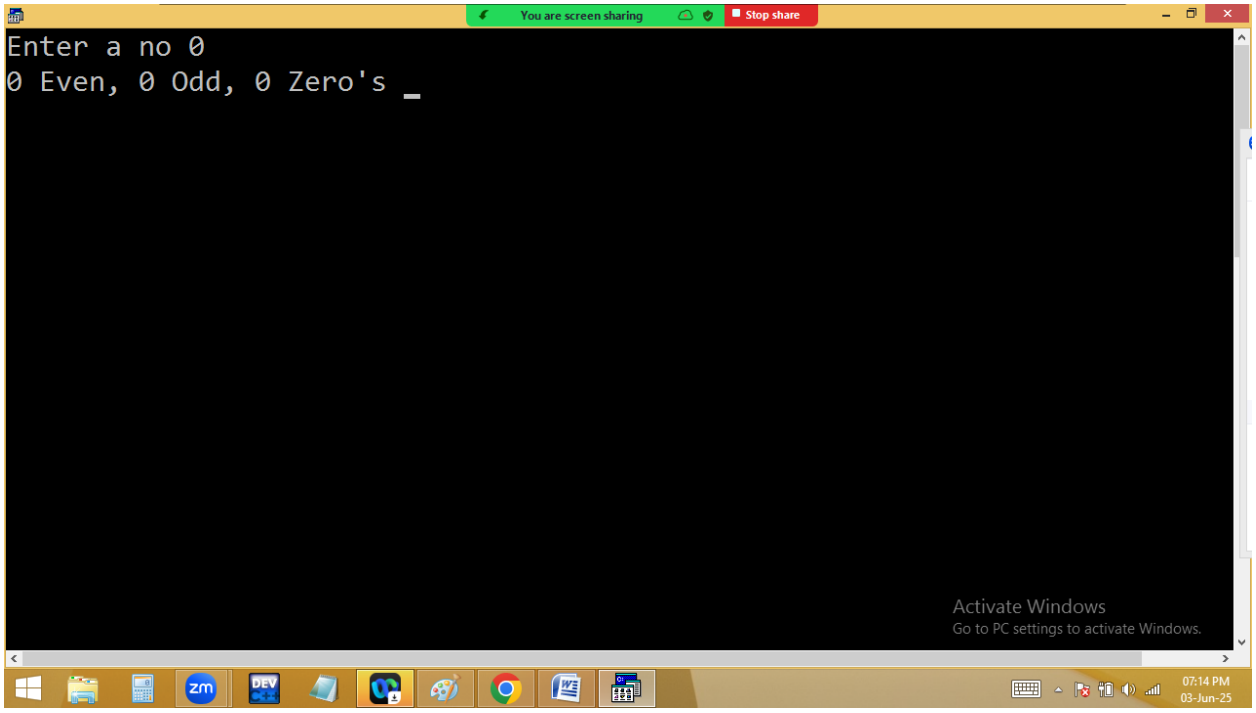
You are screen sharing
Stop share
Enter a no 0
0 Even, 0 Odd, 0 Zero's
Activate Windows
Go to PC settings to activate Windows.
07:14 PM
03-Jun-25

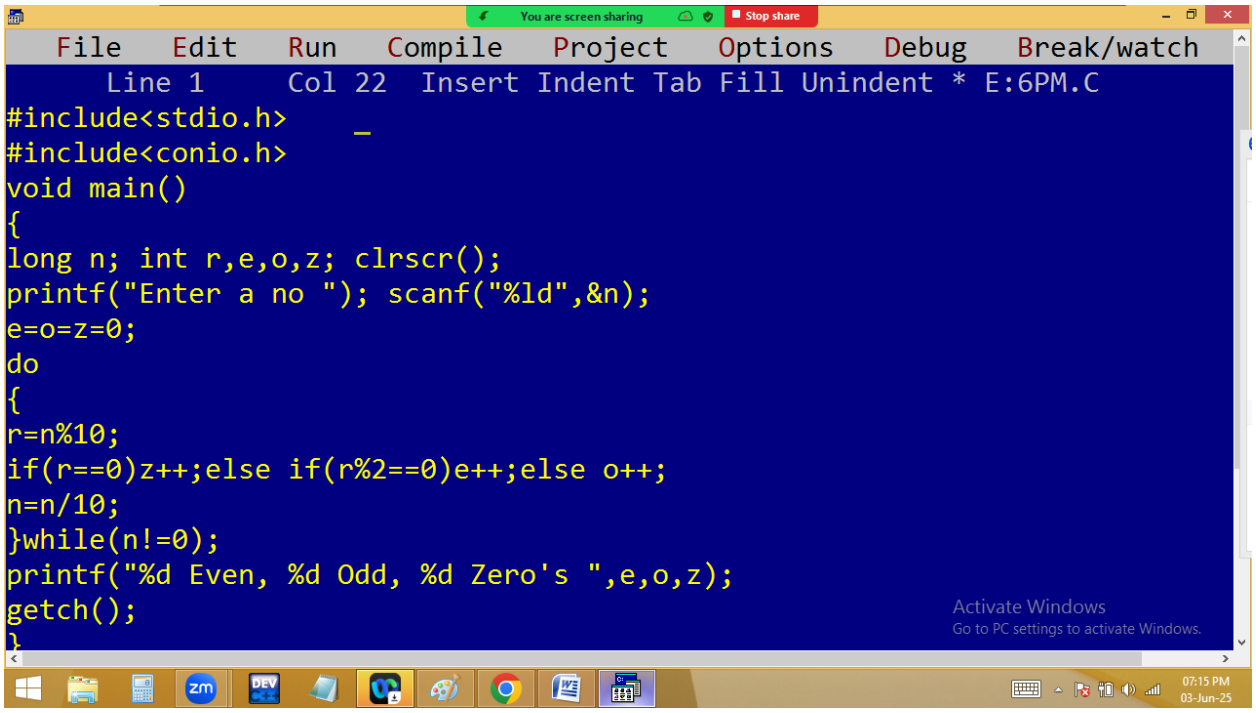

You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 1 Col 22 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
long n; int r,e,o,z; clrscr();
printf("Enter a no "); scanf("%ld",&n);
e=o=z=0;
do
{
r=n%10;
if(r==0)z++;else if(r%2==0)e++;else o++;
n=n/10;
}while(n!=0);
printf("%d Even, %d Odd, %d Zero's ",e,o,z);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:15 PM
03-Jun-25

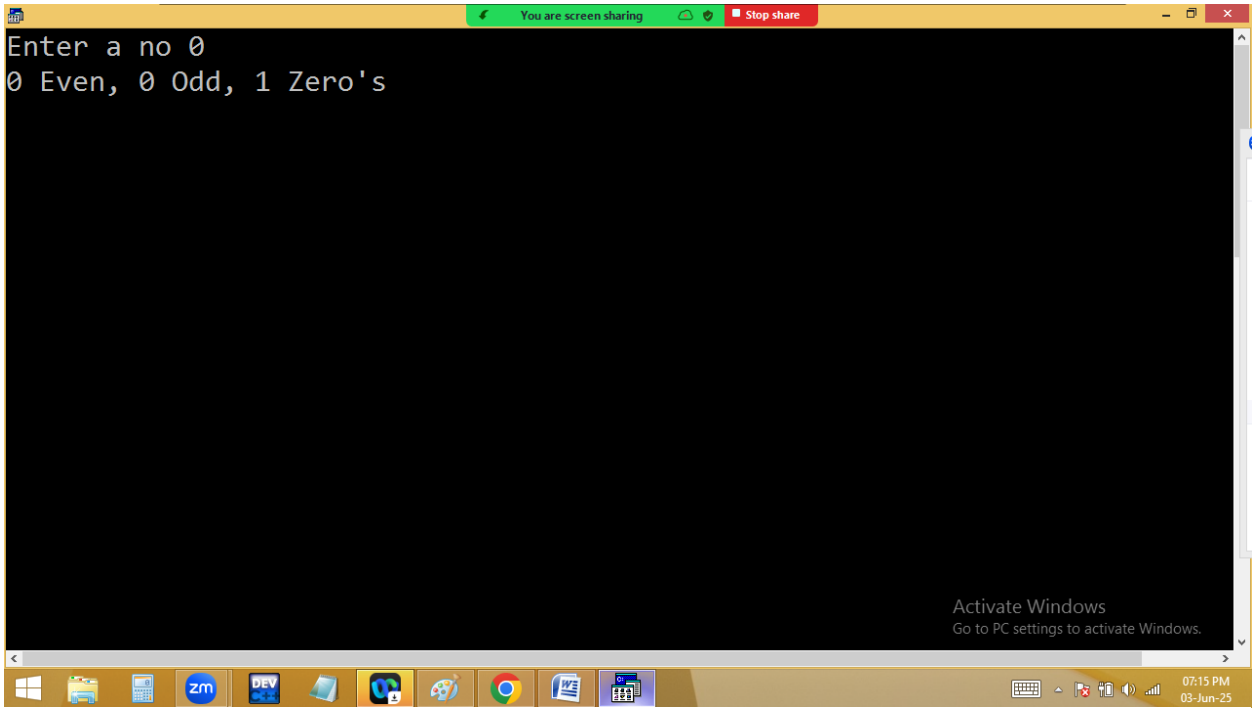


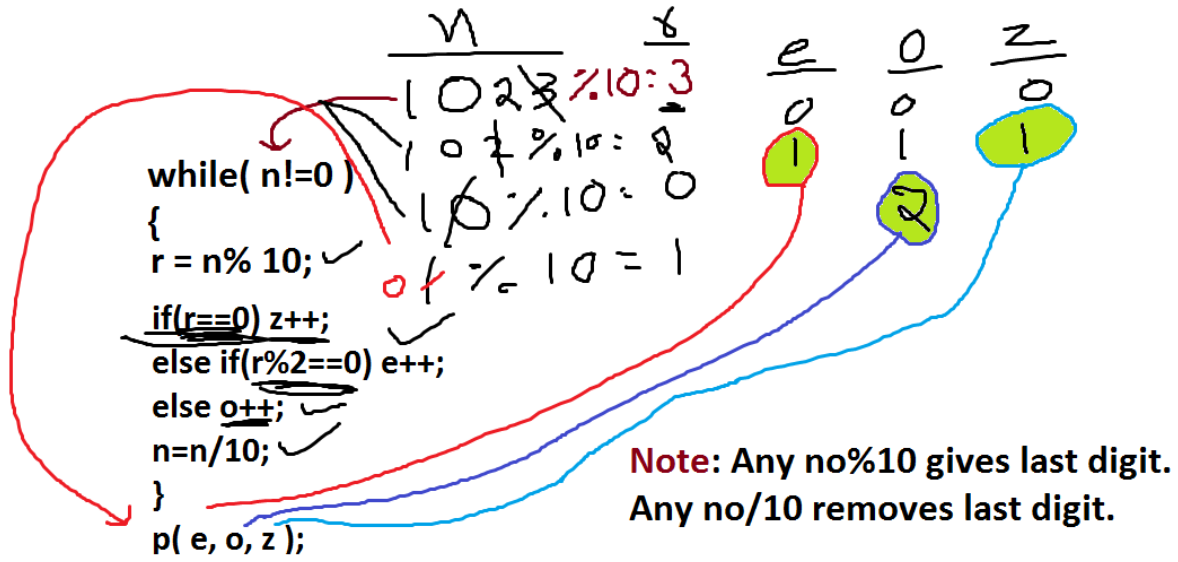



Finding max, min digits of given no?

Eg: 2025 ➔ 5 max, 0 min

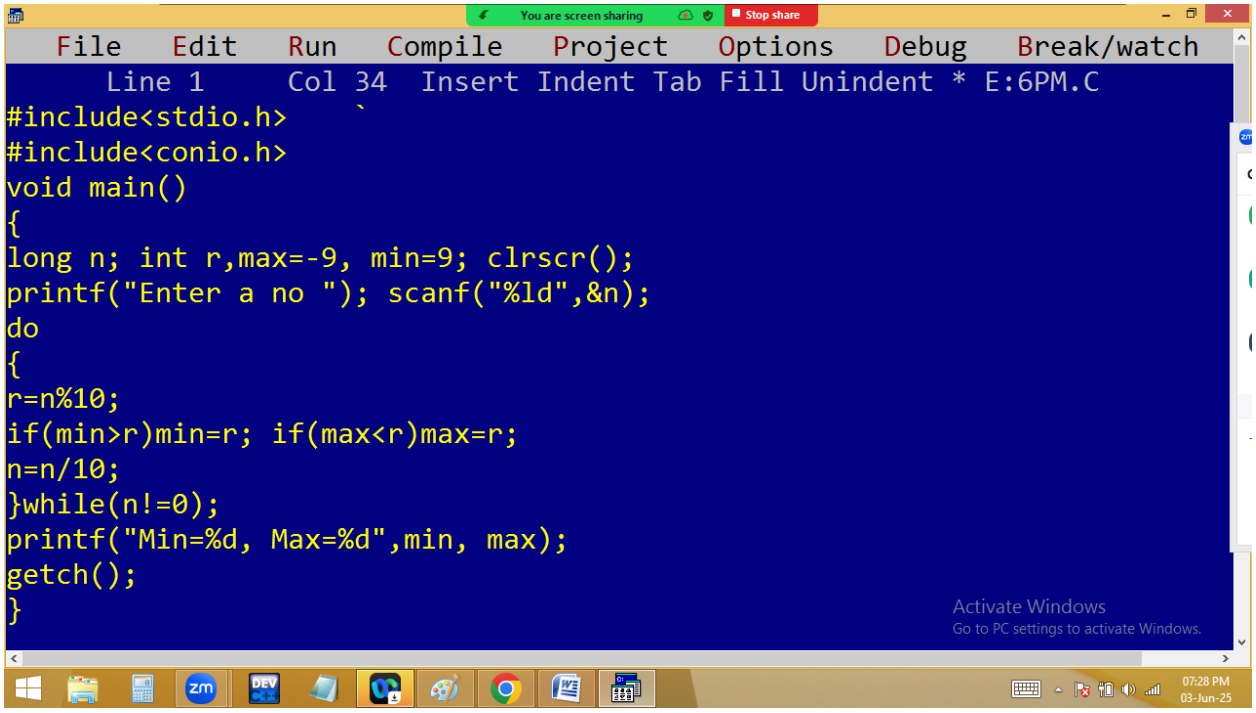
You are screen sharing
Stop share
File Edit Run Compile Project Options Debug Break/watch
Line 1 Col 34 Insert Indent Tab Fill Unindent * E:6PM.C
#include<stdio.h>
#include<conio.h>
void main()
{
long n; int r,max=-9, min=9; clrscr();
printf("Enter a no "); scanf("%ld",&n);
do
{
r=n%10;
if(min>r)min=r; if(max<r)max=r;
n=n/10;
}while(n!=0);
printf("Min=%d, Max=%d",min, max);
getch();
}
Activate Windows
Go to PC settings to activate Windows.
07:28 PM
03-Jun-25

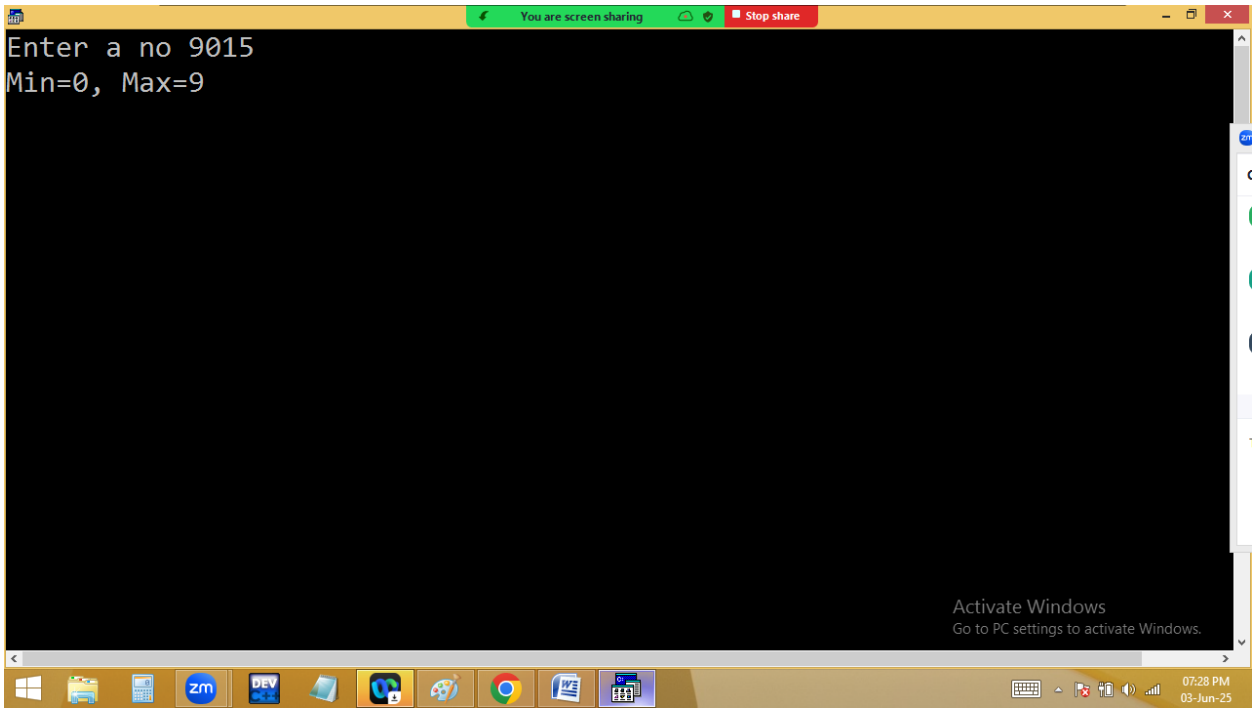
You are screen sharing
Stop share
Enter a no 9015
Min=0, Max=9
Activate Windows
Go to PC settings to activate Windows.
07:28 PM
03-Jun-25

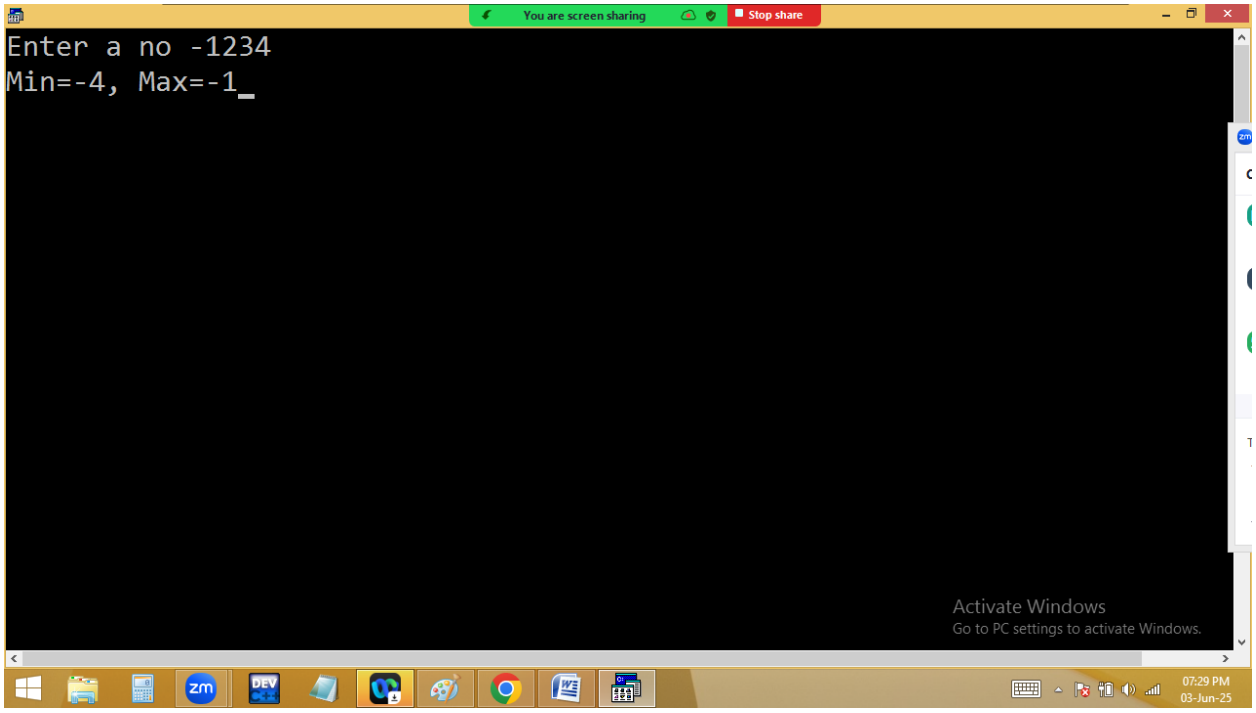
You are screen sharing
Stop share
Enter a no -1234
Min=-4, Max=-1
Activate Windows
Go to PC settings to activate Windows.
07:29 PM
03-Jun-25

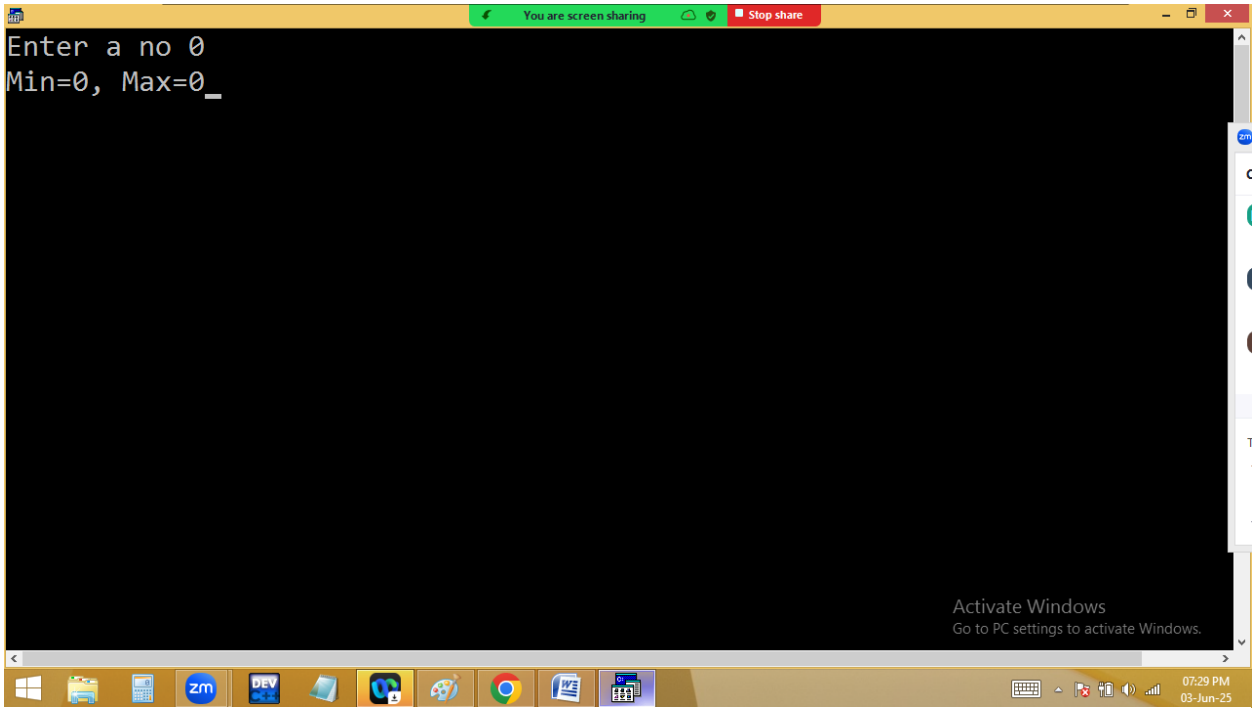


```
do
{
r=n%10;
if(min>r)min=r;
if(max<r)max=r;
n=n/10;
}while(n!=0);
p( min,  max);
```

n	min	max
9052 %10=2	~~9~~ > 2	~~9~~ < 2
905 % 10 =5	2 > ~~5~~	~~2~~ < 5
~~90~~ % 10=0	~~2~~ > 0	5 < ~~0~~
~~9~~ % 10=9	0 > ~~9~~	~~5~~ < 9
0		

Home work?

Reverse no?

105 ➔ 501

Palindrome no?

101 reverse also 101 ➔ palindrome no